electronics

OCTOBER · 1951
PRICE 75 CENTS

A McGRAW-HILL PUBLICATION

WAVEGUIDE
TEST
EQUIPMENT

Give
enough!

FOR MINIATURIZATION

The miniaturization of transformers has been a UTC specialty ever since the development of the Ouncer series in 1937. The importance of this engineering "know how" is reflected by the large number of UTC Miniature components in present military equipment. Some examples of this engineering leadership are illustrated below.



SM Unit ACTUAL SIZE — As photographed with normal pen for comparison.

DC CONTROLLED OSCILLATOR INDUCTORS

The curves below illustrate resonator frequency variation using two types of RF inductors varied by the amount of DC through the controlled windings. These units are available in ouncer size and smaller.





Ouncer case, non hermetic, is 7/8" diameter x 1 1/8" height. Weight — .06 lbs.

Ouncer case, hermetic, is 15/16" diameter x 1 3/8" height. Weight — .11 lbs.

OUNCER FILTERS

Filter miniaturization is a specialized art. The curves below show a low pass filter and a high pass filter being supplied in the UTC ouncer case.





MINIATURIZED AIRCRAFT FILTERS

The standard 75-1200 cycle aircraft filters have been reduced in size and weight by UTC's miniaturization program. The curves below illustrate the frequency characteristics of these units.





Miniaturized filter case is 1 11/16" x 13/16" x 1 3/8" height. Weight — .3 lbs.

SM sub-miniature audio components, 7/16" x 1/2" x 7/16" height. Weight — .009 lbs.

EXTREME MINIATURIZATION

Through the use of specialized materials, extremely compact designs are possible. The curve below illustrates the Q characteristics of a 7500 hy. low frequency reactor housed in the UTC ouncer case.



The sub-miniature audio transformer whose frequency curve is shown above, weighs less than one-seventh of an ounce yet provides wide range frequency characteristics. Its impedance ratio is 500 to 50,000 ohms for operation into a 1/2 meg. loaded grid.

United Transformer Co.
150 VARICK STREET NEW YORK 13, N. Y.
EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

PROPERTY OF
McGRAW-HILL PUB. CO., INC.
LIBRARY
SEP 26 1951
PLEASE
RETURN

electronics

A McGRAW-HILL PUBLICATION

OCTOBER • 1951

WAVEGUIDE TEST EQUIPMENT ..... COVER
Test equipment items developed by the Polytechnic Research and Development Co., Inc. permit microwave measurements over a thirty-to-one frequency range. Photograph by Gerald P. Oddo and Henrietta P. Kravis. (See page 138)

SELECTING AN INDUSTRIAL TRADEMARK, by A. S. Greenberg 82
How to save time and money when choosing one

HORN ANTENNAS FOR TELEVISION, by Dean O. Morgan 84
Eight-foot receiving horn provides over 14-db power gain on channel 13

NEW UHF RESNATRON DESIGNS AND APPLICATIONS, by D. B. Harris 86
Use as high-power uhf amplifiers for tv and military applications is described

SOUND WAVES TEST CYLINDER HEADS 90
Differences in sonic frequencies are used for precision comparison to a standard

MODIFIED BUTTERFLY UHF-TV CONVERTER, by Matthew Slate 92
Compact unit provides continuous tuning over proposed uhf television band

MULTIPLEXED BROADCAST FACSIMILE by John V. L. Hogan and John W. Smith 97
New York State network employs ultrasonic subcarrier without degrading 15-kc audio programs

VARIABLE PULSE DELAY FOR RADAR RANGING, by James Gordon 100
Delay is obtained with range from microseconds to milliseconds and maximum error of 0.3 microsecond

PRECISION MEASUREMENT OF SHAFT SPEEDS, by Oliver V. Riley 104
High degree of accuracy is obtained by using standard WWV tone for comparison

R-F AMPLIFIER FOR UHF TELEVISION TUNERS, by B. F. Tyson and J. H. Weisman 106
Gives gain of 12.5 db over entire range of 470 to 890 mc and improves noise figure 4 db

MINIATURE TRAVELING-WAVE TUBE, by Robert Adler 110
Broad-band amplifier tube is true traveling-wave type operating between 100 and 1,000 mc

WIDE-RANGE SWEEPING OSCILLATOR, by Louis A. Rosenthal 114
All-purpose single-tone or wobbled audio generator uses thermistor and Thyrite or Varistor elements

HIGH-POWER UHF-TV KLYSTRON, by Engineering Staff of Varian Associates 117
Development of 5-kw cascade tube used in commercial uhf-tv transmitter

SELF-GENERATING ACCELEROMETERS, by G. K. Guttwein and A. I. Dranetz 120
Advantages of piezoelectric barium titanate units include useful range from 0.022 to 600 g

AUTOMATIC BROADCAST PROGRAM MONITOR 124
Remote monitoring device with interesting possibilities in telemetering and radio-relay circuits

UNIVERSAL DIRECT-COUPLED DIFFERENTIAL AMPLIFIER, by Leonard Goldberg 128
Provides constant closed-loop gain and low output impedance for mathematical operations in computers

TEMPERATURE-COMPENSATING CAPACITOR NOMOGRAPH (Reference Sheet), by Thomas T. Brown 132
Gives directly values required when combining two capacitors to get particular overall temperature coefficient

BUSINESS BRIEFS	78	ELECTRON ART	140	NEW BOOKS	152
CROSSTALK	81	NEW PRODUCTS	144	BACKTALK	154
TUBES AT WORK	136	NEWS OF THE INDUSTRY	148	INDEX TO ADVERTISERS	(Last Page)

DONALD G. FINK, *Editor*; **W. W. MacDONALD**, *Managing Editor*; John Markus, Vin Zeluff, A. A. McKenzie, *Associate Editors*; William P. O'Brien, James D. Fahnestock, Ronald K. Jurgen, *Assistant Editors*; John M. Carroll (on Military Leave), Ann Mastropolo, Marilyn Wood, *Editorial Assistants*; Gladys T. Montgomery, *Washington Editor*; Harry Phillips, *Art Director*; Eleanor Luke, *Art Assistant*

KEITH HENNEY, *Consulting Editor*

H. W. MATEER, *Publisher*; **WALLACE B. BLOOD**, *Manager*; R. S. Quint, *Buyers' Guide Manager*; D. H. Miller, James Girdwood, *New York*; Wm. S. Hodgkinson, *New England*; Warren W. Shew, *Philadelphia*; C. D. Wardner, *Chicago*; J. L. Phillips, *Cleveland*; J. W. Otterson, *San Francisco*; J. H. Allen, *Los Angeles*; Ralph C. Maultsby, *Atlanta*; Bernard H. Butler, *London, England*

October, 1951 ELECTRONICS Vol. 24, No. 10

Member ABC and ABP

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 18, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Electronics—Subscription service, 99-129 N. Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 18, N. Y. Allow ten days for change of address. Please indicate position and company connection on all subscription orders.

Single copies 75¢ for United States and possessions, and Canada; $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $2.00. Subscription rates—United States and possessions, $4.00 a year; $6.00 for two years; $12.00 for three years. Canada, $10.00 a year; $16.00 for two years; $20.00 for three years. Pan American countries, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879. Printed in U. S. A. Copyright 1951 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved. BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; Aldwych House, Aldwych, London, WC 2; Washington, D. C. 4; Philadelphia, 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; Atlanta 3, Ga.; 1111 Wilshire Blvd., Los Angeles 17; 738-9 Oliver Building, Pittsburgh 22. ELECTRONICS is indexed regularly in The Engineering Index.

Let MARION help you . . .

. . . seal components *hermetically*

. . . speed up sub-assemblies

Marion portable, bench-type induction soldering unit . . . .

- SMALL
- COMPACT
- ADAPTABLE
- EFFICIENT
- ECONOMICAL
- EASY-TO-USE

A PRODUCTION TOOL This unit was designed to simplify and improve both the quality and quantity of production of many different assemblies in the electronic and electrical fields. It has been used successfully for many years in the manufacture of Marion hermetically sealed instruments. Assembly applications include magnet assemblies, relay armatures, connectors, capacitors and transformer cans and germanium diode assemblies; also jewelry, watches, toys, automotive parts, household fixtures, etc.

HERMETICALLY SEALED COMPONENTS Because of the present intense interest in hermetically sealed components, Marion offers the benefit of its experience in true glass-to-metal hermetic sealing with the Marion Induction Soldering Unit and Marion metalized (platinum film) glass. Marion platinum film base glass has been developed to permit higher sealing temperatures, greater thermal shock range and resoldering if necessary.

PROFIT FROM EXPERIENCE Investigate now. Submit your requirements. We will be glad to supply samples and quotations. Ask for bulletin. Marion Electrical Instrument Company, 401 Canal Street, Manchester, New Hampshire.

MANUFACTURERS OF
MARION RUGGEDIZED
INSTRUMENTS

marion meters

THIS INTERESTING QUARTERLY WILL BE MAILED FREE TO ANY PART OF THE WORLD

AUSTRALIA
Messrs. Watson Victor Limited
9-13, Bligh Street,
Sydney, N.S.W.

BELGIUM
Paul Groeninckx,
Avenue Jean Stobbaerts, 43,
Brussels.

CANADA
The J. W. Ellis Industries,
42, Lombard Street,
Toronto.

DENMARK
Ditz Schweitzer,
Norre Voldgade, 48,
Copenhagen, K.

FRANCE
Jacques Pérès Fils,
4, Avenue de l'Opéra,
Paris 1.

HOLLAND
Geo. C. F. Kauderer,
Muiden.

INDIA Adair, Dutt & Co. (India) Ltd.
5, Dalhousie Square,
Calcutta.

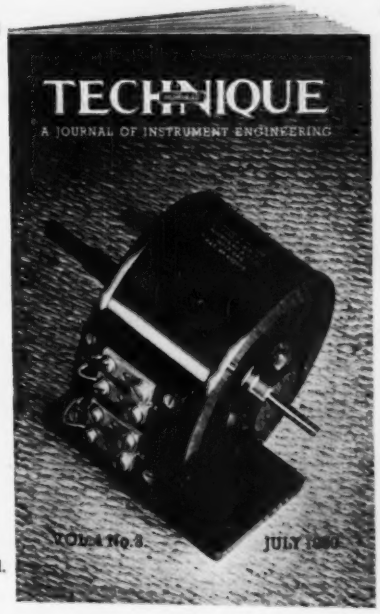

ITALY
Ing. Silvio Garrone,
Piazza Della Marina, 1,
Rome.

NORWAY
J. L. Nerlien A/S,
Nedre Slottgst. 13,
Oslo.

NEW ZEALAND
Richardson, McCabe & Co.
Ltd., P.O. Box 863,
Wellington.

SOUTH AFRICA
Johnson & Phillips South
Africa (Pty.) Limited,
P.O. Box 552,
Germiston.

SWEDEN
Ingeniorsfirma Hugo Tillquist,
Nybrokajen 7, Postbox 7026,
Stockholm 7.

SWITZERLAND
Camille Bauer,
Dornacherstrasse 18,
Basel.

U.S.A.
Muirhead & Co. Ltd.,
Elmers End, Beckenham,
Kent, England.

TECHNIQUE IS ALSO PUBLISHED IN FRENCH. IF THIS EDITION IS REQUIRED, MARK YOUR COUPON ***"EDITION FRANÇAISE"***

FILL IN THIS COUPON AND MAIL TO US OR OUR AGENTS
(SEE LIST ABOVE)

Please mail me, free of charge, the quarterly journal of instrument engineering "TECHNIQUE," published by Muirhead and Co. Limited.

NAME_____
POSITION_____
COMPANY_____
ADDRESS_____

ELECTRONICS 55

MUIRHEAD & Co. LTD.
PRECISION ELECTRICAL INSTRUMENT MAKERS
BECKENHAM · KENT · ENGLAND
Telegrams and Cables: MUIRHEADS ELMERS-END

PRECISION
MUIRHEAD
ELECTRICAL INSTRUMENTS

Low temperature is

in resistors too!

Any resistor can reduce voltage and dissipate heat. Amazingly few can do it without overheating themselves! Chief among those who *can* are IRC Resistors. Advanced, yet practical design—unusual use of heat-dissipating materials—and a rigid quality-control system—all combine to give these resistance units low operating temperatures, greater efficiency and longer life.

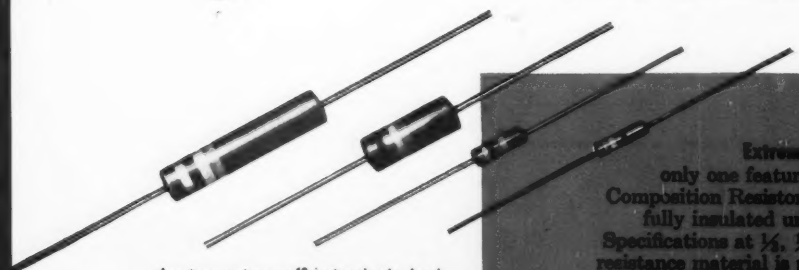

Low temperature coefficient and noise level. Meet and beat JAN-R-11 Specifications.

½, ½, 1 and 2 watts—available in ±5%, ±10%, and ±20% tolerance.

Easily meet critical requirements of television.

Fully tested by independent agencies under actual field conditions.

Extremely low operating temperature is only one feature of Advanced Type BT Fixed Composition Resistors. These compact, lightweight, fully insulated units actually surpass JAN-R-11 Specifications at ⅓, ½, 1 and 2 watts! In BT's, the resistance material is permanently cured and bonded to special glass. Leads extend into filament for faster heat conductivity. Molded bakelite seals element against moisture and prevents grounding. BT's are available in standard RTMA resistance ranges. Send for full details in 12-page technical data Bulletin B-1.

essential

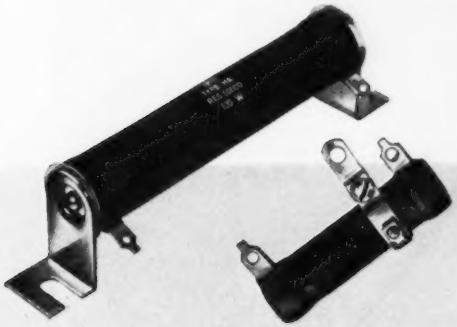

Besides unusually rapid dissipation of heat, IRC Fixed and Adjustable Power Wire Wound Resistors give balanced performance in every characteristic. Special cement coatings are designed for low range high temperature requirements—or for maximum protection against extreme atmospheric conditions. For exacting, heavy-duty applications—high voltage bleeders, bias supply, grid and filament dropping resistors—PWW's are available in a full range of sizes, types and terminals. Leading industrial, aircraft and broadcasting users have specified them for more than 14 years. Technical data Bulletin C-2 gives complete information.

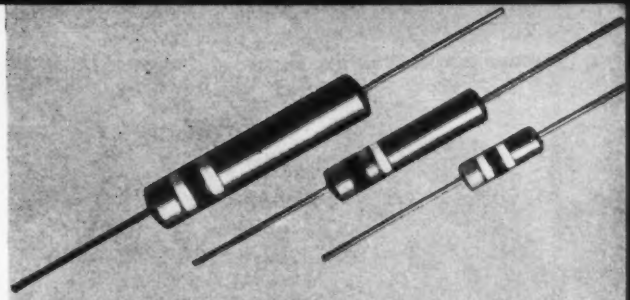

Temperature coefficients cover many resistance values in IRC Type BW Insulated Wire Wound Resistors. At ½, 1 and 2 watts, they are exceptionally stable, economical units for low range applications such as meters, analyzers, spark suppression units, TV circuits, low power ignition circuits. Resistance elements are wound uniformly on insulated core. Molded phenolic housing protects against humidity and grounding. Noise and aging are negligible. Technical data Bulletin B-5 contains full details.

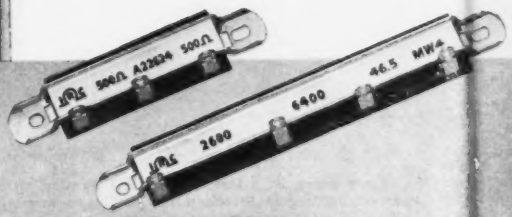

For extremely fast heat dissipation, the unique mounting brackets of Type MW Wire Wound Resistors actually transfer heat from chassis to outside. Other radical departures from conventional design give MW's widest adaptability to individual requirements. MW's are flat wire wound resistor strips, permanently enclosed by high pressure molding in a special mica-filled phenolic compound. Special feet permit mounting on any flat metal surface. Low initial cost, lower mounting cost, flexibility in providing taps at low cost, and savings in space, all offer amazing economies. Ask for technical data Bulletin B-2.

When you're in a hot spot and need experimental or maintenance quantities of standard resistors *double-quick*, phone your IRC Distributor. IRC's Industrial Service Plan provides him with a full stock of uniformly dependable standard resistors; he can give you fast, round-the-corner delivery of small-order requirements. We'll be glad to send you his name and address.



Power Resistors • Voltmeter Multipliers • Insulated Composition Resistors • Low Wattage Wire Wounds • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon Products • Ultra-HF and High Voltage Resistors • Insulated Chokes

IRC

Wherever the Circuit Says ~WW~

INTERNATIONAL RESISTANCE COMPANY
401 N. Broad Street, Philadelphia 8, Pa.
In Canada: International Resistance Co., Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE COMPANY A
403 N. BROAD ST., PHILADELPHIA 8, PA.

Please send me complete information on the items checked below:—

- ☐ Advanced BT Resistors (B-1)
- ☐ BW Resistors (B-5)
- ☐ Power Wire Wounds (C-2)
- ☐ MW Resistors (B-2)
- ☐ Name and Address of nearest IRC Distributor

NAME_____

TITLE_____

COMPANY_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

A. P. ARNDT & CO., ADV. AGENCY

Once more, RCA leads the field! This time, with new rectangular picture tubes which require no focusing coil or focusing magnet . . . thus effecting important savings in critical materials.

The currently used magnetic focus in TV sets requires coils and magnets containing the metals cobalt and copper . . . both on the Government's restricted list.

To meet the shortages, RCA engineers have developed improved electrostatic focusing for wide-deflection-angle TV tubes—eliminating need for a focusing magnet or coil. Result: The new RCA kinescopes—which not only make possible savings in critical materials, but introduce advantages that destine them to become industry's most widely used picture tubes.

Such advantages, for example, as: (a) An improved electron gun which provides excellent uniformity of focus over the entire picture area, and is so designed that the focusing electrode takes negligible current—permitting voltage for the electrode to be supplied easily and economically; (b) Focus automatically maintained with variation in line voltage and adjustment of picture brightness; (c) Simplification of tube installation and adjustment for optimum performance.

When RCA produced its outstanding Image Orthicon, "eye" of the television camera, it called upon the superlative Driver-Harris radio alloy Nichrome* V to provide 95% of the metal components of the tube. Now, in the case of the kinescopes, a Driver-Harris produced alloy fills a need.

Here are typical examples of how Driver-Harris stands ready to serve all industry with alloys necessary for new or standard applications.

During the present emergency, of course, strategic materials and the alloys made from them are on strict allocation. However, we shall be glad to make recommendations based upon your specific needs, and serve you to the best of our ability.

Makers of world-famous Nichrome® and over 80 other alloys for the electronic, electrical and heat-treating fields

Driver-Harris Company

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Los Angeles, San Francisco

In Canada: The B. GREENING WIRE COMPANY, LTD., Hamilton, Ontario, Canada

*T.M. Reg. U.S. Pat. Off.

PLASTICON M Capacitors —

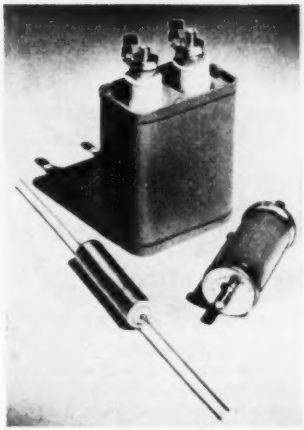

are worthy of your consideration where small size, high operating temperature and high internal resistance are a specific requirement.

By using Plasticon M film capacitors, unusual life and resistance are obtained. Typical of our NEW Plasticon M capacitors are the following:

- **Miniature hermetically sealed Type MSCM 104-4C**
  Capacitance 0.1 mfd. Rated voltage 400 DC
  Size 0.400 Dia. 1-5/16" long
  AFTER 1000 hours life test at 125°C with 565 VDC applied
  Resistance 12,000 megohms measured with 565 VDC applied in 125°C ambient
- **Miniature hermetically sealed Type MACM 104-4C**
  Capacitance 0.1 mfd. Rated voltage 400 DC
  Size 0.400 Dia. 1-5/16" long
  AFTER 1000 hours life test at 125°C with 565 VDC applied
  Resistance 40,000 megohms measured with 565 VDC applied in 125°C ambient temperature
- **Type MAC 25C05 Rectangular base CP70 style container**
  Capacitance 0.5 mfd. Rated voltage 2000 VDC
  Size 2½ x 1-3/16 x 2¾" high
  AFTER 1000 hours life test at 85°C with 2500 VDC applied
  Resistance 200,000 megohms measured with 2500 VDC applied in 85°C ambient temperature

Send specifications for your requirements.

MANUFACTURERS
Glassmike Capacitors
Plasticon Capacitors
HiVolt Power Supplies
Pulse Forming Networks

All Phones: **AMbassador 2-3727**

Condenser Products Company

7517 North Clark Street • Chicago 26, Illinois

RELAY Problems Solved

EASIER · FASTER · BETTER

with Potter & Brumfield's

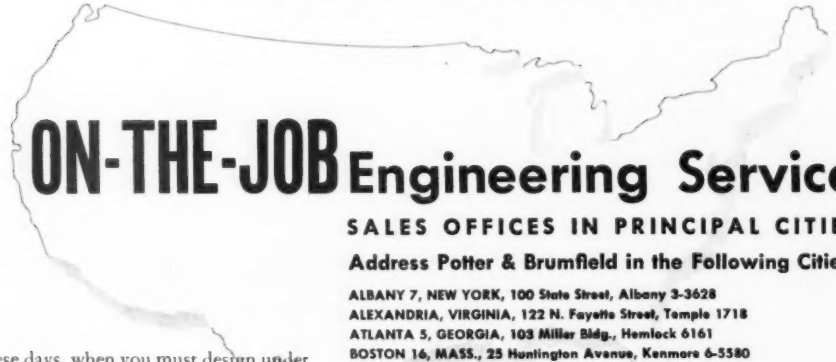

ON-THE-JOB Engineering Service

SALES OFFICES IN PRINCIPAL CITIES

Address Potter & Brumfield in the Following Cities:

ALBANY 7, NEW YORK, 100 State Street, Albany 3-3628
ALEXANDRIA, VIRGINIA, 122 N. Fayette Street, Temple 1718
ATLANTA 5, GEORGIA, 103 Miller Bldg., Hemlock 6161
BOSTON 16, MASS., 25 Huntington Avenue, Kenmore 6-5580
BUFFALO 2, NEW YORK, 1124 Prudential Bldg., Mohawk 9222
CEDAR RAPIDS, IOWA, 309 Guaranty Bldg., Phone: 40833
CHICAGO 34, ILLINOIS, 3352 N. Central Ave., Pensacola 6-6776
CLEVELAND 15, OHIO, 1836 Euclid Avenue, Main 1-1286
DALLAS 5, TEXAS, 7322 Marquette Ave., Emerson 6-6286
DAYTON 2, OHIO, 18 W. Monument Avenue, Hemlock 9661
DENVER 7, COLORADO, 5528 East Colfax Ave., Fremont 3067
DETROIT 35, MICHIGAN, 19481 James Couzens H'way, Vermont 8-3460
INDIANAPOLIS 1, INDIANA, 2208 E. Washington Street, Market 8517
KANSAS CITY 2, MISSOURI, 1010 Porter Building, Logan 9824
LOS ANGELES 6, CALIFORNIA, 2230 W. 11th St., Dunkirk 3-4197
MEMPHIS, TENNESSEE, 1336 Madison Avenue, Phone 2-1914
MILWAUKEE 3, WISCONSIN, 744 North 4th Street, Broadway 2-0517
MINNEAPOLIS 17, MINNESOTA, 5022 29th Avenue, South, Drexel 1895
NEW YORK 16, N. Y., 13 E. 40th St., Murray Hill 3-7585
PHILADELPHIA, PA., DREXEL HILL, 3611 Berry Ave., Clearbrook 9-0231
PITTSBURGH 19, PA., 600 Grant Street, Court 0131
SAN FRANCISCO 3, CALIF., 1234 Folsom Street, Market 1-4166
ST. LOUIS 5, MISSOURI, 311 Connor Building, Parkview 7622
SEATTLE 1, WASHINGTON, 2217 Fourth Ave., Main 3750
SYRACUSE 1, NEW YORK, P. O. Box 1224, Baldwinsville 662
TORONTO 13, ONT. CANADA, 2273 Danforth Avenue, Oxford 1127
VANCOUVER, B.C., CANADA, 132 W. Hastings St., Pacific 3195
WILMINGTON, NORTH CAROLINA, 4924 Oleander Drive, Phone: 5749
EXPORT: ROCKE INTERNATIONAL CORPORATION
13 East 40th Street • New York 16, N. Y., U. S. A.
Phone: Murray Hill 9-0200 • Cable Address ARLAB

IN these days, when you must design under pressure of time and the handicap of availability . . . you need fast, competent "on-the-job" help to get over the rough spots. Call the nearest Potter & Brumfield Sales & Engineering Office. Conveniently located throughout the country, these offices are staffed with well-trained, competent electrical engineers . . . men thoroughly qualified to assist you in development problems and in selecting the *right* relay for your purpose.

Many relay applications can be solved in several different ways. By using the knowledge of your Potter & Brumfield relay engineer you are assured of the quickest and most practical answer to your problem.

Potter & Brumfield
PRINCETON, INDIANA **Phone 1208**

Standard P & B Relays are Available at Your Local Electronics Parts Distributor

NEW
MINIATURE SWITCHES
BY CENTRALAB

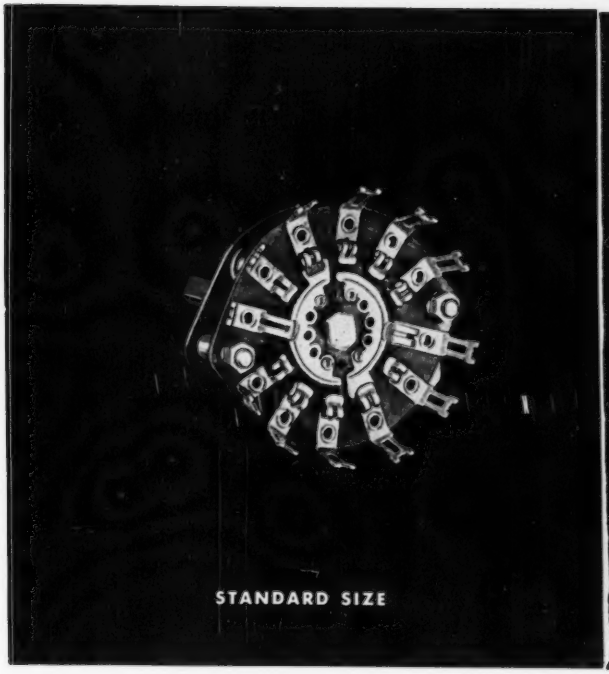

STANDARD SIZE

NEW MINIATURE SIZE

Now, Centralab, the first name in Electronic Components, offers new design possibilities in an entirely new line of truly miniature, top-quality, rotary switches for radio, TV and similar high-frequency, low-power applications.

WANT MORE INFORMATION? **SEE NEXT 2 PAGES ➧**

CENTRALAB ANNOUNCES A COMPLETE

FOR COMMERCIAL OR

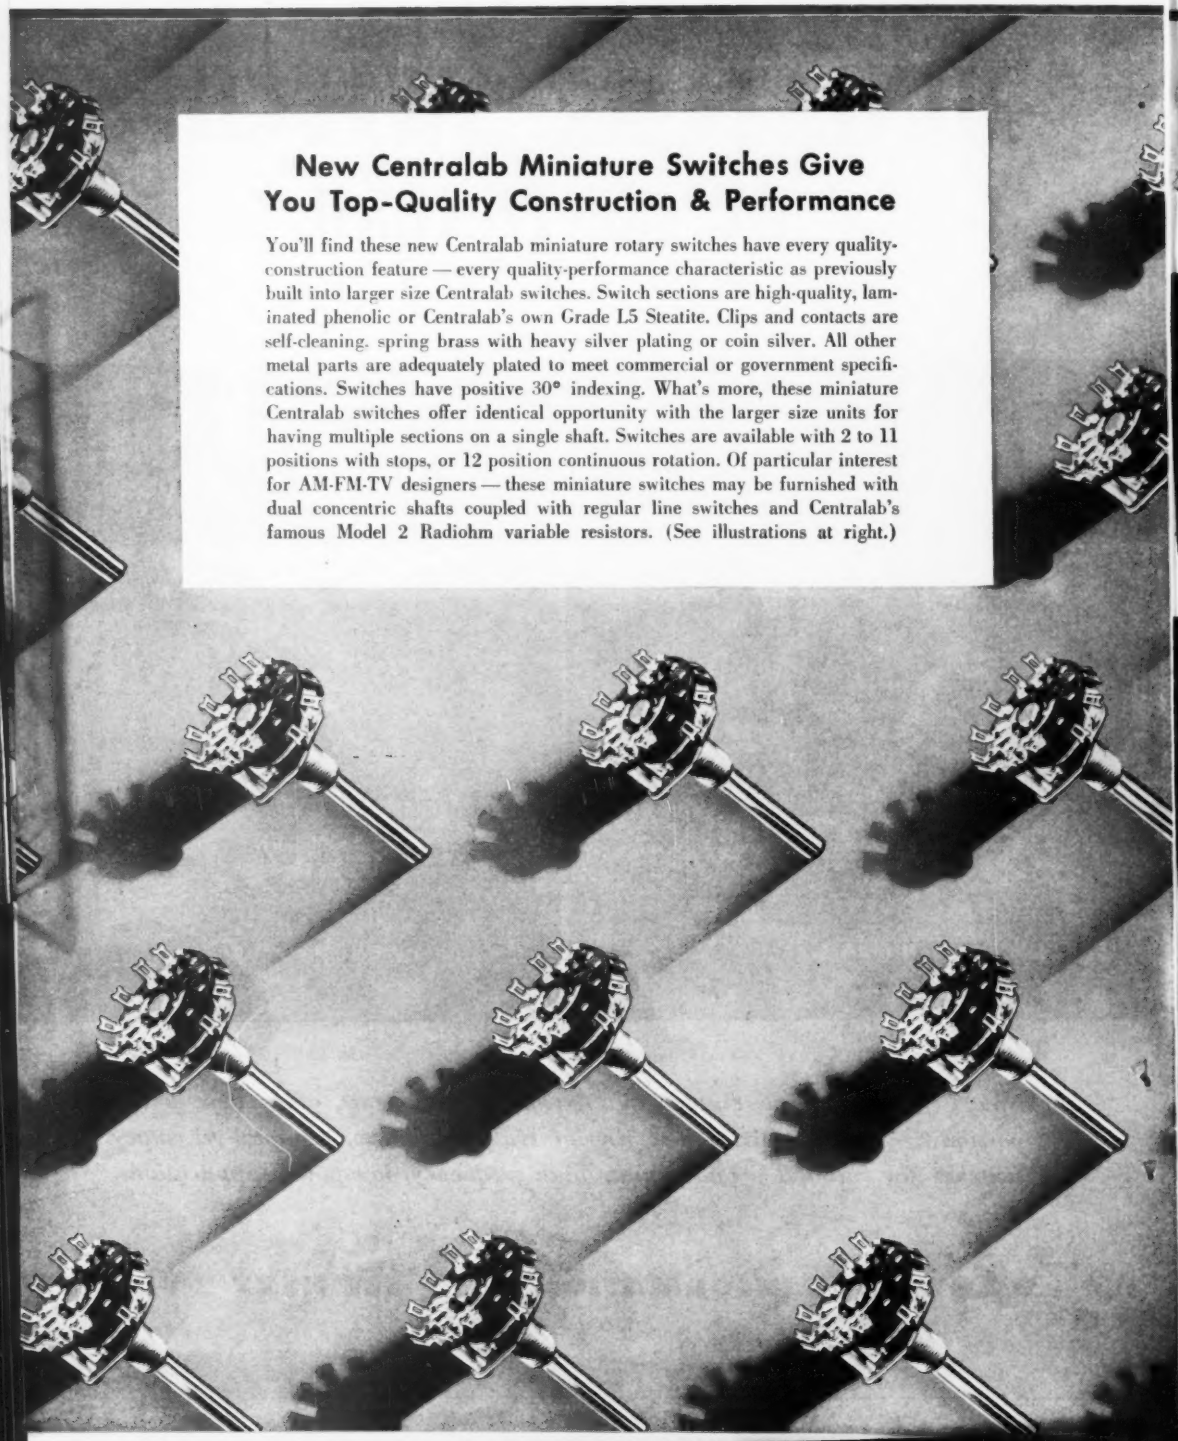

New Centralab Miniature Switches Give You Top-Quality Construction & Performance

You'll find these new Centralab miniature rotary switches have every quality-construction feature — every quality-performance characteristic as previously built into larger size Centralab switches. Switch sections are high-quality, laminated phenolic or Centralab's own Grade L5 Steatite. Clips and contacts are self-cleaning, spring brass with heavy silver plating or coin silver. All other metal parts are adequately plated to meet commercial or government specifications. Switches have positive 30° indexing. What's more, these miniature Centralab switches offer identical opportunity with the larger size units for having multiple sections on a single shaft. Switches are available with 2 to 11 positions with stops, or 12 position continuous rotation. Of particular interest for AM-FM-TV designers — these miniature switches may be furnished with dual concentric shafts coupled with regular line switches and Centralab's famous Model 2 Radiohm variable resistors. (See illustrations at right.)

NEW LINE OF MINIATURE SWITCHES

MILITARY APPLICATIONS

Now Centralab offers a completely new, unusually small rotary switch line — available in a variety of multi-pole, multi-position, multi-section models and in combination with line switches and variable resistors.

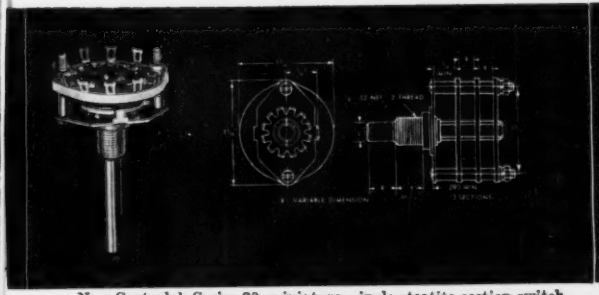

New Centralab Series 20, miniature, single steatite section switch. Available in 2 to 11 positions with stops, or 12 position continuous rotation — and with multiple sections.

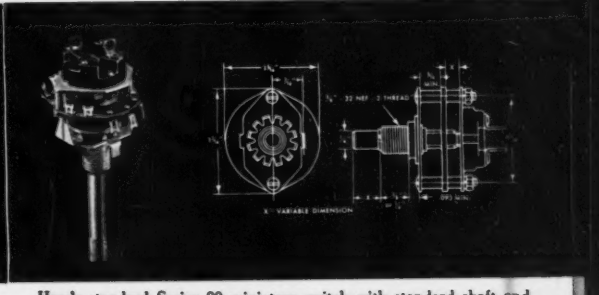

Here's standard Series 20 miniature switch with standard shaft and phenolic section with conventional off-on switch added. Also available with multiple sections.

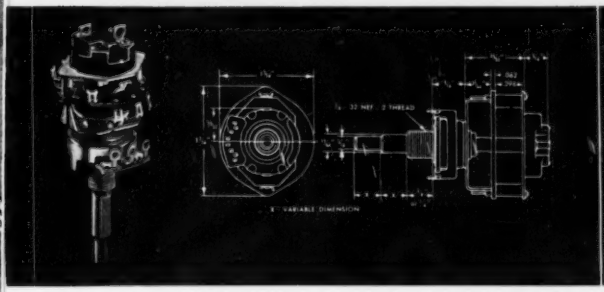

Combination Series 30 miniature switch unit with dual concentric shaft — permits independent operation of miniature switch including off-on switch, and Model 2 variable resistor.

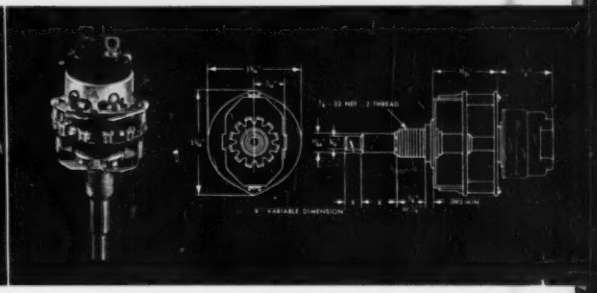

Same combination Series 30 unit as shown at left, *except* that Model 2 variable resistor is mounted at rear of miniature switch. Position of resistor provides convenience of wiring.

If you need a truly small size, long-life switch, Centralab's new miniature Series 20 and Series 30 switches are the answer. They have been specifically designed to meet the modern trend toward greatly reduced size in electronic equipment for high-frequency, low-current applications. Extremely compact design and small size, plus availability of separate sections and index assemblies provide an adaptability that is invaluable to design engineers and manufacturers. For complete specification information on the new Centralab Miniature Series 20 and Series 30 Switch line, mail the coupon today. *Manufacturer's samples promptly.*

Centralab

Division of GLOBE-UNION INC • Milwaukee

CENTRALAB Division of Globe-Union Inc.
914 East Keefe Avenue, Milwaukee 1, Wisconsin

Please send me complete specification information on Centralab's new Series 20 and Series 30 Miniature Switch line.

Name .....

Address .....

City ..... Zone ..... State .....

TELEVISION'S ONLY
2 KW VHF
TRANSMITTER
IT'S ALL
AIR COOLED

for 2 to 20 kilowatts ERP*

IF you plan to start TV station operations with a modest equipment investment . . . and still be sure you get adequate signal coverage . . . this new "2 kw" is a logical, economical solution to your problem. Initial equipment expense is lower than that of most TV stations on the air today. And tube costs are low—*because all the tubes are standard types.*

Used with RCA's popular and inexpensive high-gain 3-section Super Turnstile Antenna, this transmitter produces 5 kilowatts ERP—at the lowest cost per radiated kilowatt in TV history. Used with RCA TV antennas of higher gain, this transmitter provides up to 20 kw ERP!

Why not ask your RCA Broadcast Sales Specialist to help you with your planning. He can tell you precisely what you'll need to go on the air—and how to do it at lowest cost. Make use of his "know-how." Call him today.

ANNOUNCING—a 64-page book on RCA's new line of TV broadcast equipment for all channels, 2 to 83! An indispensable reference for station planning. *Available only from your RCA Broadcast Sales Specialist.*

*Effective radiated power

For any TV power to 200 KW—go RCA!



The heart of the "2 kw"—
the forced-air-cooled triode, RCA-5762

This service-proved triode features sturdy internal construction—and a very efficient plate radiator. The tube takes less than half the air flow previously needed for a tube having the same power-handling capability. And it's available through any RCA Tube Distributor!



RCA **RADIO CORPORATION of AMERICA**
ENGINEERING PRODUCTS DEPARTMENT CAMDEN, N.J.

The Circuit* is important...

*Manufactured under U.S. Patent 2538122 and other patents pending.



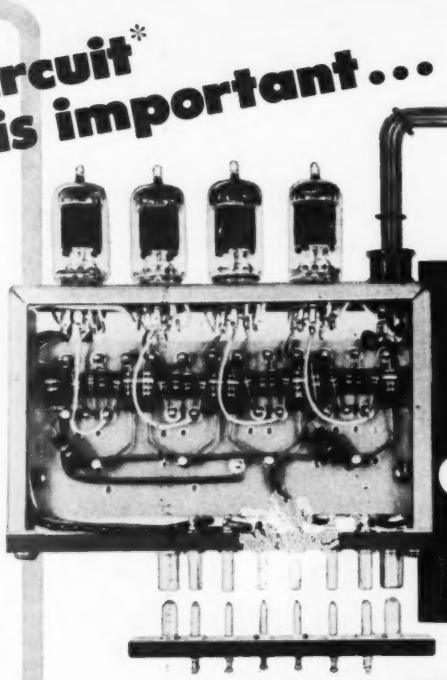

NEW! POTTER MINIATURIZED COUNTER DECADE



...this READ-OUT really counts!

Four ultra-visible neons, coded 1-2-4-8, are read as decimals with unerring ease—provide a swift check on tube operation.

This unique decimal read-out offers unparalleled observability. The lamps are brilliant and significant under high ambient lighting at oblique angles and from remote distances. No other visual indicator can be read faster or with less chance of error.

The indicating lamps couple with the decade stages and follow the true binary progression of count. Trouble in any stage is instantaneously reflected in its associated lamp. The lamps themselves are free from marginal voltage limitations.

In addition to a space-saving of one-third, the newly miniaturized decade provides a read-out adaptable to remote mounting. A small plug-in cluster of four neons is optional as a tube-servicing feature where frequency dividing, for example, makes a read-out unnecessary.

These electronic counting decades may be obtained as individual components. They are also available in complete counting, timing, computing or frequency-measuring systems. Detailed information or technical assistance will be provided upon request to Dept. 6E.

DEPENDABLE

Widest possible bias range results from grid input, common tie-point feed, simple feedback circuit and elimination of a complex readout matrix—all exclusive Potter features.

FAST AND ACCURATE

Absolute accuracy up to 130,000 counts per second assured by self-biasing under wide excursions of line voltage.

SIMPLE AND STRAIGHTFORWARD

Minimum number of components, all turret-lug mounted, in a true binary-coded decimal reset circuit.

COMPATIBLE

Binary-decimal coding (1-2-4-8) directly usable in computers, recorders and data-handling systems.

EASY TO MAINTAIN

Tube failure "locks-up" the decade and furnishes instantaneous identification through the on-off synchronization of neons and tubes, thus simplifying replacement.

POTTER INSTRUMENT COMPANY
INCORPORATED
115 CUTTER MILL ROAD GREAT NECK, NEW YORK

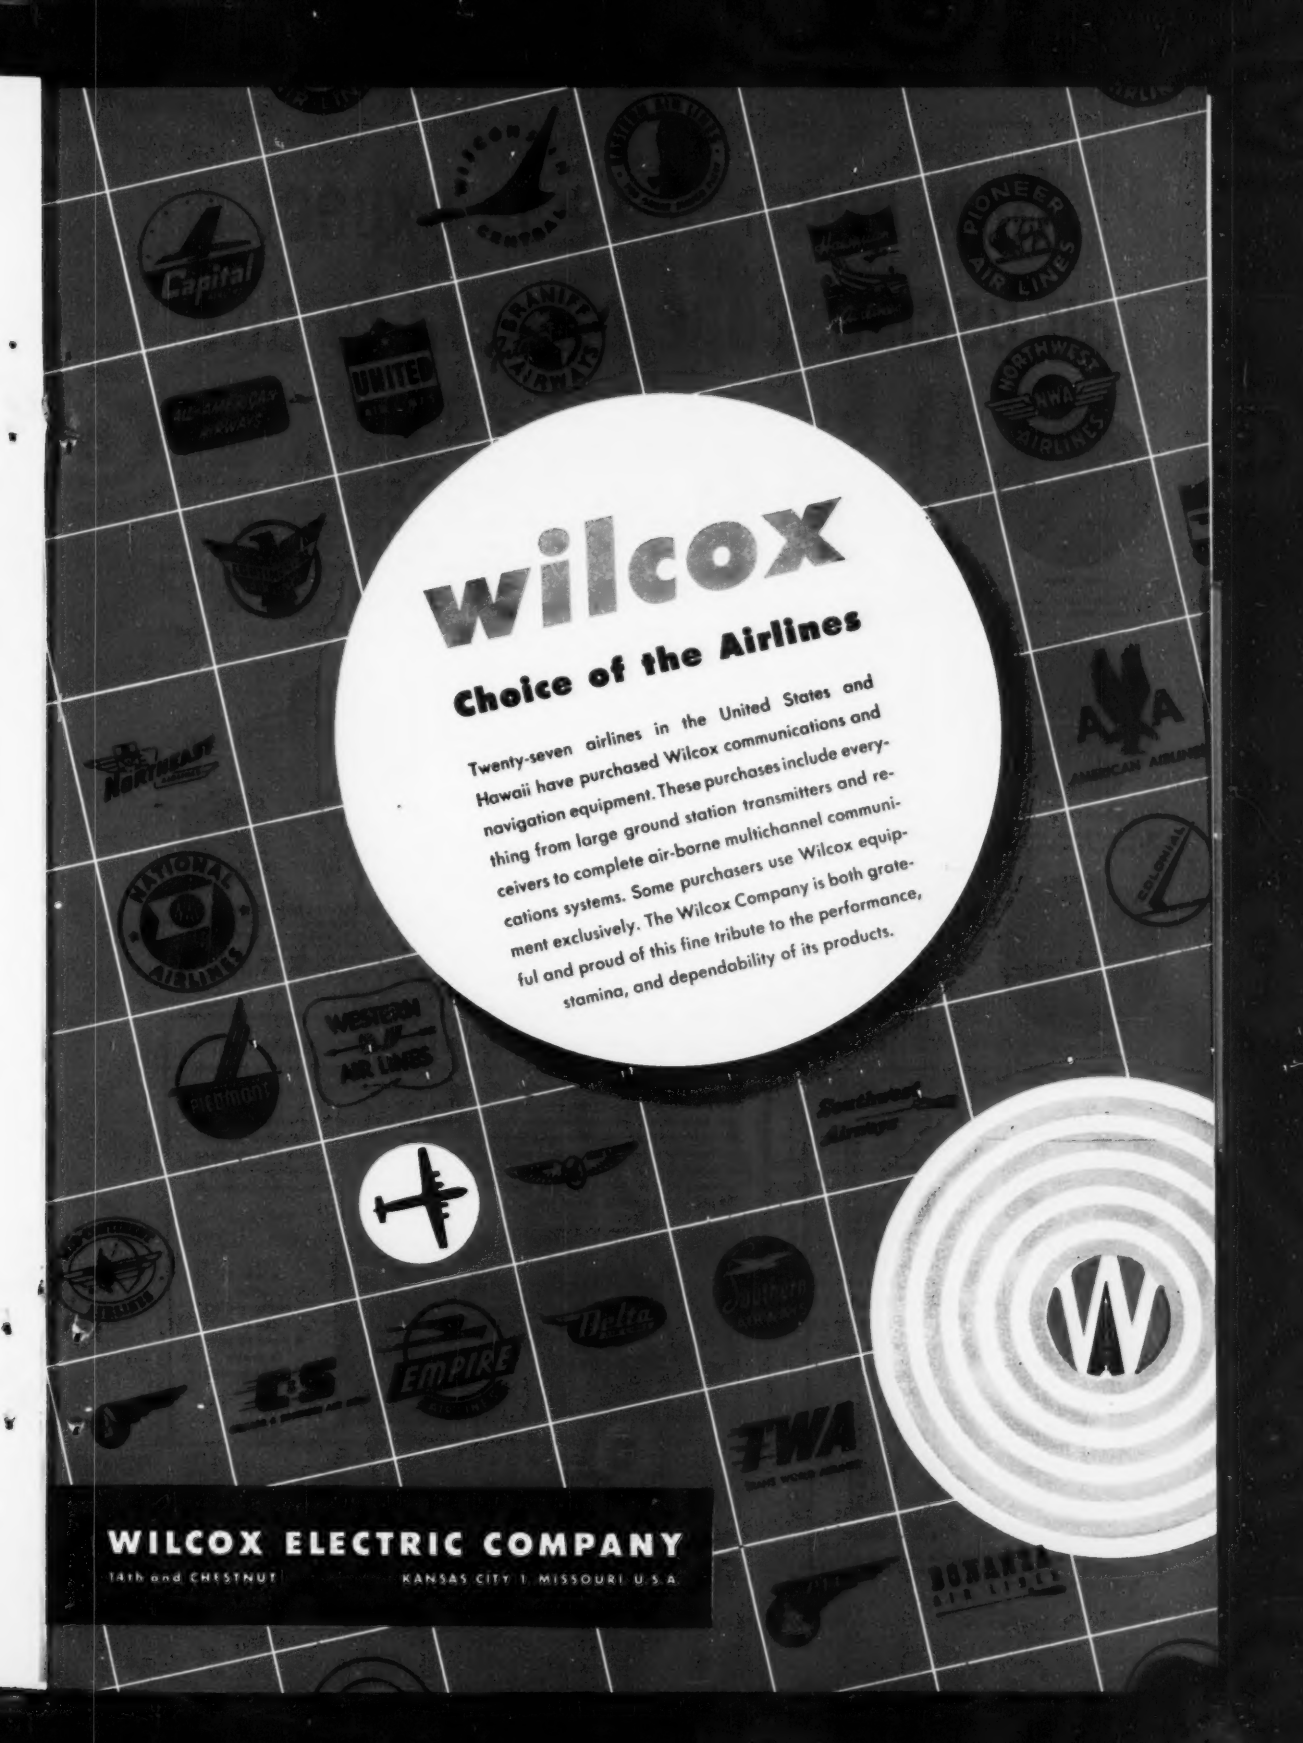
wilcox
Choice of the Airlines
Twenty-seven airlines in the United States and Hawaii have purchased Wilcox communications and navigation equipment. These purchases include everything from large ground station transmitters and receivers to complete air-borne multichannel communications systems. Some purchasers use Wilcox equipment exclusively. The Wilcox Company is both grateful and proud of this fine tribute to the performance, stamina, and dependability of its products.
WILCOX ELECTRIC COMPANY
14th and CHESTNUT
KANSAS CITY 1, MISSOURI, U.S.A.

How much can you expect an oscilloscope camera to do?



1. Single-frame photography of stationary patterns using a continuously running sweep.



2. Single-frame photography of single transients using a single sweep.



3. Continuous-motion photography employing film motion as a time base.



4. Continuous-motion photography employing oscilloscope sweep as a time base.



5. Continuous-motion photography employing combination of film motion and oscilloscope sweep as a time base.

It's only reasonable that you should expect the oscilloscope camera you buy to record what you see on an oscilloscope screen during any period. But can it be expected to do any more? We think so.

For example, did you know that the *Fairchild Oscillo-Record Camera*—our idea of the most versatile 35-millimeter oscilloscope camera now available—can GREATLY EXTEND THE USEFULNESS OF YOUR OSCILLOSCOPE?

As you know, many non-recurring phenomena occur too rapidly to permit adequate visual study. Others occur so slowly that continuity is lost. Sometimes you have combinations of very slow-speed phenomena and occasional high-speed transients. In any one of these cases, the Fairchild Oscillo-Record Camera will take over where your eye and the oscilloscope leave off.

This extremely versatile instrument is now being used daily by many hundreds of engineers in widely divergent fields. For an idea of what it can do for you, study the five scope images and recordings illustrated at left. Each solves a particular problem.

Oscillo-Record users especially like its:

CONTINUOUSLY VARIABLE SPEED CONTROL—1 in./min. to 3600 in./min.

TOP OF SCOPE MOUNTING that leaves controls easily accessible.

PROVISION FOR 3 LENGTHS OF FILM—100, 400, or 1000 feet.

For more data write *Fairchild Camera Instrument Corp., 88-06 Van Wyck Blvd., Jamaica 1, N. Y. Dept. 120-16A.*



FAIRCHILD OSCILLO-RECORD CAMERA—1. camera, 2. periscope, 3. electronic control unit. *Available accessories include external 400 and 1000 foot magazines, magazine adaptor and motor, universal mount for camera and periscope, binocular split-beam viewer.*

VALUABLE RECORDS FOR IMMEDIATE EVALUATION

The Fairchild-Polaroid® Oscilloscope Camera produces a photographic print in a minute

Valuable but inexpensive oscillograms for immediate evaluation; automatic one-minute processing without a darkroom; a set up time of two minutes or less—they're just three of the many advantages that are yours when you use the Fairchild-Polaroid Oscilloscope Camera. Wherever individual exposures meet your recording requirements—where you'd like to have permanent records of the traces you're now sketching or carrying in your memory, this is the camera that can bring new speed, ease and economy to your job. Prints are 3¼x4¼ and each records two traces exactly one-half life size. Write today for details.



A minute after you've pulled the tab a finished print is ready for evaluation

FAIRCHILD
OSCILLOSCOPE RECORDING CAMERAS

Ahead of and beyond JAN...

Sprague has developed many new ways to reduce size and weight and to improve the high-temperature performance of components

Joint Army and Navy component specifications were never meant to limit engineering progress—and, with Sprague, they most certainly haven't!

The extent of what has been achieved is no better indicated than by the fact that much of Sprague's vast military-use production is based on capacitors, wire-wound resistors and high-temperature wire insulation for which no standard JAN specifications yet exist! These are, in effect, super-JAN—fully approved via waivers to the equipment manufacturers. Such components are being produced and used in ever increasing quantities.

If your problem is one that can be solved by smaller, lighter components or by better elevated temperature performance, chances are excellent that a Sprague application engineer can help you.

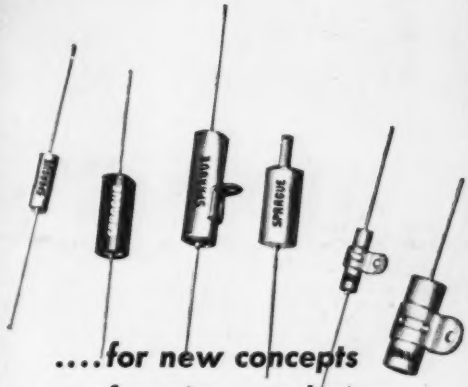

....for new concepts of equipment design

Typical of Sprague engineering progress ahead of and beyond JAN limits are these famous subminiature, hermetically-sealed, metal-encased paper capacitors. Far smaller than equivalent JAN styles and available in types for 85°C. and 125°C. operation, these capacitors have helped make possible a long list of military electronic equipment, which never could have met size and weight limitations prior to the development of these capacitors. Sprague Bulletin 213-B gives full technical data.

SPRAGUE

PIONEERS IN ELECTRIC AND ELECTRONIC DEVELOPMENT

SPRAGUE ELECTRIC COMPANY • NORTH ADAMS, MASSACHUSETTS

·FXC·

OUTLINE OF ESTABLISHED AND POTENTIAL APPLICATIONS

WRITE FOR BULLETIN

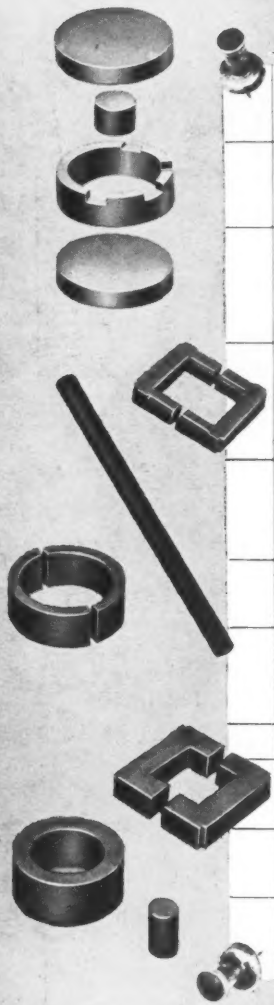

	OUTLINE OF APPLICATIONS	RECOMMENDED FERROXCUBE MATERIAL	SHAPE
1	TELEVISION FLYBACK CIRCUITRY		
	a) Flyback transformers	3C	U-Core
	b) Deflection yokes	3C	Ring segment
	c) Correction coils—to improve sawtooth linearity	3C	Slug
2	RADIO RECEIVERS		
	a) I F Transformers	Depends upon Frequency	Slug
	b) R F Tuning Coils		Slug
	i) fixed L		
	ii) permeability tuning		
	c) Antenna cores	4B	Rod
3	TELEPHONY (Voice Frequency and Carrier)		
	a) Interstage transformers	3C	E-Core
	b) Transformer for matching to co-axial cable	3C	E-Core
	c) Loading coils	Special grade	Pot-Core
	d) Filter circuits (not limited to telephony)	Special grade	Pot-Core
	e) Delay lines (not limited to telephony)	Special grade	Pot-Core
4	PULSE NETWORKS AND TRANSFORMERS		
	a) Signal-shaping	Depends upon Pulse width Special grade	Simple closed magnetic circuit
	b) Power—to feed magnetron directly—built up from Ferroxcube rods		
	c) Low-power—e.g., in computer applications		
5	MODULATION APPLICATIONS		
	a) Use of loss effects to achieve AM without FM in modulating Klystron output	4B	Rod
6	APPLICATION OF NON-LINEAR EFFECTS—e.g., in saturable core reactors		
	a) Permeability tuning of diathermy apparatus	4B	Toroid or rod with saturating circuit
	b) Pulse generation from sine waves		
	c) Magnetic amplifiers and saturable core reactors		
7	RECORDING HEADS		
8	IGNITION COILS		
	a) Automotive		
	b) Aircraft		
9	MAGNETOSTRICTION APPLICATIONS		
	a) Band-pass filters		
	b) Transducers		

FERROXCUBE

THE MODERN CORE MATERIAL

FERROXCUBE CORPORATION OF AMERICA

A Joint Affiliate of Philips Industries and Sprague Electric Co., Managed by Sprague

50 East 41st Street • New York 17, New York • Factory: Saugerties, New York

NO MATTER HOW YOU LOOK AT IT...

the TURNER is a better BOOSTER!

From every angle the new Turner Model TV-1 Booster is the finest on the market today. Under the worst possible fringe area receiving conditions, the TV-1 consistently produces sharper, clearer pictures and crisper, more natural sound.

There are many reasons for the superiority of the Turner Booster, but the two most important are advanced electronic engineering and finest construction using only high quality component parts.

Turner's low-noise-level **cascode** circuit stabilizes the picture, reduces noise and snow to a minimum.... makes viewing a real pleasure.

The Turner TV-1 is simple in operation. A single tuning knob permits fine adjustment for the best reception of picture and sound over all 12 TV channels. And because it tunes continuously from 54 to 216 megacycles, you can use the TV-1 to amplify FM, aviation and mobile radio signals. Three position control switch turns on the TV set only, the TV set and Booster, or shuts off both set and Booster.

The unit is quickly and easily installed. Attaches to any television set. Attractive styling and neutral finish harmonize with any furniture design.

CHECK THESE SUPERIOR FEATURES

Continuous Tuning - single knob control for finest adjustment to permit best possible reception of both picture and sound.

Cascode Circuit - inherent low noise level circuit with great stability and high signal-to-noise ratio.

Construction - finest quality materials carefully assembled to rigid Turner standards assure years of continuous, repair-free use.

Appearance - handsome cabinet designed to harmonize with any furniture design and finish.

Uses - amplifies FM, mobile and aviation radio signals as well as TV.

Results - most important, the Turner TV-1 produces an excellent picture under conditions which nullify the best efforts of many other boosters.

List Price **$57.50**

FOR THE BEST POSSIBLE TV RECEPTION, TURN TO

THE TURNER BOOSTER

THE TURNER COMPANY, 905 17th Street, N. E. Cedar Rapids, Iowa

In Canada: Canadian Marconi Co.,
Toronto, Ont., and Branches

Export: Ad. Auriema, Inc.
89 Broad Street, New York 4

NOW! Fill Your Needs

FOR ALL TYPES OF ELECTRIC AND ELECTRONIC COMPONENTS

custom or standard the guaranteed components

SILVER-PLATED BRASS TERMINAL LUGS

Short Lugs. For low "headroom" applications. Mounted heights from $\frac{3}{32}$". In shank lengths for 6 board thicknesses, starting with $\frac{1}{64}$".

Turret Lugs. With 2 soldering spaces for 2 or more connections. Sizes range from $\frac{1}{32}$" to ¼" terminal board thicknesses. Mounted heights from $\frac{7}{32}$".

Split Lugs. For potted units where later soldering is advisable. Also standard applications. Hole through shaft allows top or bottom wiring. Fit standard board thicknesses from $\frac{1}{64}$" through ¼". Mounted heights from $\frac{5}{32}$".



Double End Lugs. Provide terminal posts on both sides of board. Through connection for easy wiring. For board thicknesses from $\frac{1}{32}$" to ¼". Mounted heights from $\frac{3}{32}$".



Combination Lug. Removable screw permits mounting components directly to screw end. Also provides removable link connections at screw end. 3 sizes, $\frac{5}{16}$", $\frac{11}{32}$", ⅜" diameter. Bright alloy plated for easy soldering.

HARDWARE

Handles in nickel-plated brass are available in 3 sizes ranging from $3\frac{5}{16}$" length to $6\frac{3}{4}$" length. Black alumilite aluminum handle available in $4\frac{3}{8}$" length. Ferrules available on brass and aluminum handles.

Other Hardware includes tube clamps, panel and thumb screws, combination screw and solder terminals, shaft locks, terminal board brackets, standoff mounts, etc.

INSULATED TERMINALS

Phenolic. ¼" diameter, in rivet or screw stud type. Voltage breakdown from 4800 — 11,000 V at 60 cycles RMS.

Ceramic. Silicone impregnated. 5 lengths of dielectric. Voltage breakdown ratings up to 5800 V. Over-all heights range from ⅜", including lug. For high electrical stresses over a broad humidity range. Cadmium plated studs. Brass terminals plated for soldering.

INSULATED FEED THROUGHS

Phenolic. Approved XXX material. Brass bushings, nickel plated. Brass through-terminals, silver plated for easy soldering. Rugged, withstand shock and vibration. Two sizes: for ¼" and ⅜" mounting holes.

Ceramic. Silicone impregnated. Threaded for ¼" hole mounting. O.A. length ⅞". Voltage breakdown 4800 RMS at 60 cycles.

TERMINAL BOARDS

Phenolic. Available in various widths and terminal arrangements from ½" wide to 3" wide. Thicknesses: $\frac{3}{32}$"; ⅛"; $\frac{3}{16}$". All boards in 5 sections scribed for easy separation. Special boards made to your specifications.

Ceramic. Silicone impregnated. Type X1986 with 8 lugs staked in two rows. Standoffs riveted and soldered to ground strap for good grounding at R.F. frequencies. 1¼" long, ⅝" wide. All metal parts plated. O.A. mounted height: $\frac{35}{64}$".

SLUG TUNED COILS



Phenolic. 3 sizes: $\frac{27}{32}$"; 1⅛", and 2" high. 5 standard windings — also special windings or as high-quality phenolic coil forms.

Ceramic. Silicone impregnated. 5 sizes, mounted heights from $\frac{19}{32}$" to $1\frac{11}{16}$", diameters from $\frac{3}{16}$" to ½". Spring lock for slug. Cadmium plated mounting studs. Complete with mounting hardware and high, medium or low frequency slug.

R. F. CHOKES

LHC. High Q iron core with 6-32 mounting stud. 8 values from 2.5 mh to 125.0 mh. Wax impregnated.

LAB. Pie wound on phenolic core with cotter pin terminals. 8 windings .75 mh to 15.0 mh. Current rating 125 ma.

CUSTOM ENGINEERING — to your specifications or standard government specifications. C.T.C. Engineers will design all types of Boards, Coils and Terminal Lugs for production quantity to fill your needs. No extra charge for this service.

WRITE FOR NEW CATALOG — For complete data and engineering drawings on these and other C.T.C. Electrical and Electronic Components and Hardware. No obligation.

CAMBRIDGE THERMIONIC CORPORATION, 437 CONCORD AVE., CAMBRIDGE 38, MASS.

West Coast Stock Maintained by: E. V. Roberts, 5068 West Washington Blvd., Los Angeles, California

Accurate ac test voltages

Complete Coverage ½ to 10,000,000 cps



-hp- 200 Series Audio Oscillators

Six standard models, *-hp-* 200A and 200B have transformer-coupled output delivering 1 watt into matched load. *-hp-* 200C and 200D have resistance-coupled output and supply constant voltage over wide frequency range. *-hp-* 202D is similar to 200D, with lower frequency range. *-hp-* 200I is a spread-scale oscillator for interpolation or where frequency must be known accurately.

-hp- 650A Resistance-Tuned Oscillator

Highly stable, wide band (10 cps to 10 mc), operates independently of line or tube changes, requires no zero setting. Output flat within 1 db. Voltage range 0.00003 to 3 volts. Output impedance 600 ohms or 6 ohms with voltage divider.



-hp- 206A Audio Signal Generator

Provides a source of continuously variable audio frequency voltage with less than 0.1% distortion. Very high stability, accuracy 0.2 db at any level. Specially designed for testing high quality audio circuits, checking FM transmitter response and distortion, broadcast studio performance or as a low distortion source for bridge measurements, etc.

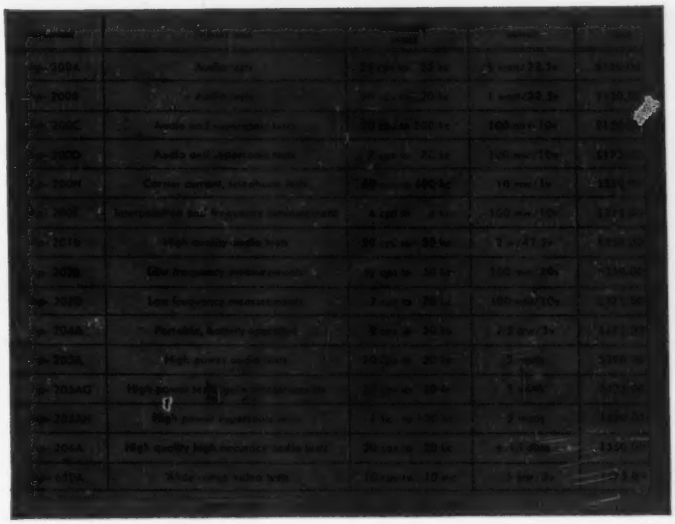

Whatever ac test voltage you need—whatever frequency or magnitude you require—there is an *-hp-* oscillator or generator to provide the exact signal desired.

-hp- oscillators offer complete coverage, ½ cps to 10,000,000 cps. They are dependable, fast in operation, easy to use. They bring you the traditional *-hp-* characteristics of high stability, constant output, wide frequency range, low distortion, no zero set during operation.

-hp- oscillators and audio signal generators are used by manufacturers, broadcasters, sound recorders, research laboratories and scientific facilities throughout the world. For complete details on any *-hp-* instrument, see your *-hp-* sales representative or write direct.

HEWLETT-PACKARD COMPANY

2250A Page Mill Road **Palo Alto, California, U.S.A.**

Sales representatives in principal areas.

Export: Frazar & Hansen, Ltd., San Francisco, New York, Los Angeles

2290

HEWLETT-PACKARD hp INSTRUMENTS

How Bing Crosby's Shavex Speeds up Electric Shaving

Model 5M4 Rectifier illustrated. Current rating 75MA. Max. input 130V RMS. Max. inv. voltage 380V. Size 1" square.

...THANKS TO VERSATILE SELETRON SELENIUM RECTIFIERS

A wonderful boon to faster whisker removal as smooth as Bing's voice is the Crosby Shavex* which changes household alternating current to D.C., thus boosting the power and speed of any electric razor as much as 40% . . . And built into each unit is a miniature SELETRON Selenium Rectifier No. 5M4 for trouble-free operation.

The Shavex is very small, and excessive heating within such a compact enclosure could be a problem. Yet President William H. Burgess of Shavex Division, Electronic Specialty Co., Los Angeles 39, says that extensive temperature tests under full load show SELETRON rectifiers operate much cooler than other rectifiers tested . . . and SELETRON's reliability has been *confirmed* by successful use of the Shavex under varied conditions of temperature and humidity over a period of several years.

SELETRON builds 'em midget size for radio, TV and other electronic circuits, all the way up to the giant stack assemblies for industrial use. Perhaps the unusual Shavex application may give *you* an idea for putting these versatile selenium rectifiers to work in some other unique spot . . . If so, SELETRON engineers can be of real assistance. Write us today, and request your copy of bulletin 104—D-10.

*Reg. T.M. of Electronic Specialty Co.

SELETRON DIVISION

RADIO RECEPTOR COMPANY, INC.

Since 1922 in Radio and Electronics

Sales Dept.: 251 W. 19th St., New York 11, N. Y. • Factory: 84 N. 9th St., Brooklyn 11, N. Y.

Seletron

T. M. Reg. U. S. Pat. Off

For *lasting* insulation strength, Sperry counts on HARVEL 912-C

For more than 10 years, Sperry Gyroscope Company has been insulating coils and other components with Harvel Internal Curing Varnishes, because of their excellent mechanical and electrical properties. Sperry . . . world famous for the quality and performance of its instruments . . . reports these specific advantages from the use of Harvel 912-C, electrical insulating varnish:

1. *High mechanical strength.* Conductors rigidly bonded into a compact mass. No soft, tacky varnish interiors to allow movement of conductors.
2. *High dielectric strength* . . . 2200 vpm. Electrical properties retained at high temperatures—unaffected by oil.
3. *Fast baking time.* 912-C cuts baking schedules as much as 50%—materially reduces production costs.

Sperry also turns to Irvington for Class "H" flexible insulations when space and weight are at a premium. Running safely at temperatures as high as 500°F, these insulations permit using smaller conductors, and thus open the way to lighter, more compact designs. It will pay *you* to investigate these Irvington products—mail coupon today for the full story.



Send this convenient coupon now

Irvington

VARNISH & INSULATOR COMPANY

Irvington 11, New Jersey

Plants: El Monte, California Hamilton, Ontario, Canada

EL 10/51

Irvington Varnish & Insulator Co.
6E Argyle Terrace, Irvington 11, N. J.
Gentlemen:
Please send me technical literature on:
☐ Harvel 912-C Varnish ☐ Class "H" Insulation
Name.....
Company.....
Street.....
City.....Zone.....State.....

Represented in the western states by C. D. LaMoree, Los Angeles, Berkeley, Seattle, Portland; Electric Motor Supply Company, Denver

NEW! Synchronous Motor Driven SINGLE CAM and MULTI-CAM RECYCLING TIMERS

The new Industrial Cam Recycling Timer continuously repeats a constant cycle consisting of definite ON and OFF periods which can be adjusted from 2% to 98% of the cycle. By means of percentage calibrations on the cam face any desired setting is quickly and accurately obtained. The time cycle itself can also be changed easily by substituting simple gear-rack assemblies. Thus, from one timer, by using different gear racks you can obtain 50 different cycles ranging from the lowest cycle of the timer up to nine times that cycle. The snap action switch operated by the timer is a single pole double throw, totally enclosed 10 ampere type. We can supply 500 different time cycles in this model ranging from one revolution in 15 seconds to one revolution in 72 hours.

The Multi-Cam Recycling Timer is identical to the Single Cam Timer but operates from 2 to 6 circuits and incorporates several additional features. On this timer all cams are mounted on a single driving shaft which assures a common time cycle for all circuits. Each cam, however, is independently adjustable for a specific timing sequence. This is accomplished by actually rotating the cam with finger pressure using the drum calibrations for guidance. Thus a range of timing sequences from 0% to 100% is obtainable on each circuit with ease. The elimination of cam followers and other types of moving parts makes possible this compact unit. 11 models are available with time cycles ranging from one revolution in 1 minute to one revolution in 72 hours.

REMOTE CONTROL FOR SINGLE CYCLE OPERATION AVAILABLE.

Send today for complete details—or, if you would like to send us specifications, we shall be glad to make recommendations based on your particular needs.

Manufacturers of These and Other Timers and Controls for Industry

TIME DELAY TIMERS

INSTANTANEOUS RESET TIMERS

MANUAL SET TIMERS



TANDEM AUTOMATIC RECYCLING TIMERS

RUNNING TIME METERS

Time's Best Control Is Pulse Beat of Industry

INDUSTRIAL TIMER CORPORATION

INDUSTRIAL TIMER CORPORATION
115 EDISON PLACE, NEWARK 5, N. J.

PAA adds 3 stations to global radio net

The Collins high frequency radio equipment in this 18,000-pound load which went aboard at La Guardia field has now extended PAA radiophone operations throughout Africa. The three new stations are set up at Leopoldville in the Belgian Congo, Salisbury in Southern Rhodesia, and Johannesburg, South Africa.

Included for each station are a Collins 231D-20 Autotune* transmitter and four 51N-2 fixed frequency receivers with remote control units, now standard throughout the Pan American World Airways system.

*Reg. U.S. Pat. Off.

For land based radio communications, it's . .

COLLINS

COLLINS RADIO COMPANY, Cedar Rapids, Iowa

11 W. 42nd St., NEW YORK 18 | 1937 Irving Blvd., DALLAS 2 | 2700 W. Olive Ave., BURBANK

for SMOOTH VOLTAGE CONTROL

Variac

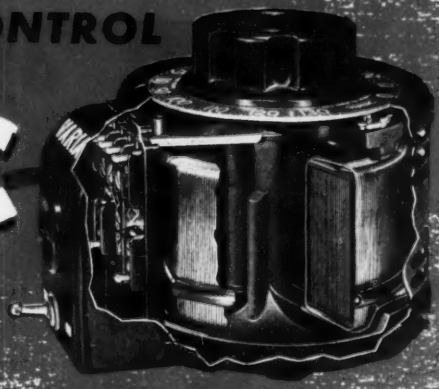

— the original continuously-adjustable autotransformer — is the ideal device for controlling [illegible] equipment. VARIACS not only supply perfectly smooth control of voltage from zero, but also furnish [illegible] voltage. VARIACS are correctly [illegible] many years of trouble-free operation. [illegible] below are for single-phase operation. Polyphase and other ganged assemblies are available.

Single-Phase Units

	Input Voltage	KVA	OUTPUT Output Voltage	OUTPUT Amperes Rated	OUTPUT Amperes Maximum	Type of Mounting*	Type	Price
Type 200-B	115	0.17	0-115 0-135	1	1.5 1.0	1	200-B	$12.50
Type V-5	115	0.86	0-115 0-135	5	7.5 5.0	1 2 3	V-5 V-5M V-5MT	18.50 20.50 25.00
	230	0.60	0-230 0-270	2	2.6 2.0	1 2 3	V-5H V-5HM V-5HMT	21.00 23.00 27.50
Type V-10	115	1.5	0-115 0-135	10	13.0 10.0	1 2 3	V-10 V-10M V-10MT	33.00 35.50 40.00
	230	1.2	0-230 0-270	4	5.2 4.0	1 2 3	V-10H V-10HM V-10HMT	34.00 36.50 41.00
Type V-20	115	3.	0-115 0-135	20	26.0 20.0	4	V-20M	55.00
	230	2.4	0-230 0-270	8	10.4 8.0	4	V-20HM	55.00

The trade name Variac is registered at the U. S. Patent Office. Variacs are patented under U. S. Patent No. 2,009,013 and are manufactured and sold only by General Radio Company or its authorized agents.

* 1 Unmounted model.
2 Protective Case around windings.
3 Protective Case, terminal cover line switch, convenience outlet and line cord.
4 Protective Case, terminal cover and BX outlet.
5 Two gang assembly — requires type 50-P1 choke — $12.00.

Type 50	115	5. 10.	0-115 0-115	40 80	45.0 90.0	4 5	50-A 50-AG2	140.00 310.00
	230	7 14.	0-230 0-230	20 40	31.0 62.0	4 5	50-B 50-BG2	140.00 310.00

Write for the NEW Variac Bulletin

GENERAL RADIO Company

275 Massachusetts Avenue, Cambridge 39, Mass.

90 West Street NEW YORK 6 920 S. Michigan Ave. CHICAGO 5 1000 N. Seward St. LOS ANGELES 38

How to Select the Variac (or the Variac Assembly) for Your Needs

	Input Volts	OUTPUT KVA[a]	OUTPUT VOLTS[b]	OUTPUT AMPERES Rated[c]	OUTPUT AMPERES Max.[d]	Type	Price	Description
Single Phase	115	.17	0–115 0–135	1.0 1.0	1.5 1.0	200-B	$ 12.50	*Uncased, with terminal strip.*
	115	.86	0–115 0–135	5.0 5.0	7.5 5.0	V-5 V-5M V-5MT	18.50 20.50 25.00	*Uncased, with terminal strip.* *With case and terminal strip.* *With case, terminal box, line cord, plug and switch.*
	115	1.5	0–115 0–135	10.0 10.0	13.0 10.0	V-10 V-10M V-10MT	33.00 35.50 40.00	*Uncased, with terminal strip* *With case and terminal strip.* *With case, terminal box, line cord, plug and switch.*
	115	3.	0–115 0–135	20.0 20.0	26.0 20.0	V-20M	55.00	*With case and terminal box.*
	115	5.	0–115 0–135	40.0 40.0	45.0 40.0	50-A	140.00	*With case and terminal box.*
	115	6.	0–115 0–135	40.0 40.0	52.0 40.0	V-20G2	126.00	*2-Gang for Windings in parallel. Requires one 50-P1 Choke ($12).*
	115	9.	0–115 0–135	60.0 60.0	78.0 60.0	V-20G3	182.00	*3-Gang for Windings in parallel. Requires one 50-P1 Choke ($12.) and one 50-P2 Choke ($12)*
	115	10.	0–115 0–135	80.0 80.0	90.0 80.0	50-AG2	310.00	*2-Gang for Windings in parallel. Requires one 50-P1 Choke ($12).*
	115	15.	0–115 0–135	120. 120.	135. 120.	50-AG3	460.00	*3-Gang for Windings in parallel. Requires one 50-P1 Choke ($12) and one 50-P2 Choke ($12).*
	230 *115*	.60	0–230 0–270 *0–270*	2.0 2.0 *1.0*	2.6 2.0 *1.0*	V-5H V-5HM V-5HMT	21.00 23.00 27.50	*Uncased, with terminal strip.* *With case and terminal strip.* *With case, terminal box, line cord, plug and switch.*
	230 *115*	1.2	0–230 0–270 *0–270*	4.0 4.0 *2.0*	5.2 4.0 *2.0*	V-10H V-10HM V-10HMT	34.00 36.50 41.00	*Uncased, with terminal strip.* *With case and terminal strip.* *With case, terminal box, line cord, plug and switch.*
	230 *115*	1.7	0–230 0–270 *0–270*	5.0 5.0 *2.5*	7.5 5.0 *2.5*	V-5G2	49.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	230 *115*	2.4	0–230 0–270 *0–270*	8.0 8.0 *4.0*	10.4 8.0 *4.0*	V-20HM	55.00	*With case and terminal box.*
	230 *115*	3.	0–230 0–270 *0–270*	10.0 10.0 *5.0*	13.0 10.0 *5.0*	V-10G2	79.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	230 *115*	4.8	0–230 0–270 *0–270*	16.0 16.0 *8.0*	20.8 16.0 *8.0*	V-20HG2	126.00	*2-Gang for Windings in parallel. Requires one type 50-P1 Choke ($12).*
	230 *115*	6.	0–230 0–270 *0–270*	20.0 20.0 *10.0*	26.0 20.0 *10.0*	V-20G2	126.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	230 *115*	7.	0–230 0–270 *0–230*	20.0 20.0 *10.0*	31.0 20.0 *10.0*	50-B	140.00	*With case and terminal box.*
	230 *115*	14.	0–230 0–270 *0–230*	40.0 40.0 *20.0*	62.0 40.0 *20.0*	50-BG2	310.00	*2-Gang for Windings in parallel. Requires one type 50-P1 Choke ($12).*
	230 *115*	21.	0–230 0–270 *0–230*	60.0 60.0 *30.0*	93.0 60.0 *30.0*	50-BG3	460.00	*3-Gang for Windings in parallel. Requires one type 50-P1 Choke ($12) and one 50-P2 Choke ($12).*
	460	1.2	0–460 0–540	2.0 2.0	2.6 2.0	V-5HG2	54.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	460	2.4	0–460 0–540	4.0 4.0	5.2 4.0	V-10HG2	81.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	460	4.8	0–460 0–540	8.0 8.0	10.4 8.0	V-20HG2	126.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
	460	14.	0–460 0–540	20.0 20.0	31.0 20.0	50-BG2	310.00	*2-Gang for Windings in series. Cannot be used with grounded load.*
Three Phase	230(e)	1.	0–230 0–270	2.0 2.0	2.6 2.0	V-5HG2	54.00	*Open Delta Circuit.*
	230	2.	0–230 0–270	4.0 4.0	5.2 4.0	V-10HG2	81.00	*Open Delta Circuit.*
	230	3.	0–230	5.0	7.5	V-5G3	68.50	*Wye Circuit. Overvoltage connection not recommended.*
	230	4.	0–230 0–270	8.0 8.0	10.4 8.0	V-20HG2	126.00	*Open Delta Circuit.*
	230	5.	0–230	10.0	13.0	V-10G3	113.00	*Wye Circuit. Overvoltage connection not recommended.*
	230	10.	0–230	20.0	26.0	V-20G3	182.00	*Wye Circuit. Overvoltage connection not recommended.*
	230	12.	0–230 0–270	20.0 20.0	31.0 20.0	50-BG2	310.00	*Open Delta Circuit.*
	230	18.	0–230	40.0	45.0	50-AG3	460.00	*Wye Circuit.*
	460	2.	0–460	2.0	2.6	V-5HG3	76.00	*Wye Circuit. Overvoltage connection not recommended.*
	460	4.	0–460	4.0	5.2	V-10HG3	116.00	*Wye Circuit. Overvoltage connection not recommended.*
	460	8.	0–460	8.0	10.4	V-20HG3	182.00	*Wye Circuit. Overvoltage connection not recommended.*
	460	25.	0–460	20.0	31.0	50-BG3	460.00	*Wye Circuit. Overvoltage connection not recommended.*

(a) KVA as used = normal input line voltage × maximum output current.
(b) Maximum output voltage = line input voltage, for "Line Voltage" output connection.
(c) Rated current (amps) should not be exceeded for the overvoltage connection. Output KVA for overvoltage connection = output voltage × rated current.
(d) Maximum current (amps) can be drawn at maximum voltage for the line-voltage connection only.
(e) On 208-volt circuits, current ratings remain unchanged, but voltage range and KVA ratings are reduced in proportion to voltage. Overvoltage connections may be used, but are not recommended on 120-volt Wye connections

Largest Horn Type Permanent Magnet—

is an INDIANA HYFLUX ALNICO V

. . . weighing 350 pounds and developing a magnetic field of 8,000 gausses in a gap 1¼" long, this giant horn type permanent magnet was developed for one of the nation's leading university research laboratories. It is used in development work in the fields of nuclear physics, micro-wave research and polymerization.

Self-powered permanent magnets have long been preferred for thousands of applications in industry, electronics, communications and research . . . preferred because they are so compact, easy to install and produce uniform magnetic force without heat or moving parts.

Now, THE INDIANA STEEL PRODUCTS COMPANY, world's largest producer of permanent magnets, offers INDIANA HYFLUX Alnico V—the most powerful permanent magnet material commercially produced. Its 16% greater guaranteed energy product assists in developing new uses to swell the 30,000 existing applications for which THE INDIANA STEEL PRODUCTS COMPANY has furnished magnets.

From Design to Delivery . . . your production or design problem may easily—and economically—be solved with an efficient, powerful INDIANA HYFLUX magnet.

INDIANA'S engineers will cooperate fully—place at your disposal their vast experience at no cost to you.

NOW 16% MORE ENERGY for ALNICO V with INDIANA HYFLUX

. . . no extra cost—INDIANA HYFLUX Alnico V develops the highest energy product of any magnet material—an average of 5½ million BH max or more, with 5¼ million guaranteed! This means greater strength—yet HYFLUX costs no more than ordinary Alnico V. You, too, will want to join the swing to HYFLUX!

Let INDIANA'S designing and unified services save you time and money—and remember only INDIANA makes HYFLUX—the magnet material that at no extra cost gives you 16% more guaranteed energy for Alnico V.

Write or Phone Today! Ask for 11A catalog of stock experimental magnets.

INDIANA PERMANENT MAGNETS

THE INDIANA STEEL PRODUCTS COMPANY

VALPARAISO, INDIANA • • • Sales Offices Coast to Coast

SPECIALISTS IN "PACKAGED ENERGY" SINCE 1908

Burnell Filters
FOR MILITARY APPLICATIONS

With the increasing number of audio filter applications in electronic military equipment, the importance of stability and durability under extreme service conditions creates many more problems in the design and manufacture of these networks.

A filter, which is not really a component, but an assembly of many components (often quite intricate) is affected by the slightest weakness in any of these parts. As a consequence, it has been our greatest task to either develop or find sources of the highest quality for materials employed in the production of filters. This project has so far been very fruitful although it necessarily resulted in increased material cost, much of which has been offset by the introduction of new and more efficient production and design methods.

All of this adds up to another step forward for Burnell & Company in the production of high quality filter networks for the Nation's military electronic program.

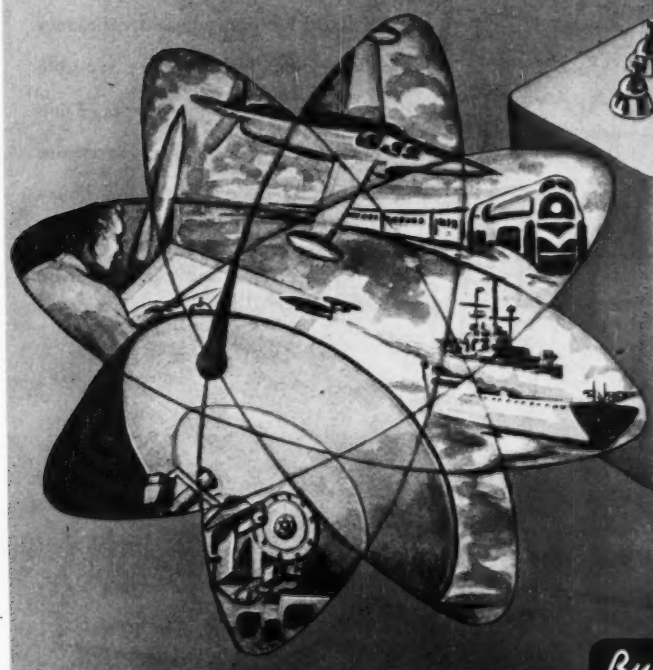

EXCLUSIVE MANUFACTURERS OF COMMUNICATIONS NETWORK COMPONENTS

Burnell & Company
YONKERS 2, NEW YORK
CABLE ADDRESS "BURNELL"

Another HAYDON

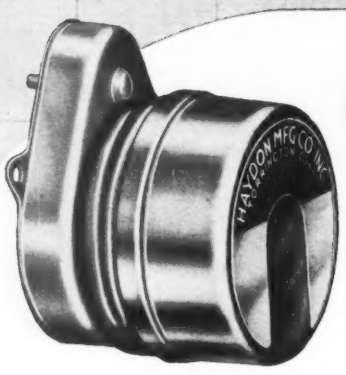

400 CYCLE

HAYDON research and engineering staffs constantly seek to develop new and build better products. One example is the HAYDON 400 cycle timing motor. This is an hysteresis type synchronous timing motor, for use as a separate motor or in many different types of timers. HAYDON personnel and plant are equipped to build motors and timers using D.C., 60 cycle or 400 cycle for military or civilian applications.

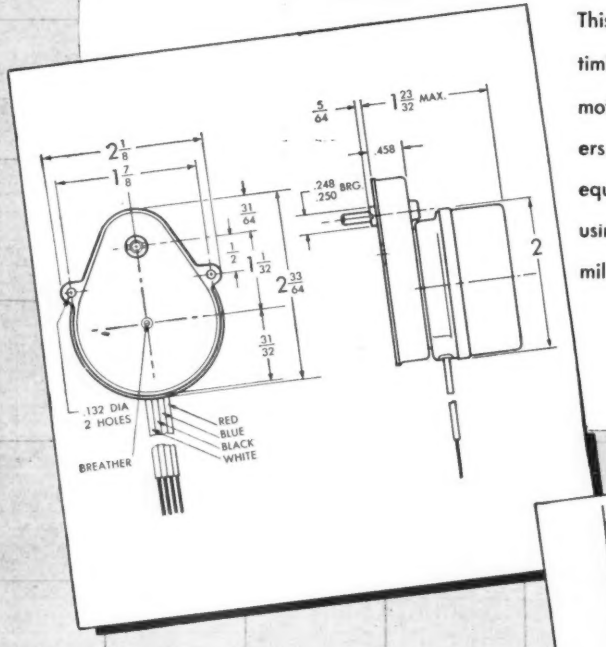

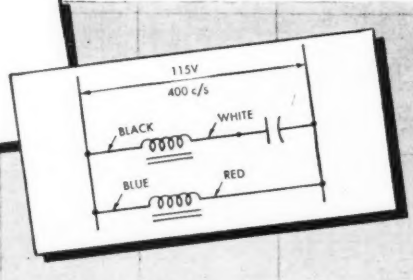

FIRST *in Timing*

SYNCHRONOUS TIMING MOTORS and TIMERS

SPECIFICATIONS:

Hysteresis type synchronous timing motor, essentially two phase . . . furnished with capacitor for self-starting operation on single phase . . . standard gear trains available, special designs available for quantity production . . . speeds available with standard gear trains range from 1/60 to 30 rpm . . . weighs approximately 6-1/2 oz. . . . dimensions, except for slightly greater depth, closely follow those of HAYDON 60 cycle timing motors.

FEATURES:

Inherently accurate approach to timing problems. Not affected by variations in temperature, supply voltage, load and altitude. R-F filtering or shielding not required. Brush life or wear not a problem. Where primary current supply is 400 cycle, rectifying equipment and duplication of wiring may be reduced or eliminated.

Write for a copy of Engineering Bulletin #2 for complete information on the 400 cycle motor.

HAYDON
AT TORRINGTON

HEADQUARTERS FOR
TIMING

HAYDON Manufacturing Co., Inc.
SUBSIDIARY OF GENERAL TIME CORPORATION
2434 ELM STREET
TORRINGTON **CONNECTICUT**

Plus Values of CLARE when unfailing



Connection diagrams clearly and permanently imprinted by silk screen process. Not just stamped upon top of enclosure.

CLARE hermetically sealed relay with solder terminals.



Same relay with AN Plug Connector

This small CLARE Type "R" Relay supplies many special features responsible for the outstanding performance of these new "AN" approved relays.

The operating "heart" of these two new hermetically sealed relays is the CLARE Type "R" Relay which is characterized by unusual sensitivity and extremely long life.

It combines the advantages of a telephone-type relay with the small size, light weight and resistance to vibration required to meet the rigid demands of aircraft service. The Type "R" retains in an improved form the reed armature suspension which discerning engineers have come to recognize as one of the subtler reasons for the superior performance of CLARE Type "K" relays.

The Type "R" is $1\frac{7}{16}$" long, $1\frac{3}{64}$" high and 1" in width. It weighs approximately 2 ounces. Coil may be single or double-wound; armature, single or double-arm; operating voltage up to 230 volts d-c.

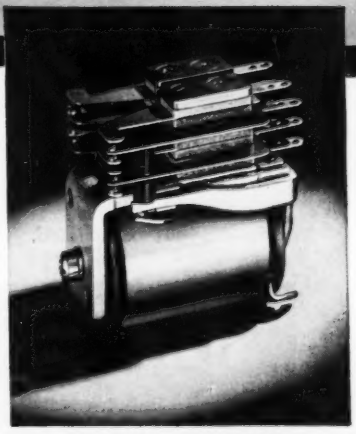

CLARE Type "R" RELAY

CLARE RELAYS . .

RELAYS make them 1st choice performance is a "must".

These two hermetically sealed CLARE RELAYS not only meet, but surpass, stringent requirements for airborne military use.

When the safety of a plane costing perhaps millions of dollars, and the priceless lives of its crew, may depend upon the unfailing performance of a relay, the *plus values* of a CLARE RELAY are of tremendous importance.

These two hermetically sealed CLARE Type "R" Relays were designed to meet airborne-service specifications so difficult and exacting that several months were required to run the rigid performance tests. They meet the specifications in every particular—and even *exceed* them in many significant respects!

The CLARE standard leak test, for example, made with a mass spectrometer, is much more stringent than the immersion test the relays are asked to meet. The resistance to vibration inherent in the design of the CLARE Type "R" Relay is an important factor in enabling these relays to exceed required specifications by a wide margin.

Outstanding Operational Features

- CLARE Type "R" Relay provides uncommonly wide contact gaps and heavy contact pressures without requiring any more operating power than ordinary relays of the same size.
- Powerful coil and generous use of iron in close-coupled magnetic structure enables these relays to pull in at 64% of nominal operating voltage at 85° C. and yet draw no more than 0.120 amp. on 28 volts at 25° C.
- Leakage: Terminal-to-terminal or terminal-to-frame resistance, 10,000 megohms.
- Cover is rolled and crimped over edge of base in a hydraulic press; does not depend on solder seam for mechanical strength.

Clare sales engineers are located in principal cities. Call on them or write: C. P. Clare & Co., 4719 West Sunnyside Avenue, Chicago 30, Illinois. In Canada: Canadian Line Materials, Ltd.; Toronto 13. Cable Address: CLARELAY.

First in the Industrial Field

wondering about glass?

LET CORNING TECHNICAL SERVICES HELP SOLVE YOUR PROBLEMS!

DESIGN ENGINEERING

PRODUCT ENGINEERING

GLASS TECHNOLOGY

Like most materials, glass for electronic applications must be carefully selected and properly engineered to the application involved. When you come to Corning for your electronic glass requirements you have available complete technical services to help solve these problems.

Specialists in product engineering, glass working techniques, and design are ready to go to work for you. And their experience is backed by complete and modern research, pilot plant and manufacturing facilities.

What's more, Corning has developed hundreds of glasses with widely varying electrical characteristics. Whether you need low loss, high dielectric constant and strength, or low power factor, Corning has a glass to fit your requirements. So why not take advantage of the services Corning has waiting for you. For further information, write to department E-10, Corning Glass Works, Corning, N. Y.

CORNING GLASS WORKS, CORNING, N. Y.

Corning means research in Glass

ELECTRONIC SALES DEPARTMENT — ELECTRICAL PRODUCTS DIVISION

1851 - 100 YEARS OF MAKING GLASS BETTER AND MORE USEFUL - 1951

COLORED CORES....

prevent costly errors, save time, reduce core selection to a routine

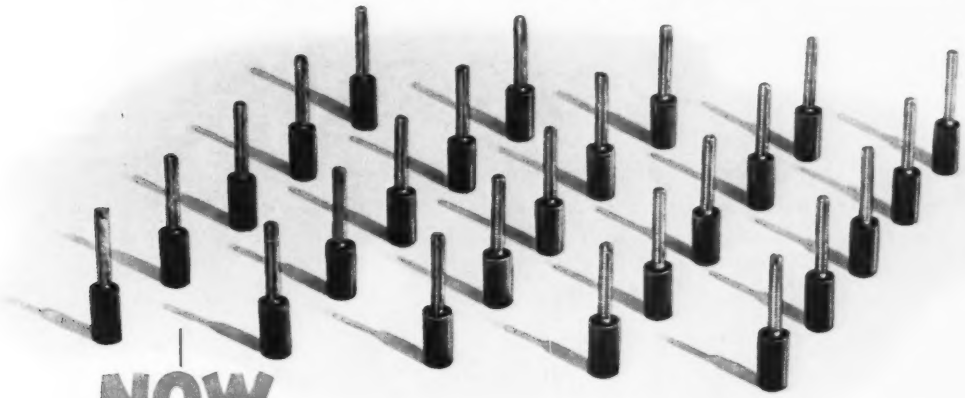

NOW

to MANY GRADES . . . G A & F Carbonyl Iron Powders do a precision job—because they are manufactured to exacting standards of uniformity . . . in particle size, particle shape, purity, permeability, "Q" value, etc. With six different grades, there is a powder for every use.

and MANY USES . . . The cores made from G A & F Carbonyl Iron Powders are designed and made for specific jobs in electronics, and on exacting standards. These cores become the hearts of accurate instruments and dependable receiving sets . . . Each must be used for the application for which it was designed. This means that these cores must be accurately identified or otherwise protected against costly errors of selection.

ADD

MANY COLORS . . . Instead of embossing, engraving or paint-daubing the finished cores—all slow and expensive processes—Antara Products now offers the simplest and easiest of all possible answers: distinctive, *permanent* dyes, incorporated with the powder, to be built into the cores. With an adequate color choice, these dyes provide the fool-proof identification that cuts down costly errors, reduces production costs, makes core selection routine instead of a mental hazard.

The dyes are strong and easily seen; they withstand the heat of the curing; they are not affected by humidity or temperature; they are satisfactory at a wide range of molding pressures and shapes. They do not improve electrical or magnetic properties, to be sure, but any decrease is very minor and more than compensated by the production advantages. *For further details, kindly contact your core manufacturer and write us for Technical Bulletin.*

gdc ANTARA

ANTARA® PRODUCTS

DIVISION OF

GENERAL DYESTUFF CORPORATION

435 HUDSON STREET • NEW YORK 14, NEW YORK

G A & F® Carbonyl Iron Powders

The Development of CARBONYL IRON POWDERS

Carbonyl Iron Powder is an extremely pure form of iron, the metal content being over 99.99% iron, produced in the form of almost perfect spheres only one to fifteen microns in diameter—the average diameter being 8 microns (.00032 inches). It has been produced commercially for some years, primarily for use in magnetic cores for electronic equipment. Its production is therefore now under perfect control to give absolute reliability in quality and properties.

The production of Iron Carbonyl, from which Carbonyl Iron Powders are made, depends on a unique reaction, which was discovered in 1890 by the distinguished British chemist, Sir Ludwig Mond. When iron is treated with carbon monoxide it reacts to form iron pentacarbonyl, a rare case of a liquid compound of a metal. Each atom of iron combines with five molecules of carbon monoxide to give a compound with the formula $Fe(CO)_5$. This reaction leaves behind any impurities in the original iron.

This liquid is vaporized and the vapor heated above 200°C, when it decomposes into its constituents. The carbon monoxide is driven off and the iron separates from the vapor phase, first in the form of free atoms, then as ultramicroscopic crystals, finally as microscopic, almost perfect spheres. The particle size distribution can be controlled by temperature, pressure and other operating conditions.

Controlled purity and distribution of particle size is essential for use of the powder in electronics, where minor variations in these properties have exaggerated consequences in delicate electrical and magnetic effects.

The only other elements present are non-metals such as carbon, oxygen and nitrogen. In G A & F Carbonyl Iron Powder, they amount to not more than 0.8% carbon, 0.9% oxygen and 0.7% nitrogen.

These unique properties tell why G A & F® Carbonyl Iron Powders are superior:

PROPERTY	ADVANTAGE
Spherical structure . . .	Facilitates insulation and compacting
Concentric shell structure (some types only) . . .	Low eddy current losses
High iron content . . .	Exceptional permeability and compressibility
Absence of non-ferrous metals . . .	Absence of corresponding disturbing influences
Relative absence of internal stress; regular crystal structure . . .	Low hysteresis loss
Spheres of small size . . .	Low eddy current losses; usable for high frequencies
Variations of sphere size . . .	Extremely close packing

The first large-scale production of Iron Carbonyl was undertaken in Germany shortly after 1920. By 1928 the process had been adapted to the continuous commercial production of Carbonyl Iron Powder. Subsequently, detailed studies and meticulous laboratory-type controls in the plant permitted accurate regulation of purity and particle size for the needs of the modern electronic industry.

The first commercial Carbonyl Iron plant in the United States was opened at Grasselli, N. J. in 1941 by the General Aniline & Film Corporation, primarily to meet the large wartime demand for electronic equipment. Newer and finer grades of the powder were developed for use in high-frequency electronic equipment for radar and television. Later a second plant was put into operation at Huntsville, Alabama.

Thus the G A & F Carbonyl Iron Process is now well established and in steady operation. It is an outstanding case of the succesful precision control of a sensitive chemical reaction to produce a unique material that must meet extraordinary specifications of purity, particle shape and size, and uniformity.

Write today for a free book—fully illustrated with performance charts and application data. It will help radio engineers or electronics manufacturers to step up quality, while saving real money. Kindly address your request to Department #100.

ANTARA® PRODUCTS

DIVISION OF

GENERAL DYESTUFF CORPORATION

435 HUDSON STREET • NEW YORK 14, N. Y.

G A & F® Carbonyl Iron Powders . . . .

MEMBER mpa METAL POWDER ASSOCIATION

Buy Appeal

For Home Entertainment Units

High in quality . . . yet low in price . . . General Industries' Model 250 Tape-Disc Recorder Assembly meets every need for an all-purpose sound recorder. It is simple to operate, foolproof and dependable—built to the same high quality standards which identify all GI *Smooth Power* phonomotors and turntable assemblies.

Now is the time to investigate the tremendous profit possibilities offered by this versatile recording assembly. Write today for catalog sheet describing both recording and playback features of the GI Model 250.

Model 250 Tape-Disc Recorder Assembly

Suggested amplifier circuit and complete amplifier parts list is contained in a comprehensive service manual which accompanies each unit.

The GENERAL INDUSTRIES CO. **Department B • Elyria, Ohio**

AEROVOX
capacitors
CUSTOM-FITTED
TO EVERY NEED*
† That's the "why" of Aerovox capacitors. For along with these capacitors you can get Aerovox Application Engineering — experience background second to none — in fitting the RIGHT capacitor to the RIGHT circuitry for the RIGHT operating conditions. And that's most important.
AEROVOX CORPORATION
THE HOME OF CAPACITOR CRAFTSMANSHIP
AEROVOX CORPORATION, NEW BEDFORD, MASS., U.S.A.
Export: 41 E. 42nd St., New York 17, N. Y. • Cable: AEROCAP, N. Y. • In Canada: AEROVOX CANADA LTD., Hamilton, Ont.
SALES OFFICES IN ALL PRINCIPAL CITIES

Now!

Transient-free test voltages down to 0.01 cps!

Versatile, general purpose generator for subsonic and audio work! Continuously variable, 0.01 to 1,000 cps, 5 bands. High stability, distortion less than 1%. Radical new circuitry offers sine, square and triangular waves.

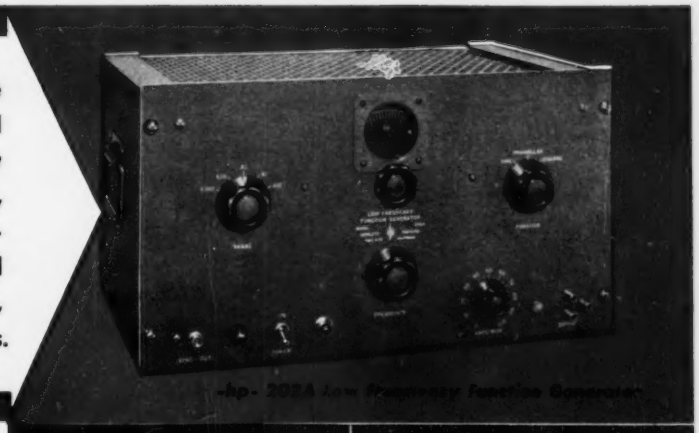



Figure 1. Oscillogram shows freedom from transients as output frequency is changed.



Figure 2. Oscillogram of (a) triangular wave applied to shaping circuit and (b) resulting sine wave.

SPECIFICATIONS

-hp- 202A Low Frequency Function Generator

FREQUENCY RANGE: 0.01 to 1,000 cps in five decade ranges.

DIAL ACCURACY: Within 2%.

FREQUENCY STABILITY: Within 1% including warm-up drift.

OUTPUT WAVEFORMS: Sinusoidal, square, and triangular.

MAXIMUM OUTPUT VOLTAGE: At least 30 volts peak-to-peak across rated load for all three waveforms.

DISTORTION: Less than 1% RMS distortion in sine wave output.

OUTPUT SYSTEM: Can be operated either balanced or single-ended. Output system is direct-coupled; dc level of output voltage remains stable over long periods of time. Adjustment available from front panel balances out of any dc.

FREQUENCY RESPONSE: Constant within 1 db.

HUM LEVEL: Less than 0.1% of maximum output.

SYNC PULSE: 5 volts peak, less than 10 μsec duration. Sync pulse occurs at crest of sine and triangular wave output.

POWER: 115-volt, 50/60 cycles, 175 watts.

DIMENSIONS: 10½" high, 19" wide, 13" deep.

PRICE: $450.00 f.o.b. Palo Alto, California. End frames, for table use, $5.00 per pair f.o.b. factory. (Specify No. 17.)

Data subject to change without notice.

–hp– 202A Low Frequency Function Generator offers you a compact, convenient and versatile source of transient-free test voltages between 1,000 and 0.01 cps. It provides virtually distortion-free signals for vibration studies, servo applications, medical and geophysical work, and other subsonic and audio problems. For such applications, the equipment generates 3 wave forms: sine, square and triangular. (Desired wave form is selected on front panel switch.) Output is 30 volts peak-to-peak for all 3 wave forms.

NEW CIRCUIT CONCEPT

–hp– 202A differs from conventional low-frequency oscillators in that the sine wave is electronically synthesized. A controlled bi-stable circuit generates a rectangular wave. This wave is passed through a special integrator providing a true triangular wave (Figure 2a). The triangular wave then enters a shaping circuit developed by *–hp–*. Here 6 duo-diodes modify or "shape" the peaks and provide a true sine wave with distortion of less than 1% (Figure 2b). This synthesizing circuit provides virtually transient-free output even when range switch is operated or frequency is rapidly varied. This circuit also maintains the amplitude constant under all conditions. It is not necessary to wait long periods for the circuit to stabilize at a new level as with conventional oscillators.

OTHER FEATURES

The output system of *–hp–* 202A is fully floating with respect to ground. May be used to supply a balanced voltage or either terminal may be grounded. It will deliver 10 v RMS to a load of 5,000 ohms or greater; internal impedance, however, is only 100 ohms. There are no coupling capacitors in the output system, and a high degree of dc balance is achieved by means of a special circuit.

-hp- field engineers, in most major cities, have complete details. Or, write direct.

HEWLETT-PACKARD CO.

2325A Page Mill Road • Palo Alto, Calif.

Export: FRAZAR & HANSEN, LTD.

San Francisco • Los Angeles • New York

HEWLETT-PACKARD hp INSTRUMENTS

The FIRST all-band direct reading SPECTRUM ANALYZER

10 MCS to 16,520 MCS

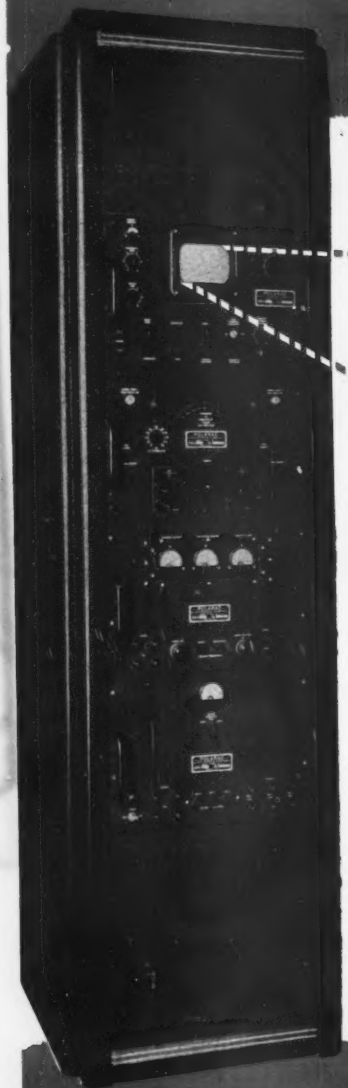

Polarad's Model LSA Spectrum Analyzer is the result of years of research and development. It provides a simple and direct means of rapid and accurate measurement and spectral display of an r.f. signal.



Outstanding Features:

- Continuous tuning.
- One tuning control.
- 5 KC resolution at all frequencies.
- 250 KC to 25 MCS display at all frequencies.
- Tuning dial frequency accuracy 1 percent.
- No Klystron modes to set.
- Broadband attenuators supplied with equipment above 1000 MCS.
- Frequency marker for measuring frequency differences 0-25 MCS.
- Only three tuning units required to cover entire range.
- Microwave components used to est design non-contacting shorts for long mechanical life.
- Maximum frequency coverage per dollar invested.
- 5 inch CRT display.

Where Used:

Polarad's Model LSA Spectrum Analyzer is a laboratory instrument used to provide a visual indication of the frequency of distribution of energy in an r.f. signal in the range 10 to 16,520 MCS.

Other uses are:

1. Observe and measure sidebands associated with amplitude and frequency modulated signals.
2. Determine the presence and accurately measure the frequency of radio and/or radar signals.
3. Check the spectrum of magnetron oscillators.
4. Measures noise spectra.
5. Check and observe tracking of r.f. components of a radar system.
5. Check two r.f. signals differing by a small frequency separation.

Write for Complete Details

the instrument consists of the following units:

Model LTU-1 R.F. Tuning Unit—10 to 1000 MCS.
Model LTU-2 R.F. Tuning Unit—940 to 4500 MCS.
Model LTU-3 R.F. Tuning Unit—4460 to 16,520 MCS.
Model LDU-1 Spectrum Display Unit.
Model LPU-1 Power Unit.
Model LEU-1 Klystron Power Unit.

Polarad
Electronics Corporation
100 Metropolitan Ave. Brooklyn 11, N. Y.

Manufacturers of broadband microwave laboratory instruments.

REPUBLIC ALUMINUM FOIL

PROCESSES ECONOMICALLY

Republic makes high quality aluminum foil that works well with production equipment. Straight, clean edges, accurate gage, uniform strength are all important . . . Add to these an understanding of the abilities and limitations of the machines on which it will be processed and in Republic foil you have a product that gives maximum performance with a minimum of down time.

REPUBLIC FOIL & METAL MILLS
INCORPORATED
DANBURY **CONNECTICUT**

BRANCH SALES OFFICES: 209 W. Jackson Blvd., Chicago 6, Ill.
666 Mission St., San Francisco 5, Calif.

Your exact power needs met *Quickly!* ...*Economically!*

WIDEST RANGE OF OUTPUT RATINGS IN THE MOST COMPACT SIZES AND WEIGHTS

EICOR

DYNAMOTORS

for all types of Mobile Communications

You Get All These Advantages

- Extremely Light Weight
- Most Compact Size
- Exceptionally Low Ripple
- Remarkable Voltage Regulation
- High Efficiency Power
- Excellent Commutation
- Quiet Operation
- Long Trouble-Free Life
- Minimum Maintenance
- Proved Performance

EICOR engineering starts with load tests and analysis of your power requirements and ends only after proof of satisfactory installation performance. With complete laboratory testing facilities, every phase of design and production is under strict quality control.

That is why Eicor Dynamotors are standard equipment with many manufacturers of radio and electronic devices for railroad, aircraft, marine, police, and other mobile users.

Engineered by EICOR Specialists ... Proved through Years of Service

Every inch . . . every ounce . . . every feature of EICOR DYNAMOTORS is engineered to meet the critical demands of mobile communication and other D.C. electronic equipment.

Complete range *from the smallest in size to the largest in output* makes it easier to provide the exact units needed for your application. Available in both open and enclosed types . . . with or without filters. Supplied with or without metal base, operate satisfactorily in any position.

Hundreds of optional output ratings are completely designed and can be produced on short notice. Our facilities are equally adaptable to the engineering of a single experimental unit or to the production of large quantities. EICOR experience can prove profitable and time-saving for you. *Check your needs with us now!*

OTHER EICOR PRODUCTS: Fractional Horsepower D C Motors —Alternators, 8 K.VA to 34 KVA—Exciters, both integral and electronic—Electronically controlled Inverters 100 VA to 5000 VA —and many other special items for power conversion (either electrical to electrical or mechanical to electrical) are engineered and manufactured to your specifications.

EICOR, INC.

MANUFACTURERS OF *Rotary Electrical Equipment*

1501 W. CONGRESS ST. EICOR CHICAGO 7, ILL.

DYNAMOTORS • CONVERTERS • MOTORS • GENERATORS • ALTERNATORS

STRAIGHT-SIDE DESIGN

gives you G-E rectifier tubes for broadcasting that are better in three ways—

1. Safety margin is high, with less chance of arc-backs.
2. Designers can group these "slim" tubes compactly.
3. Straight-side rectifier tubes are easy to handle and install.

CLOSE TUBE-ELEMENT SPACINGS WARD OFF ARC-BACKS in popular G-E rectifier types GL-8008 and GL-673, giving improved protection from high voltages. The narrow straight-side bulb lies close to the anode. Spacings between anode, cathode, and cathode-shield are reduced. Volume of ionization thus is less—deionizing time shortened.

"SLIM" TUBE CONTOUR HELPS THE DESIGNER. Space is at a premium in compact modern equipment, and GL-8008's and GL-673's will mount side-by-side to take up minimum panel area. Maintenance men find these straight, slender tubes ideal to handle; quick to install.

YOU CAN COUNT ON UNIFORM QUALITY, UNIFORM PERFORMANCE. G-E know-how in precision-building rectifier tubes goes back more than 20 years to basic development work done by General Electric. *Four out of the five tubes* rated below were pioneered by G.E.—these types covering most broadcast requirements for high-vacuum rectifier tubes!

G.E. OFFERS YOU A TOP-TO-BOTTOM RANGE OF SIZES. Types shown and listed here are examples. Whatever your rectifier-socket need may be, there's a G-E tube to meet that need! If your problem is one of circuit application, your nearby G-E electronics office is ready to offer expert counsel. If you are a broadcaster wishing replacements, phone your nearby G-E tube distributor for fast, competent service! *Electronics Department, General Electric Company, Schenectady 5, New York.*

Type	Cathode voltage	Cathode current	Anode peak voltage	Anode peak current	Anode avg current
GL-866-A	2.5 v	5 amp	10,000 v	1 amp	0.25 amp
GL-8008	5 v	7.5 amp	10,000 v	5 amp	1.25 amp
GL-673	5 v	10 amp	15,000 v	6 amp	1.5 amp
GL-869-B	5 v	19 amp	20,000 v	10 amp	2.5 amp
GL-857-B	5 v	30 amp	22,000 v	40 amp	10 amp

GENERAL ELECTRIC

EXPLOSION-PROOF POWERSTATS

excel for SAFETY wherever HAZARDOUS CONDITIONS EXIST

POWERSTAT
TYPE 1126

EXPLOSION-PROOF
POWERSTAT
TYPE X1126

THE POWERSTAT is a precision-built variable transformer operated manually or with motor drive to deliver any selected output voltage in the range from zero to or above line voltage.

EXPLOSION-PROOF means that the POWERSTAT is enclosed in a rugged cast iron housing to withstand internal gas or vapor explosions and prevent ignition of gas vapors surrounding the enclosure. Approved by Underwriters' Laboratories for Class 1, Group D service.

Designed for precise control of a-c power lines, Explosion-proof POWERSTATS are widely accepted and are at work in the lab, pilot and processing plants . . . providing protection in hazardous areas to men, equipment and facilities.

Explosion-proof POWERSTATS possess all the desirable characteristics found in all POWERSTATS including excellent regulation, high efficiency, conservative ratings, zero waveform distortion, smooth and dependable operation.

THIS FOLDER CAN HELP YOU SAFEGUARD PLANT INVESTMENTS

Complete with product and application information, rating charts, circuit diagrams and dimensions on variable voltage control equipment.

WRITE TODAY, SECO, 410 CHURCH ST., BRISTOL, CONN.

THE SUPERIOR ELECTRIC CO.
BRISTOL, CONNECTICUT

POWERSTAT VARIABLE TRANSFORMERS • VOLTBOX A-C POWER SUPPLIES • STABILINE VOLTAGE REGULATORS

BRING YOURSELF UP-TO-DATE ON

Hermetic Sealing

WITH THIS

Completely New

32-PAGE BROCHURE!

Free!

This important new brochure is yours for the asking. It is more than merely a catalog; it is the result of years of creative effort by the largest exclusive manufacturer of hermetic seals in the world. This Company has pioneered and innovated almost every development in this highly specialized field. It has achieved remarkable results in miniature and subminiature plugs and seals. The brochure features many illustrations and complete technical data to make it easy for you to determine the right glass-metal headers for the components you are planning.

Remember, too, that Hermetic Seal Products' staff of specialist-engineers is eager to help you with your problems in the ever-expanding field of hermetic sealing.

HERMETIC SEAL PRODUCTS' headers are available in unlimited shapes and with any number of terminals as required. They are the only seals you can hot tin dip at 525°F. for easy assembly soldering, for a strain and fissure-free sealed part with resistance of over 10,000 megohms. They will also withstand sub-zero conditions, swamp test, temperature cycling, high vacuum, high pressure, salt water immersion and spray, etc.

Important! Terminals and Headers are available in RMA Color Code.

SEALED IN — Hermetic Headers

HERMETIC SEAL PRODUCTS COMPANY

31-33 South Sixth Street • Newark 7, New Jersey

Visit Hermetic's Exhibit—Booth 43, 1951 National Electronics Conference, Chicago, Oct. 22-24

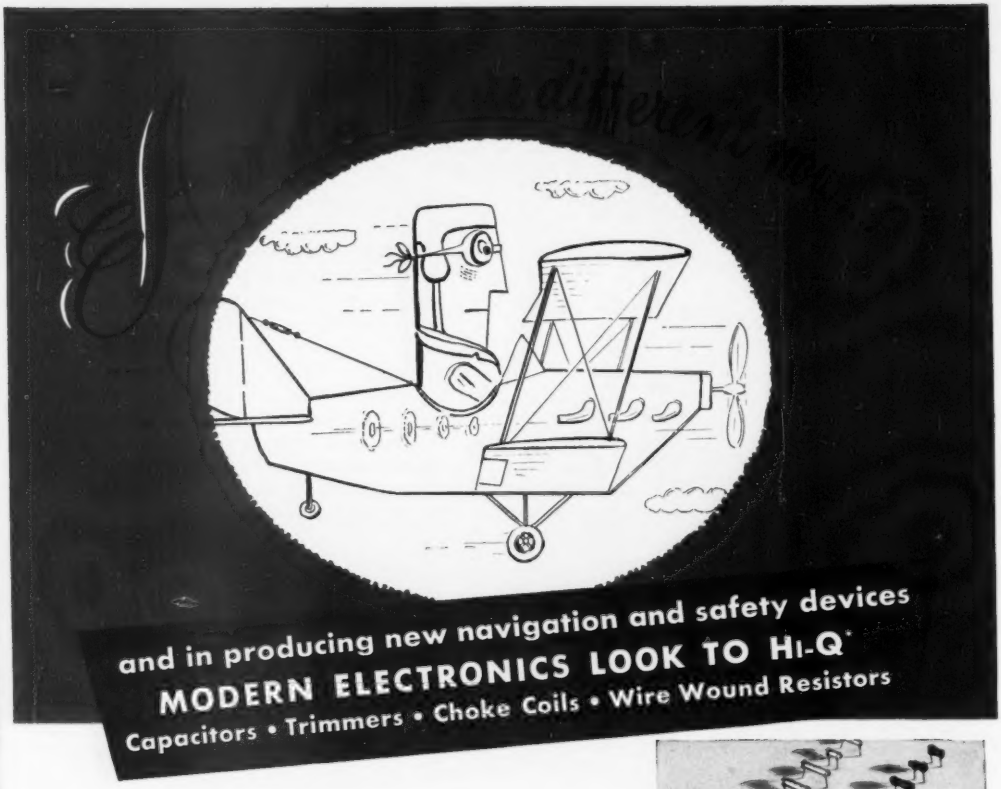
and in producing new navigation and safety devices
MODERN ELECTRONICS LOOK TO HI-Q*
Capacitors • Trimmers • Choke Coils • Wire Wound Resistors

In the air, where space and weight are at a premium, the value of the minute compactness of **HI-Q** Components is vividly dramatized. Of equal importance is their never failing dependability under any and all conditions. For let a single small unit fail, and life itself may hang in the balance.

The same high engineering standards and unvarying quality which have made **HI-Q** a leader with producers of aircraft equipment, have found equal favor with other electronic manufacturers. Individual tests of every single component at each stage of production, and as a part of final inspection, insure the precise adherence to specifications, ratings and tolerances. That is one reason why **HI-Q** is now serving virtually every leading producer of television, communications and other electronic equipment. Another is the ready availability of **HI-Q** engineers to cooperate in the development of new components to meet specialized needs.

JOBBERS—ADDRESS: 740 Belleville Ave., New Bedford, Mass.



HI-Q TEMPERATURE COMPENSATING CAPACITORS

These high voltage tubular capacitors are available in capacities from 25 mmf. to 250 mmf. Units with working voltage of 3000 V. D. C., are 1.840″ long with .375″ diameter. Those between 500 V. D. C. and 3000 V. D. C. are slightly smaller. All are Durez coated and made of temperature compensating materials.

BETTER 4 WAYS

- ✓ PRECISION
- ✓ UNIFORMITY
- ✓ DEPENDABILITY
- ✓ MINIATURIZATION

* *Trade Mark Registered, U. S. Patent Office*

HI-Q*

Electrical Reactance Corp.
OLEAN, N. Y.

SALES OFFICES: New York, Philadelphia, Detroit, Chicago, Los Angeles

PLANTS: Olean, N. Y., Franklinville, N. Y. Jessup, Pa., Myrtle Beach, S. C.

Superior Tubular Parts ...mean Superior Electronic Performance

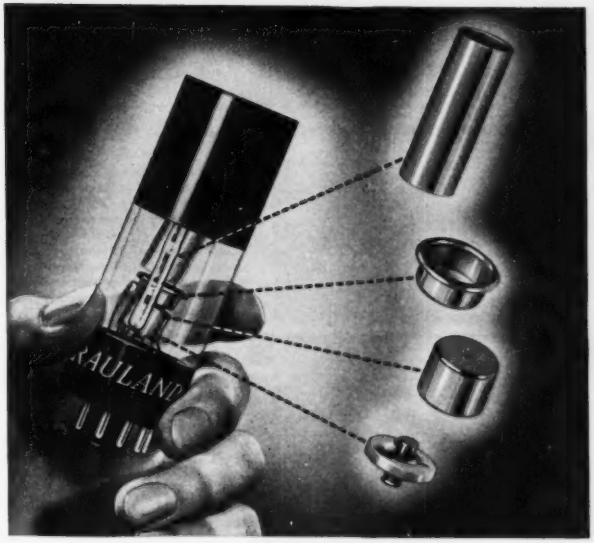

Part of Inspection Procedure on Lockseam Nickel Cathodes as they come off the production machine. Each cathode must undergo many rigid tests before being approved.

Engineering . . . laboratory equipment for all kinds of testing, including emission characteristics of nickel cathode materials.

To Guard Against contamination by processing lubricants, Superior tubing is thoroughly degreased before each annealing operation.

Superior supplies disc cathodes, cups and anodes for the famous *Rauland* "Tilted Offset" Electron Gun used in peak-performance picture tubes. This new development of Rauland permits the use of a single Ion Trap magnet, bends the electron beam only once and gives the sharpest possible beam focus. The new Indicator Ion Trap reduces adjustment time to a matter of seconds, eliminates the need for mirrors or guesswork in Ion Trap adjustment. This "Double Feature" gun is a triumph of Rauland research.

But no electronic device can be better than the components of its assembly. That's why Rauland and so many other electronics manufacturers specify Superior tubular parts.

Here at Superior we combine production know-how, research facilities and engineering experience to produce tubular parts, in many forms and metals, each designed to do tough electronics jobs better. We have specialty equipment for the high speed production of anodes, cups, cathodes, grid cylinders and many other parts for television and cathode ray gun structures. If you are not now a customer of Superior it will pay you to check on the many ways in which we can serve you. Write for information —no obligation of course. Superior Tube Company, 2500 Germantown Ave., Norristown, Pennsylvania.

Which Is The Better For Your Product . . .

SEAMLESS . . . ? The finest tubes that can be made. Standard production is .010" to .121" O.D. inclusive, with wall thicknesses of .0015" to .005". Cathodes with larger diameters and heavier walls will be produced to customer specification.

Or LOCKSEAM* . . . ? Produced directly from thin nickel alloy strip stock, .040" to .100" O.D. in standard length range of 11.5 mm to 42 mm. Round, rectangular or oval, cut to specified lengths, beaded or plain.

Superior

THE BIG NAME IN SMALL TUBING

All analyses .010" to ¼" O.D.
Certain analyses (.035" max. wall) Up to 1¼" O.D.

*MFD. UNDER U. S. PATS. **SUPERIOR TUBE COMPANY** • Electronic Products for export through Driver-Harris Company, Harrison, New Jersey • Harrison 6-4800

DOW CORNING SILICONES

Heat-Stable, Moisture-Proof

SILICONE DIELECTRIC MATERIALS

are available in the following forms:

LIQUID DIELECTRICS

DOW CORNING 200 FLUIDS are a series of clear, inert liquids, notable for their thermal stability and for their remarkably flat viscosity-temperature slopes. Available in viscosities from 0.65 to 1,000,000 centistokes. Pour points range from −125° to −47°F. and flash points range from 30° to 600°F. Low dissipation factors at elevated temperatures or at high frequencies, inertness to moisture, oxidation resistance and heat stability make Dow Corning 200 Fluids unique among liquid dielectrics.



As indicated by these curves, neither frequency nor temperature changes have any pronounced effect on the power factors or dielectric constants of Dow Corning 200 Fluids. Power factor and dielectric constant of 1000 cs. fluid at −17°, 23°, and 83° C. are plotted against frequencies ranging from 10 to 10^{10} cycles per second.

DIELECTRIC COMPOUND

DOW CORNING 4 COMPOUND is a nonmelting water-repellent dielectric paste which retains its grease-like consistency at temperatures from −70° to 400°F. It is highly resistant to oxidation and to deterioration caused by corona discharge. Power factor is less than 0.003 at frequencies up to 10,000 megacycles; volume resistivity is more than 10^{12} ohm centimeters at temperatures up to 400°F.; dielectric strength is more than 500 volts per mil at a 10 mil gap. Dow Corning 4 meets all requirements of Specification AN-C-128a.



Dow Corning 4 packed in phonograph pick-up head cartridges increased crystal service life 20 times. The silicone compound prevents Rochelle Crystals from deteriorating due to absorbed moisture. It also acts as a viscous damping medium, thereby reducing excess vibration and enabling the head to handle a much higher frequency.

ELECTRICAL INSULATING VARNISHES

DOW CORNING 996 VARNISH dries tack-free in not more than 3 hours at 150°C. Dielectric strength measured with 2 inch electrodes on 2 mil films baked for 16 hours at 150°C. is 1000-2000 volts/mil, dry, and 500-1500 volts/mil, wet. Heat flexibility is more than 100 hours at 250°C. Cured films have good resistance to dilute acids, concentrated hydrochloric acid, and dilute or concentrated alkalies.

Flashover in high voltage television power supply coils can set ordinary organic varnish aflame. To eliminate this fire hazard, coils are impregnated with Dow Corning 996. Highly resistant to arcing, 996 provides positive protection against carbon tracking for the life of the entire set.

SILASTIC *, THE DOW CORNING SILICONE RUBBER

Silastic combines the remarkable heat stability and moisture resistance of resinous silicones with the physical properties of rubber, including resilience, shock and abrasion resistance, and resistance to both mechanical and electrical fatigue. Its dielectric properties show little change over a wide range of frequencies, even after aging at high temperatures. The surface resistivity of Silastic is high, and its thermal conductivity is about twice as great as that of either organic rubber or resinous insulating materials.

*T.M. REG. U.S. PAT. OFF.



Completely eliminating taped connections on aircraft antennae, white Silastic seals reduce static and corona discharge by as much as 90%. They retain their resilience as well as their dielectric properties, excluding moisture and foreign matter after long exposure to the full range of ground and stratospheric temperatures.

SILICONE-GLASS LAMINATES

DOW CORNING THERMOSETTING RESINS are used to bond inorganic fabrics and finely divided particles such as powdered metals or mica. Typical ⅛" silicone-glass laminates have a flexural strength of 22,000 to 45,000 psi; water absorption after 24 hours of 0.25 %; dielectric strength with continuous filament cloth of 250 volts/mil or more; power factor of 0.002 at 1 mc; loss factor of 0.007 at 1 mc; wet insulation resistance of more than 10^{12} ohms; arc resistance of 300 seconds and a heat distortion value above 250°C.



For maximum dependability and long service life, silicone-glass terminal blocks and contactor bases are being used in late model automatic toasters. Tests prove that Dow Corning silicone resin bonded glass laminates are more rigid, more heat-stable, more resistant to moisture and easier to fabricate and assemble than conventional materials.

MAIL THIS COUPON TODAY!

DOW CORNING CORPORATION, DEPARTMENT BE-10, MIDLAND, MICHIGAN

Please send me full information on the subjects checked:

☐ Dow Corning 200 Fluids ☐ Dow Corning 4 Compound ☐ Dow Corning Electrical Insulating Varnishes ☐ Silastic ☐ Dow Corning Silicone-Glass Laminates ☐ Reference Guide to Dow Corning Silicones

NAME_____

COMPANY_____

STREET_____

CITY_____ ZONE_____ STATE_____

ATLANTA • CHICAGO
CLEVELAND • DALLAS
LOS ANGELES • NEW YORK
WASHINGTON, D.C.

In Canada: Fiberglas Canada Ltd., Toronto • In Great Britain: Midland Silicones Ltd., London

FIRST IN SILICONES

DOW CORNING CORPORATION

MIDLAND, MICHIGAN

Seen in the Best Circles!

Sylvania Electric Products



Proctor & Schwartz



Climax Molybdenum



Distillation Products Industries



National Research Corp.

- **Sylvania Electric Products is producing super-size TV picture tubes in this giant merry-go-round.**
- **Climax Molybdenum uses this high vacuum furnace for metallurgical research.**
- **Proctor & Schwartz and Dry-Freeze Corporation have developed a process for freeze-drying materials which would otherwise be damaged by high temperatures.**
- **Putting a thin layer of metal on cellophane is the job of this vacuum coating machine made by Distillation Products Industries.**
- **Metals are melted and cast to a new high standard of quality in this National Research Corporation vacuum furnace.**

Each of these installations is different: each is designed to perform a highly specialized task. But all have this in common — all use KINNEY HIGH VACUUM PUMPS to get down to low absolute pressures fast and dependably.

For your vacuum needs, be sure to get a KINNEY, the pump that's seen in the best of circles. Send for new Bulletin V-51B. KINNEY MANUFACTURING CO., 3565 Washington St., Boston 30, Mass. Representatives in New York, Chicago, Cleveland, Houston, New Orleans, Philadelphia, Los Angeles, San Francisco, Seattle.

SEND FOR THIS NEW BULLETIN V-51B

Kinney VACUUM PUMPS

FOREIGN REPRESENTATIVES: Gen'l Engineering Co., Ltd., Radcliffe, Lancs., England • Horrocks, Roxburgh Pty., Ltd., Melbourne, C. I. Australia • W. S. Thomas & Taylor Pty., Ltd., Johannesburg, South Africa • Novelectric, Ltd., Zurich, Switzerland • C.I.R.E. Piazza Cavour 25, Rome, Italy.

INSTALLED . . . 1941

Old P-167 gave 10 years of almost continuous service

R. C. FRICKEL, Supervisor
Ground Communication Maint.
Continental Air Lines

CONTINENTAL AIR LINES, Inc.

STAPLETON AIRFIELD
DENVER 7, COLORADO

August 9, 1951

Eitel-McCullough, Inc.
San Bruno, California

Gentlemen:

We finally had to replace old "P-167." This tube had been in continuous use at Continental Air Lines so long that it almost seemed like the passing of an old friend.

We here at Continental are very proud of our 17 year safety record and we know that dependable plane-to-ground radio communications have played an important part in the maintaining of this perfect record of safety.

Old P-167 was installed on Jun: 17, 1941, and was removed July 28, 1951. During those 10 years the tube has seen almost continuous use at Continental's Denver transmitter, which is the communications control center of the airline's plane-to-ground radio contact.

The dependable performance of your tubes, as demonstrated by old P-167, is all the evidence we need as to where to buy our tubes. We will continue to use Eimac Tubes, as in the past.

Cordially,

R. C. Frickel, Supervisor
Ground Communications Maintenance

RCF:wre
Attch.

P.S. Tubes P-117 and P-118, which were installed at the same time as P-167 in the same transmitter are still going strong.

The feelings expressed in Continental's letter are not unlike the feelings of thousands of other users of Eimac tubes. Top performance and a low cost to life ratio always make for customer satisfaction.

The new Eimac 450T that replaced "Old P-167" in Continental's transmitter should, because of improved vacuum tube materials and techniques, give even more satisfactory service.

Eimac tubes invariably do a job better . . . and at lower cost. Take advantage of their almost two decades of proved performance.

A new "Quick Reference" catalog on Eimac's Wide Variety of Tube Types is yours for the asking.

Follow the Leaders to Eimac TUBES The Power for R-F

EITEL-McCULLOUGH, INC.
San Bruno, California
Export Agents: Frazar & Hansen, 301 Clay St., San Francisco, California

KARP IS GEARED FOR ALL TYPES OF SHEET METAL FABRICATION

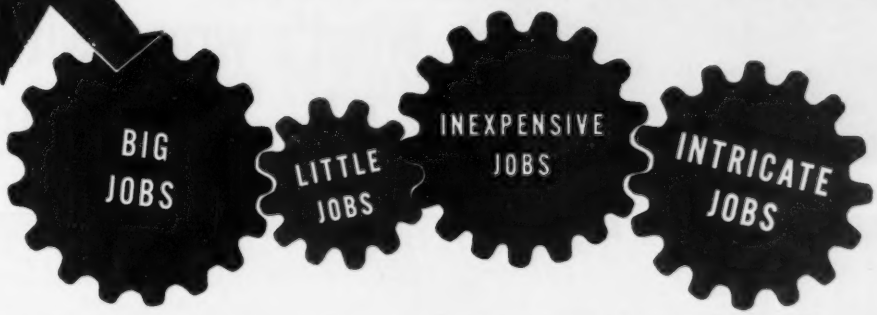

To large and small manufacturers alike, the Karp Blueprint Man is the symbol of traditional excellence in sheet metal fabrication . . . hallmark of highest quality and value in every class of work, from the most routine to the most exacting.

Our plant, three full city blocks long, is equipped with every advanced mechanical facility to enhance the superior skills of our craftsmen, and to insure speedy and economical production.

Thousands of accumulated dies and jigs are at the service of our customers, to save them the time and expense of special dies. We do all types of welding, including heliarc. Aluminum welding is handled with great care and precision. Our welders and equipment are certified by the U. S. Air Force. Painting and finishing are done in a dustproof, water-washed atmosphere.

No job is too big or too small to merit the traditional excellence for which our craftsmanship is known. Write for data book.

Any Metal Any Gauge Any Size Any Quantity Any Finish

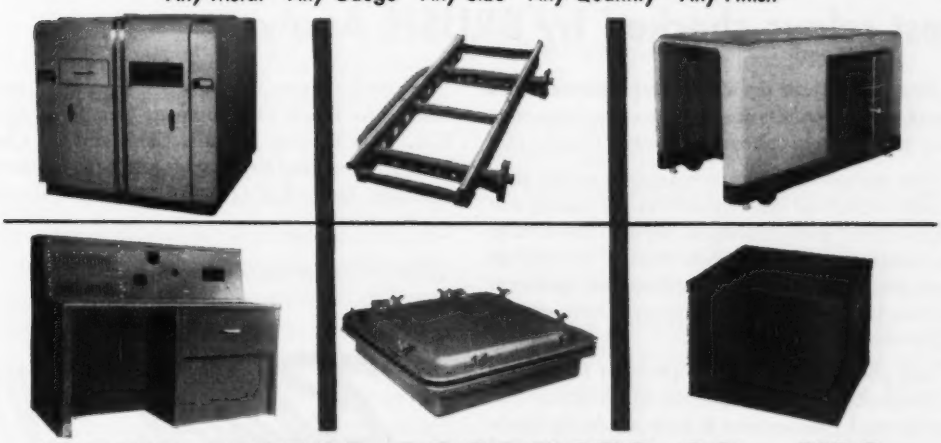

KARP METAL PRODUCTS CO., INC.

215 63rd STREET, BROOKLYN 20, NEW YORK

Specialists in Fabricating Sheet Metal for Industry

What's wrong with telephone WU 2-1186?

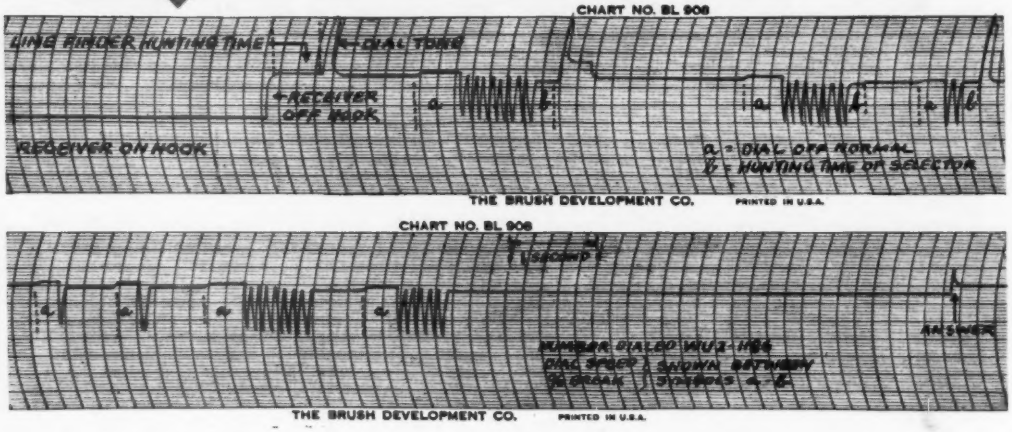

Fast relays checked by BRUSH Analyzer

A Brush Analyzer drew the graph above when one of the subscribers of an eastern telephone company picked up his phone and dialed WU 2-1186.

This record—drawn automatically in the time it took to dial the number—shows the timing and magnitude of every electrical impulse involved in the complex operation. Such records of impulses from the dials of both subscribers and operators provide the tip-off on equipments which require adjustment or repair.

This check on fast relay operation is but one of hundreds of investigations of electrical and mechanical phenomena which are being made speedily with Brush Analyzers. They record instantaneously. They simplify the study of strains, displacements, pressures, light intensities, temperatures, d-c or a-c voltages or currents.

Write for time-saving help stating your problems. The Brush Development Company, Dept. K-6, 3405 Perkins Avenue, Cleveland 14, Ohio, U. S. A. *Canadian Representatives:* A. C. Wickman (Canada) Limited, P. O. Box 9, Station N, Toronto 14, Ontario.

Put it in writing with a

BRUSH RECORDING ANALYZER

THE **Brush** DEVELOPMENT COMPANY

PIEZOELECTRIC CRYSTALS AND CERAMICS • MAGNETIC RECORDING
ELECTROACOUSTICS • ULTRASONICS • INDUSTRIAL & RESEARCH INSTRUMENTS

Not, PLEASE, In the Name of Fairness

Our national Office of Economic Stabilization has adopted a policy of gearing wages to the cost of living. We are told that "escalator clauses," which provide that rates of pay shall be adjusted to take account of changes in the cost of living, will be generally approved.

If the adoption of this policy had been announced as a frank concession to political expediency, it would have been quite understandable. There may very well be votes, lots of them, in a policy which purports to protect the income of a large group against loss through the price inflation caused by the defense program.

A case might even have been made for a policy of approving escalator clauses on grounds of production expediency. The leaders of some three million organized workers now covered by such clauses have indicated that they would fight to the limit to keep them and thus maintain "real wages," that is, wages measured by their purchasing power. The leaders of other organized groups have indicated they would fight to get the benefit of such clauses. Denial of them might mean serious strikes.

Justified "in Fairness"

However, the policy of approving escalator clauses was not based on these relatively low grounds of expediency. It was justified on high moral grounds, on grounds of "fairness." In the words of the President's Council of Economic Advisers, "maintenance of real wages during inflation cannot in fairness be disallowed."

That proposition is false.

It would be truthful to say, "maintenance of real wages during inflation cannot in fairness be allowed."

The truth of the corrected proposition becomes evident immediately when you take a look at the basic nature of the inflationary problem created by defense mobilization.

We are devoting a large share of our national production to defense. The share is now scheduled to hit about 20% in 1952.

Since we are not able to increase our total production fast enough to meet defense needs

in addition to civilian needs, that means a cut in the supply of goods and services that is available for civilian consumption. But the money paid out for the production of defense materials is added to that which is available to buy civilian goods.

Thus, more money is put into the hands of the people to buy less goods. So prices go up. That is inflation.

If one group of people then is granted enough additional money to offset the price increases — and that is the purpose of an escalator clause — and thus can continue to buy as much as they have been buying right along, less goods will be left for other consumers who are not getting this advantage. That is palpably an unfair distribution of the sacrifices necessitated by defense mobilization. In fairness, therefore, maintenance of real wages in inflation cannot be allowed.

Organized workers were not the first, of course, to get the benefit of an automatic adjustment to take account of the increased cost of living. The farmers got theirs first. The price parity formula is, in essence, an escalator clause. The federal government underwrites increases in the prices of the things farmers sell in order to match increases in the prices of the things they buy.

Crucifying the Helpless

As matters stand, two groups are without benefit of escalator clauses. One group is composed of manufacturing firms. While they have not been nearly as successful as the misleading reports of "record-breaking profits" suggest, they have been able to look after themselves fairly well — thus far.

But one group is completely without protection. It is that numerically large but politically unorganized mass of people — many of them old and relatively helpless — who are trying to live on pensions, annuities and other fixed incomes derived from their savings. They are at the end of the line when the increased costs of inflation are passed along. They have no one to whom they can pass the buck. They are being progressively pauperized by the continuing inflation caused by progressive boosting of costs and hence prices.

With the present line-up of pressure groups in Washington, protection for the principal victims of inflation — those who have saved for a rainy day only to find inflation has blown away the roof — is obviously an extremely difficult business. But to have even temporary insulation against inflation granted to powerful groups in the name of fairness should be offensive to the nostrils of a nation that presumes to assert the moral leadership of the Western World.

The only really fair way to handle inflation is to prevent it. But once it is under way, fairness demands that the burdens be as evenly distributed as practicable.

An escalator clause — or a farm parity provision — is explicitly a device to enable the group favored by it to escape the burden of inflation. Whatever concessions we feel we must make to political pressures or production expediency, let us at least be honest enough not to invoke "fairness" as justification for so arbitrary a discrimination in the distribution of the defense burden.

McGraw-Hill Publishing Co., Inc.

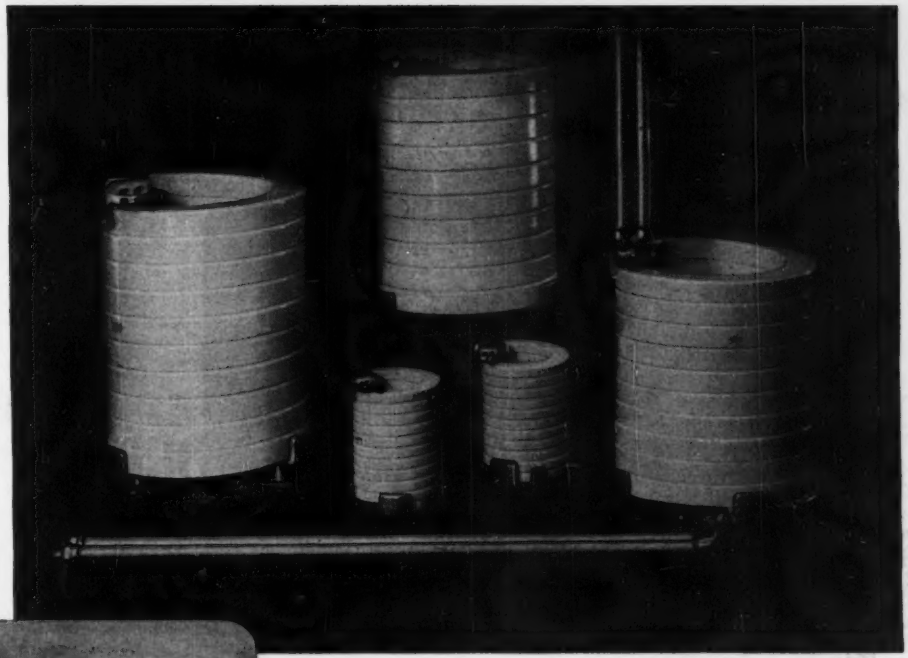

Lapp
PORCELAIN WATER COILS

for tube-cooling water . . .

2 gals. per min. . . .

or 90 gals. per min.

Lapp porcelain water coils are now available in twin-hole types (for water supply and return) and single-hole models in a variety of standardized sizes. Of pure white, completely vitrified, non-porous, low-loss chemical porcelain, they provide for positive cooling and long tube life, because they are permanently non-deteriorating and non-sludging. They permit no water contamination, so avoid need for frequent inspection and water changing, eliminate possibility of electrolytic attack on fittings with consequent leakage. Compact, too—a 29-foot coil of porcelain pipe with two holes of size equivalent to ¾" pipe, and capable of carrying 35 gallons per minute both ways, at 25 pounds water pressure, measures only 12" outside diameter by 18" overall height including base mount.

WRITE for complete description and specifications. Radio Specialties Division, Lapp Insulator Co., Inc., Le Roy, N. Y.

Lapp

RANGE — is continuously adjustable from a minimum of —0.1 to +1 mv . . . up to a maximum of —2 to +20 mv.

ZERO SUPPRESSION — uncalibrated coarse and fine . . . is continuously adjustable from —50 to +50 mv.

range and zero suppression are continuously adjustable

Just turn a knob . . . twist a dial . . . and you have adjusted this new Speedomax Recorder to the exact specs required for the automatic data-charting job at hand.

Turning the ZERO knob varies zero suppression . . . pushes off-scale that portion of the range in which you are not interested . . . spreads the few millivolts you want to watch across full width of the 9⅞" Speedomax chart. Twisting the RANGE dial calibrates the recorder so that its scale represents the range span in which changes occur.

With full scale pen speed of 3, 2, even 1 second . . . limit of error only 0.3% of range, Speedomax proves especially useful for measuring:

Force, weight, etc.—with load cells. Adjustable zero compensates for tare. Range is adjusted to provide desired calibration.

Temperature or temperature-difference—with thermocouples. Minute changes can be measured with extreme sensitivity.

Speed—with electric tachometers. Change of speed can be measured over a narrow band in detailed studies of motors, engine governors, etc.

Voltage—from other transducers and amplifiers.

For further information write-

LEEDS NORTHRUP

4979 Stenton Ave.
Philadelphia 44, Pa.

Jrl Ad EM9(3)

3 TRUARC RETAINING RINGS LOWER COST... IMPROVE PERFORMANCE OF REVOLUTIONARY NEW TEXTILE SPINDLE!

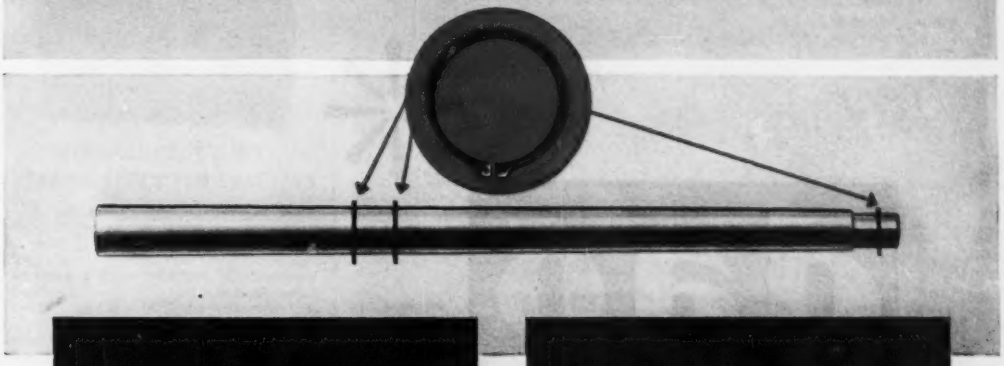



OLD CONSTRUCTION. To position 2 ball bearings, an oversize diameter rod had to be turned on a lathe to provide 3 shoulders. In addition, blade required 2 threading operations . . . 2 lock nuts . . . separate tapering operation. Proper pressure of nuts against ball bearings required skilled labor adjustment.



NEW CONSTRUCTION. Standard rod, equal in diameter to finished blade is used. Three grooves for Truarc Rings and shoulder are made quickly and easily on screw machine. Blade is economically tapered by centerless grinding. Truarc Rings maintain correct pressure on ball bearings for life of unit!

The H & B American Machine Company's new anti-friction CENTURY spindle is probably the most mechanically advanced spindle on the market today. Waldes Truarc Retaining Rings have eliminated many of the material, tooling and assembly costs...have kept its price competitive. Truarc Rings not only simplify spindle assembly, they position ball bearings accurately...simplify maintenance...eliminate skilled labor...improve performance! And there are Truarc Rings to solve any design or re-design problem!

Redesign with Truarc Rings and you too will cut costs.

Wherever you use machined shoulders, bolts, snap rings, cotter pins, there's a Waldes Truarc Retaining Ring designed to do a better job of holding parts together.

Truarc Rings are precision-engineered...quick and easy to assemble and disassemble. Always circular to give a never-failing grip. They can be used over and over again.

Find out what Truarc Rings can do for you. Send your blueprints to Waldes Truarc engineers for individual attention, without obligation.

Waldes Truarc Retaining Rings are available for immediate delivery from stock, from leading ball bearing distributors throughout the country.

SEND FOR NEW BULLETINS

WALDES

TRUARC

REG. U. S. PAT. OFF.

RETAINING RINGS

WALDES KOHINOOR, INC., LONG ISLAND CITY 1, NEW YORK

WALDES TRUARC RETAINING RINGS AND PLIERS ARE PROTECTED BY ONE OR MORE OF THE FOLLOWING U. S. PATENTS: 2,382,947; 2,382,948; 2,416,052; 2,420,921; 2,420,341; 2,459,705; 2,461,946; 2,466,168; 2,483,380; 2,483,383; 2,487,002; 2,487,603; 2,491,205; 2,509,081 AND OTHER PATENTS PENDING.

Waldes Kohinoor, Inc., 47-16 Austel Place, L. I. C. 1, N. Y.
Please send engineering specifications and data on Waldes Truarc Retaining Ring types checked below. E-105

- ☐ Bulletin #5 Self-locking ring types
- ☐ Bulletin #6 Ring types for taking up end-play
- ☐ Bulletin #7 Ring types for radial assembly
- ☐ Bulletin #8 Basic type rings

Name_____

Title_____

Company_____

Business Address_____

City_____ Zone_____ State_____

5678

Products bearing the registered trademark **"dag"** originate only with the Acheson Colloids Corporation, Port Huron, Michigan, or with Acheson Colloids Ltd., London, England. Acheson Colloids is the world's largest producer of colloidal graphite dispersions for the metalworking and electronic industries, and also supplies dispersed pigments to a large segment of the color-consuming trade. The trademarks "Oildag", "Aquadag", "Prodag", "Glydag", "Castordag", "Varnodag" and "Gredag" identify particular products of Acheson Colloids Corporation or its affiliates, and are duly registered in the United States and in other principal countries of the world.

dag DISPERSIONS

Acheson Colloids Corporation, Port Huron, Michigan

... also Acheson Colloids Limited, London, England

Something New



WIDE-RANGE, DIRECT-READING CAPACITOR ANALYZER

A laboratory-type Capacitor Analyzer meeting the need for a highly accurate, wide-range, direct-reading measuring instrument capable of determining the essential characteristics of capacitors has been announced by the Shallcross Manufacturing Co. This versatile instrument will determine capacitance values between 5mmf. and 12,000 mfd.; insulation resistance from 1.1 to 12,000 megohms; also leakage current, dielectric strength, and percentage power factor. A divided panel carrying an outline of the operating instructions makes it readily possible to use the instrument without reference to an instruction book. The Shallcross analyzer operates on 110 volt, 60-cycle alternating current. Literature giving full details will gladly be sent on request to the Shallcross Manufacturing Company, Collingdale, Pa.



MULTI-PURPOSE TRANSMISSION TEST SET

In addition to measuring the electrical characteristics of telephone lines and equipment the new Shallcross multi-purpose transmission test set may be used for efficiency tests on local and common battery telephone lines and sets, carbon microphones, receivers, and magnetic microphones. It also provides a fast, efficient means of testing capacitors, generators, ringers, insulation resistance, dials, and continuity. Key switches and dials are used to select and control the test circuits. The 693 Transmission Test Set is powered by external batteries. It features compact, substantial construction and is fully portable, thus making it ideal for either field or laboratory use. Details may be obtained from the Shallcross Manufacturing Company, Collingdale, Pennsylvania.

ADV.

Really Smooth—Outstandingly Quiet—Fully Dependable

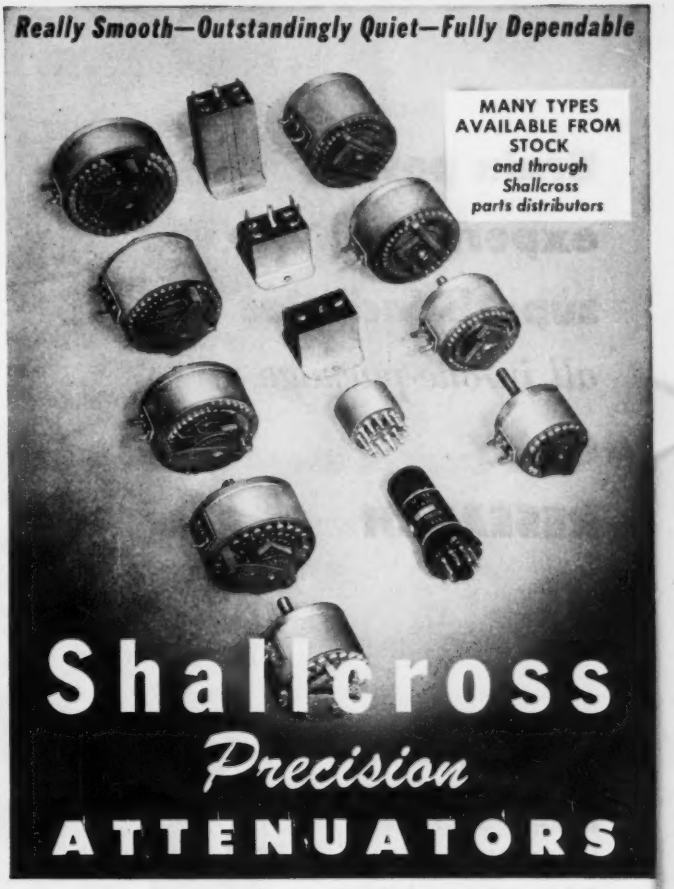

ALL STANDARD FIXED AND VARIABLE TYPES
•
LADDER AND BALANCED LADDER CONTROLS
•
"T" CONTROLS
•
BALANCED "H" CONTROLS
•
POTENTIOMETERS
•
VARIABLE IMPEDANCE MATCHING NETWORKS
•
V.U. METER RANGE EXTENDING ATTENUATORS
•
STANDARD AND SPECIAL FIXED PADS
•
SPECIAL NETWORKS

Perhaps you've noticed how frequently Shallcross attenuators now appear in the finest audio or communications equipment? Or how often they are chosen for replacement purposes?

There's a reason! Improved design, materials and production techniques have resulted in a line that sets new, higher standards of attenuation performance for practically every audio and communications use.

Shallcross Attenuation Engineering Bulletin 4 gladly sent on request.

Shallcross Manufacturing Co.
Dept. E-101 Collingdale, Pa.

RESISTORS — INSTRUMENTS — SWITCHES — ATTENUATORS

Brain power, experience, superb facilities *all in one package at* GRAY RESEARCH

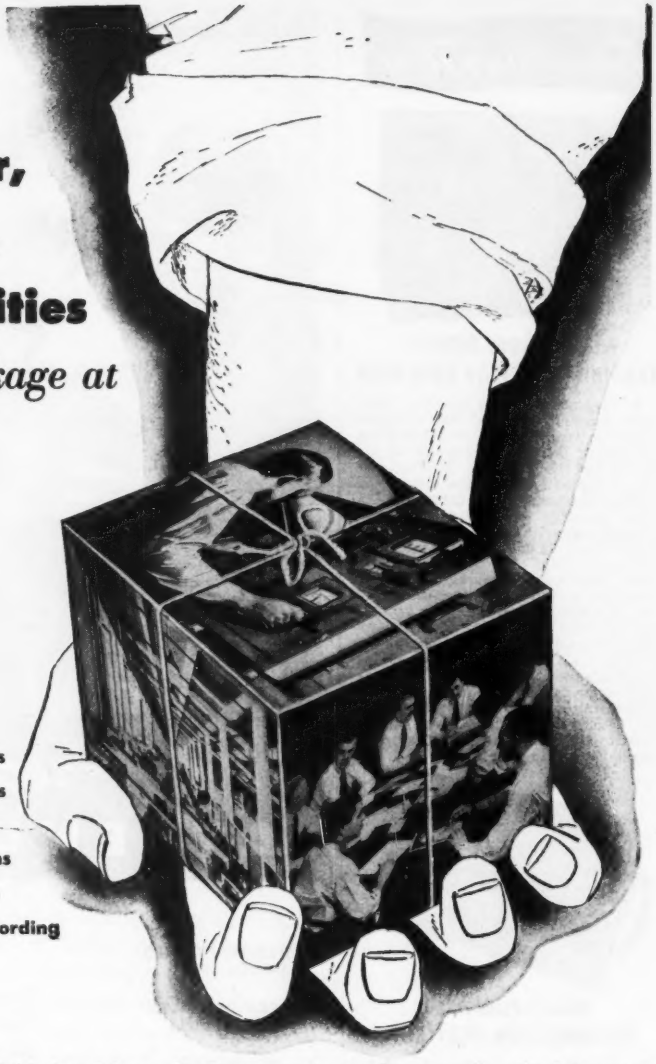

- Television
- Video and display systems
- Audio and communications
- Teleprinter techniques
- Precise electro-mechanisms
- Aeronautic control devices
- Data transmission and recording
- Facsimile

In each of the defense-important fields listed here, the Gray organization has recently solved important problems. These facilities are available to prime contractors and to the military services as our contribution to the national effort in furtherance of communications, engineering or electro-mechanical designing. A booklet telling more of the Gray story will be sent for the asking.

● Please write for Bulletin RB-10 describing the above equipment

GRAY RESEARCH

AND DEVELOPMENT CO., INC., 16 ARBOR ST., HARTFORD 1, CONN.
Division of The GRAY MANUFACTURING COMPANY—
Originators of the Gray Telephone Pay Station and the Gray Audograph

AUDOGRAPH

Arthur C. Gray
President

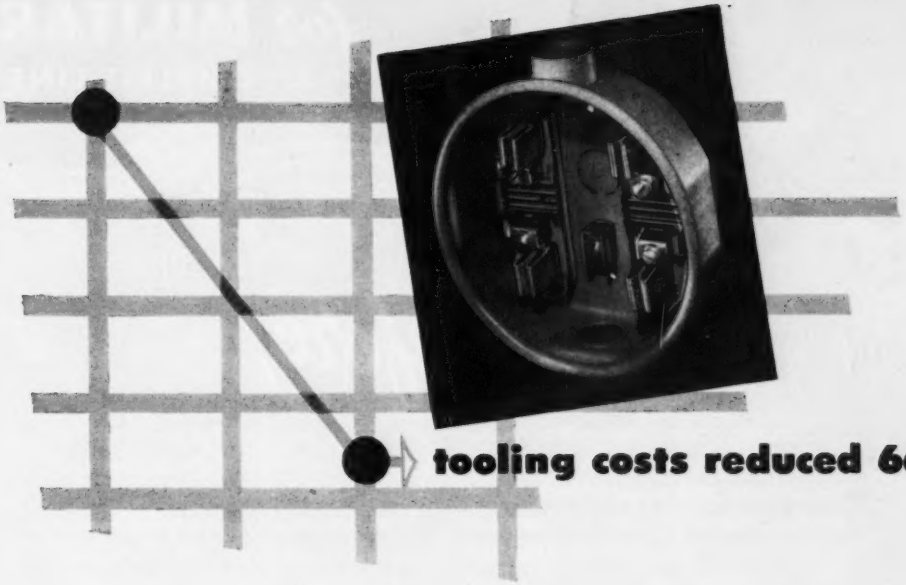

tooling costs reduced 66⅔%

Let Mr. Ray Blakeman, president of Blakeman Bros. Electric Mfg. Co., Los Angeles, tell you this story of savings with Plaskon Alkyd Molding Compound in the manufacture of his company's commercial and residential watt-hour meter-mounting devices. Mr. Blakeman writes: "Tooling cost is about one-third using this material as compared to the tooling cost of other plastic materials"..."We have found that Plaskon Alkyd lends itself very well to automatic molding, giving us a high production rate on automatic presses"..."Percentage of reworks and breakages is extremely low"..."Our particular device requires a high dielectric strength for which Plaskon Alkyd is noted"..."Since using Alkyd we have not had one operating failure...of our product."

Here is more evidence that parts can be molded better and faster at lower cost—with the amazing quick-curing plastic which has created new concepts of speed and economy in compression molding.

It may pay you well to check the possibilities of Plaskon Alkyd in relation to your product. We will be glad to send you a complete set of the latest bulletins describing the many unusual properties of this unusual thermosetting plastic molding compound.

mold it better and faster with

PLASKON DIVISION • LIBBEY•OWENS•FORD GLASS CO.
2136 Sylvan Avenue • Toledo 6, Ohio
In Canada: Canadian Industries, Ltd., Montreal, P. Q.
Branch Offices: Boston, Chicago, New York, Rochester, Los Angeles
Manufacturers of Molding Compounds, Resin Glues, Coating Resins

PLASKON.
ALKYD

for MILITARY
A COMPLETE LINE OF

Never Before!

DELIVERS TOP PERFORMANCE IN AN UNPRECEDENTED TEMPERATURE RANGE FROM THE BITTEREST COLD IN ARCTIC REGIONS OR EXTREME ALTITUDES TO FIERY HOT TROPICAL BATTLEFIELDS . . . AND IN AN UNPARALLELED HUMIDITY RANGE FROM COMPLETE ARIDITY TO THE SATURATION POINT.

Highly recommended for use in jet and other planes, guided missiles, tanks, ships and submarines, portable or mobile equipment and all other military communications.

Manufactured from specially developed materials, this absolutely unique variable resistor is available in *miniaturized* size (Type 65) or in conventional size (Type 95) in resistance ranges from 250 ohms to 10 megohms.

TYPE 65
MINIATURIZED

TYPE 95

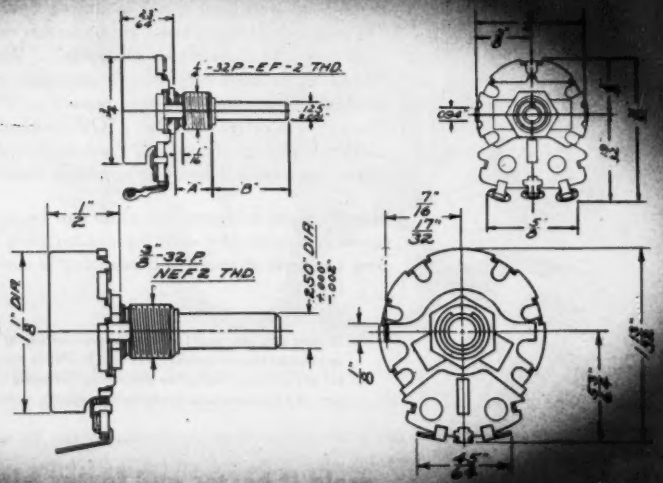

EXCEPTIONALLY GOOD DELIVERY CYCLE

. . . on military orders due to enormous mass production facilities . . . Please give complete details on your requirements when writing or phoning for further information.

REPRESENTATIVES

S. J. Hutchinson, Jr.
401 North Broad Street
Philadelphia 8, Pennsylvania
Phone: Walnut 2-5369

W. S. Harmon Company
1638 So. La Cienega Blvd.
Los Angeles 35, California
Phone: Bardshaw 2-3321

SOUTH AMERICA

Jose Luis Pontet
Buenos Aires, Argentina
Montevideo, Uruguay
Rio de Janeiro, Brazil
Sao Paulo, Brazil

OTHER EXPORT

CHICAGO TELEPHONE SUPPLY
Corporation

Specialists in

APPLICATIONS

VARIABLE RESISTORS (COMPOSITION and WIRE WOUND)

MEETS ALL JAN-R-19 SPECIFICATIONS



JAN Type RA 20A
2 Watt (CTS Type 252)



JAN Type RA 20B
2 Watt (CTS Type GC-252)



JAN Type RA 25A or 30A
3 or 4 Watt (CTS Type 25)



JAN Type RA 25B or 30B
3 or 4 Watt (CTS Type GC 25)

JAN-R-94, Type RV-1A
CTS Type 35, 1½" Diameter
Composition



JAN-R-94, Type RV-2A
CTS Type 45, 1½" Diameter
Composition

JAN-R-94, Type RV-
CTS Type 45, 1½" Diameter
Composition



ILLUSTRATIONS ARE ACTUAL SIZE

Precision Mass Production of Variable Resistors

FOUNDED 1896

BURTON BROWNE ADVERTISING

Plastic tape's the choice in compact Du Mont cameras!

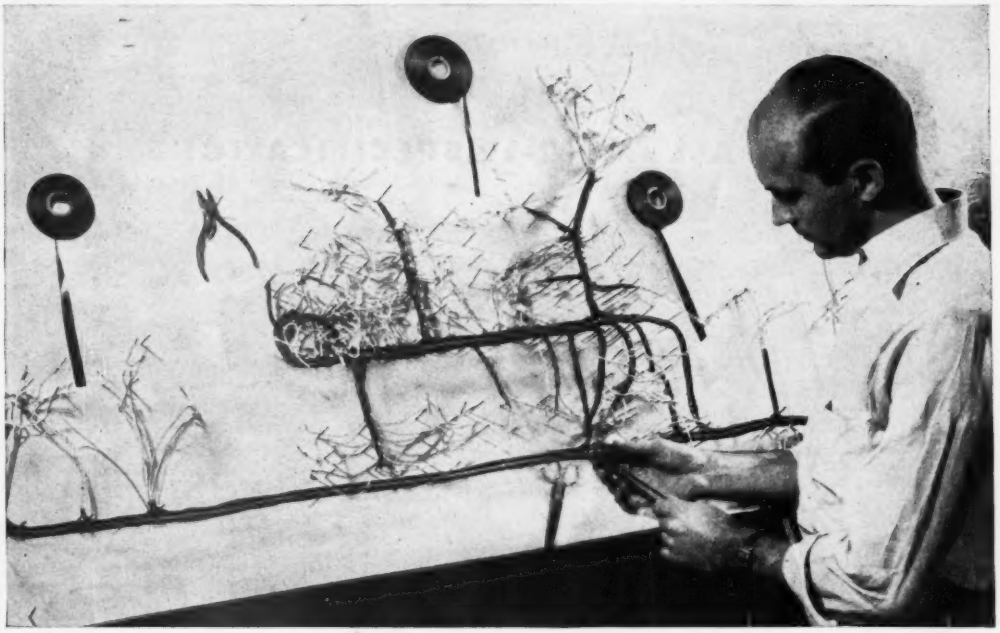

See that neat Du Mont camera-harness being wrapped with "SCOTCH" No. 33 Electrical Tape? That's typical of over 100 feet of harnessing protected with this super-thin plastic tape in every Du Mont Image Orthicon Camera Chain assembled at the Allen B. Du Mont Laboratories, Inc., Clifton, New Jersey.

Du Mont finds, like many other manufacturers, that "SCOTCH" No. 33 Electrical Tape takes less room to do a better job than conventional insulating tapes. It's easier, *faster* to work with. Smooth, stretchy backing speeds harness installation, leaves plenty of working space and stays neat and tight.

Harnessing cables is just one of hundreds of uses for this remarkable tape. High dielectric strength makes it ideal for insulating splices on all kinds of wiring. Acids can't harm it—resists abrasion, too! Try "SCOTCH" No. 33 on *your* next job. There's nothing else like it.



DU MONT TRANSMITTER HARNESSES get the same care and attention as the *camera* harnesses. Here's another big job done better with "SCOTCH" No. 33 Electrical Tape! Replaces bulky, old-fashioned insulating tapes, cuts costs, saves time.

Quick Facts about "SCOTCH" No. 33 Electrical Tape

- **TOUGH**—plastic backing is abrasion-resistant, unaffected by water, oil, acid, alkalies.
- **STRETCHY**—conforms to any surface.
- **HIGH DIELECTRIC**—10,000 volts.
- **THIN CALIPER**—only .007 inch thick.

The term "Scotch" and the plaid design are registered trade marks for the more than 100 pressure-sensitive adhesive tapes made in U.S.A. by Minnesota Mining & Mfg. Co., St. Paul 6, Minn.—also makers of "Scotch" Sound Recording Tape, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-slip Surfacing, "3M" Abrasives, "3M" Adhesives. General Export: Minn. Mining & Mfg. Co., International Division, 270 Park Avenue, New York 17, N. Y. In Canada: Minnesota Mining & Mfg. of Canada, Ltd., London, Canada.

the Du Mont
UNIVERSAL COLOR SCANNER

Operating on the principle of the flying spot scanner, the Du Mont Universal Color Scanner provides for the Broadcaster, Receiver Manufacturer, Development Laboratory – tri-color signals from any 35 mm. 2 x 2" color transparency. Available as outputs are an FCC approved field sequential video color signal and three simultaneous video color signals which may be fed to any external sampling equipment for experimental work with line or dot sequential systems. Horizontal line frequencies may be set at 15.75 or 29.16 kc and vertical field rates at 60 or 144 fields per second (intermediate values may be specified as desired). This assures a flexible equipment embracing both present black and white standards as well as FCC approved color standards and adaptable for use with any of the other presently proposed color systems.

SEND FOR DETAILED TECHNICAL LITERATURE

DUMONT *First with the Finest in Television*

ALLEN B. DU MONT LABORATORIES, INC. • TELEVISION TRANSMITTER DIVISION, CLIFTON, N. J.

triple-threat to trouble!

A PROBE TYPE VACUUM TUBE VOLTMETER

As an a-c probe type vacuum tube voltmeter, ranges of 3 to 300 volts, frequency coverage extends from 50 cycles to 300 megacycles. Specially designed RF and D-C probes supplied.

AN ELECTRONIC VOLT-OHMMETER

Using 115 volts, 60 cycle external power, Model 769 is a stable electronic instrument providing 6 ranges from 3 to 1200 volts d-c full scale and 6 ohmmeter ranges to 2000 megohms full scale.

A VOLT-OHM-MILLIAMMETER

With self-contained power source, provides 6 d-c voltage ranges (10,000 ohms per volt)—6 a-c rectifier type voltage ranges (1,000 ohms per volt)—6 d-c current ranges and 3 ohmmeter ranges.

WESTON model 769

ULTRA HIGH FREQUENCY ELECTRONIC ANALYZER

Here is a truly versatile, three-in-one instrument that's a natural for those engaged in electronics production or maintenance. The entire instrument is protected from external RF influences. Its broad range and its complete stability make it ideally suited for AM, FM, and television testing, as well as for many applications in the HF and VHF fields. Uses standard commercial tubes, replaceable without recalibration. Extremely compact, Model 769 provides greater economy, greater convenience, because this one instrument provides for practically all electronic measurements. Literature available . . . WESTON Electrical Instrument Corporation, 595 Frelinghuysen Avenue, Newark 5, New Jersey . . . manufacturers of Weston and TAGliabue instruments.

WESTON *Instruments*

NEO-SIL
CORPORATION

Master Pieces of Hermetic Sealing

OC-8 and OC-12

"8 and 12 Pin Octal Type Plug In Headers, molded with NEO-SIL, are applicable for use on MIL requirements. They will withstand thermal shocks, vibrations, mechanical strains and excessive pressures with no impairment to the seal or other functional characteristics. For use with standard Octal Type Sockets."

¼" SHAFT WATERSEAL BUSHING

"Rotary Waterseal Panel Assemblies, with GRAF-SIL Packing Glands, have an excellent five year customer history on gas filled pressurized components. They are available for ¼" shafts and for potentiometers and switch bushings."

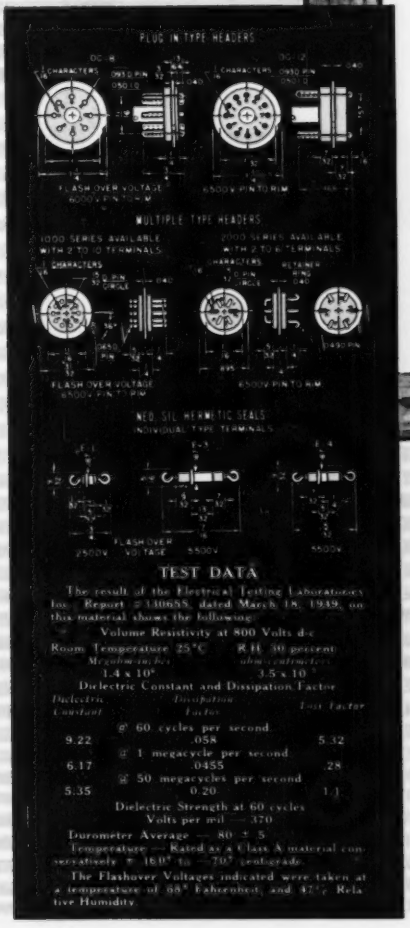

TEST DATA

The result of the Electrical Testing Laboratories Inc. Report #130655, dated March 18, 1939, on this material shows the following:

Volume Resistivity at 800 Volts d-c

Room Temperature 25°C	R.H. 30 percent
Megohm-inches	ohm-centimeters
1.4×10^5	3.5×10^5

Dielectric Constant and Dissipation Factor

Dielectric Constant	Dissipation Factor	Test Factor
@ 60 cycles per second		
9.22	.058	5.32
@ 1 megacycle per second		
6.17	.0455	.28
@ 50 megacycles per second		
5.35	0.20	1.1

Dielectric Strength at 60 cycles
Volts per mil — 370

Durometer Average — 80 ± 5

Temperature — Rated as a Class A material conservatively + 160° to — 70° centigrade.

The Flashover Voltages indicated were taken at a temperature of 68° Fahrenheit, and 42% Relative Humidity.

"NEO-SIL's proven Hermetic sealing components will eliminate rejects resulting from breakage, strains, cracks, etc. Each NEO-SIL component is pressure checked at 25 psi — to meet military requirements and as applied to our units, NEO-SIL rubber will resist abusive temperature cycling, salt water, most acids and alkalies, and withstand high pressures and vacuums."

"In addition to the items illustrated above, NEO-SIL offers many other components, such as Hermetically Sealed Fuse Holders, Hermetic Sealing Terminals, Multiple Pin Headers, Hermetically Sealed Cables, Hermetically Sealed Line Cords With Plugs for European use, Meter Gaskets, Panel Gaskets, Adapters (U. S. to Continental), Coil Forms, Crystal Contacts and other molded bakelite and NEO-SIL rubber units."

"Hermetically Sealed Fuse Holders are available for 3-AG and 4-AG fuses. These units are completely sealed from moisture with or without the cap or fuse inserted and are applicable for use on vacuum or gas filled units."

Your special problems are solicited.

NEO-SIL
CORPORATION

26 CORNELISON AVE., JERSEY CITY 4, N. J.

NOW YOU CAN MOVE

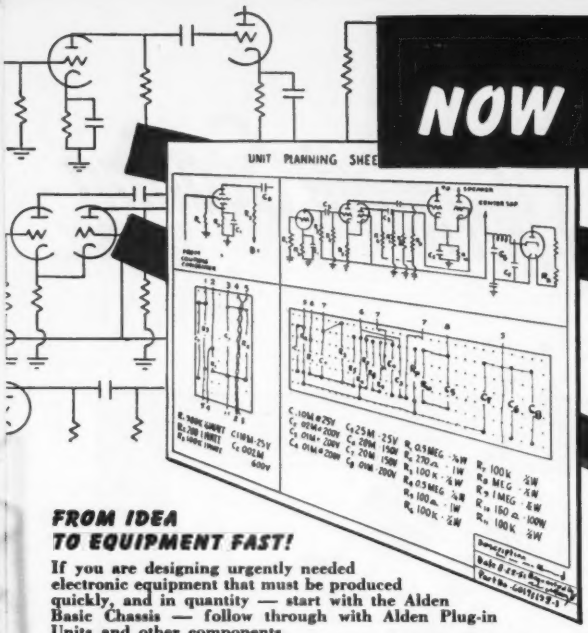

① ORGANIZE CIRCUITS QUICKLY FOR SYSTEMATIC LAYOUT AND CONSTRUCTION

Schematics of most all electronic equipment can be broken down into circuit blocks of logically associated functions. These functional circuit blocks can be mounted readily either in the Alden "20" plug-in packages or Basic Chassis unit. The tube sockets and associated components quickly lay out on full scale Unit Planning Sheets for mounting on terminal cards. These special pre-punched, multi-hole terminal cards have wide flexibility to take an infinite variety of circuit variations. Both sides of card can be used to obtain maximum component density area. Using the Unit Planning Sheets, functional circuit units — components and housings — are all planned in one step.

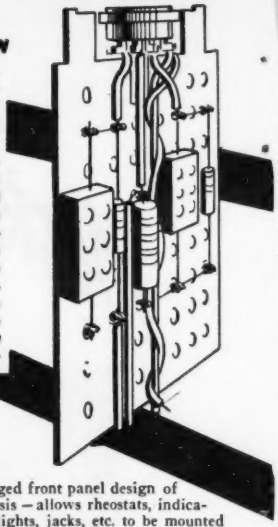

FROM IDEA TO EQUIPMENT FAST!

If you are designing urgently needed electronic equipment that must be produced quickly, and in quantity — start with the Alden Basic Chassis — follow through with Alden Plug-in Units and other components.

Make your original model with the Alden Basic Chassis rather than breadboard — automatically force isolation of circuits — ready accessibility, easy replacement — and natural functional sub-assemblies. Save vital engineering and planning time — machine and tool hours — critical material and manhours.

IT'S AS SIMPLE AS THIS!

Basic Chassis Construction

The **Basic Chassis** frame is of strong "U" shape construction — designed for utmost accessibility in assembly and servicing — and for rapid manufacture and delivery to you from small to large volume.

Manufacturing technique allows most of chassis work to proceed as flat piece — Without stacking — it flows from one operator to next, similar to progressive die. Bending is last. Finish and plating is done by automatic conveyorized equipment. Means fast delivery — minimum delay.



Miniature Terminals — 650 Series

Terminal cards have been designed to accommodate tremendous number of circuit variations — to make neat tube and component sub-assemblies with a minimum of wiring and simplified assembly techniques. Special **Alden Miniature Terminals** are new and radical punch press configuration — ratchet slot holds various size component leads for soldering — no twisting of leads with pliers. Figure "eight" shape accommodates cross wiring and buss leads. Punch press parts — so take a minimum of solder, reduce solder time, eliminate danger of cold solder joints.



Back Connectors — 462 Min Series

Alden Terminal Card System means minimum of inter-cabling — but even this cabling can be laid out easily and proceed as simple sub-assembly. Open sided chassis construction makes cable easy to wire to front panel, terminal cards and back connectors. **The Alden Back Connectors** are units that can be discretely positioned on the back of the chassis — isolating lines with incompatible voltages, currents, or frequencies. This design insures accessible solder terminals for soldering — avoids rat nests of congested conventional back connector wiring — Color coded, the Alden back connectors provide beautiful operational or service check points for all leads to and from chassis.

Target Screws

Hinged front panel design of chassis — allows rheostats, indicator lights, jacks, etc. to be mounted on panel as another easy-to-work sub-assembly. This panel attaches easily to chassis — is wired — swung up and fastened with **Alden Target Screws.** These screws have concave head with arced notch so power screw driver locates head quickly, no danger of it slipping out and marring panel surface — yet same screw can be unfastened with coin in order to hinge forward the front panel for servicing and check in the field.

Assembled — Basic Chassis simplifies the operation of your equipment — Slashes service and maintenance time. Smooth, positive insertion and removal of the chassis is provided by the Alden **"Serve-A-Unit Lock."** A simple twist of the handle and the chassis backs off with finger tip ease. It also pilots the chassis back into place — securely locking it for operation with the same facility.

FOR YOUR SMALLER UNITS!

"20" Non-Interchangeable Base

Get the same ease of layout — speed of assembly — ready check or replacement — with the Alden "20" Plug-in Packages. The Alden Terminal Cards with completely interwired tube sockets and components are mounted on special **Alden "20" Non-Interchangeable Bases.** These bases have stubby, strong pins — no molded locating boss to break. Units can be made non-interchangeable to prevent mismating by selected variable pin layouts of less than 20 pins. Using the same Alden "20" base — coupled with simple brackets and housing — relays, stepping switches, and condensers can be made neat, accessible, replaceable units.

Only recently developed, Alden "20" Packages have already saved thousands of vital engineering and construction hours in large computer projects. They are natural for extensive, complicated electronic equipment.

"20" Rack and Chassis Mounting Sockets

Whole Alden "20" Packaged circuit panels can be constructed by simply mounting "U" channels across racks! **The Alden "20" Rack Mounting Socket,** having 4 extended ears, quickly rivets side by side between the channels. Wiring to sockets feeds up from cables laid along "U" frame — leaving contacts accessible for soldering and checking. Where Alden "20" Packages are mounted on chassis, the space saving **Alden "20" Chassis Mounting Socket** has 4 mounting ears which rivet within the square area covered by the Alden "20" Base.

ALDEN PRODUCTS COMPANY

FROM IDEA TO EQUIPMENT FAST

FORCE STRAIGHT LINE THINKING WITH NEW ALDEN COMPONENTS FOR PLUG-IN UNIT CONSTRUCTION

② GET THE MOST NATURAL, EASY SUB-DIVISION OF LABOR IN MANUFACTURE

Solder terminals and sockets quickly rivet to Alden terminal card according to layout on Unit Planning Sheet. Components snap into the special Alden Miniature Terminals which hold them for soldering. — (No twisting or wrapping of leads necessary) — With all tube sockets and their associated components mounted on one card — the wiring and soldering of circuits is an open, easy-to-work sub-assembly operation.

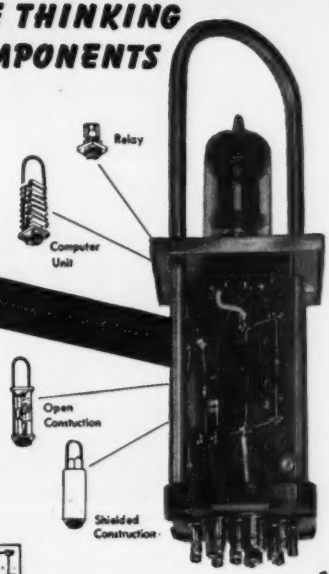

③ INSURE THE LOWEST OPERATING AND SERVICE COSTS IN FINAL EQUIPMENT

The ALDEN "20" PLUG-IN PACKAGE is completed simply by mounting the terminal card on the Alden "20" Non-Interchangeable base, dip soldering the leads and adding cover or housing and handle. . . . In operation, visual or instrument checks are easily made — if trouble occurs doubtful units are quickly isolated — these units easily unplug and a comprehensive inspection made. Spare units can be plugged in so equipment doesn't have to be inoperable while repairs are in process.

The ALDEN BASIC CHASSIS UNIT is rapidly completed by mounting terminal cards into the chassis — soldering unit cables and making connections to Alden Color Coded Back Connectors and detachable front panel. Completed unit is easily piloted in and out of rack with the Serve-A-Unit Lock. Open sided construction, aided by the neat direct front and back connections, gives instant accessibility for rapid circuit checks and service.

ALDEN "20" PLUG-IN PACKAGE

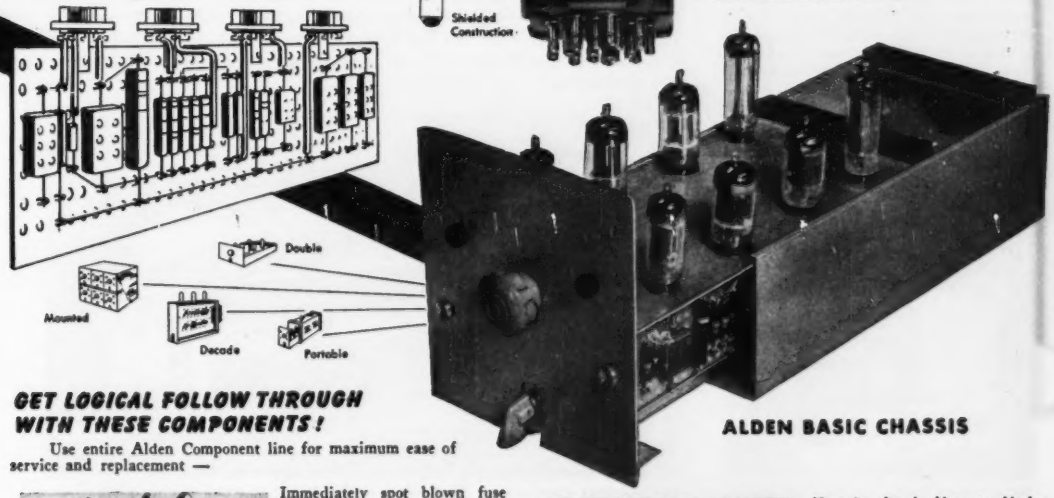

ALDEN BASIC CHASSIS

GET LOGICAL FOLLOW THROUGH WITH THESE COMPONENTS!

Use entire Alden Component line for maximum ease of service and replacement —

Indicating Fuseholder – 440-3FH

Immediately spot blown fuse — quickly replace it. Neon bulb glows when fuse blows — is molded as integral part of crystal clear lens. **Compact Indicator Fuseholder** rivets or eyelets easily to mounting panel — accessible solder tabs for fast soldering.

Miniature Test Point Jack — 110BCS

Beautiful Miniature Test Point Jack available for making instantaneous circuit checks while equipment is in operation. Has 100% insulation around the beryllium copper spring contact. Contact retains its life over thousands of insertions and doesn't score the test prod. Yet it takes minimum of panel space — solders easily to leads.

Pan-i-Lite — 86L

Here's the indicator light you've probably been waiting for. The **Alden Pan-i-Lite** — really small — easy-to-service. Bulb is made integral part of lens. Replaces from the front of panel — no digging into equipment necessary. Takes the absolute minimum of space. Less than 1" overall, it can mount almost anywhere — simply punch ¾" hole. Tiny but powerful 6 V. bulb gives brilliant indication through the high-temperature — translucent lens. Use minimum of critical material.

TO GET STARTED QUICKLY!

'phone our New Products Director for an appointment to visit our plant—wire for a sample Basic Chassis at $40.00 or an Open and Closed Alden "20" Plug-in Package at $10.00 or write Dept. E for booklet: "Basic Chassis and Components for Plug-in Unit Construction".

117 North Main Street · Brockton · Massachusetts NA-ALD

AUTOMATIC FEED BOOSTS PAPER-SECTION COIL OUTPUT



MAXIMUM COIL DENSITY An entirely new type of delivery shelf is used to insure coils of extreme accuracy and high density. It imparts a uniform backward pull to the paper as it is fed into the coil.

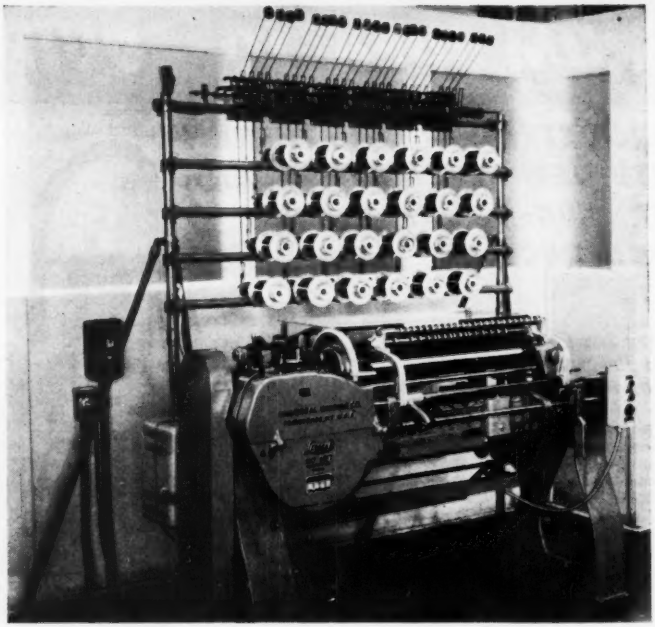

25 INSERTS A MINUTE Single or laminated insulating sheets, either paper or acetate, are fed into the Leesona No. 107 Coil Winder at rates as high as 25 per minute. Thus, on a coil containing 100 wire turns per layer, the machine can be run at speeds as high as 2500 rpm.



SLOW, CUSHIONED AUTOMATIC START Electronic speed-control automatically and smoothly accelerates the winding arbor to required speed and maintains it. No "jockeying" needed by operator. Wire breakage is minimized, tension is uniform.

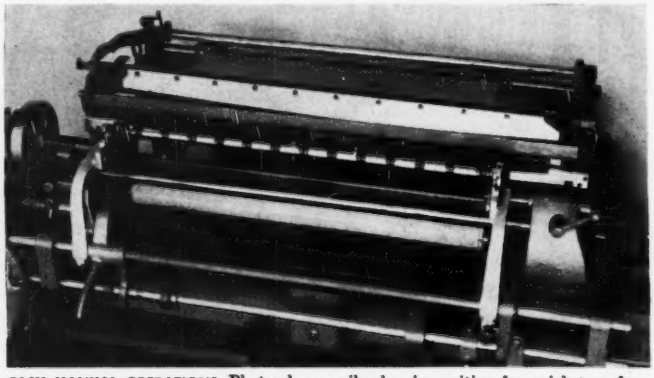

EASY MANUAL OPERATIONS Photo shows coil arbor in position for quick transfer. Wire turn counter can be reset quickly. No cam transfers are required when changing wire layer length, wire spools are easily changed.

Write for GMCW-15

UNIVERSAL WINDING COMPANY

P. O. Box 1605, Providence 1, R. I.



LEESONA®

For winding coils in quantity accurately . . . automatically use Universal Winding Machines

238.1.3

RUGGED

is the word for the new Erie Style 327

FEED-THRU CERAMICON®

ERIE adds another outstanding capacitor to the most complete line of ceramic by-pass units available. Style 327 Feed-Thru design is a further result of continued Erie development in accomplishing ruggedness in components to meet severe military requirements and to give trouble-free service in other electronic applications. It embodies the following outstanding features:

1. Mechanically rugged. Tubular ceramic capacitor is sealed at both ends in thermosetting low loss insulation.
2. Very low and uniform inductance path to ground.
3. Electrical shielding is provided by means of the grounded metal case.
4. All internal connections are soldered; no pressure contacts.
5. Hook type terminals provide sturdy connection tie points; also facilitate precision spacing of leads from other components where required in VHF and UHF circuits.

Specifications:

Standard capacitance values, mmf: 10, 33, 47, 68, 82, 100, 470, 680, 1000

Capacitance tolerance: ± 20% or + 80%, —20%

Rated voltage: 500 WVDC (values through 100 mmf also available in 1000 WVDC rating)

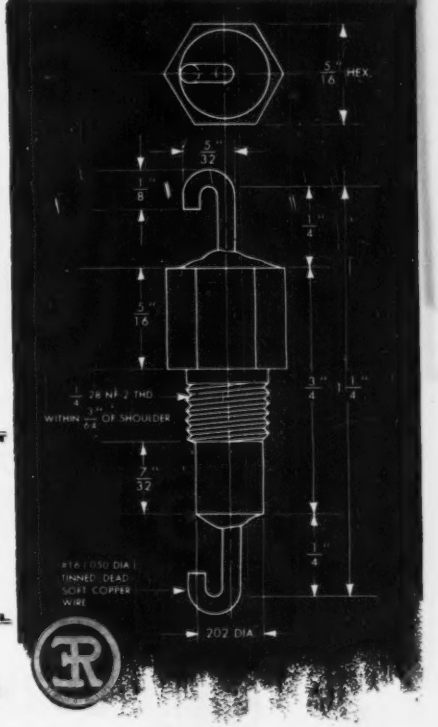

OTHER ERIE FEED-THRU CERAMICONS:



Style 357, rigid hooked wire lead, maximum capacitance 1000 mmf.
Style 362, #20 straight pig-tail wire lead, maximum capacitance 1500 mmf.
Style 2416, rigid wire lead, cadmium plated shell for solder mounting, maximum capacitance 1500 mmf.
Style 2418, no center lead, cadmium plated shell for solder mounting, maximum capacitance 1500 mmf.

Electronics Division

ERIE RESISTOR CORP., ERIE, PA.

LONDON, ENGLAND . . . TORONTO, CANADA

C-D always the Leader IN A.C. MOTOR CAPACITORS!

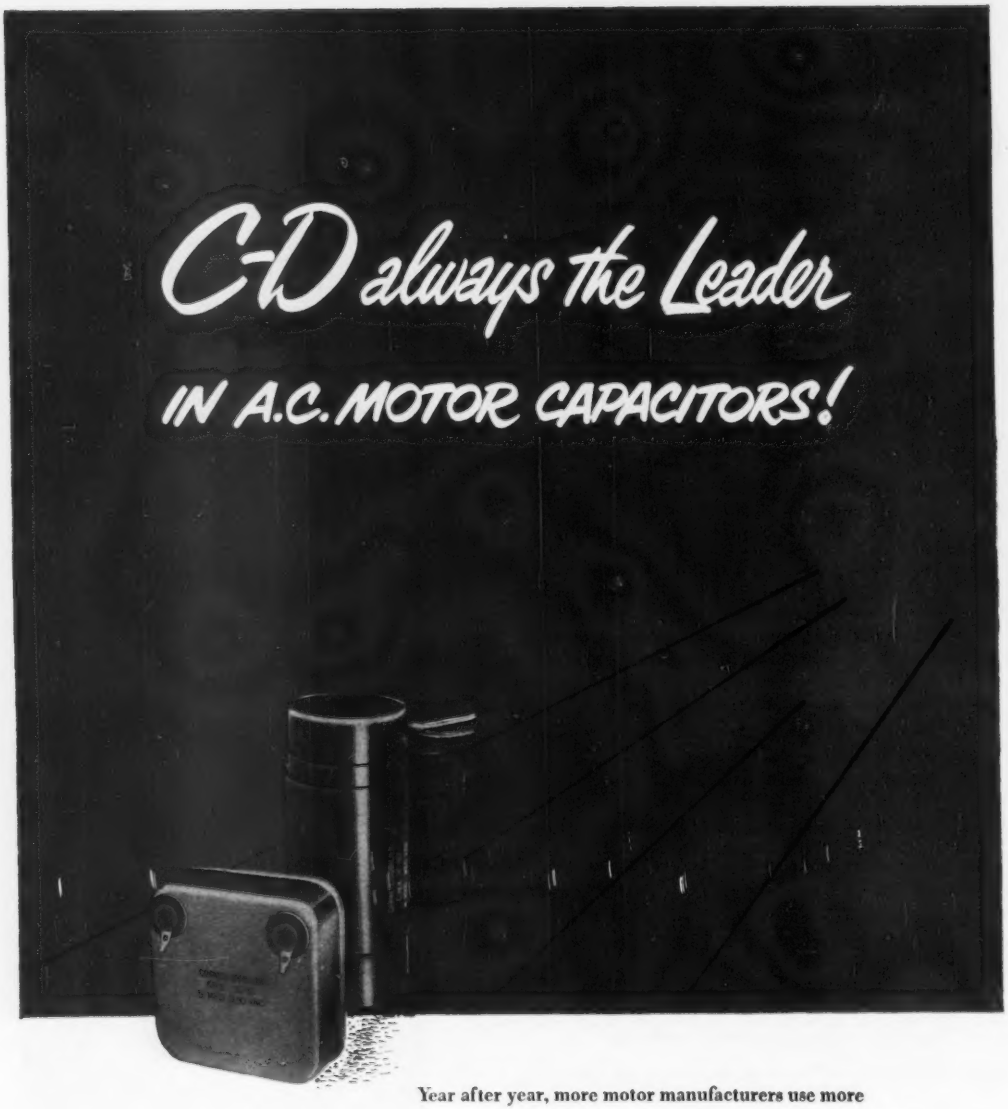

Year after year, more motor manufacturers use more Cornell-Dubilier A.C. motor capacitors than any other. The reason: a great record of trouble-free service in the field! Filled with C-D's world-famous Dykanol, and conservatively rated for extra dependability. Dept. K-101, Cornell-Dubilier Electric Corp., South Plainfield, N. J.

CONSISTENTLY DEPENDABLE

CORNELL-DUBILIER

CAPACITORS

1910-1951

PLANTS IN SOUTH PLAINFIELD, N. J.; NEW BEDFORD, WORCESTER, AND CAMBRIDGE, MASS.; PROVIDENCE, R. I.; INDIANAPOLIS, IND.; FUQUAY SPRINGS, N. C.; AND SUBSIDIARY, THE RADIART CORP., CLEVELAND, OHIO

SUBSIDIARY

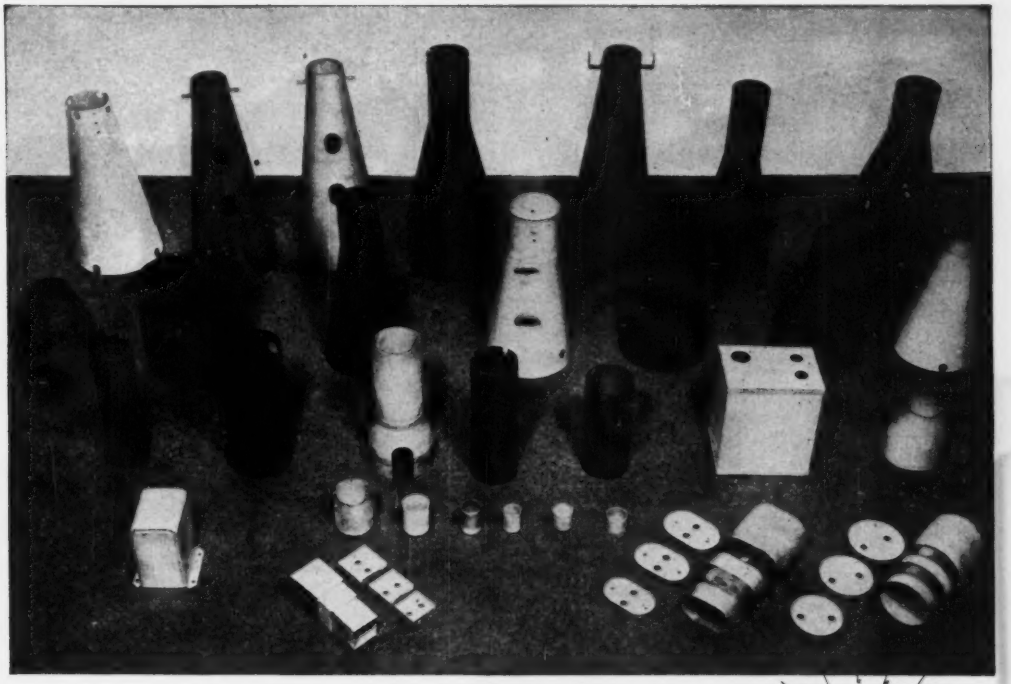

Get out of the Magnetic Doghouse



with MUMETAL SHIELDS

Write for

BLUE SHEETS

on Allegheny Ludlum Electrical Materials

Complete, laboratory-certified data on each grade—its physical properties, electrical characteristics, uses, methods of handling, etc. Write for Blue Sheets on the materials in which you are interested.

ADDRESS DEPT. E-22.

Mumetal shields will give instant relief to interference caused by extraneous magnetic fields. This material can cure many troubles—solve many a problem for you. Always consider it where high permeability is required at low flux densities, such as in input and microphone transformers, hearing aid diaphragms, instruments, wire and tape recorders, etc. For properly heat treating Mumetal, we can also offer commercial hydrogen annealing facilities.

A fund of technical data on shields and other applications for Allegheny Mumetal is available—let us help with your problems.

ALLEGHENY LUDLUM STEEL CORPORATION
Pittsburgh, Pa.

Steel Makers to the **ELECTRICAL INDUSTRY**

AL

WSD 2570

Westinghouse Switchboard Instruments are used as "standards" on this Universal Tube Test Station manufactured by Radio Corporation of America.

Westinghouse Switchboard Instruments are available in circular or conventional scale types for any switchboard application.



Where instrument accuracy is a "Must"... specify Westinghouse

The use of Westinghouse instruments as "standards" on RCA's Master Tube Test Stations demonstrates how they measure up to *your* need for accurate measurement of any electrical quantity.

In order to reliably measure the quality of all types of electronic tubes the instruments have to consistently maintain precise accuracy. Westinghouse Switchboard Instruments not only fulfill this requirement but provide important plus benefits as well: Easier readability—to simplify the operator's job . . . and co-ordinated space-saving design—to contribute to the functional compactness of the unit.

Here's further assurance of quality: all Westinghouse switchboard panel, portable and recording instruments are built to meet the rigid performance requirements of the American Standards Association. Moreover, you can select from . . .

The most complete line in the industry!

You get a wider selection for every need whether it be a-c or d-c current and voltage, single or polyphase circuits, watts or vars, frequency, power factor, synchroscopes, temperature indicators, ground detectors or synchrotie (position indicators). And you get . . .

Competent application assistance!

Westinghouse Instrument Application Engineers are available to consult with and serve you in selecting and applying the proper instruments for your application. Simply call your nearest Westinghouse office.

For complete information about Westinghouse Instruments write for Booklet B-4696. Address: Westinghouse Electric Corporation, P.O. Box No. 868, Pittsburgh 30, Pennsylvania. J-40400

Westinghouse

INSTRUMENTS

When you TEST use the BEST...



Type 578-A
PRECISION COAXIAL FREQUENCY METER
0.925–1.70 kmc/s

THE STANDARD OF COMPARISON IN

Augmented by many new components, the PRD line of RF Test Equipment is presently the most complete line available covering the entire frequency range from .01 to 40 kilomegacycles per second. The units listed indicate the wide diversity and applicability of PRD equipment. In addition to the standard line, PRD specializes in the design and manufacture of special equipment to meet special requirements. A skilled staff of engineers is available to analyze your requirements and to assist in the application of standard or special components to your test problem. PRD equipment is engineered and manufactured to the highest attainable standards. No effort has been spared to make this equipment the finest available anywhere with the result that PRD equipment is now used in leading laboratories all over the world.



Type 801-A
UNIVERSAL KLYSTRON POWER SUPPLY
300-1500 V at 65 ma;
1.5–3.6 KV at 25 ma



Type 854
UNIVERSAL SPECTRUM ANALYZER
8.5–9.6 kmc/s



Type 902
BROADBAND MICROWAVE SIGNAL GENERATOR
3.65–7.3 kmc/s

Type 904
VHF-UHF NOISE GENERATOR
.01–1.0 kmc/s

FREQUENCY MEASURING DEVICES

Frequency Meters	Frequency Range (kmc/sec)	Type No.	Transmission Line Size (Nominal O.D.—inches)	R—Reaction T—Transmission
General Purpose	0.47–0.95	584	⅜	T
	3.95–5.85	574	2 x 1	R
	4.00–10.0	562-A	⅜	Detector included
	5.85–8.20	575	1 ½ x ¾	R
	7.05–10.0	576	1 ¼ x ⅝	R
	8.45–9.91	551-E	1 x ½	R
	8.45–9.91	551-F	1 x ½	T
	8.45–9.91	551-G	1 ¼ x ⅝	R
	8.45–9.91	551-H	1 ¼ x ⅝	T

In addition to the General Purpose Frequency Meters listed above, PRD manufactures a complete line of Precision Frequency Meters covering the entire frequency range from 0.55 to 39.0 kmc/s. Transmission line sizes include ⅜" coaxial line and all standard wave guide sizes from 0.280" x 0.140" I.D. to 2" x 1" O.D. All types are available in Reaction and Transmission styles.

The Type 500 Frequency Standard Multiplier is available to generate standard frequency signals in the UHF and microwave regions when used with the Type 612-A Tunable Crystal Mount.

SIGNAL SOURCES AND RECEIVERS

ITEM	DESCRIPTION
TUBE MOUNTS	
Type 701	For type 2K28 klystrons, 2.400–3.445 kmc/sec
Type 702	For type 2K25 klystrons, 8.50–9.60 kmc/sec, 1 ¼ x ⅝ waveguide
Type 703	For type 2K25 klystrons, 8.50–9.60 kmc/sec, 1 x ½ waveguide
OSCILLATORS	
Type 705	Covering the frequency range from 7.0 to 11.0 kmc/sec
Type 706	Covering the frequency range from 3.6 to 7.3 kmc/sec
POWER SUPPLIES	
Type 801-A	Providing all required electrode voltages to operate a wide variety of klystrons, plus internal modulators
SPECTRUM ANALYZERS	
Type 853	Covering the frequency range from 2.40 to 3.40 kmc/sec
Type 854	Covering the frequency range from 8.50 to 9.60 kmc/sec
Type 855	Combining both of the above ranges in one instrument
SIGNAL GENERATORS	
Type 902	Covering the frequency range from 3.65 to 7.30 kmc/sec
Type 903	Covering the frequency range from 7.00 to 10.5 kmc/sec
NOISE GENERATORS	
Type 904	For the direct measurement of noise factors in the range of 10 to 1000 mc/sec



Type 706
BROADBAND MICROWAVE OSCILLATOR
3.6–7.3 kmc/s

Polytechnic

RESEARCH & DEVELOPMENT COMPANY, INC.

VISIT US AT THE NATIONAL ELECTRONICS CONFERENCE

from VHF to it's PRD

QUALITY, ACCURACY, DEPENDABILITY

ITEM	COAXIAL (Nominal O.D.—inches)		WAVEGUIDE (Nominal O.D.—inches)							
	⅞	⅜	3x1½	2x1	1½x¾	1¼x⅝	1x½	0.622x 0.311 I.D.	0.420x 0.170 I.D.	0.280x 0.140 I.D.
ATTENUATORS AND TERMINATIONS										
Variable Attenuators Uncalibrated			171	162	161	160	154 150	189	190	191
Dial			174-A	169-A	177-A	184-A	196-A 196-B	187-A		
Precision			175-A	170-A	178-A	185-A	195-A	188-A	153-A	192
Cut-Off		181, 198					180			
Fixed Attenuators Low Power	136 series 142 series	130 series 135 series	s	s	s	s	140 series	s		
High Power	141, 143	144								
Terminations	145	139	129	115	121	114	116	131	132	133
TRANSMISSION LINE COMPONENTS										
Waveguide to Coaxial Adapters			365	357	356	355	354			
Coaxial Transitions	389, 390 391, 392	389, 390 391, 392								
Directional Couplers				400	404	401	402	405		
Waveguide Stands			373-A	376-A	377-A	378-A	379-A	386A	387-A	388-A
Flange Bolt and Nut Assemblies			369-A	369-B	369-B	369-C	369-D	369-E	f	
Bends and Tees				s	s	s	462 463 481	s	s	s
IMPEDANCE MEASUREMENT AND TRANSFORMATION										
Slotted Sections	200-C 200-D	205-A 215-A	209-A	201-A	204-A	202-A	203-A	210	211	212
Tuners		306	309	300	305	302	303	314	313	312
DETECTION AND POWER MEASUREMENT										
Detector Mounts Crystal		612-A 613					601	616	621	615
Bolometer	623, 624 625, 626	612-A, 613 627, 628						616	620 621	618
Thermistor							635			

The Type 250-A Broadband Probe is designed for use with the Types 200-C through 209-A and 215-A Slotted Sections; Types 210-212 are supplied with built-in tunable probes. The Type 361 R-F Adapter is available for use with the Type 250-A Probe.

The Type 650 Universal Power Bridge is designed to be used with any of the bolometers or thermistors listed for the measurement of absolute power level.

BOLOMETERS

TYPE No.	FOR USE WITH	TYPE No.	FOR USE WITH	TYPE No.	FOR USE WITH
610-A	210-A, 612-A, 613	629-A	623	630-B	626
614	210, 211, 616, 621	629-B	624	631-A	627
617	212, 618, 620	630-A	625	631-B	628

f—Equipment supplied with captive flange screws
s—Available on special order only

Precision RF Test Equipment

Type 196-A VARIABLE ATTENUATOR
8.20—12.4 kmc/s



Type 389 COAXIAL TRANSMISSION LINE ADAPTER
0—4.0 kmc/s



Type 481 E/H TEE
8.20—12.4 kmc/s

Type 312 E/H TUNER
26.5—40.0 kmc/s



Type 211 PRECISION WAVEGUIDE SLOTTED SECTION
18.0—26.5 kmc/s

Type 250-A BROADBAND PROBE
1.00—12.4 kmc/s



Type 650 UNIVERSAL POWER BRIDGE
0.1, 1.0, 10, 100 mw full scale

Type 627 BROADBAND COAXIAL BOLOMETER MOUNTS
4.0—10.0 kmc/s

NEW ILLUSTRATED CATALOG AVAILABLE ON REQUEST

Contains complete information on the entire PRD line of precision rf test equipment. Write for your copy today on your company letterhead — no obligation; address Dept. E-15.

PRD

TILLARY ST., BROOKLYN 2, NEW YORK
Chicago, October 22, 23 and 24

4-900 Series
1000 V (RMS)

Disc size $\frac{11}{16}$ D
Available 2 to 9 electrodes.
Electrode treatment L only.



5-900 Series
1500 V (RMS)
Disc size $\frac{61}{64}$ D
Available 2 to 9 electrodes.
Electrode treatment L only.

7-700 Series
2000 V (RMS)



Disc size $\frac{61}{64}$ D
Available 2 to 7 electrodes.
Electrode treatments
TH, FP, HT and L.

Meet the FUSITE FAMILY of MULTIPLE TERMINALS

Glass to Steel for a True Fused Hermetic Seal

Protect Sensitive Electrical Components from

• DIRT • MOISTURE • FUMES
• CHANGING PRESSURES



7-900 Series
2000 V (RMS)
Disc size $1\frac{15}{64}$ D
Available 2 to 9 electrodes.
Electrode treatments
TH, FP, HT, and L.



7-1300 Series **2000 V (RMS)**
Disc size $1\frac{15}{64}$ D
Available 10 to 13 electrodes.
Electrode treatments TH and HT.

7-2300 Series **2000 V (RMS)**
Disc size $1\frac{5}{8}$ D
Available 11 to 23 electrodes.
Electrode treatments TH and HT.

GENERAL SPECIFICATIONS

materials -- C.R. steel disc and steel electrodes. Interfused with glass.

finish -- fused electro tin plate.

voltage test -- see individual terminal.

pressure test -- 12 pounds gauge.

insulate electrically -- 10,000 megohms after salt water immersion.

sudden thermal shock test -- dry ice to boiling water.

INSULATE ELECTRICALLY
GLASS TO METAL
FUSITE
TERMINALS
PROTECT PRODUCT PERFORMANCE
SEAL HERMETICALLY

Key to Electrode Treatment Available on These Terminals

TH TURRET HEAD
FP FLATTENED AND PIERCED
HT HOLLOW TUBE
L LOOPED
HTL HOLLOW TUBE LUG
NH NAIL HEAD
SW STRAIGHT WIRE

Write FOR CATALOG of Complete Line and Engineering Details -- Dept. B

THE FUSITE CORPORATION
6028 FERNVIEW AVENUE - CINCINNATI 13, OHIO



G-610 Triaxial 3-way
World's Finest Loudspeaker (15")

H-510 Coaxial with Acoustic Lens
World's Finest Coaxial (15")

K-310 Coaxial (15")

K-210 Coaxial (12")



Single-Unit Direct Radiator Types
(5-15")

how to choose a high fidelity loudspeaker

GENUINE Jensen WIDE RANGE

This trademark* denotes the most comprehensive series of high fidelity loudspeakers available today. Every unit has been designed with the same objective . . . the achievement of the finest possible reproduction of music attainable for the size and type. Every model in the series sets a new high standard of performance . . . a new value . . . makes listening a thrilling new experience.

what GENUINE JENSEN WIDE-RANGE means

Mere extension of response to high frequencies is not enough to insure truly satisfying reproduction . . . good listening which improves with closer acquaintance. Much more is required to make music come to life, free from annoying factors which might mar the illusion of reality. So, by application of the most modern principles of acoustics, confirmed by precise measurements and checked by exhaustive quality judgments and comparative listening tests, Genuine JENSEN Wide-Range loudspeakers give you all 7 Performance Points for enhanced listening pleasure: (1) Wide Frequency Range, (2) Balanced Frequency Response, (3) Smooth Reproduction, (4) Wide-Angle Distribution, (5) Low Distortion, (6) Good Efficiency, and (7) Adequate Power-Handling Capacity.

Thus Genuine JENSEN Wide Range means much more than wide frequency range — it means superior performance all the way — in every attribute that makes for enhanced listening pleasure.

Whatever the limitations on cost or size, the choice of a loudspeaker from the Genuine JENSEN Wide-Range series automatically insures a maximum of performance to today's new high standards . . . a judicious choice to meet exact needs. Only in the Genuine JENSEN Wide-Range series can you make such an exact choice.

Write today for free booklet, "Let Music Come to Life."
It includes a complete listing of
Genuine JENSEN Wide-Range loudspeakers.

Jensen
MANUFACTURING COMPANY
Division of The Muter Company
6601 SOUTH LARAMIE AVE., CHICAGO 38, ILLINOIS

BURTON BROWNE ADVERTISING

MYCALEX

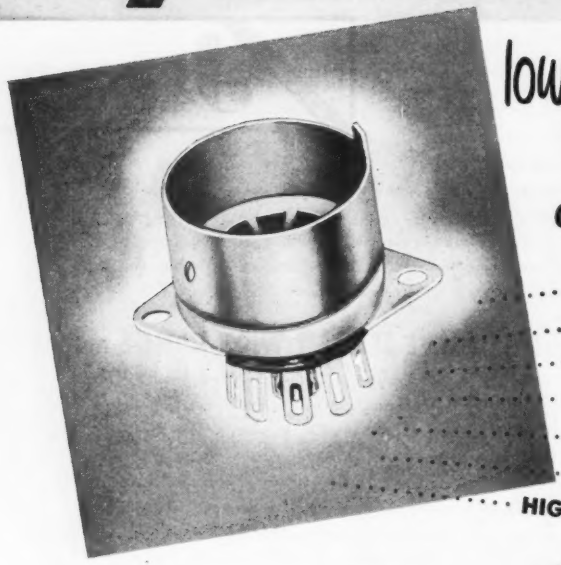

low-loss miniature TUBE SOCKETS

OFFER ALL THESE ADVANTAGES:

- CLOSER TOLERANCES
- LOWER DIELECTRIC LOSS
- HIGH ARC RESISTANCE
- HIGH DIELECTRIC STRENGTH
- GREAT DIMENSIONAL STABILITY
- IMMUNITY TO HUMIDITY
- HIGH SAFE OPERATING TEMPERATURE

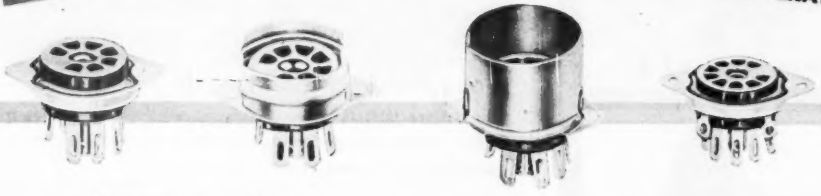

-cost no more than PHENOLIC TYPES

These glass-bonded mica sockets are produced by an exclusive MYCALEX process that reduces their cost to the level of phenolic sockets. Electrical characteristics are far superior to phenolics while dimensional accuracy and uniformity exceed that of ceramic types.

MYCALEX miniature tube sockets, available in 7-pin and 9-pin types, are injection molded with great precision and fully meet RTMA standards. They are produced in two grades, described as follows, to meet diversified requirements.

MYCALEX 410 is priced comparable to mica-filled phenolics. Loss factor is only .015 at 1 mc., insulation resistance 10,000 megohms. Conforms fully to Grade L-4B under N.M.E.S. JAN-1-10 "Insulating Materials Ceramic, Radio, Class L."

MYCALEX 410X is low in cost but insulating properties greatly exceed those of ordinary materials. Loss factor is only one-fourth that of phenolics (.083 at 1 mc.) but cost is the same. Insulation resistance 10,000 megohms.

MYCALEX TUBE SOCKET CORPORATION
Under Exclusive License of
MYCALEX CORPORATION OF AMERICA
30 ROCKEFELLER PLAZA, NEW YORK 20, N.Y.

SINCE 1919 MYCALEX THE INSULATOR TRADE MARK REG U.S. PAT. OFF.

MYCALEX CORPORATION OF AMERICA
Owners of 'MYCALEX' Patents and Trade-Marks
Executive Offices: 30 ROCKEFELLER PLAZA, NEW YORK 20 — Plant & General Offices: CLIFTON, N.J.

tape it... with PRESTO

best results . . . tape it with PRESTO, the best buy in tape recorders today.

PRESTO AMPLIFIER 900-A2

The recommended amplifier for the RC-10/24 tape recorder, has a frequency response of 50 to 15,000 cps., a low level three mike mixer and a bridging input. Five-way switch for recording, playback, remote, erase current and bias current.

PRESTO MODEL RC-10/24

World favorite for relay rack mounting. Accommodates 10½" reels, three magnetic heads, push-button controls, response up to 15,000 cps. Panel size 19" x 24½". Also available in console unit.





PRESTO PORTABLE PT-920

Brand new and improved successor to the famous PT-900. Three motors, no friction clutch or tension adjustments. Fast forward and rewind speeds, instantaneous monitoring from tape. Compact case contains 10 watt amplifier, two speakers, power supply.

PRESTO PORTABLE RC-10/14

Portable version of the RC-10/24 with smaller panel size (19" x 14") and rotary switch selector. Weighs only 68 lbs. Superb audio quality, speed control and reliability.



PRESTO

WORLD'S LARGEST MANUFACTURER OF PRECISION RECORDING EQUIPMENT AND DISCS

new!

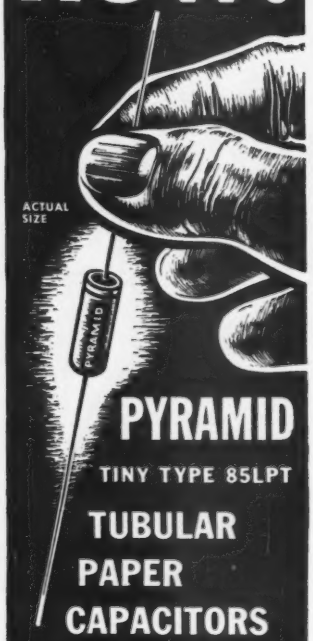

PYRAMID

TINY TYPE 85LPT

TUBULAR PAPER CAPACITORS

Fit anywhere!

Suitable for 85°C. operation!

CAPACITANCE RANGE:
.0001 TO .5 MFD.

VOLTAGE RANGE:
200 TO 600 V., INCLUSIVE

Sturdily built in phenolic-impregnated tubes. Ends are plastic-sealed.

WRITE FOR COMPLETE LITERATURE
Representatives and Distributors Throughout the U.S.A. and Canada

PYRAMID

PYRAMID ELECTRIC COMPANY
1445 Hudson Boulevard
North Bergen, N. J., U. S. A.
TELEGRAMS: WUX North Bergen, N. J.
CABLE ADDRESS: Pyramidusa

BUSINESS BRIEFS

By W. W. MacDONALD

Production Potential of electronic equipment manufacturers in the Los Angeles-San Diego area is very substantial, according to a report prepared by the local Inspector of Naval Material and forwarded to the Electronic Production Resources Agency in Washington.

The report lists 236 active manufacturers of end equipment, subassemblies and component parts, having a total of 6,710,168 sq ft of floor space and 45,020 employees. The letter of transmittal points out that many of the companies listed are not using their full manufacturing facilities and that they have ample trained personnel to handle many military equipment contracts. Very few are, however, represented at any procurement location, so they are frequently overlooked.

It so happens we will be in California on an editorial trip within a week after this is written and will have an opportunity to see some of this productive capacity at first hand, not only in the section mentioned but also in the San Francisco area. We're looking forward to it with interest.

Presidential Directive to government departments and agencies says that to the greatest extent practicable certificates of necessity, allocation of critical materials for construction purposes, emergency loans growing out of defense production and defense contracts should go to manufacturers meeting satisfactory standards of plant dispersal.

Comforting to many in the field of electronics who wonder how rigorous the standards will be in view of the threat of atomic bombing are the following excerpts from an approved National Security Resources Board planbook: *"This . . . program . . . is designed to disperse new industry and expanding industry, not to move established industry."* Dispersion of facilities is suggested *"within your local marketing area"*, with space, *"perhaps only several miles"*, between manufacturing facilities.

The plan does not contemplate mass shifts of manufacturing facilities from any one section of the country to any other.

Wright Field advises that increased use of electronic equipment in military aircraft has required revamping of the training program to provide men adept in the handling of instruments required by modern speeds and all-weather flying. Ellington Air Force Base, in Texas, is the first to institute the new observer training plan.

Department Of Army invites us, through the mails on their Form 49-R275 in duplicate, to bid on resistors destined for delivery at the Lexington Signal Depot. We are indeed flattered to be identified so closely on Army's mailing list with manufacturers of electronic equipment whom we serve, but must decline.

Our business is publishing ELECTRONICS magazine, and it keeps us plenty busy.

TV License Applications on hand at the FCC total 400, according to chairman Wayne Coy, who thinks at least this many more may be expected when the freeze is lifted.

Coy believes it would take a year to get the average new station on the air, and says consideration will first be given to areas with no facilities and second to heavily populated areas with only one station. He estimates that there will be 1,500 tv stations in operation within five years and perhaps 2,500 within 10, with a probable limit of about 3,000.

Definition going the rounds: CBS—*Color Belongs to Stanton.*

TV Picture Tube Sales to manufacturers dropped 20 percent in the first six months of 1951 as against the corresponding period of 1950, according to RTMA. Sales

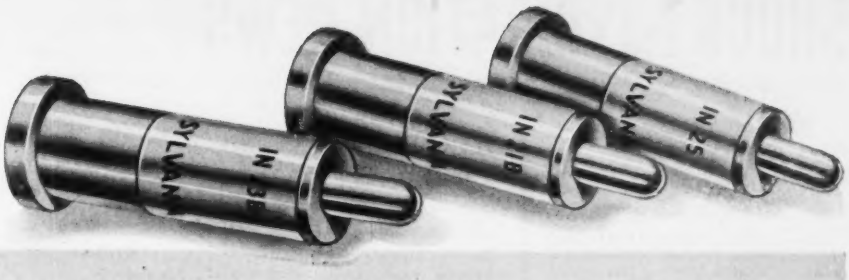

SYLVANIA PLUGS THE 16,000 MC GAP

with the new 1N78 Silicon Crystal Mixer

Sylvania adds another to the world's widest Silicon Crystal Mixer line—the 1N78 for 16,000 mc, one of the newest SHF bands. This new diode is the latest product of Sylvania's continuing exploration into frequency conversion in microwave regions.

Better and better performance at existing frequency bands and new designs for tomorrow's frequencies are both to be expected of Sylvania's advanced research and long experience in Silicon Diode technology.

Sylvania also makes Silicon Crystal Video Detectors for use as microwave detectors in receivers of non-heterodyne type. Other Sylvania products engineered for radar and SHF receivers include magnetrons, TR tubes, ATR tubes and hydrogen thyratrons.

Sylvania Silicon Mixer Diodes

Type	Construction	Design Frequency (Approx.)
1N25	Cartridge	1000 mc.
1N21B	Cartridge	3000 mc.
1N23B	Cartridge	10,000 mc.
1N78	Coaxial	16,000 mc.
1N26	Coaxial	24,000 mc.
1N53	Coaxial Miniature	Above 30,000 mc.

Write for this 16-page book, "Microwave Crystal Rectifiers," including the new 1N78 characteristics and ratings.



Sylvania Electric Products Inc.
Dept. E-1010, Emporium, Pa.
Please send me the "Microwave Crystal Rectifiers" booklet, including data on the 1N78.

Name_____
Company_____
Street_____
City_____ Zone____ State_____

SYLVANIA

SYLVANIA ELECTRIC PRODUCTS INC. 1901–1951 FIVE DECADES OF PROGRESS 50th ANNIVERSARY

ELECTRONIC DEVICES; RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

SHOCK and VIBRATION NEWS

BARRYMOUNTS FOR ASSURED CONTROL OF SHOCK AND VIBRATION

SMALL AIR-DAMPED BARRYMOUNTS
for Miniaturized Airborne Equipment

New-series Barrymounts, designed to meet requirements for compact isolators usable with miniaturized equipment, provide effective shock and vibration isolation in small space.

These mountings utilize air damping to minimize shock of aircraft landing and taxiing and to limit excursion so there is no snubber contact, even at resonance.

Upright and inverted types are available for two-hole or four-hole mounting. Unit mountings are one inch in diameter and 1-1/32 inches high under maximum rated load. Load ratings are 0.1 to 3.0 pounds per mount. The mountings weigh only 5/16 ounce each.

Bases using the inverted mountings raise the mounted equipment only 1/2 inch. Either upright or inverted unit mountings can be furnished on bases that conform to your specifications, load-ratings, and dimensions.

FREE CATALOGS

- 502 — Air-damped Barrymounts for aircraft service; also mounting bases and instrument mountings.
- 509 — ALL-METL Barrymounts and mounting bases for unusual airborne applications.
- 605-606 — Miniaturized air-damped Barrymounts for use with airborne equipment.

"RUGGEDIZED" BARRYMOUNTS AND MOUNTING BASES
Now Available to Meet Shock Requirements of AN-E-19

Barry vibration isolators and mounting bases are now available in "ruggedized" construction, to withstand the severe shocks of arrested landings in aircraft carrier service and of crash landings. These units are tested to meet the shock-test requirements of Specification AN-E-19, for the equipment sizes listed in JAN-C-172A.



"Ruggedized" Barrymounts are available in both the air-damped type and the ALL-METL type. Air-damped Type 770R covers load ranges between ¼ lb. and 9 lbs. Air-damped Type 780R covers load ranges between 4 lbs. and 35 lbs. ALL-METL Type 6600R covers load ranges between 4 lbs. and 35 lbs. Type M-112R covers ranges between 2 and 10 lbs.



"Ruggedized" mounting bases, equipped with Barrymounts of the above types, are available in standard JAN sizes (JAN-C-172A) and in special sizes to meet customers' requirements. A conspicuous advantage of these "ruggedized" Barry bases is the gain in strength of the base framework itself — beyond JAN requirements — achieved with very little increase in weight for loads up to 60 lbs. by design modification of standard JAN bases. For greater loads, the "ruggedized" Barry bases are of stainless steel instead of aluminum. Write for data sheet.

See our advertisement in Electronic Buyer's Guide pages 240-241

THE **BARRY** CORP.

707 PLEASANT ST., WATERTOWN 72, MASSACHUSETTS

SALES REPRESENTATIVES IN

New York · Rochester · Philadelphia · Washington · Cleveland · Dayton · Detroit · Chicago · Minneapolis · St. Louis · Seattle · Los Angeles · Dallas · Toronto

totaled 2,552,757 as against 3,171,660 units.

Tubes sold in the first six months of 1951 were valued at $66,546,932. Some 86 percent of them were rectangular in form, and 92 percent were 16 inches or larger in size.

American Gas & Electric is going in heavily for industrial television. The Tidd generating station has four units, Sporn has six and is adding two more, Tanners Creek has two and is adding two, Twin Branch has two and two new generating stations now under construction will each have four units.

Bogota, Colombia, has just ordered a Marconi television transmitter, with the Municipal Bank of Bogota doing the financing. British manufacturer E. K. Cole has simultaneously been given an order for receivers using the American 525-line standard. The sets will be rented.

West German Officials are seeking Washington's advice on whether to start commercial television service in black and white or in color. We hope we eventually get to see what should be a very interesting reply.

Quotable Quotes from a speech by Edwin T. Gibson of DPA before the RTMA:

"Of the total money available during fiscal '51 for electronic gear, $2,482,000,000 had been obligated as of May 1, and the backlog of orders as of that date, including some long-lead-time material going back to fiscal 1950, amounted to $2,784,000,000. . . . .

"The expected rate of deliveries will be $881,000,000 worth during the fourth quarter of this year, with much much more to come in 1952. . . . ."

Electronic equipment manufacturers are being called upon to produce at "a rate approximately equal to 85 percent of the peak production in World War II. . . . .

"About 86 percent of the price of a typical 17-inch television set is represented by purchased materials and components, labor and

engineering representing the balance. For a modern airborne fire-control equipment, only 49 percent represents materials. . . . ."

Germanium Diode Production is currently in the neighborhood of 4,000,000 units a year, and the units are now standing up well. The National Bureau of Standards eastern automatic computer (SEAC) uses 16,000 of them and after 2,500 hours of service only 5.4 percent of those originally installed had to be replaced, most of the replacements being for back-current drift or creep. The rejection rate for several thousand diodes purchased in the last six months of 1950 was less than 2 percent.

Many Products that one would not ordinarily think of as being saleable to electronic equipment makers find a market in our field. Fibre-glass erasers, for example, are being used to reduce the value of resistors in certain printed circuits.

Life lists total investment by advertisers in ten top media for the six months period between January and June 1951 as follows:

Life	$43,089,969
CBS Radio	39,285,216
Saturday Evening Post	34,121,636
NBC Radio	30,000,036
NBC TV	*26,739,532*
ABC Radio	17,344,512
CBS TV	*17,069,328*
Time	14,229,834
Ladies Home Journal	11,484,173
Better Homes & Gardens	11,413,731

Radio and tv figures are for network time only. The italics are ours.

Positions of a two-point switch in a circuit diagram currently being edited are intriguingly labelled. In television as in many other fields of endeavor, apparently, one must still *Synch* or *Skim*.

Editor O'Brien, planning some scientific experiment the nature of which remains a mystery, returned from lunch the other day with a white mouse in a cardboard box. The box rested on top of a copy of our September issue overnight and by morning the rodent had gnawed his way down to page 132.

No one, it seems, can digest a copy of fact-packed ELECTRONICS in one session.

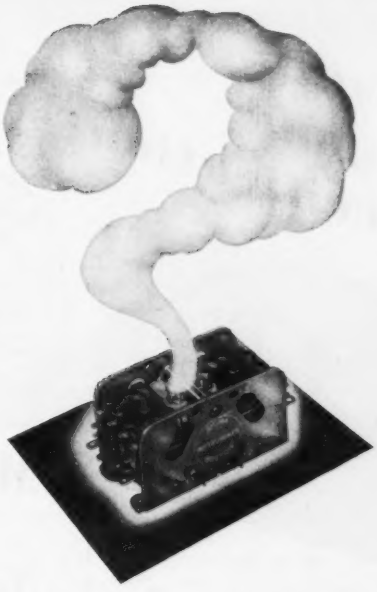

LINK OR KINK

If it is true that a sensitive relay is an ordinary design in which common principles and dimensions have been "squeezed" in order to gain performance, it logically follows that even as features of merit are accentuated, so also will be an occasional weakness.

An engineering group charged with the task of making sensitive relays successfully perform a variety of jobs (us) can obviously assist other groups having specific relay-using jobs to finish (you) as much by highlighting weakness as by tub-thumping strong points. For one thing, we are very well aware both of the weaknesses and of the best defenses against them. For another, we have the greatest possible interest in seeing you the user avoid trouble. Naturally, the more fully you describe your intended use of our product, the better we can help you get the benefit of its advantages.

It does not occur to us as either wise or useful to "catalog" weaknesses where they have restricted importance, or are complicated to understand, or are not fully evaluated. By the same token, we are perhaps only human if we call attention only to those apparently having a bearing on the problem at hand. But if you tell us what you are trying to accomplish, we can tell you of more pitfalls and how to dodge them in a five-minute telephone conversation than you are apt to find out in a month of study on any single application.

SIGMA

SIGMA INSTRUMENTS, INC., 62 Pearl St., So. Braintree, Boston 85, Mass.

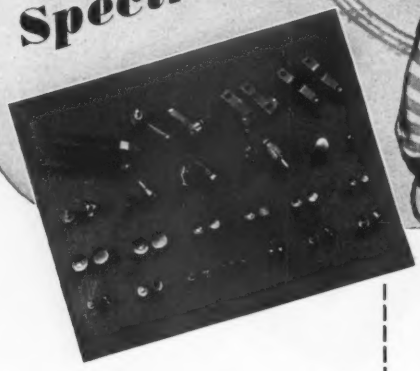



MALLORY SILVER CONTACTS

Fine and coin silver, while having desirable properties for many applications, do not provide the physical properties required for some applications. To cover these applications, Mallory has developed a series of silver base alloys. These alloys have such improved characteristics as greater resistance to wear, less sticking or metal transfer, and greater hardness. Mallory is fully qualified to recommend the best contact material for your design. Write today.

Mallory Engineering *Suggests New Contact Assembly ...Saves Customer Money*

Hundreds of customers are profiting from Mallory contact know-how which simplifies design and production, saves valuable time and money.

A manufacturer of electric toy trains submitted a contact assembly job to Mallory which called for large silver contacts on a flat section of spring steel. Mallory suggested a re-design of the part enabling a great reduction in the size of the silver contact and utilizing a Mallory-developed welding technique to insure maximum mechanical strength. The customer was given improved performance . . . at a substantial saving!

That's result beyond specification!

Mallory contact know-how is at your disposal. What Mallory has done for others can be done for you!

In Canada, made and sold by Johnson Matthey and Mallory, Ltd., 110 Industry St., Toronto 15, Ontario

Electrical Contacts and Contact Assemblies

P.R. MALLORY & CO. Inc.
MALLORY
P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

CROSS TALK

▶**TV POWER** . . . As we write, the FCC has granted power increases to 42 television stations, ranging from 1.02 times for KPIX, San Francisco, to 11.4 times for WTVJ in Miami, amid shouts of joy from just about everyone concerned. Before the boost these stations had a combined effective radiated power of 546 kw; now the combined power is 896 kw, an average increase of about 64 percent. This 64 percent is a nice juicy bit, as measured by the time-salemen's pitch and even as measured in the electric light bill. But in good old decibels it ain't much, only 2.2 db, which is an amount the eye can just barely detect by looking at the image. All of which goes to prove that a mere scratch has been made on the surface of this power increase business. Some stations, those having high towers and high-gain antennas, have done very well. Others only think they have.

The moral of the story is that the broadcaster who soaked a lot of money into a high tower, plus a lot of antenna gain, when he built his station, is now reaping the harvest. The ground rules of the recent power-boost authorizations allow him to turn his final amplifier up to its maximum rating, whereas the old rules required him to turn down the power, the higher his tower and the more gain stacked into his array. The new rules also allow him to put in more antenna gain, but this takes time, and, if the Empire State story is any criterion, plenty of bucks. So a free hand with the stockholders' money is rewarded again, as is only right.

This is, of course, only a preliminary step, a partial derogation of the freeze allowed by an enlightened (repentant?) government body which shall be nameless. Much more is in the offing. Post-freeze power increases of the order of 5 to 10 times above the present average level are promised. Then we'll have decibels of improvement in substantial, rather than liminal, numbers. For which praise be to Allah!

▶**EDUCATIONAL** . . . The educational-tv argument is in the doldrums at the moment, so we'll give it a kick to keep it alive. Our stand: Television needs educational institutions, their facilities and personnel, as fulltime program sources if it is to serve the people fully. We need now, and even more we'll need later, a leaven for a program fare geared principally to the channels of trade. But television will never get such educational support while we, and that's us, take a parsimonious stand on educational expenses in general. Every time a taxpayers group in your town or mine gets up to oppose increases in teachers' salaries or better school facilities, the forces against educational tv can be seen at work. Broadcasters who want channels may relax so long as this goes on. But it's bad nonetheless. More money, much more, is needed for primary and secondary schools. If we wake up in time, we may have some takers for educational channels, and we'll all be the richer for it.

▶**STATESMAN** . . . President Truman could not have picked a better man as his Telecommunications Adviser than Haraden Pratt. The job, suggested in the report of the President's Communications Policy Board, has been filled with a man who combines knowledge and experience with an ability to inspire confidence to a degree unmatched in the profession of radio engineering. A chairman of the FCC, under whom Pratt had served at an international conference, called him "an honest man, absolutely straight"; and from this particular chairman that statement was the accolade.

In noting the departure of industry figures for government service we try to avoid the style of an obituary notice. Nevertheless we cannot avoid the statement that Haraden will be missed, badly missed, by his associates. The nature of his new job requires his resignation as secretary of the IRE, a position he has held since 1943 and from membership on JTAC, in whose work he has served as principal moderator since its inception. Good luck has not figured as a prominent explanation of his past achievements. But, such being the responsibility of bringing order out of the present chaos in the administration of civil and military radio, he's going to need it from now on. Good luck!

Selecting an INDUSTRIAL

By
ABRAHAM S. GREENBERG
Trademark Attorney
Radio Corporation of America
New York, N. Y.

SELECTION of a trade symbol is most important in the field of electronics. If advertising funds are to be expended, they should be used for a symbol which is capable of legal protection. If a trademark is selected in a haphazard fashion, the business or promotion campaign based on it will be founded on a symbol having little value and the symbol will not be easily retained as exclusive property of the company.

Trademark Categories

Trademarks and service marks as used in modern trade generally fall into the following categories:

Coined Designations: Coined designations are very desirable from a legal viewpoint. Trademarks such as "Kodak" and "Philco" are readily protected. The inventing or coining of trademarks has been studied by A. H. Cousins and H. E. Wadsworth in "Trade Names . . . a Guide to Their Invention, Protection and Use", published by Harlequin Press Co., Ltd., London, England.

Picture or Motif: The dog and phonograph of RCA, the musical clef of Emerson radio and the cat of the National Carbon Company are familiar examples of valuable picture trademarks. By choosing such a mark, the following advantages are gained: perfect export use identification, personalization of the product, a source of interesting themes for advertising, and symbolic representation which lends itself to television promotion.

Sounds: Sound trademarks have been popularized by radio. One good example is the NBC chime-like notes (trademark registered April 4, 1950, No. 523,616).

Letters and Numerals: The mark "GE" is an excellent example of letter type marks. Brevity is their virtue.

Descriptive: Descriptive trademarks should be avoided. The U. S. Patent Office will not register them nor will courts normally protect them. The word "Telecolor" has been refused registration as descriptive of television apparatus. The mark "Kwickstart" has been refused registration for storage batteries. The word "Sightmirror" was held as descriptive of mirror screens for television receivers. Sufficient use is required to create distinctiveness. After this, the trademark may acquire a secondary meaning which can be protected.

Color: Color, as a trademark, should be avoided since color-type trademarks are not normally capable of protection. For example, the light and dark vertical stripes for Burgess batteries was refused registration as a trademark. Also, a circular red area for phonograph record labels was ruled not a valid trademark.

Others: Other trademark categories frequently used are geographic names, historical names, literary references, family names and laudatory titles. The latter are not too wise to select as they can be protected only with great difficulty.

Searching Sources

Once a desirable expression has been selected for a trademark, it is a good plan to do preliminary search screening to be certain that the expression is clear or available. Search facilities which are available to the business man are as follows.

RTMA Trade Directory: This directory is the most obvious search source in the radio and television fields and provides a rough screening. The members of the RTMA list their trade names in the directory.

U. S. Patent Office—Trademark Register: The Patent Office Register in Washington contains files arranged alphabetically and by product and service classes. There are also available published notices of pending applications and special classified files of registered trademark pictures and symbols.

Forty-Second Street Library—Engineering Section (New York City); Files of alphabetically arranged trademarks are provided up to the year 1947. Files are not of registered trademarks but only those which were published for opposition.

Private Search Services: There are a number of private search facilities. Three typical ones are Thomson and Thomson, 80 Federal St., Boston, Mass.; Trade-Mark Service Corp., 253 Broadway, New York, N. Y. and U. S. Printing and Lithograph Co., Cincinnati, Ohio. Such organizations maintain files of registered trademarks as well as files of unregistered trade names

FUNCTIONS OF A TRADEMARK

In choosing a trademark, the three functions performed by such a symbol should be kept in mind. These functions are as follows:

(1) As an advertisement, the trademark helps sell the product

(2) As a guarantee of the quality of a product, the trademark vouches for the company's integrity

(3) As an identification of the manufacturer, the trademark indicates the source of a product

TRADEMARK

Cautious approach to the choice of a trademark for use in the field of electronics will result in fewer headaches and less wasted money. Proper procedure is discussed together with some of the more common pitfalls to avoid

collected from trade periodicals.

Slogan Searches: Among important search sources for slogans are U. S. Trade-Mark Association, 522 Fifth Ave., New York, N. Y. and Printer's Ink Clearing House of Advertised Phrases, 205 E. 42nd St., New York, N. Y. The book "American Slogans" by William Sunners, published in 1949 by The Paebar Co., New York, N. Y., has an excellent classified slogan collection.

Miscellaneous Sources: If the selected word has a "tron" suffix, it would be worthwhile to check lists appearing in: *Electronic Industries*, January, 1946, page 80; *Electronic Industries*, November, 1946, page 58; ELECTRONICS, May, 1950, page 112 and ELECTRONICS, June, 1951, page 218.

Controlling Trademarks

Every trademark involves an initial and continuing investment in creating and defending the mark. The expense of these items multiplies with the number of marks.

The initial investment comprises many items including selection, advertising and marking of products. In addition, one or more trademark registrations are usually required in each country, according to the variety of merchandise upon which the mark is used or is likely to be used. The cost of obtaining trademark registrations is substantial.

The continuing investment includes renewals from time to time at a cost generally equal to that of the original registration. Further, most successful trademarks are encroached upon either inadvertently or intentionally. Much time, effort and expense are required to trace and stop imitations.

Every additional mark used duplicates the initial and continuing investment and expense and the expenditures are further multiplied by the number of countries in which trade is conducted.

A word of warning is perhaps in order. Do not go in for mass trademark, slogan and name usage. District Judge Tuttle once had this to say about an advertising man's "vice". ". . . It is like the monkey of the fable who reached into the jar to get nuts. The monkey was so greedy and grabbed so many that he couldn't get his hand out of the jar and he lost them all. The plaintiff has attempted to adopt so many alleged trademarks, trade names, trade slogans and trade configurations that, if one were to understand this fully and speak intelligently about all of the baits, slogans, boasts and names that have been used, it would be necessary to prepare a dictionary of substantial size. . . . A manufacturer cannot build a business up around a thousand slogans. . . . He cannot take a thousand words out of the dictionary and build a business around all of them . . . because the plaintiff has used so many different things that the public has never come to associate its goods with any of those things."

Before selecting a trade symbol, the owner of a new business or the merchandise director of a new promotion campaign should first acquire an understanding of the nature and function of a trademark. A simple rule to follow is a commercial adaptation of the Golden Rule. Don't select a trade symbol that you would not want a competitor to select. If this rule is followed, the average business man will see why the trade symbol to be selected should be unique, not a part of the public reservoir of words or pictures, not deceptive and above all nonconflicting.

When in doubt about the availability of a trade symbol it is the best policy to contact the owner of the adverse symbol. A simple and frank statement of the facts will more often than not clear up any doubts as to the right to use a selected trademark. A wise rule for the business man and his counsel to follow is that when in doubt about a selected symbol leave it alone. It is not worth the expenditure of promotion funds.

REQUIREMENTS FOR A GOOD TRADEMARK

Experience has shown that certain requirements for a trademark will insure its value to a company. Of primary importance is the consulting of available search material (see text) to reveal legal clearance over trademarks in the same competitive field. In addition, the trademark should be:

Easy to remember
Easy to read and speak
Brief and striking
Creative of proper association
A selling idea for the product
Unrestricted to one line of goods
Suitable for export use
Pictorial in nature

HORN ANTENNAS For Television

Eight-foot equilateral bisectional horn antenna provides over 14-db gain on channel 13 compared with isotropic source antenna. Same performance can be obtained for transmission. Antenna matches commercially available 300-ohm line

By DEAN O. MORGAN

Engineering Section
Broadcast Engineering
General Electric Company
Syracuse, N. Y.

Experimental modified horn antenna made from wood scraps and chicken wire. High directivity makes rotator a very desirable adjunct to system



FIG. 1—For reception of channels 2 through 13, where channel 2 is not especially weak, the most practical dimensions are $W = H = B = 8$ feet, and $\theta = 60$ degrees

Most of the transmitting and receiving antennas in use today for television and communication are of the linear or standing-wave variety. Examples include the dipole, dipole-reflector-director combinations and multiple stacked arrays of all sorts. In general, these types are characterized by comparatively narrow frequency bandwidth and concomitant matching problems. Power gains of 10 db are possible only with large structures which by their nature become more critical toward bandwidth as the gain increases.

Another type of antenna finding moderate use where space will permit, is the traveling-wave antenna. This category includes the terminated long wire, the *V* and the rhombic. These types, however, in addition to requiring a large space, require more than one supporting pole; changes in directivity are difficult; many minor lobes exist; and feed impedances are generally undesirably high (400 to 800 ohms). Bandwidth in the traveling-wave types is often in excess of 3 to 1, which is entirely adequate for most receiving and transmitting conditions.

The antenna shown in experimental form in the photograph offers several advantages over both of the types mentioned above. It has not, however, found very wide application for tv and communication on the lower frequencies, except by a few. This antenna will be recognized as a modified horn type. Since horizontally polarized waves are of primary importance (for the reception of television and f-m signals) two of the usual four sides of a horn may be omitted, and the resulting two-sided horn may be fed by direct excitation.

A drawing of this antenna is shown in Fig. 1. This design consists of only two vertical side sectors of the horn. The feed line is connected at the apex of the horn, one conductor being connected to each sector. There are no metallic ties between sectors.

Attenuation to transmission transition being gradual, the approximate cutoff is determined when

$$W_o = 0.5\lambda_o$$

If true unidirectional characteristics are wanted, the flare angle θ should be small. However, a small θ would necessitate a long horn. A good compromise angle of 60 degrees may be used. In this case the dimension B is given by

$$B_o = \frac{W_o}{2 \sin \theta} = 0.5\ \lambda_o$$

The height of each sector H is made equal to the mouth width W, so

$$H_o = W_o = 0.5\lambda_o$$

Resistive and reactive components of an equilateral bisectoral horn antenna of the type described are shown in Fig. 2. It will be noted that the resistance approaches 377 ohms at infinite frequency. The reactive component similarly approaches zero.

Line Match

Since both 300-ohm and 400-ohm line are commercially procurable,

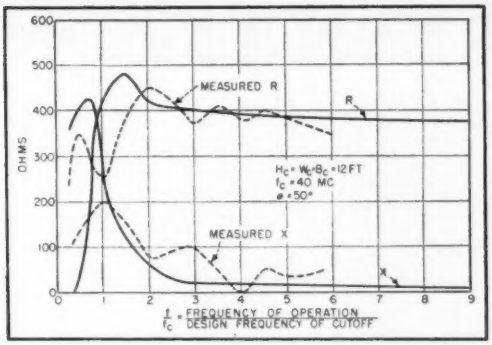

FIG. 2—Universal impedance curves show resistance approaching 377 ohms and reactance approaching zero ohms as frequency increases

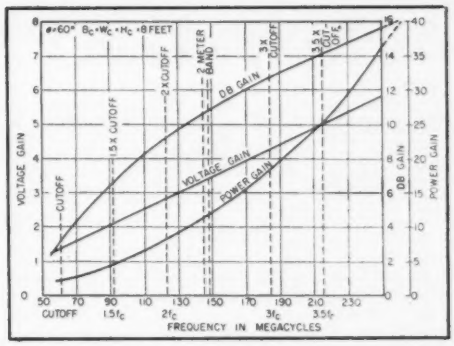

FIG. 3—Curves show calculated gain characteristics (over isotropic point source) for 8-foot 60-degree modified horn antenna

it follows that an ideal match may be secured over a wide band of frequencies with this antenna. In the case of 300-ohm line, the mismatch is only 2 percent in power or 0.8 db in addition to the published attenuation loss of the line, when perfectly matched. At cutoff frequency the loss increases to 0.25 percent in power or 1.22 db. Below cutoff the loss increases rapidly due to the decrease in resistance. The use of 400-ohm line would decrease these losses quite a bit from the infinite frequency down to cutoff (being an ideal match at three times cutoff, or channel 7 and 8).

Dimensions

The actual dimensions used will depend upon the individual problem. For most practical vhf-tv reception, cutoff can be taken as 57 megacycles. For this value of cutoff, $W_c = B_c = H_c = 8.6$ ft. With these dimensions the power gain at 213 mc over an isotropic source is 14.7 db.

Using a slightly reduced size (8 ft) this gain is reduced to 14 db. This is comparable to the gain from 10 dipoles and reflectors in a stacked array, or 20 elements with their added complexity.

Figure 3 is a calculated plot of power gain, db gain and voltage gain. These curves are based on the 8-ft dimension, or a cutoff frequency of 61.2 mc. Figure 4 shows the horizontal and vertical pattern of a scaled model at 28.7 cm, which had an aperture of slightly less than 3 times cutoff. Rear radiation is of the order of 1 percent.

Performance

During the course of the experiments, a 12-ft model was erected at Skaneateles, New York. Good pictures and sound were obtained on channels 4 (Buffalo and Schenectady), 5 (Syracuse), 6 (Rochester), 8 (Syracuse), 12 (Binghamton), and 13 (Utica). Other high-gain types failed to produce a usable picture on any channel except 5. This particular location is down in a valley with hills of 100 ft or more an all sides.

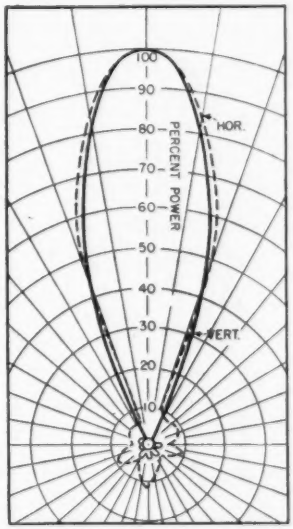

FIG. 4—Directivity patterns for 28.5-cm model (antenna rotated for vertically-polarized signal)

The 8-ft model is almost as good as the 12-ft version, but the lower channels were inferior. Also, channel 6 could not be enjoyed when channel 5 was on the air because of adjacent-channel interference caused by broadening of the beam.

It should be pointed out that the modified horn type of antenna makes an excellent harmonic radiator when used in transmission work. Experiments show that the presence of a metal supporting pole does not affect operation, and the planes may be constructed from wire mesh (chicken wire variety shown in photograph), spline-type construction, woven wire or flat sheets.

Acknowledgements

The author wishes to thank R. B. Dome for his assistance in regard to the fundamental concepts of this antenna. Much advice and helpful hints were also appreciated from R. E. Fisk and L. O. Krause, associates in antenna development at General Electric, Electronics Park, Syracuse, N. Y.

Bibliography

R. B. Dome, "Television Principles," Chapter 8. McGraw-Hill Book Co.

W. L. Barrow and F. D. Lewis, The Sectoral Electromagnetic Horn, *Proc. IRE*, p 41, Jan. 1939.

W. L. Barrow and L. J. Chum, Theory of the Electromagnetic Horn, *Proc. IRE*, p 51, Jan. 1939.

D. R. Rhodes, An Experimental Investigation of the Radiation Patterns of Electromagnetic Horn Antennas, *Proc. IRE*, p 1,101, Sept. 1949.

New UHF RESNATRON

Recent resnatron developments include uhf amplifier operation with high power output, and greater bandwidth and gain. Experiments indicate suitability of resnatrons for uhf television transmission and certain military applications

THE RESNATRON PRINCIPLE was originally developed[1] in 1938, by W. W. Salisbury, D. H. Sloan, and L. C. Marshall at the University of California, in an attempt to find a solution to the problem of obtaining high power outputs at frequencies in excess of 100 mc. Previous designs had always suffered from transit time effects, and from difficulties inherent in the necessarily finite inductance of the leads to the external terminals of the tube.

In the resnatron, (the theory of which has been discussed by Dow[2, 3]) interelectrode spacings are so chosen with relation to the operating voltages on the various elements of the tube that the transit time ceases to be a disadvantage. In general, this demands rather high plate and screen grid voltage. These are not objectionable, however, since one of the objectives of design is a tube capable of extremely high c-w power outputs. Complete electron bunching is employed and the phase delay caused by the transit time is augmented by a controllable phase shift in the cathode circuit to bring the cathode and anode resonating elements into the proper phase relations for oscillator operation.

Early models of the resnatron solved the lead inductance problem by adopting the simple, yet revolutionary, approach of placing all resonating circuits inside the evacuated envelope of the tube. Supply leads, therefore, are not a part of the resonating circuits, and their inductance has a negligible effect on the operation of the system.

These principles of operation may be more clearly understood by reference to Fig. 1, which is a diagram of a resnatron amplifier tube. Without describing the operation of this tube in detail, it may be pointed out that the resonant circuits consist of two concentric three-quarter-wave coaxial lines, with the active elements of the tube, including the cathode, control grid, screen grid and anode, located one-quarter wavelength from the shorted end. Standing waves are set up along these lines, with voltage peaks at the location of the active elements. There are no leads between the active elements and the resonant circuits, as the former are built into, and continuous with, the latter.

It may be observed from Fig. 1 that the interelectrode spacings in the tube are quite large, particularly in the output cavity, and in the screen-grid-control-grid section, where high d-c supply voltages might cause breakdowns if critical dimensions were involved. Later developments have made it possible to operate resnatron tubes with external tuning elements.



FIG. 1—Cross section of uhf resnatron of the grounded-cathode type

Wartime Development

Several years after the original conception of the resnatron principle, an urgent need arose, in connection with the radar countermeasures program being directed by Terman at Harvard's Radio Research Laboratory, for vacuum tubes capable of generating high c-w power output levels (20 kilowatts to 100 kilowatts) at frequencies in the range from 350 to 650 mc. There was no particular requirement for frequency stability or low noise level. Self-excited oscillators were, therefore, known to be satisfactory for the purpose. It was immediately evident that the resnatron would be entirely suited for this application, and a program was, therefore, established, under the sponsorship of Division 15 of NDRC, C. G. Suits, Chairman, for the development of resnatron oscillators designed for c-w power outputs in excess of 50 kilowatts in the frequency range centering at 500 mc.

This program finally culminated in the development of the Model 4 resnatron oscillator. This oscillator has been operated with c-w power outputs as high as 85 kilowatts, a figure which could probably have been increased to 100 kilowatts if an adequate power supply had been available. The tuning range is from 350 to 650 mc, requiring a minor change in the cavity geometry near the middle of the range. Its efficiency is high, measuring from 40 to 70 percent, depending

* Formerly associated with Collins Radio Co., Cedar Rapids, Iowa.

Designs and Applications

By D. B. HARRIS*
Applied Electronics Laboratory
Stanford University
Stanford, California

upon the modulation bandwidth required. Plate voltages of the order of 15 kv are employed for maximum power output.

The problem of modulation of the resnatron was studied in great detail with the result that, at the end of the war, noise-modulated outputs, having bandwidths in excess of 4 mc, had been achieved. This type of equipment (called "Tuba") was used in connection with the jamming of airborne interceptor radar equipment carried by German night fighters over the English Channel. In all, three models of the Tuba transmitter were delivered to the operational theater.

Resnatron Amplifiers

Following the war, resnatron equipment was used for propagation study. When it became evident, in 1947, that it would be necessary to assign uhf channels for television broadcast purposes, due to a shortage of vhf channels, consideration was given to the possibility of adapting the resnatron for television transmitter purposes. It was known that, due to the high frequencies involved, television transmitters for the uhf band would require much higher power output ratings than those previously employed in the vhf band. It was, in fact, estimated that radiated powers of the order of 200 kilowatts would be necessary to produce adequate coverage in an average service area. Power levels of this order could be obtained with the resnatron assuming reasonable antenna gains. No other known tubes were, or are, capable of such c-w power outputs with reasonable efficiency.

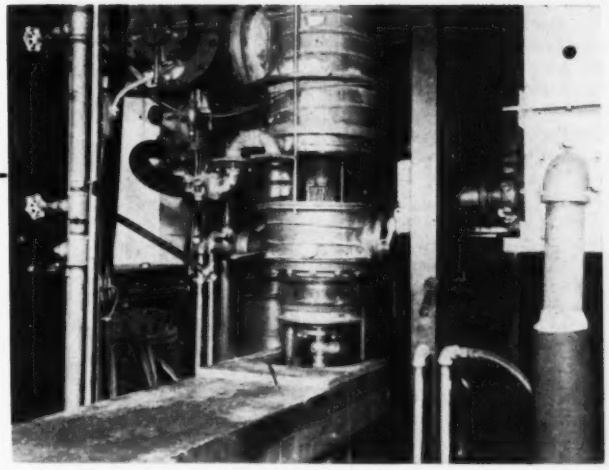

Partially assembled resnatron shows tube parts, including output waveguide (right). The screen grid is visible in gap between upper and lower housings. Vacuum pumps are not shown

Another requirement for uhf television transmitters was a high degree of frequency stability. It was also evident that, for commercial operation, efficiency was a matter of paramount importance.

These considerations, studied accumulatively, led to the conclusion that the prime requirement for satisfactory uhf television transmitter operation was the development of a high-power uhf amplifier tube capable of being driven by a highly frequency-stable oscillator system.

First Design

In view of these circumstances, a program was instituted by W. W. Salisbury, then Director of Research of the Collins Radio Company, for converting a resnatron oscillator tube to operate as an amplifier.

In the first tube converted for amplifier operation, shown in Fig. 1, the cathode was operated at ground potential, a high positive voltage being placed on the anode.

It was found that the principal problem involved in converting to amplifier operation was the design of an input circuit capable of feeding energy into the input cavity with good effectiveness. Due to the small dimensions of the cathode cavity, it was not possible to introduce a conventional coupling loop of any sizable area. A considerable amount of experimentation, carried on under the supervision of S. G. McNees, developed the fact that one method of obtaining optimum coupling involved the use of a metallic connection from the center conductor of the input coaxial line to the inner wall of the cathode cavity. By varying the point at which this connection was made, an adequate match, resulting in an acceptable standing-wave ratio, could be obtained without undue complication.

Using a resnatron oscillator as a driver, a tube converted to amplifier operation in this fashion was operated at 570 mc, with c-w power outputs of 20 kw, a power gain of 10 to 1, and an efficiency in excess of 75 percent.

Further experimentation succeeded in broadening the bandwidth of the tube to 6 mc. This was achieved principally by eliminating standing waves in the input coaxial line. The structure of the input seal

was, of course, sufficiently rugged to withstand standing waves of considerable amplitude, and when the first amplifier tests were made, no particular effort was exerted to avoid standing waves in this section of the system, the standing-wave ratio in the input waveguide, beyond the input seal, being reduced to a satisfactory level by adjusting the tuning plungers at the input seal. It was found, however, that the coaxial line in the input seal had a sufficiently high Q so that, if standing waves were permitted to exist in this section of line, the bandwidth was narrowed to an unsatisfactory extent.

By further adjustment of the point at which a connection was made at the inner wall of the cathode cavity, it was found possible to eliminate standing waves in the input section and produce bandwidths in excess of 4 mc. Having reached this point, it was found that the Q of the output circuit became controlling; additional manipulation of the output seal circuit resulted in broadening the over-all bandwidth beyond 5 mc.

Difficulty was experienced on account of radio-frequency leakage. It was found, under operating conditions, that as much as 5 to 10 kilowatts of output power leaked out of the output cavity without entering the output seal, causing undesirably high leakage field strengths in the vicinity of the tube, and wasting power output. Since the anode cavity was isolated from ground, shielding was inadequate in the section of the tube carrying the highest power. It was concluded that it would be necessary to ground the anode to remedy this fault completely.

Improved Version

A revised design of the tube, incorporating the necessary changes, is shown in Fig. 2. In this design, which is the result of the joint efforts of S. G. McNees, W. J. Armstrong, and Roger Borne of the Research Division Staff, the anode is operated at ground potential, a high negative potential being applied to the cathode. Under these conditions, the elimination of leakage fields due to the anode cavity is greatly facilitated, as the output

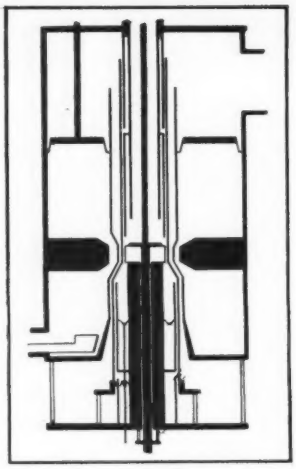

FIG. 2—Grounded-anode resnatron makes better shielding of high-power cavity possible

coax can be tied down solidly to the anode cavity without employing external chokes. Special arrangements must be employed in the input feed to isolate the external parts of the feed from the high voltage applied to the cathode, but any chokes used in this section of the system are operated at relatively low power levels, and any leakage fields which may exist may, therefore, be expected to be relatively low in power.

Employing tubes of this general design, a crystal-controlled uhf propagation transmitter for service at 500 mc is now being constructed under the general direction of R. L. McCreary, head of the Vacuum Tube Design Section of the laboratory. A prototype of the power amplifier stage of this transmitter, consisting of two resnatron amplifiers in cascade, operates at a c-w power output of 75 kw, when driven with an input driving power of 100 watts derived from a crystal-controlled driver. No appreciable leakage is observed and the bandwidth has been found to be about 3 mc, without any attempt having been made to widen it.

As may be inferred from these results, it has been found that when resnatron amplifiers are operated with low driving powers, gains as high as 70 to 1 are obtained. As the power input is increased, a condition is reached where the input feed is no longer matched. At a certain point, which may coincide with the point at which the grid begins to be driven positive, the power output flattens off, and very little increase in output power is obtained with further increase in driving power. This effect, again, is evidently due to an imperfect match which starts to take effect as soon as the load impedance of the cathode circuit becomes low.

Further work in this program will, therefore, concern itself principally with the problem of designing an input feed which will satisfactorily match the impedance of the cathode cavity when the grid is driven positive. It is anticipated that even higher gains and power outputs can easily be obtained through judicious design of the input system.

Characteristics

Figure 3 shows the static characteristics of a resnatron amplifier. It should be noted from this figure that the calculated transconductance of this tube is approximately 15,000-micromhos at a plate voltage of 10 kv and a plate current of 3 amperes.

In connection with all aspects of the amplifier development program, emphasis is being laid on tunability. The original oscillator tubes function satisfactorily over a tuning range from 350 to 650 mc. Amplifier tests so far made have concentrated principally on certain spot frequencies, as the particular applications for which these amplifiers are intended have not required tunability.

Tests made for informational purposes outside the bands specifically required for these applications have, however, indicated that the broad tunability of the original oscillator tubes will also be obtained without difficulty. This aspect of the matter will be borne in mind during the progress of the work, and it is intended that any amplifier tubes produced will have broad tuning ranges.

200-Mc Resnatron Amplifier

The Research Division of the Collins Radio Company is also en-

gaged at present in the design of an extremely high power resnatron amplifier for linear accelerator applications, at a frequency of 202.5 mc. This work will be done under a sub-contract with the University of Minnesota, which is operating under a prime contract with the Atomic Energy Commission for the development of a large proton linear accelerator of the Alverez type. This accelerator will include four accelerating tanks, driven by four resnatron power amplifiers, which will deliver, respectively, 1.2, 8.5, 8.5, and 8.5 megawatts, to the tanks with which they are associated. The power will be delivered in pulses about 160 microseconds in length.

Higher Frequency Tubes

The usefulness of the resnatron is not confined to the uhf range. Tubes of the axial flow type, in which the electron stream travels in a direction parallel to the axis of revolution of the tube structure, may be expected to reach much higher frequencies. Some work along these lines has been done at Collins, and L. C. Marshall and D. H. Sloan, at the University of California, have also undertaken a program for the development of high-power resnatron oscillators and amplifiers designed for operation at a frequency of approximately 3,000 mc. Theoretical considerations indicate that the resnatron principle should still be effective at frequencies as high as this, and the work of Sloan and Marshall has resulted in the construction of models which promise to produce the desired results.

Other Tube Types

Only three types of tubes are known which are capable of generating or amplifying c-w power at the levels (20 to 100 kw) required for satisfactory operation in the uhf band. These are the resnatron, the magnetron, and the klystron. Of these tubes, the magnetron would not seem to be a permanently satisfactory solution to the problem, since it is not an amplifier, although proposals for magnetron amplifiers have been made, and, if such amplifiers can be developed, the magnetron might be found to have all of the necessary characteristics for satisfactory system operation.

Both klystrons and resnatrons may be operated as amplifiers. Klystrons capable of high power outputs and utilizing extremely high electron stream currents (100 amperes) have been built. The power gains obtainable with tubes of this type have also been determined to be adequately high, and they possess important manufacturing advantages over the resnatron. Their development is also further advanced in that sealed-off klystrons have been constructed. Nevertheless, the klystron, at least in its present state of development, possesses an important drawback: its efficiency is low. The electron stream efficiency under present operating conditions is limited to 57 percent, and this figure must, of course, be multiplied by the circuit efficiency in determining the over-all efficiency of the tube. In practice, klystrons are seldom operated with over-all efficiencies higher than 25 percent. It is possible that the development of multicavity power klystrons, or changes in the operating parameters might result in some improvement in electron stream efficiency, but it seems doubtful whether efficiencies as high as those obtainable from triodes and tetrodes of the type now generally used in low-frequency transmitter operation will ever be obtainable. From a commercial standpoint, this characteristic of the klystron is an extremely important consideration since, in the applications, discussed herein, the power outputs are large, and power dissipated due to low efficiency is excessive and costly.

The resnatron, in its present state of development, already possesses excellent efficiency characteristics. Efficiencies as high as 80 percent have been obtained in normal operation at ultra-high frequencies. This high efficiency is due to the fact that in the resnatron the density of the electron stream may be completely modulated, while in the klystron it can be modulated only downward and upward from an average current value which, in itself, contributes nothing to the useful output power and results merely in power dissipation. A resnatron operated on a class-C basis is entirely similar to other class-C amplifiers, the plate current being entirely cut off during the passive part of the driving cycle.

Resnatrons, like high-power klystrons, have also been demonstrated in actual practice to be comparatively noise-free. Noise measurements were made in connection with the tests of a resnatron amplifier when it was being driven by a frequency-stable oscillator system. It was found that the noise level observed at the output of the detector of a receiver monitoring the signal was more than 60 db below the d-c level of the carrier, as determined by measuring the direct current in the detector circuit. Resnatron class-C amplifiers may, therefore, be expected to have noise characteristics fully as satisfactory as those of conventional tubes now in use.

Summarizing the situation, it thus appears that the resnatron is best able to fulfill the requirement for a high-power, high-gain, high-efficiency, ultra-high-frequency amplifier having a low noise figure. This conclusion is subject to modification in the light of any new developments which may be made. The traveling-wave tube, for example, shows promise of being able to operate at fairly high power levels. As yet, however, such tubes have not been developed as high-power amplifiers.



FIG. 3—Static characteristics of a resnatron amplifier. Calculated transconductance is about 15,000 micromhos at 10 kv and anode current of 3 amperes

REFERENCES

(1) W. W. Salisbury, The Resnatron, ELECTRONICS, p 92, Feb. 1946.
(2) W. G. Dow, Transit Time Effects in Ultra-High-Frequency Class C Operation, *Proc. IRE*, p 35, Jan. 1947.
(3) W. G. Dow and H. W. Welch, "Very High Frequency Techniques," Chapter 19, McGraw-Hill Book Co., Inc., New York, 1947.

Sound Waves Test Cylinder Heads

Fast, precision testing of tolerances in production is accomplished by translating differences in natural sonic frequencies of standard cylinder-head cavity and unknown to differences in volume. Rate of inspection is 180 six-cylinder heads per hour

INDUSTRIAL TESTING of cylinder-head tolerances in automobile manufacturing has been speeded up considerably through the application of an electronic volume comparator known as the Cavitometer.

The underlying principle of volume measurement by the instrument is that all cavities within a certain type of throat opening have a natural resonant frequency. If a master cavity of known volume is used for comparison with an unknown cavity and the two cavities are made to resonate at their natural sonic frequency with the frequencies opposing each other, then the difference in frequency may be interpreted in terms of difference in volume as compared with the master cavity. The volume varies as the reciprocal of the square of the frequency.

The difference in sonic frequency may be translated into a difference in electrical frequency and used to deflect a pointer on a dial which is calibrated in terms of volume. Any change in ambient temperature or humidity affects equally the natural resonance period of both the cylinder head being tested and the master cylinder-head cavity.

Principle of Operation

If a cavity is connected to an open tube of small cross-section as compared to its length and the volume of the tube is very small compared to the cavity, then the air contained in the volume of the tube can be considered as a piston. Because of the minute displacements of the air piston, it moves as a whole. The cavity volume, whose diameter is large compared with its depth, will suffer compression and expansion which will set up a sonic wave. The principle is similar to a weight hanging on a coil spring.

A source of sound, such as a transducer energized by an oscillator, placed just outside the tube or air piston and driven at resonant frequency will cause the cavity to resonate. If a microphone is imbedded in the cavity wall, then its output will experience a sharp rise when the cavity resonates. If two cavities, one of known volume, are opposed, as described previously, the volume of the unknown cavity can be measured.



FIG. 1—The closed oscillatory system operates at the resonant sonic frequency of the cavity. The discriminator translates the resonant frequency into direct current proportional to volume differential as compared with a master volume

Automotive Application

In the use of the volume comparator for automotive application, each engine block head slides upside down on hardened slides on to a fixture table. The engine head slides into a predetermined location adjacent to a master cylinder head. Pushing a button on the control panel energizes an electric air valve and loads a hydraulic piston which clamps the head against transducer plates, thus cutting off the cavities.

The setup for testing an individual cavity is shown in Fig. 1. The transducer plates are made of steel. Imbedded in the plates opposite the center of each cylinder-head depression are adjustable-length sonic piston throats, 4, 6 or 8 as required. Back of each piston throat is a transducer encased in a sound-absorbing housing. Adjacent to the sonic piston throats are microphones also imbedded in the transducer plates. Either 4, 6 or 8 microphones are used depending on the number of cylinders in the head.

A stepper selector switch com-

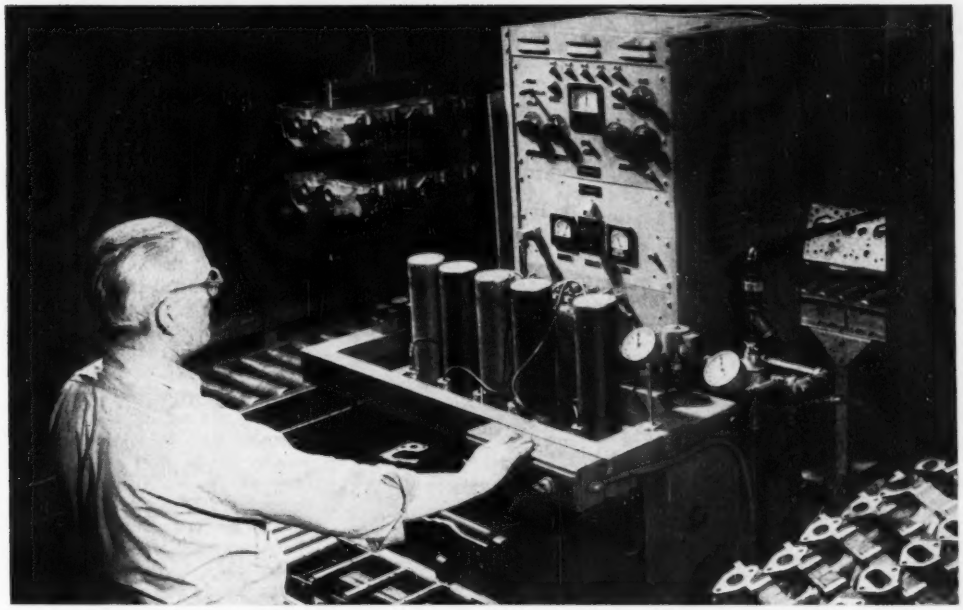

Volume comparator in use on the assembly line of the Rocket engine plant of the Oldsmobile Division of General Motors. Cylinder-head cavities are held to a tolerance of plus or minus one cubic centimeter

pares the sonic resonant frequency of each cylinder-head cavity in turn against the sonic resonant frequency of the master cylinder-head cavity. The difference in frequencies, if beyond tolerance, is indicated by HIGH or LOW lights supplemented by a dial indication in terms of some deviation from master cylinder-head cavity volume.

Operating Procedure

To start the operation of the comparator, a start button is depressed which causes the selector switch to connect the master cavity to the oscillator assembly. This operation permits a zero adjust of the instrument.

After a period of about two seconds, automatic operation starts for comparing each cylinder cavity in turn with the master cavity. Within one-half to one second, the discriminator circuit compares the frequency of the voltage from the cylinder being tested to that of the master cylinder. If the difference is within tolerance, the selector switch automatically moves on to the next cylinder head to be tested. The operation is repeated until all the cylinder heads have been tested or until one is found beyond volume tolerance. A signal light shows which cylinder head is being tested at the moment.

If a particular cylinder head is beyond tolerance, a sequence of operations takes place. The selector switch automatically stops. The signal light, indicating excessive negative or positive tolerance as the case may be, lights. An indicating meter automatically indicates the amount of excess volume tolerance. The entire system remains in standby position until the inspector makes the decision about the particular cylinder head and restarts the system by pressing down on the ADVANCE button.

After a cycle of operation is completed, approximately eight seconds total time for six cylinders if they are within tolerance, the selector switch stops at its original position and is ready for zero checking before inspecting another engine head.

In the event there is a production requirement involving double tolerances, one tolerance between any two cavities in a given head and a second tolerance between the cavities of any two different heads, an electronic memory circuit may be added. In this case, when either tolerance requirement is violated, the system remains in standby until the inspector restarts the system by pressing the ADVANCE button.

The instrument can be stopped or moved on to any cylinder position to let the indicating meter indicate the actual difference in volume as compared with the master cylinder-head cavity by holding a MANUAL button until the desired cylinder cavity is connected.

The Cavitometer, manufactured by Poole Manufacturing Engineers of Dallas, Texas, will inspect cylinder heads at about two seconds per cylinder if they are within tolerance. Six seconds are required for the operator to take a cylinder head off the rack and place another one on. Six-cylinder heads can be inspected at the rate of about 180 per hour—R.K.J.

Modified Butterfly

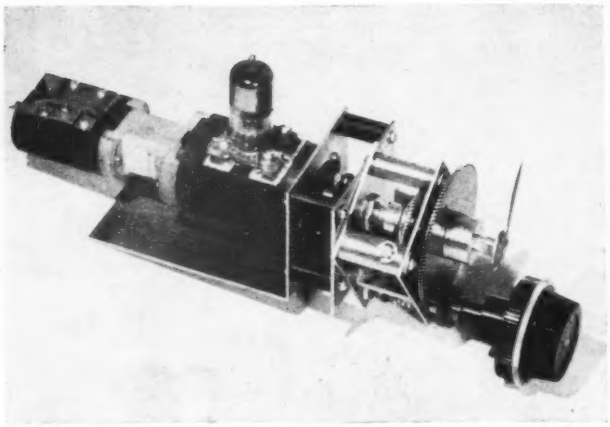

Photograph of uhf-tv converter tandem oscillator-mixer and dial drive. Complete converter contains components shown plus appropriate shielding and power supply, and cascode amplifier for converted i-f signals

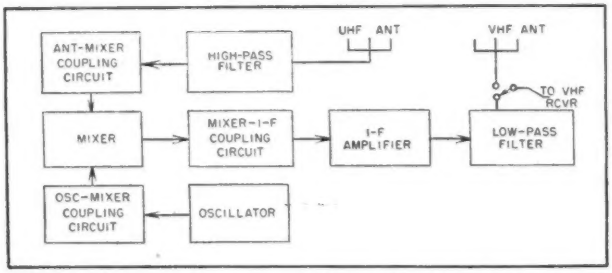

FIG. 1—Block diagram of uhf converter. Present FCC allocation plans indicate desirability of using vhf channel 5 or channel 6 for first i-f

THE POSSIBILITY of an eventual opening of uhf television channels in this country has stimulated a number of research programs seeking new and better techniques for adapting present-day vhf receivers for uhf reception. One such program resulted in the development of the continuous tuning converter to be described.

Figure 1 shows a block diagram of a complete uhf tuner. The three essential portions of the tuner are the oscillator circuit, the mixer circuit and the i-f amplifier. A developmental 7-pin miniature-based version of the 6F4 (since designated as type 6AF4) was chosen as the most likely usable oscillator tube to be available and commercially practical for use in this tuner. The only practical mixer for the uhf range was considered to be a germanium crystal diode. Triode mixers are generally inferior to crystals at frequencies above about 500 mc.

No r-f amplifier is included because of the lack of a satisfactory tube for commercial use. If such a tube should become available, it might then profitably be incorporated into the tuner design.

Tuned Circuit Design

The primary requirements of a tuned circuit design are range and

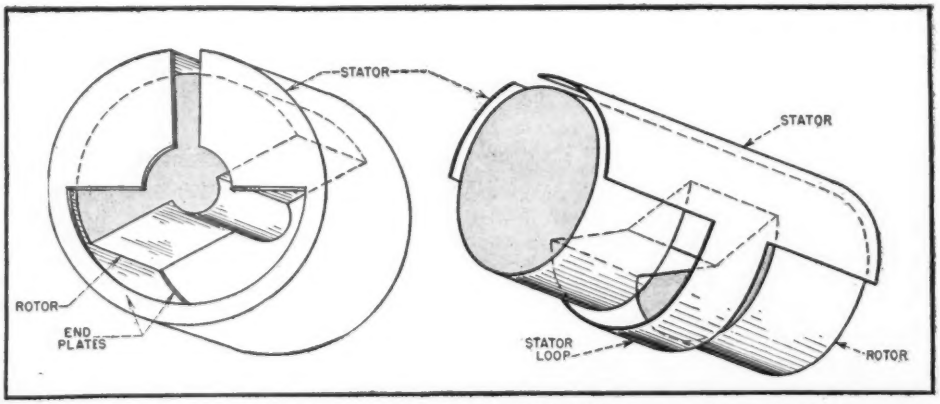

FIG. 2 —Typical solid-rotor semi-butterfly (left) and modified version (right) used in converter to increase the frequency range to cover the 470 to 890-mc uhf-tv band

UHF-TV Converter

Converts uhf signals to vhf for reception on existing television receivers. Modified butterfly tuned circuits provide good tuning linearity with low noise figure and excellent high-frequency oscillator stability over 470 to 890-mc uhf-tv frequency range

By M. W. SLATE, J. P. VAN DUYNE and E. F. MANNERBERG

Allen B. DuMont Laboratories
East Paterson, New Jersey

stability. Both of these factors are more critical for the oscillator circuit than for the mixer.

The oscillator tuned circuit range is important because the oscillator tube has a lower resonant frequency than the crystal diode, and because the high-impedance tube must be connected to the high-impedance points of the oscillator circuit while the crystal, representing an impedance of two to three hundred ohms, is tapped down on the mixer circuit. The wide range required makes both inductance and capacitance variation desirable.

Since the i-f bandwidth is much less than the r-f bandwidth, the stability of the oscillator circuit is more important than that of the mixer. Stability, both thermal and mechanical, in a unit of this type is a function both of the basic design of the circuit and of the materials of which it is made. Electrical and mechanical design cannot be considered separately.

It was early decided to use wide-range continuously-tuned noncontacting resonators. The maximum obtainable inductance variation is desirable to minimize mixer bandwidth variations. The familiar semi-butterfly approach was used.

A typical solid rotor semi-butterfly is shown at left in Fig. 2. The rotor is a solid metallic semi-cylinder. The stator consists of a cylindrical metallic ring with a slot near the top plus two end plates at each end as shown. The rotor revolves inside the stator with a small clearance between the ends of the rotor and the end plates attached to the stator. The points of connection to the circuit are at the top of the stator across the slot.

In the low-frequency position the rotor is turned upward. A capacitance exists from each side of the stator to the rotor through the small air gap between the rotor and the stator loop and between the rotor and the end plates. These two capacitances in series form the tank capacitance. The inductance of the circuit is essentially that of the lower portion of the stator loop since the upper portion is magnetically shielded by the rotor and the end plates. In this position the inductance and capacitance are both at their maximum values. As the rotor is turned somewhat, as shown in Fig. 2, the effective capacitance area is decreased, decreasing the total tank capacitance. The total circuit inductance is decreased because the rotor now



FIG. 3—Complete assembled oscillator unit

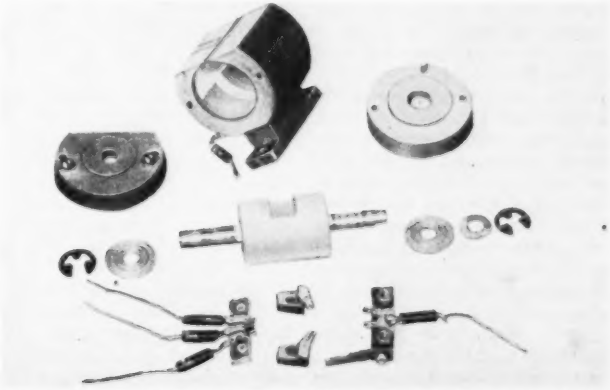

FIG. 4—Disassembled view of oscillator. Stator consists of silvered area on inside of glass-bonded mica housing



FIG. 5—Assembled view of mixer used in uhf-tv converter

obstructs the magnetic field of the inductance loop portion of the stator. The upper portion of the stator is still magnetically shielded by the end plates to some degree. At the highest frequency, with the rotor in its lowest position, the inductance loop of the stator is completely shielded by the rotor for minimum inductance, capacitance also being at a minimum.

A slight modification of the semi-butterfly will serve further to increase the inductance variation, as shown at right in Fig. 2.

By removing the portions of the inductance loop shown, the low-frequency inductance is substantially increased, while the capacitance is not affected. In the high-frequency position, due to the shielding effect of the rotor, variations in the width of the stator inductance loop have only a second-order effect if the gap between rotor and stator is small.

The stator in the modified version is a thin shell. The rotor, however, instead of being essentially semicylindrical is a solid cylinder with a single transverse slot. No end plates are used. Inductance variation is obtained in much the same manner as previously. In the low-frequency position the slot on the rotor, which is somewhat wider than the narrow inductance loop, is adjacent to that loop. Because there is sufficient space between the slot and the loop, the rotor causes little reduction in inductance of the loop. The capacitance is essentially that from the upper portion of the stator through the air gap to the rotor. In the high-frequency position the inductance of the loop is reduced as before, but because the upper portion of the stator is largely obstructed by the solid rotor, its inductance is low. The high-frequency capacitance is less than that at the low-frequency end because with the slot in the upper portion the effective capacitance area is less. Capacitance variation, though, is less than that of the units previously described, and the inductance variation is greater. This is basically the type of resonator that has been used in the units to be described.

Resonator Materials

As was previously mentioned, one of the most important factors affecting the operation of the resonator is the nature of the materials of which it is made. For reasons both of stability and producibility, it was decided to make rotor and stator of a glass-bonded mica material with silvered conducting surfaces. Figure 3 shows an oscillator unit made in this manner. Figure 4 is a disassembled view of the same oscillator unit. As can be seen, the stator electrically consists of the silvered areas on the inside and the top of the glass-bonded mica stator. The rotor consists of a slotted glass-bonded mica cylinder entirely silvered, and with a shaft inserted in place.

Figure 5 shows a mixer unit made in the same manner. The glass-bonded mica has several advantages over other materials which might be used. One is stability. It has a low moisture absorption and low thermal coefficient of expansion—approximately that of steel. This means, for example, that in addition to the degree of stability expected from such a low coefficient, shafts and inserts may readily be molded in place. These materials can be molded to close tolerances— ± 1 mil is obtainable. If closer tolerances or shapes which cannot be molded are required, the material can readily be machined.

The conducting surfaces were applied by means of an air-drying conductive silver paint which may be applied by conventional printed circuit techniques. Firing-on paints were unsatisfactory because the glass-bonded mica would not withstand the required temperatures. The best air-drying paints encountered to date have been found to have conductivities of the order of 0.1 to 0.05 of that of pure silver. Consequently, a further coating of silver was electroplated for improved conductivity. Conventional plating techniques could not be used because the usual acid-copper bath attacked the glass-bonded mica base, and because the high current densities ordinarily used in silver plating produced a blistering of the silver paint. Consequently, silver was directly plated onto the conductive paint from a cyanide bath at low current densities, with excellent results.

One important problem encountered in the design of these units was that of getting a suitable wear-resistant, rigid and accurate bearing. One approach that was tried was the use of a steel or bronze sleeve inserted into the glass-bonded mica end cap, but a much more accurate and durable means was found. Although the glass-bonded mica is abrasive, it machines smoothly. Reamed holes in the glass-bonded mica end caps, with the steel rotor shafts running through them, were found to produce excellent bearings. For example, when an attempt was made to life-test an oscillator unit with a motor-driven rotor and an arm

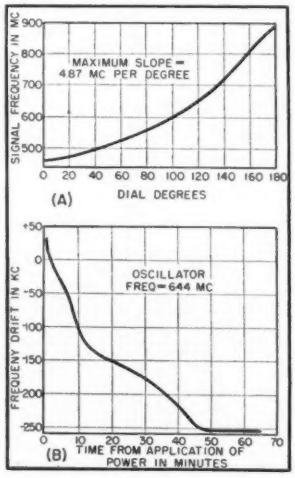

FIG. 6—Calibration and warm-up curves for converter

attached to the shaft actuating a counter, after 130,000 revolutions the metal counter-actuating arm wore through, stopping the test. When the oscillator unit was disassembled and carefully inspected no wear whatsoever was noticeable on either the shaft or the reamed bearing hole.

Oscillator Circuit

The oscillator unit is basically a conventional balanced Colpitts circuit. The plate blocking capacitor is formed by a sheet of mica under the plate contact mount. The grid return is taken from a low-impedance point to minimize loading effects. The required range of the oscillator is 361.75 to 775.75 mc plus whatever overlap and trimming range is desired. At the high-frequency end of the range the major portion of the oscillator circuit is within the tube, which means that the resonator structure itself must have a very much greater unloaded range. A typical tuning characteristic is shown in Fig. 6A. More linear curves are readily obtained at the expense of range. For example, for 50 mc less range an almost linear curve may be obtained.

The thermal coefficient of frequency of these units has been found to be essentially constant over the tuning range. This means that thermal drift is a problem proportional to frequency. Thermal coefficients of frequency of 25 parts per million per deg C have typically been obtained. A typical oscillator warm-up drift characteristic measured in the upper part of the range is shown in Fig. 6B. This curve was measured with the oscillator unit in a large enclosure maintained at a constant temperature. The drift therefore is that of the oscillator unit alone. The effect of enclosure may be determined from this drift and from the temperature coefficient and the rise in temperature of the oscillator enclosure.

The mechanical stability of these units has been found to be excellent. This has been most vividly shown by the remarkable freedom from microphonics. For example, when a complete tuner was placed in a vhf receiver with a separate sound i-f, slight microphonic effect was observed. This, however, was no greater than that of the vhf tuner of the receiver itself. In one instance the speaker was placed directly on top of and actually touching the uhf tuner with no microphonic effect. Of course a test made in a nonintercarrier receiver is far more stringent than one made in an intercarrier receiver since any frequency modulation of the uhf local oscillator in the latter will affect sound and picture carrier equally and hence have no significant effect on the sound output.

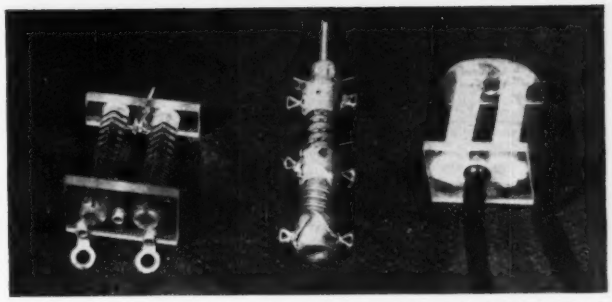

FIG. 7—Closeup photograph of oscillator injection transformer (left), i-f take-off coil (center), and antenna balanced-to-unbalanced transformer (right)



FIG. 8—Uncompensated injection characteristic

When a complete tuner was connected to a frequency calibrator and the frequency calibrator adjusted for zero beat with the local oscillator, it was found that pounding on top of the unit produced some frequency modulation but it still remained within a low audio beat.

Mixer Circuit

The tuning range required for the mixer circuit, if this circuit is tuned to a frequency between picture carrier and sound carrier, is approximately 472 to 886 mc. This range, being different from that of the oscillator, calls for different dimensions than those of the oscillator resonator, but similar shapes.

Since the crystal mixer is a low-impedance device of the order of 200 to 300 ohms, a tap down on the high-impedance tuned circuit is required. The structure (Fig. 5) is generally similar to that of the oscillator. The capacitive tap-down circuit consists of three capacitors printed on a sheet of mica. This sheet of mica can be seen underneath the two metal plates to which the antenna coupling transformer is connected. One end of the crystal is connected to the lug shown, which, with a small piece of mica underneath it, forms the diode load capacitor. The other end of the crystal connects to a lucite block, the purpose of which is described later.

The antenna is coupled to the mixer by a balanced-to-unbalanced transformer shown at the right of Fig. 7, consisting of two bifilar-wound coils. Each bifilar winding may be considered as a coiled-up transmission line with a characteristic impedance of 100 ohms.

These windings are connected in parallel at the unbalanced 50-ohm input end, and in series at the balanced 200-ohm end of each coil; due to the high unbalanced inductance the impedance at the 200-ohm end is essentially balanced.

The oscillator injection was obtained by using a tapered balanced-to-unbalanced transformer to couple from the high-impedance oscillator circuit to low resistance in series with the crystal. This resistance, which is approximately 30 ohms, is printed on the previ-



FIG. 9—Schematic diagram of oscillator-mixer circuit

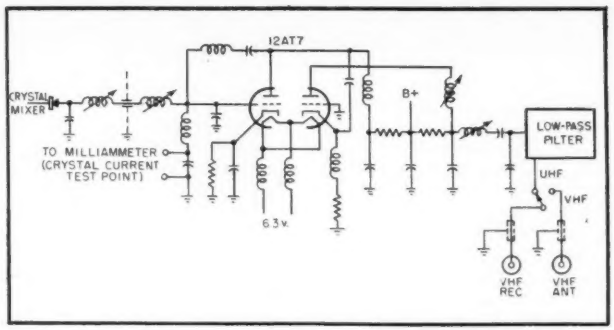

FIG. 10—Intermediate-frequency amplifier. Substituting newly-developed 6BQ7 for 12AT7 provides circuit with noise figure of approximately 6 db

ously mentioned insulating block, which also serves as one of the crystal mounts.

The injection transformer, shown at the left of Fig. 7, is similar to the previous one, except that instead of each bifilar winding having a constant characteristic impedance, the two wires are wound with slightly different pitches, causing the characteristic impedance to vary along the length. The windings are so arranged that the transformer impedance is approximately 600 ohms at the high-impedance series end and about 30 ohms at the low-impedance parallel end. Because of the high unbalanced inductance, balance is not a problem at either end.

The transformer is coupled to the oscillator by the small capacitance between its mounting and the oscillator structure and is connected at the other end to the resistance in series with the crystal.

An uncompensated injection characteristic is shown in Fig. 8. This curve, which has a range of 5 to 1, shows a cyclical variation which should be amenable to correction. The absolute value of the injection can readily be varied by changing the capacitance from the injection transformer to the oscillator.

The i-f take-off from the mixer presented a problem, since with the mixer arrangement shown neither side of the crystal was grounded for either r-f or i-f. The solution was to use a bifilar-wound coil which acts as an unbalanced choke at r-f and a short length of transmission line at i-f. This length of line and an adjustable series inductance at the bottom of the coil form are the inductance elements in the double-tuned bottom capacitance-coupled i-f input circuit. This coil is shown in the center of Fig. 7.

Integrated Tuner

The r-f circuit schematic is shown in Fig. 9. The oscillator circuit is shown at the top and the mixer circuit at the bottom. Between the two is the representation of the tapered injection transformer, showing the method of connection of the windings. The antenna-to-mixer unbalanced-to-balanced transformer is shown at the left of the mixer tank and the i-f output circuit directly below the crystal.

Figure 10 is the schematic of the driven grounded-grid or cascode i-f amplifier. A 12AT7 has been used in this work, but the newly developed 6BQ7 which is designed specifically for use in a circuit of this type is apt to have a noise figure of two or three db less. The output circuit is a double-tuned bottom capacitance-coupled circuit. The primary purpose of the low-pass filter in the output of the i-f amplifier is to eliminate the vhf receiver local oscillator frequency and its harmonics from the mixer circuit, where small amounts of such extraneous signals would produce spurious responses.

The purpose of the high-pass filter, shown between the antenna and the r-f transformer in Fig. 1, is to get added rejection to undesired low-frequency signals, such as those of vhf stations, beyond that rejection due to the selectivity of the mixer circuit and the essentially broad-band r-f coupling transformer.

Performance

With the unit as described, noise figures of approximately 22 db have been obtained. With a somewhat modified design having a broad-band r-f circuit, noise figures of approximately 17 db were obtained.

The 12AT7 i-f circuit has been found to have a noise figure of approximately 8 db. The use of a 6BQ7 in place of the 12AT7 may be expected to reduce the i-f noise figure by about 3 db and the overall noise figure by about 2 db.

Due to the fact that only one tuned circuit was used ahead of the oscillator in this tuner, local oscillator radiation has been a problem. The obvious solution and one which eventually will be required is the use of a double-tuned resonator in the mixer circuit.

In a unit of this type a double-tuned input circuit can readily be built in one mechanical assembly to replace the present single-tuned input circuit. It is expected that the use of this arrangement will give satisfactory oscillator radiation performance.

In this paper it has been attempted to describe several new techniques useful in solving the problems of uhf operation. We have attempted to indicate the advantages of these methods, and have described a completed tuner which has been built incorporating them.

Multiplexed Broadcast Facsimile

Ultrasonic system now used by Rural Radio Network permits relaying facsimile newspaper from New York to Ithaca audience on same f-m channels that provide audio programs up to 15 kc. Subcarrier channel has also been successfully tested with ordinary voice modulation for Civil Defense commands

By JOHN V. L. HOGAN and JOHN W. SMITH
President *Senior Electronics Engineer*
Hogan Laboratories
New York, N. Y.

COMMUNICATION by facsimile and document duplication by the use of facsimile scanning have progressed to an advanced state of utility and reliability, but the growth of facsimile broadcasting has been stunted by a number of factors.

Although the Federal Communications Commission, and their predecessors, have for many years provided frequencies for experimental facsimile broadcasting, it was not until July 15, 1948 that commercial facsimile broadcasts were authorized, for extremely limited periods, in place of audio programs on f-m stations. Providing there was no degradation of the audio below 10 kc, multiplexed commercial facsimile programs were permitted for three hours during normal listening periods[1].

Effective June 13, 1951, multiplexed facsimile became available to f-m broadcasters for commercial programs on an unlimited time basis. The modern development demonstrated before the FCC in December 1949, and which influenced the recent ruling, is described below.

The idea of putting both audio and facsimile on the same radio-frequency channel is not new and was originally demonstrated at 5 square inches a minute by Armstrong[2], but it is not likely that the techniques of the earlier days would satisfy present requirements. Although the 1948 rule of the FCC specified no degradation of the audio below 10 kc, it was felt that a truly satisfactory service could be rendered only by a system that allowed the full 15 kc of audio without impairment by facsimile on the same carrier.

Various schemes, including low percentage amplitude modulation of the radio carrier, had been suggested. Some had been tried successfully in the laboratory but the complication and potential high cost discouraged further development. It was then decided to investigate the possibilities of a very simple system using an ultrasonic facsimile-modulated subcarrier to frequency-modulate the radio trans-



FIG. 1—Equipment used to multiplex facsimile with f-m broadcasting

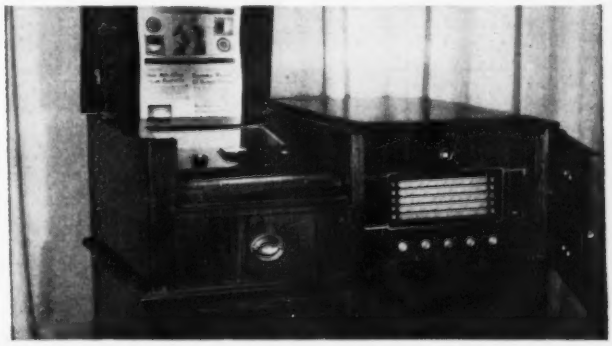

General Electric type 417A radio receiver used in the type FR-1 combination for sound and facsimile

mitter in the normal manner. It was felt that the low inherent distortion and wide frequency range of f-m modulators and detectors of conventional types might make such operation possible with a low percentage of radio carrier modulation. If a relatively low facsimile level could be used, the loss in the audio could be kept to negligible proportions in this double modulation scheme.

Standard broadcast facsimile receiving equipment designed for operation with a 10-kc double-sideband amplitude-modulated subcarrier was tested with subcarriers in the range between 20 and 30 kc and satisfactory results were obtained. Since it appeared that little except complication could be gained by altering the type of modulation, a subcarrier of 25 kc with double-sideband amplitude modulation was selected for the system. Laboratory tests were conducted using a Measurements Corp. Model 78 f-m standard signal generator as a simulated broadcast station. Audio program signals received on a Pilotuner at the laboratory from WQXR-FM were amplified, high-frequency pre-emphasized and low-pass filtered to a top of approximately 16 kc. These audio signals were combined with the facsimile-modulated 25-kc subcarrier in a simple resistance mixing pad after the facsimile signals had passed through a bandpass 20-to-30-kc filter. The combination output of the mixing pad was used to modulate the f-m signal generator.

At the receiver, the output of the discriminator (before the de-emphasis network) was fed to a high-pass filter and amplifier and thence to the regular facsimile recording equipment. Various relative audio and facsimile levels were tested. Satisfactory facsimile recordings were made with full-black radio-carrier facsimile deviation as low as 400 cycles and with simultaneous audio deviation of 75 kc. Facsimile black deviations as high as 10 kc could not be audibly detected in the output of standard f-m radio receivers.

Field Tests

Bench demonstration having worked out successfully, the first field tests of the system were conducted over Station WQXR-FM in New York in September 1948. A full-black facsimile deviation of 5 kc was used, simultaneously with a peak audio deviation of 70 kc. Observations on approximately 120 f-m receivers of more than 20 makes scattered throughout the city revealed no trace of the facsimile signals in the audio output of the receivers. Furthermore, no report of any interference was received from the critical WQXR-FM audience. Other field tests were conducted, with similar results, over stations WFIL-FM in Philadelphia, WEAW, Evanston, Ill., and WMAQ-FM in Chicago.

The complete system for single station operation is shown in the block diagram of Fig. 1. The transmitting multiplexer is shown in greater detail in Fig. 2. The facsimile preamplifier provides for facsimile full-black (peak-level) input as low as −50 dbm. This input signal is received as a standard amplitude-modulated 10-kc subcarrier, which is fed over a wire line or STL from the facsimile program originating location or studio. In all cases, the multiplexer is located at the radio transmitter. It will be noted that audio as well as the facsimile signal are fed through the multiplexer unit. Sufficient noise, distortion and direct audio components in the 20-to-30-kc region exist in the output of the best of audio equipments to necessitate the use of the low-pass audio filter. High-frequency pre-emphasis of the audio can be accomplished before feed to the multiplexer, or in the unit itself, since both standard pre-emphasis and flat plug-in networks are provided for the audio amplifier. Pre-emphasis after combination with the facsimile signal is not advisable since pre-emphasis characteristics beyond 15 kc are not normally specified.

Upon installation, the audio section of the multiplexer is adjusted to a gain of approximately unity so that it can be cut in or out of the transmitter-input circuit by means of patch cords or keys without disturbing the audio level. After initial installation adjustment, no further attention by the transmitter operator is required.

The principal requirement for multiplexing with the equipment described is that the transmitter be capable of being modulated properly in the 20-to-30-kc region. It is desirable for the output of the multiplexer to feed the grid of the modulator tube directly. Any intervening amplifiers introduce the possibility of intermodulation distortion, causing interference.

The only equipment required to

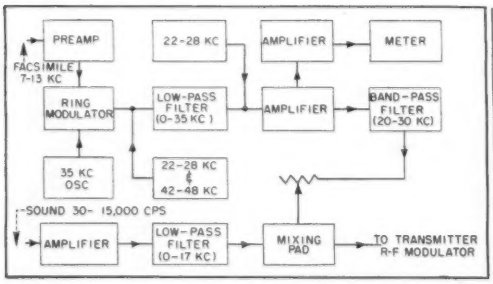

FIG. 2—Essentials of multiplex transmitting amplifier used to combine facsimile and sound

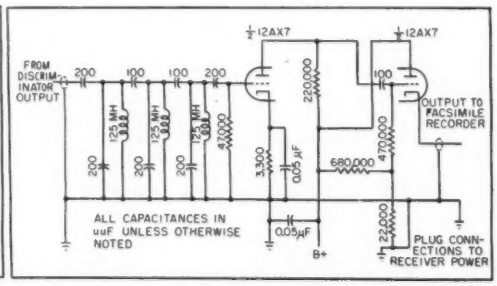

FIG. 3—Circuit diagram of adapter amplifier used between f-m receiver and standard facsimile recorder

adapt a standard combination sound-and-facsimile receiver to multiplex operation is the adapter amplifier shown in Fig. 3. The unit is designed to plug into a connector on the back of a GE 417A radio receiver used in the type FR-1 combination sound and facsimile receiver illustrated. The adapter amplifier operates successfully with other receivers, its output circuit being completed through a 3,000-ohm resistor in the RA-3 facsimile recorder amplifier used to supply the marking current. Total power required from the 417A receiver for the single miniature tube is 0.3 ampere at 6.3 volts and 2 to 5 milliamperes at 100 to 300 volts.

Filter Construction

The band-pass input filter (18 to 32 kc) is assembled from available radio-frequency chokes and 20-percent tolerance mica capacitors. Acceptable units are flat within ±1.5 db from 22 to 28 kc and down at least 40 db at 15 kc. It was discovered early in the development that it is of the utmost importance to provide a high-pass or band-pass filter directly at the output of the discriminator in the radio receiver. Any amplifier, even a cathode follower, ahead of the filter results in sufficient intermodulation with the relatively high-level audio signals to make subsequent clean separation impossible with any type of filter. The result is noisy sound-degraded facsimile copy. The filter shown opens-up at lower frequencies so that loading of the discriminator tends to become negligible in the audio region.

Practical Applications

Satisfactory equipment having become available, regular operation of multiplexed facsimile is increasing. A multiplexer installed at station WELD, Columbus, Ohio, in 1949 is in use on a predetermined schedule. A similar installation was made in the summer of 1950 at WMC-FM in Memphis, Tenn. The latter is used to disseminate information from a private weather service to planters in the rich Mississippi Valley cotton-growing region at distances up to more than 100 miles from the f-m radio transmitter. In all cases, it has been found that satisfactory facsimile can be recorded at any point at which good quality audio can be received, when a facsimile-black deviation of 3 to 5 kc is employed. Major E. H. Armstrong and his staff have confirmed this observation by means of tests from his experimental station KE2XCC at Alpine, N. J., to receivers located at such points as Poughkeepsie and West Hampton, Long Island, N. Y.

Relayed Multiplex

The possibility of satisfactory radio relay multiplex operation inspired further laboratory experimentation and field tests in the latter part of 1950 and early 1951. Two multiplexer units similar to the type described were constructed, but with the heterodyning modulator and oscillator eliminated and a good 20- to 30-kc band-pass filter designed to work out of a radio receiver discriminator substituted therefor. Using three type 78 f-m signal generators and two REL model 646 radio receivers for relaying, two-hop-and-broadcast relay operation was achieved in the laboratory. An audio program was relayed simultaneously with the facsimile transmission. Thus encouraged, an experimental field test was arranged with Major Armstrong and the Rural Radio Network. This network uses radio relay with frequency-modulation broadcast stations for audio program distribution throughout New York State and northern Pennsylvania. During the experiments programs from the Columbia University campus were sent by 900-mc STL to KE2-XCC, Alpine, N. J. Multiplex facsimile signals on 93.1 mc from Alpine were picked up by WQAN-FM in Scranton, Pa., and rebroadcast multiplex on 92.3 with the regular WQAN-FM audio program. These signals were received by WHCU-FM in Ithaca, N. Y. and there rebroadcast multiplex on 97.3 mc with the regular WHCU-FM audio program. Despite the marginal reception caused by the long hops (Alpine to Scranton is 90 miles and Scranton to Ithaca is 95 miles), satisfactory facsimile copy was recorded in the Ithaca region a good part of the time.

After these initial tests, commercial broadcast station WOR-FM operating at 98.7 mc in North Bergen, N. J. replaced KE2XCC. This change necessitated another link, since WOR-FM could not be received satisfactorily in Scranton because of adjacent-channel interference. The fourth station was WHVA-FM on 104.7 mc in Poughkeepsie (transmitter at Beacon), New York. The final network includes a wire line that handles the 10-kc amplitude-modulated subcarrier to WOR-FM.

An MTA-2 multiplexer at the WOR-FM transmitter converts the subcarrier to 25 kc. The facsimile signals are passed on by MTA-3 (relay-type) multiplexers from Beacon through the rest of the net. All links except the New York-to-Beacon hop are still in the marginal class. Reception is satisfactory a large percentage of the time, despite this serious handicap.

The program material prepared by supervised students at the Columbia School of Journalism is actually a miniature four-page to eight-page newspaper consisting of the news-in-brief, together with weather and market information of importance to the Rural Radio Network audience in New York and northern Pennsylvania. Each page is $9\frac{1}{2} \times 12$ in. in size and the four pages are transmitted in a period of 15 minutes. Photographs and typewritten and typeset printing are pasted on make-up sheets together with late weather maps supplied by the U. S. Weather Bureau. These made-up pages are wrapped around the drums of the dual-scanner FT-3 facsimile transmitting console and the scanners are operated alternately, in the same manner as dual-record turntables, so that there is no reloading pause between pages.

The possibility of using the multiplex relay net with audio rather than facsimile has been suggested for Civil Defense and similar applications. The laboratory relay setup was tested with a voice channel and results indicated that such operation is perfectly feasible.

REFERENCES

(1) A. A. McKenzie, Facsimile Goes Commercial, ELECTRONICS, p 97, Aug. 1948.

(2) E. H. Armstrong, A Method of Reducing Disturbances in Radio Signaling by a System of Frequency Modulation, *Proc IRE*, p 689, May 1936.

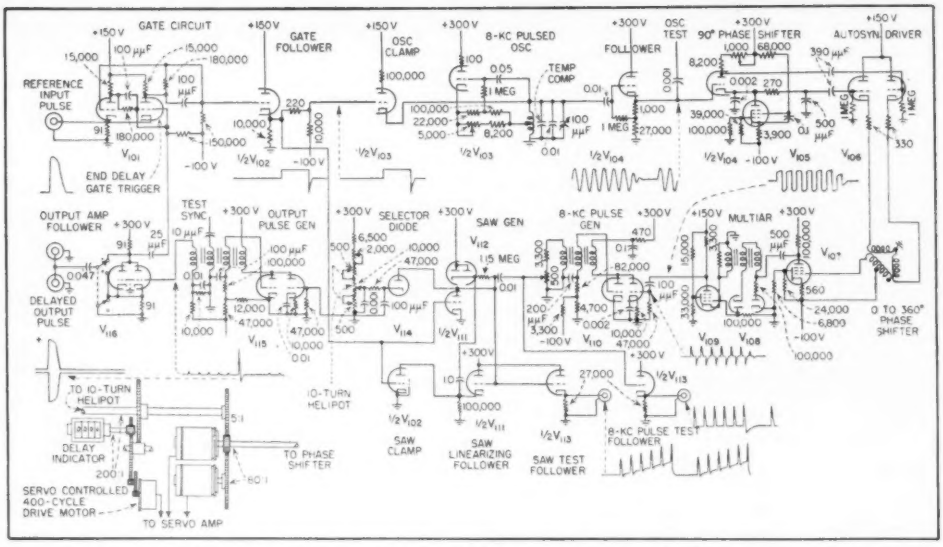

Schematic diagram of pulse delay unit. Output pulse has a width of one μsec and a peak value of 70 volts. Delay is variable from a few μsec to several milliseconds

Variable Pulse Delay

By JAMES F. GORDON

Principal Research Engineer
Research and Development Department
Bendix Radio
Division of Bendix Aviation Corporation
Baltimore, Md.

Although there are several methods for obtaining variable pulse delays, many of them become impractical where a number of general requirements must be met. It is possible to design a multivibrator-type delay[1] for periods extending from a few microseconds up to several milliseconds. These delays are entirely satisfactory for applications not requiring high stability or calibration accuracy.


123.82-μSEC PULSE SPACING CONTROLLED BY 8076.2-CPS OSCILLATOR
VOLTAGE PEAK AT WHICH SAWTOOTH IS CUT OFF
DELAY PERIOD
0 TO 123.82-μSEC SPACING CONTROLLED BY AUTOSYN PHASE SHIFTER

FIG. 1—Basic sawtooth time delay

For short periods of fixed delay, both real and artificial delay lines are generally satisfactory. Other methods of creating pulse-type delays may be considered such as the phantastron,[1,3] mercury delay lines,[3] and other types wherein an ultrasonic delay[4] may be accomplished.

One of the requirements of such a delay unit may be to establish pulse delays of the order mentioned above while maintaining a calibration accuracy which is independent of the repetition rate of the reference input pulse. A system which may be made reasonably insensitive to repetition rate is that used considerably in the past several years as a means of creating a pulse delay.[5]

This article is based on a paper presented at the 1950 National Electronics Conference. The Conference paper will appear in the *NEC Proceedings*.

A brief review of the general function of such a system is as follows: A delay reference input pulse is made to trigger, simultaneously, a sine-wave oscillator circuit and a sawtooth generator. The oscillator feeds a 0 to 360-deg variable phase-shifting circuit, the output of which feeds a pulse generator. The pulse generator output consists of pulses, one for each cycle of the sine-wave oscillator. These pulses are superimposed upon the sawtooth circuit and appear as shown in Fig. 1.

By making the sawtooth generator trigger itself after it reaches a predetermined peak value, sawtooth plus superimposed pulse, and by using this peak trigger voltage to develop an output pulse, a time delay is realized. The time delay is essentially equal to the period of the total sine-wave oscillations represented by the pulse spacings on the sawtooth.

By changing the point at which the sawtooth generator triggers itself, it is possible to create a delay

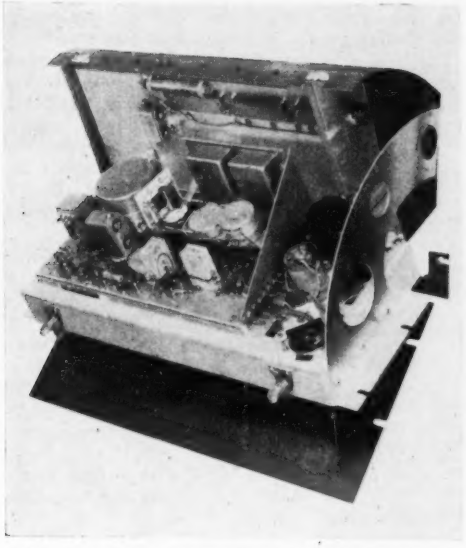

Delay unit chassis in one position of the double-hinged relay rack. Servo system and helipot are in black case at right

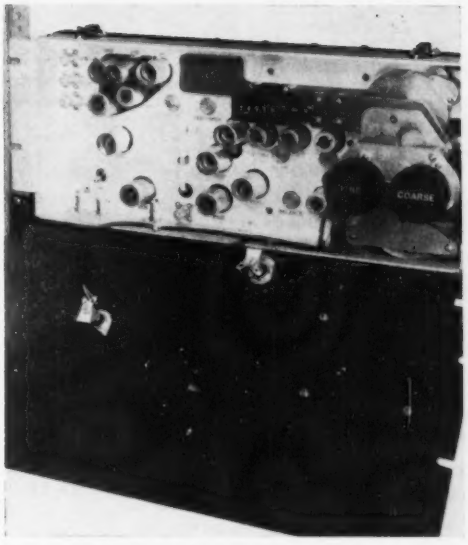

Delay unit chassis in alternate position showing counter in center, fine and coarse servo autosyns and gear assembly

for Radar Ranging

Accurate, continuously-variable or fixed pulse delay unit may be used in radar ranging, navigation, propagation studies and other similar techniques. Delay is obtained locally or remotely with range from a few microseconds to several milliseconds with a maximum error of 0.3 microsecond

which is adjustable in steps, each step equal to one cycle of the sine-wave oscillator. By virtue of the phase shifter following the pulse sine-wave oscillator circuit it is possible to superimpose upon this sawtooth, pulses equally spaced by one cycle of the sine-wave following the first pulse.

The first pulse at the base of the sawtooth will be spaced a period from the start of the sawtooth by a 0 to 360-deg value depending upon the setting of the phase shifter. By suitably adjusting the sawtooth stopping point and by setting the phase shifter it is possible to superimpose any number of pulse spacings plus any part of a pulse space on the sawtooth. If the sawtooth cut-off point is made to increase in synchronism with the corresponding sine-wave phase shifter, the delay period as indicated will be continuously adjustable. Since this is accomplished in practice by a mechanical linkage, the unit is referred to as an electromechanical pulse delay unit.

In a unit designed on the foregoing basis the total pulse delay accomplished is the same as a number of individual delays, all of which are not immediately apparent. One of the general sources of such individual delays results from the existing condition in all pulsed timing equipments that any pulse must necessarily have a finite rise period. The designer should make all pulses in the delay chain have as short a rise period as possible and the amplitude should be generous in all cases to reduce the total delay in any system and the triggering action sensitivity to amplitude variations. Sensitivity of this sort is often responsible for a type of annoying pulse phase modulation generally referred to as jitter. Long term variations of the same type result in reset inaccuracies.

The total delay effected by a unit of this type must take into consideration the delay introduced by the character of the delay reference input pulse and by the effect of the



FIG. 2—Input and output waveforms for autosyn phase shifter. Resulting distortion is not dissipated until the end of the first two cycles



FIG. 3—Relationship between electrical error and mechanical error due to the gear train of the counter



FIG. 4—Stable and adjustable pulse generator consisting of two delay units connected back to back



FIG. 5—Total calibration error of a typical delay unit over a range of 3714.6 microseconds plotted at each autosyn revolution except for the two points indicated. The two delay-error points shown were plotted from more frequent readings



FIG. 6—An automatically traced error curve for a carefully balanced and adjusted unit over a 500 to 2,500-microsecond delay

delayed output pulse characteristic upon the circuit to which the unit is connected. The total unit delay in microseconds for a given control setting may be expressed as $D = d + k + m + 10^6/360f\ (\theta + \rho)$ where

- d is the delay in microseconds due to the character of the input pulse, the effect of the output pulse on the driven circuit and the delay caused by triggering characteristics within the circuit
- θ is the phase angle due to sine-wave oscillator phase shifter
- ρ is the total degrees of sine-wave oscillator duration between second and last pulses on sawtooth, (see Fig. 1 and 5.)
- f is the sine-wave oscillator frequency in cycles
- k is the additional delay, positive or negative, created by waveform distortion of the initial cycles following triggering of the sine-wave oscillator, (see Fig. 2 and 6.)
- m is the delay due to errors in the mechanical system

As shown in Fig. 2, the oscillator output is clean and harmonic free following the initial time t, and should have a total harmonic distortion of less than 1%. The sharp wave front caused by starting the sine wave creates a waveform distortion following the autosyn phase shifter that is not dissipated until after the first two cycles at least, also shown in Fig. 2. Depending upon the adjustment of the phase shifter, the total delay adjustment for delays less than the first two cycles will not have correct angular agreement and k will either be a plus or a minus value. A linear calibration cannot be made for delays appreciably less than 360 μsec, although the unit is capable of about a 30-μsec minimum delay. A variation in the phase balance of the 90-deg phase shifter by a value of 1 deg will create an error of ± 0.4 μsec. For delays extending beyond the region of distortion shown in Fig. 2, k may be neglected.

Design Limitations

There are some obvious limitations to the arrangement as described. The method requires a very stable sine-wave oscillator and a faithful sine-wave phase shifter.[5] The method also requires a rigid means of developing pulses from the sine-wave oscillator which are phase locked to the sine-wave oscillator. Increasing the delay period accentuates these requirements.

A limitation is presented by the maximum amplitude of linear sawtooth that may be generated. This maximum amplitude determines the minimum sawtooth pulse spacing which may be accommodated on the sawtooth without danger of ambiguous pulse selection. This in turn determines the frequency of the sine-wave oscillator.

For the unit described here, the sine-wave oscillator operates at 8,076.2 cycles resulting in a voltage separation on the sawtooth of approximately 3.5 volts. This represents a peak sawtooth voltage of 3.5×40 or 140 for the maximum delay of 40 pulse spaces and is the condition for a delay of approximately 5,000 μsec. The delay is readily accomplished with miniature vacuum tubes and low supply voltages.

Sine-Wave Oscillator

The sine-wave oscillator shown in the circuit diagram is a pulsed Hartley type. It is rendered operative by removing the impedance of a cathode-follower-type clamp from across its tank circuit as soon as a reference input pulse is applied to the unit. The oscillator feedback network is adjusted to maintain a sine-wave oscillation at the peak direct voltage determined by the energy stored in the inductance at the time of release. The oscillator is made inoperative by replacing the oscillator clamp across it at the end of the delay period.

To obtain both short and long-term stability the oscillator is arranged to include a high-Q inductor, well shielded and rigidly mounted within a magnetic shield. Temperature compensation is provided. The 90-deg phase-shifter circuit is utilized primarily because it requires only one R and one C and is less critical to adjust.

The variable 0 to 360-deg phase shifter is the familiar autosyn.[6] Many phase shifters of this sort utilize a rotating capacitor.[6] By the use of the autosyn, a low impedance results at the sine-wave oscillator frequency plus relatively high-level operation. These characteristics are desirable in order to reduce the total tube requirements. The phase accuracy of the arrangement can

be made to be of the order of 10 minutes.

Use of the Multiar

In order to phase-lock the pulses to the sine-wave output of the autosyn phase shifter, a form of multiar[7] is used. The multiar has the advantage of being regenerative for voltage increments of one sign and insensitive to those of opposite sign. This creates a situation where, as the sign of the voltage changes through zero, the circuit becomes immediately operative.

In the multiar circuit shown, the conduction which triggers V_{2a} is obtained when the sine-wave input is going from positive to negative with respect to ground.

The method described performs well enough to be satisfactory. The multiar output pulse drives a conventional pulse generator which functions to maintain both a constant level output and a low-impedance pulse source to feed the pulses to the sawtooth generator.

The sawtooth generator utilizes a single feedback follower to provide a linear charging current for the sawtooth capacitor. The linearity resulting is of the order of one-tenth of one percent. Precision resistors and capacitors are used in the circuit.

A triode may be used instead of a selector diode. There is a greater stability in the cut-off characteristics of a biased diode which reduces the hazards of pulse skipping.

A second conventional parallel-triggered blocking oscillator type of pulse generator provides an output pulse. The pulse is shaped and made available as either a positive or negative pulse to feed a 90-ohm line.

To provide rigid synchronization of the triggered functions in the circuit, an Eccles-Jordan bistable type of biased multivibrator[8] is rendered conducting in one direction by the delay reference input pulse. This is referred to as a gate circuit and it remains conducting until one delay period has been completed. The output pulse resulting from the delay function triggers the Eccles-Jordan circuit back to its original position to await the next delay reference input pulse. The gate circuit control to the sine-wave oscillator and sawtooth is accomplished by means of a cathode follower to minimize loading effects on the gate circuit.

The smallest disturbance to any part of the circuit is likely to affect the stability and hence the accuracy. Since in order to operate and calibrate it is necessary to observe circuit functions, two follower tubes are built into the unit as nonloading test connections. The follower tubes allow examination of the sawtooth and the 8,076.2-kc derived blocking-oscillator output pulse.

Unit Construction

The chassis is mounted in a temperature-controlled oven so that all thermosensitive components associated with the accuracy of the delay are kept at a constant temperature. To improve the uniformity of component temperature, a small air circulator is incorporated within the oven.

The unit uses 16 miniature-type vacuum tubes and is arranged to provide complete accessibility as a relay rack-mounted unit.

The front panel hinges outward exposing first the vacuum tubes and adjustments. The component side of the chassis and the oven is available by hinging back the oven cover. Complete hinge-out of the chassis and dust cover makes the cable connectors accessible.

By utilizing a counter and suitable gearing, it is possible to arrange a means of directly reading the delay period to which the unit is adjusted. Accuracy of the reading depends upon the accuracy of the gearing between the counter indicator and the delay control shaft. The accuracy is excellent with precision gearing. The error curve for a 120-μsec section of the total delay range is shown superimposed upon the gear error in Fig. 3. The long-period cyclic gear error as indicated by the dotted line may be attributed to a large gear in the mechanical part of the system. The short-period cyclic error may be attributed to a smaller gear and other mechanical errors.

The linearity of the unit as a function of the position of the control shaft is degraded by the "run out" in the gearing driving the indicator but is a minor factor. By careful balancing of the 90-deg. phase shifter, the measured results shown in Fig. 6 may be obtained. Here, the gear-train error becomes predominant.

Remote Control

The unit may be operated remotely by a servo system comprising a coarse and fine autosyn system which is designed as an integral part of the unit. The error curve of Fig. 3 does not take into account the errors in the servo system. These errors must be added algebraically to the results obtained with direct control of the unit.

Units of the type described are applicable in radar ranging, navigation, propagation studies, coding, and other similar techniques. A novel application is the use of two such units to trigger each other to form a very stable pulse generator as shown in Fig. 4. In this arrangement the pulse output period is equal to $D_1 + D_2$ and may be varied by changing the period of either or both of the delays. It is necessary to start the action by causing either of the units to generate a pulse. If either of the units fail to deliver a pulse, the oscillation ceases. The probability of failure during normal operation is so remote as to be insignificant.

The successful development of the unit described is due to the contributing efforts of H. A. Straus, J. M. Miller, Jr., C. G. McMullen, E. C. Nunn, E. L. Gray, W. G. Chenoweth and G. M. Trinite.

References

(1) S. Seely, "Electron-Tube Circuits," McGraw-Hill, 1950. Chance, Hughes, MacNichol, Sayre and Williams, "Waveforms," 19, Rad. Lab. Series, McGraw-Hill, 1949.
(2) F. C. Williams and Moody, *Jour. Inst. Elec. Engrs.*, 93, p 1,188. 1946.
(3) H. J. McSkimin, Theoretical Analysis of the Mercury Delay Line, *Jour. Acoustical Soc. of America*, July 1948.
(4) Rad. Lab. Series (Ref. 1). H. B. Huntington, A. G. Emslie and V. W. Hughes, Ultrasonic Delay Lines I, *Jour. Franklin Inst.*, I, p 245, 1948. V. Hughes, A Theory of the Supersonic Delay Line, Rad. Lab. Report No. 733, Sept. 15, 1945. H. B. Huntington, The Theory and Performance of Liquid Delay Lines, Rad. Lab. Report No. 792, Sept. 21, 1945. F. A. Metz, Jr. and W. M. A. Anderson, Improved Ultrasonic Delay Line, ELECTRONICS, July 1949.
(5) L. A. Meacham, Timer for Radar Echoes, *Bell Lab. Record*, June 1947.
(6) E. D. Cockrell, "Industrial Electronic Control," McGraw-Hill, 1944.
(7) Rad. Lab. Series, (Ref. 1).
(8) W. H. Eccles and F. W. Jordan, *Radio Review*, 1, p 143, 1919. O. S. Puckle, "Time Bases", John Wiley, Inc., 1943. Cruft Electronics Staff, "Electronic Circuits and Tubes", McGraw-Hill, 1947. H. J. Reich, "Principles of Electron Tubes," McGraw-Hill, 1941.



FIG. 1—Schematic of thyratron circuit

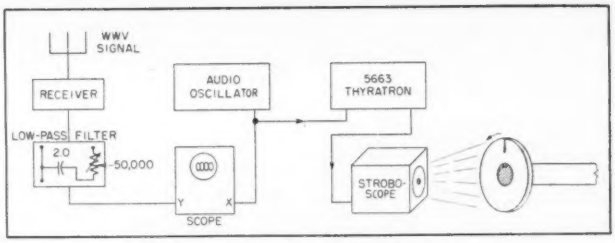

FIG. 2—Block diagram of synchronized stroboscope

Precision Measurement of Shaft Speeds

Accuracy within a fraction of one percent is obtained when measuring shaft speeds by use of 440-cycle tone from station WWV as standard. Audio oscillator is synchronized to submultiple of 440 cycles and used with thyratron to trigger stroboscope

By OLIVER V. RILEY

Professor of Electrical Engineering
Kansas State College
Manhattan, Kansas

A RESEARCH PROJECT concerned with the design of exit nozzles in a hot-air heating system required the precision measurement of the speed of a cage-type fan providing the air pressure for the system. Measurements of the nozzle velocities were being conducted to a high degree of accuracy and long-time variations in the velocity were suspected as being due to the d-c motor-driven fan.

Ordinary integrating tachometers are averaging instruments by nature and were considered not suitable for high-accuracy shaft speed measurements or for disclosing the nature of any variation. The d-c generator type of tachometer cannot be more reliable than the meter readability or accuracy, therefore not much better than one percent. The ordinary stroboscope is not accurate to better than this; thus it appears that most conventional speed-measuring techniques are not suitable for high precision work.

Time Standard

A search for an accurate time standard with which to compare the unknown shaft speed indicated that the Bureau of Standards station WWV was the most convenient and accurate standard available. The 440 and 600-cycle audio tones transmitted on alternate 5-minute intervals are accurate to one part in 50 million.

The first attempt using WWV was to take the audio signal through a low-pass filter to a type 5663 thyratron, as shown in Fig. 1, and use the thyratron as a switch across the contactor terminals of a standard stroboscope. The flashing light of the stroboscope would then monitor a chalk mark on the fan pulley. An arbitrary adjustment of the d-c motor speed to obtain stationary chalk mark positions allows any drift in speed to be determined quickly.

The system as described has two faults: fading of the signal results in faulty firing of the stroboscope and the flashing rate is much greater than the shaft speed giving closely-spaced multiple images of the chalk mark on the fan pulley. For example, a 1,200-rpm pulley speed and a 600-cps flashing speed

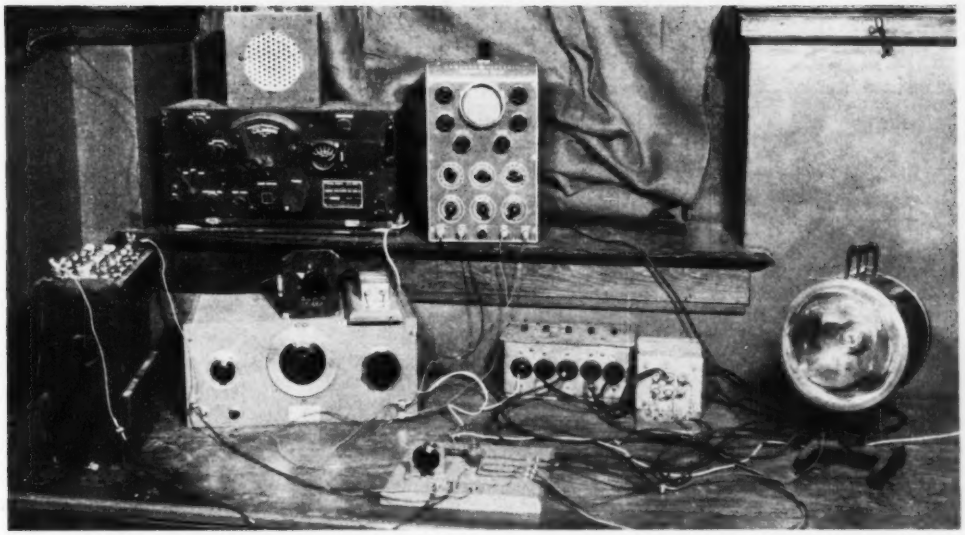

Arrangement of equipment used for measuring shaft speed of a cage-type fan

would result in 30 chalk mark images on the wheel. This ambiguity makes reading difficult.

An audio oscillator and an oscilloscope were added to the system to overcome these two faults. The audio oscillator provides the flywheel effect during signal fading and the oscilloscope, through the medium of Lissajous figures, provides a convenient count-down system. The resulting circuit arrangement used is shown in Fig. 2. Here the receiver audio output signal is fed through the low-pass filter to the Y input of the scope, while the audio oscillator is used to drive the thyratron contactor control and the X input of the scope.

Operating Procedure

As an example of operation, the 440-cycle WWV tone is fed from the receiver to the oscilloscope and a 44-cycle signal comes from the audio oscillator. A 10 to 1 Lissajous pattern is obtained on the oscilloscope and is adjusted to stability by synchronizing the audio oscillator manually for the proper Lissajous ratio. The thyratron bias control is adjusted for best operation of the stroboscope. The stroboscope flashing rate is then $44 \times 60 = 2{,}640$ flashes per minute.

A pulley wheel rotating at 880 rpm will have three images of the peripheral chalk mark appearing at equal angular intervals. Assuming a speed change of 0.1 percent, the marks would creep 0.88 part of a revolution in one minute. The ability to keep the audio oscillator manually synchronized with the WWV tone should be much better than this. A frequency drift of one part in 4,400 is represented by the coincidence of wave crests of the Lissajous patterns at 10-second intervals. Manual adjustment within these limits is feasible with a stable audio oscillator; thus speed stability measurements and precise speed measurements are possible.

This system could be considerably simplified by the attachment of a small permanent bar magnet to the rotating pulley and the use of a coil of wire placed near the magnet path. This coil would have a pulse of voltage developed in it which could be applied directly to the scope Y input. The WWV audio tone could then be applied directly to the X input. The shaft speed would need to be 26,400 rpm for a pulse to appear on each complete excursion of the trace along the X axis. Should the shaft speed be 440 rpm, the pulse would appear only once in 60 traversals of the sweep. This limitation may be overcome by constructing a 60-tooth wheel and placing the pickup coil on a U-shaped magnet, the span of which is equal to the slot span of the toothed wheel.

Another system is to feed the coil pulse voltage to the Y plates in series with the 440-cps tone and establish a stable Lissajous pattern with 44 cps applied from the audio oscillator to the X plates. A drift of one rpm in pulley speed would cause the voltage pip to move three times around the X traversal per minute. Since the X sweep is actually moving at the rate of 2,640 traversals per minute and the pickup feeds in pulses at 880 ppm, there would be 3 traversals per pulse.

Interpolation

Interpolation of the speeds using these techniques may be done by allowing the chalk mark image to drift and timing the rate of drift with a stop watch over long enough intervals to minimize the operator error on the stop watch. This method is applicable to narrow speed ranges about those stable image values obtained as an integral submultiple of the 440 and 600-cycle tones.

R-F Amplifier for

By B. F. TYSON and J. G. WEISSMAN

Physics Laboratories
Sylvania Electric Products Inc.
Bayside, N. Y.

IN THE DESIGN of head-end tuners for television receivers, there are two important reasons why an r-f amplifier stage is usually included. The first reason is to improve the receiver's noise figure, or ability to pick up weak signals. The second is to isolate or shield the local oscillator from the antenna.

Tuners for the uhf band of 470 to 890 mc will probably employ crystal mixers which intrinsically have quite good noise performance. However, where the service range may be limited by low transmitter powers, small receiving antennas and inefficient transmission lines, an improvement in noise figure by the use of an r-f amplifier would be most welcome. Also, local oscillator excitation power required for optimum conversion in crystal mixers is relatively low, but the radiation might still be high enough to interfere seriously with other television receivers or other services.

Design of R-F Amplifier

In order to investigate these points and solve the circuit problems of covering the wide tuning range of the uhf band, an r-f amplifier using a Sylvania type 5768 disk-seal planar triode in a grounded-grid circuit was designed and built. The physical construction of this tube, shown in Fig. 1A, results in extremely low lead inductances and interelectrode capacitances. The grid connection at the center is in the form of a disk or flange completely encircling the tube, so that a low-impedance connection to ground may be made and the shielding between input and output maintained. The cathode and plate leads on either end are 0.2-inch-diameter rods which continue right in through the glass, coming up close to the flat mesh grid. The ends of the rods act as the effective cathode and plate surfaces. The grid-cathode input capacitance and the grid-plate output capacitance are only slightly over 1 $\mu\mu$f each and the plate-cathode capacitance has a maximum value of 0.015 $\mu\mu$f. The tube also features high g_m and low power consumption. A g_m of 6,500 micromhos is obtained with 8 ma of plate current. The low plate-cathode capacitance and high g_m, together with the high mu of 100, are all desirable characteristics for grounded-grid amplifier operation.

The small physical size of the 5768 and its double-ended construction make it readily adaptable to concentric line circuitry. Operation at frequencies as high as 2,500 or 3,000 mc is possible, so a relatively simple circuit arrangement is capable of producing good results in the 470 to 890 mc range.

First, let us look at the input impedance of the tube under the conditions shown in the simplified circuit of Fig. 1B. Assuming the output load impedance Z_L equal to the plate resistance, and neglecting loading due to transit time, the input admittance is given by:

$$Y_{in} = \frac{g_m}{2} + j\omega \left(C_{gk} - \frac{\mu}{2} C_{pk} \right)$$

Substituting the values of g_m = 6,500 micromhos, μ = 100, C_{gk} = 1.6 $\mu\mu$f, and C_{pk} = 0.015 $\mu\mu$f, and taking a frequency of 700 mc near the middle of the uhf band gives an input admittance of 5 /50° millimhos. Here C_{gk} is assumed slightly higher than the rated value to allow for the unavoidable increase due to stray capacitance. The input impedance is therefore 200 ohms at a phase angle of −50°. This impedance is so low that it was decided to feed the cathode input directly from the 50-ohm antenna transmission line. The resulting mismatch loss is quite low, between 1 and 2 db. With a direct input connection, the mechanical complexities of providing a tuned input matching transformer are avoided without appreciable loss.

The input circuit is untuned, as shown in the complete amplifier circuit diagram of Fig. 1C. The input blocking capacitor and the heater and cathode bypass capacitors are all 100-$\mu\mu$f mica buttons. The cathode and heater feed chokes

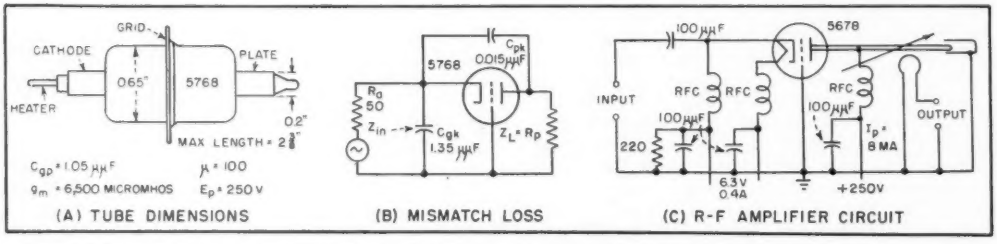

FIG. 1—Dimensions of Sylvania type 5768 triode, simplified circuit used in measuring its input mismatch loss, and circuit of r-f amplifier using tube for uhf television

UHF Television Tuners

Design and performance of concentric-line r-f amplifier circuit using disk-seal planar triode with grounded grid. Ahead of typical crystal mixer, amplifier gives gain of 12.5 db over entire uhf range of 470 to 890 mc, improves overall noise figure by 3 to 4 db and reduces radiated local oscillator power 500 times. Chief drawback is high cost of tube

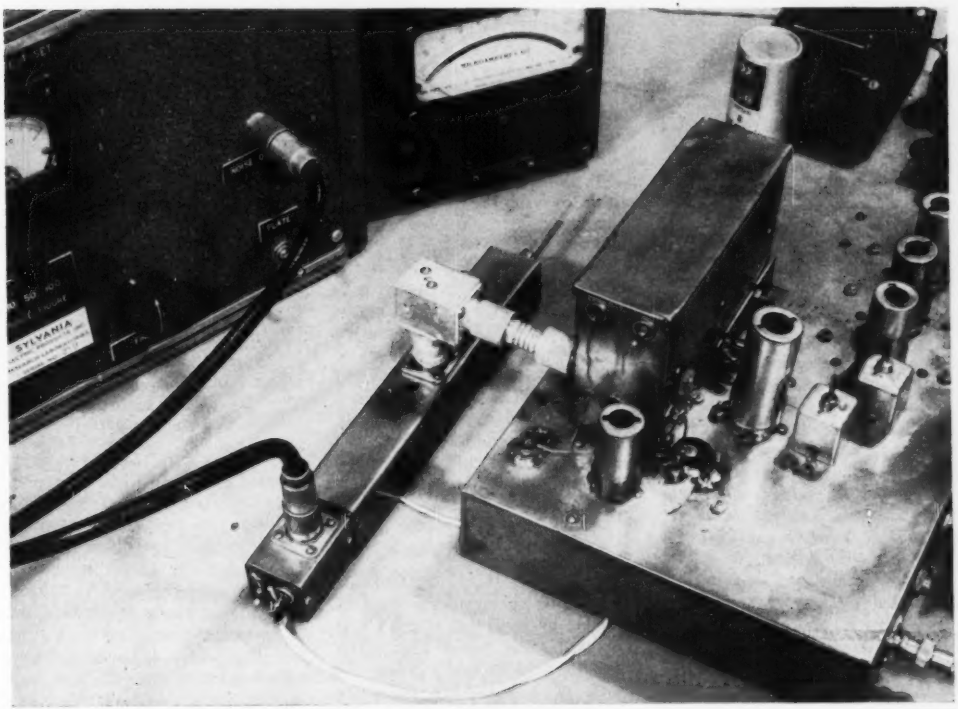

Setup used to measure noise figure of amplifier. Noise generator, feeding into amplifier, is at upper left; output of amplifier feeds into crystal mixer and i-f amplifier at right, which also provides operating voltages

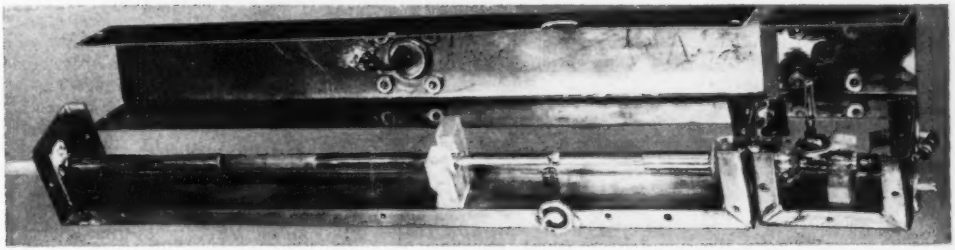

Complete concentric-line uhf r-f amplifier, with covers lifted off to show inner construction. Tuning push-rod is at left; input jack is on small cover at right; output jack with coupling loop is on longer cover

are 7 turns of No. 22F wire wound $\frac{1}{8}$ inch in diameter and $\frac{1}{2}$ inch long.

In the plate circuit of the amplifier, a half-wave type of concentric line is used as the tuning element. Since the gain-bandwidth product of an amplifier is limited by total circuit capacitance and the capacitance of a concentric line varies inversely with its characteristic impedance, the impedance of the line is made as high as physically possible. The highest practical ratio of outer-conductor effective diameter to inner-conductor diameter is about 9 to 1, giving a line impedance of approximately 130 ohms.

Tuning of the line over the band is achieved by sliding a movable telescoping section of the inner conductor into a fixed hollow section connected to the plate rod. The amount of fixed line external to the tube is determined by the highest desired frequency of 890 mc. This external length is not a full half-wavelength at 890 mc because of the equivalent length of line within the tube itself. The length of the plate rod of the tube itself is approximately 2.8 cm. For a line impedance of 130 ohms the grid-plate output capacitance of 1.05 $\mu\mu$f corresponds to a line length of 3.5 cm. At 890 mc a half-wavelength equals 16.8 cm. Subtracting the 6.3 cm due to the tube leaves an external length of 10.5 cm available for the telescopic tuning action.

The lowest tunable frequency is determined by the line length at full extension of the telescoping section. Allowing $\frac{1}{2}$ cm of overlap, there are 20.5 cm of line external to the tube, plus 6.3 cm in the tube, or a total of 26.8 cm. A half-wave line this long resonates at 560 mc and the lower frequency limit of 470 mc has not been reached. To overcome this difficulty, a small length of grounded tubing was arranged so that the sliding inner conductor forms a cylindrical capacitor with it at the low-frequency end of the range. This capacitive loading extends the coverage down to 470 mc.

Construction Details

The physical construction of the amplifier is shown in Fig. 2. The tube is mounted with its grid disk firmly grounded between the ends of the input and output shield boxes. The cathode input connections are made as short as possible. One side of the input blocking capacitor is soldered directly to the cathode connector, while the other side carries the center pin of the type N input jack. The long shield box acts as the outer conductor of the plate circuit tuning line. The fixed portion of the line is supported by a small insulating block near the output jack. The movable portion is driven by an insulated push rod. The ground side of the low-frequency loading capacitor is soldered to the end shield plate. The plate circuit r-f choke is connected to the tuning line at the point of minimum voltage for the center of the range. This results in least disturbance to the plate circuit. The choke is the same as those used in the cathode circuit, and the bypass capacitor is another 100-$\mu\mu$f mica button.

Gain and Bandwidth

Output power is taken from this amplifier at an impedance level of 50 ohms by means of a small loop coupled to the tuned line. The magnetic field intensity along the length of a half-wave resonator varies sinusoidally, rising to a maximum at a quarter-wavelength from the open ends. Loop coupling is essentially electromagnetic so that the amount of coupling is a function of the position of the loop along the line. Maximum coupling occurs at the region of maximum field intensity, resulting in greatest amplifier bandwidth at this point. This is not necessarily the point of maximum gain, which only occurs when the output impedance of the tube is matched. These effects were explored at several frequencies in the band by cutting a longitudinal slot in the outer conductor of the line so that the position of the loop could be varied.

The curves of Fig. 3 show how the amplifier's gain and bandwidth depend on the loop position. Examination of the 700-mc bandwidth curve, for example, shows that the


BANDWIDTH IN MC, GAIN-POWER RATIO
BW AT 900MC
GAIN AT 900MC
GAIN AT 700 MC
BW AT 700 MC
GAIN AT 500 MC
BW AT 500 MC
OPTIMUM LOOP POSITION
DISTANCE BETWEEN OUTPUT LOOP AND GRID PLANE IN CM

FIG. 3—Effect of output loop position on gain and bandwidth

bandwidth increases to a maximum of 17.5 mc with the loop about 8.5 cm from the grid plane and then falls off again. The point of maximum bandwidth at 8.5 cm is the maximum coupling point for 700 mc, but the gain curve shows that the 8.5-cm point gives the lowest gain. The gain rises on either side, reaching a maximum when the loop position is about 14.5 cm from the grid plane. This is the point where the tube impedance is matched, while the 8.5-cm point is actually the point of greatest mismatch. The curves at other frequencies show similar effects except that the gain and bandwidth maxima and minima come at different loop positions because of the change of wavelength.

Observation of the variation in gain and bandwidth with loop position at different frequencies throughout the uhf band enables one to choose the best fixed position of the loop. If the loop is placed 11 cm from the grid plane, the bandwidth is 7 mc at 500 mc, rises to

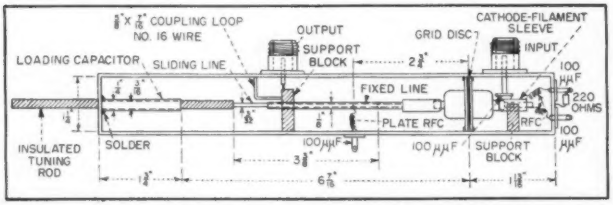

FIG. 2—Construction details of grounded grid r-f amplifier for 470 to 890-mc tv band

12 mc at 700 mc, and then decreases again to 6 mc at 900 mc. The corresponding power gains are fairly constant, ranging between 17 and 23 times. Any other choice of a fixed coupling position would result in greater departures from uniformity of either gain or bandwidth over the tuning range.

The table in Fig. 4 lists the final measurements of gain and bandwidth with the coupling loop fixed at 11 cm from the grid plane. The gain is quite constant in the neighborhood of 12.5 db, with the 3-db bandwidth ranging between 6 and 12 mc.

FREQUENCY IN MC	GAIN		BANDWIDTH IN MC	NF_{12} DB	NF_1 DB
	POWER RATIO	DB			
500	17.5	12.4	7.0	11.0	10.3
600	16.5	12.2	10.3	11.1	10.4
700	17.0	12.3	12.0	11.4	10.8
800	19.0	12.8	10.8	11.5	11.0
900	23.0	13.6	6.0	11.6	11.2

$$NF_{12} = NF_1 + \frac{NF_2 - 1}{G_1} \; ; \; NF_2 = 15 \text{ DB}$$



FIG. 4—Performance data for amplifier, and circuit arrangement used for obtaining noise figure data

Noise Figure

The noise figure of this amplifier was measured at several frequencies in the uhf band by the setup shown in Fig. 4. The amplifier feeds a crystal mixer which is followed by a 3-db attenuator, a 44-mc i-f amplifier and an output meter. The crystal mixer section also includes a local oscillator and a cascode-connected i-f preamplifier. To measure the overall noise figure, NF_{12}, the diode noise generator at the input is turned off, the 3-db pad is switched out of circuit and the noise output observed on the output meter. The 3-db pad is now switched in and the noise input from the generator increased until the same output reading is obtained. This means that the generator is producing noise equal to that of the apparatus under test. The ratio of this noise to that produced in the 50-ohm antenna resistance gives the noise figure. The measured overall noise figures range between 11.0 and 11.6 db across the uhf band.

The noise figure of the mixer used in these tests was measured by the method outlined above and found to be 15 db. Therefore, use of the r-f amplifier gave an improvement of 3.4 to 4 db over the noise figure of the mixer alone.

The equation under the block diagram gives the overall noise figure of two networks in cascade in terms of their individual noise figures and the gain of the first. In the case discussed here, the amplifier is the first network and the mixer is the second network. Having measured the overall noise figure NF_{12}, the noise figure of the mixer NF_2 and the amplifier gain G_1, it is possible to compute the noise figure NF_1 of the amplifier alone. The computed values of NF_1 range between 10.3 and 11.2 db over the band.

Oscillator Radiation

An attempt was made to measure the local oscillator power coming out of the antenna terminal of the amplifier in the same setup which was used for noise measurements. However, the level was so low that reliable measurements could not be obtained. Another method was tried, with the r-f amplifier turned around and inserted between a c-w signal generator and a uhf receiver. The signal generator output simulates the local oscillator power entering the plate circuit side of the amplifier. The uhf receiver picks up the simulated local oscillator power which gets through the amplifier, and an output meter indicates the strength of the signal. A 6-db pad was used ahead of the uhf receiver to smooth out any impedance irregularities in its input. In the tests, the amplifier plate circuit was tuned to the generator frequency so the attenuation measured is that due to the shielding effect of the tube alone. Under those conditions, the measured reduction in local oscillator feed-through is 500 times in power or 27 db. The measured values were about the same throughout the entire band.

It is interesting to estimate the local oscillator radiation field strength from a receiver using this r-f amplifier. Assume that 1 milliwatt of local oscillator power is available to the plate circuit of the amplifier and that the oscillator runs at 44 mc above the signal frequency. At a frequency of 700 mc near the center of the uhf band, the amplifier 3-db bandwidth is 12 mc. Therefore, at 44 mc off resonance, the circuit selectivity will introduce about 17 db attenuation to the local oscillator. This, added to the 27 db due to the shielding effect of the tube, makes a total of 44 db. The power available for radiation is therefore 44 db below 1 milliwatt or 0.04 microwatt. Assuming that there are no other radiation paths from the local oscillator and that there is no attenuation in the antenna line, a half-wave dipole radiating 0.04 microwatt in free space would create a field strength of 45 microvolts per meter at a distance of 100 ft.

Conclusions

The r-f amplifier described uses a tube type which may be too costly for application in competitive receiver designs. However, the results obtained show the possibilities of improving tuner performance in the uhf television band. Use of this amplifier ahead of a typical crystal mixer improves the overall noise figure by 3 to 4 db and reduces the radiated local oscillator power by 500 times. Circuit design techniques have been presented which are simple and straightforward and should prove useful in future work.

Miniature Traveling-Wave Tube

Gain per unit length and noise figures are good for miniature broad-band amplifier tubes operating at frequencies between 100 and 1,000 mc. Operating voltages and currents are no larger than those required for other small tubes

By ROBERT ADLER

Research Department
Zenith Radio Corporation
Chicago, Illinois

THE TRAVELING-WAVE tube to be described is a wide-band low-noise low-level exponential amplifier for frequencies between 100 and 1,000 megacycles. The tube stands midway between conventional miniature tubes used at the lower end of this frequency range and traveling-wave tubes built for much higher frequencies.

Perhaps the most powerful tool for controlling electrons is the old-fashioned grid; it seems promising to use this well-known mechanism in traveling-wave tubes. This paper describes one possible approach.

Tube Constructions

The arrangement shown in Fig. 1 is a model in which the various functions are neatly separated; it is not a practical tube. Two helices are shown. One helix is wound around a cathode so that one of its surfaces acts like a control grid; the other one forms an anode. The two helices are so thoroughly coupled with each other that they constitute two parallel branches of a single transmission line. This is indicated in Fig. 1 by the four coupling capacitances between corresponding points on the two helices. Actually, these capacitances should be uniformly distributed and very large so that no potential difference can exist across them.

A generator on the left sends a wave traveling along both helices simultaneously toward a load on the right. Corresponding points on the two helices are in phase with each other; the cathode serves as ground return.

Electrons leave the cathode in accordance with the instantaneous potential distribution along the grid helix. If the frequency is so low that electron transit time can be neglected, each short section of the tube acts like a triode with feedback directly from plate to grid. A resistance load appears between the helices and ground and the signal is attenuated. This remains true if generator and load are interchanged. For low frequencies, the tube merely acts like a lossy transmission line.

If the frequency is increased until the electron transit angle becomes one-half cycle and the electron trajectories are kept straight, then in each short section of the tube, the half-cycle transit time reverses the phase of the feedback. A negative resistance load appears everywhere. Again, interchanging generator and load has no effect. The tube has a negative attenuation constant in both directions and becomes unstable.

But now let the electron trajectories be deflected toward the left in the manner shown in Fig. 1. This is done by a magnetic field perpendicular to the plane of the paper. The amount of deflection is chosen so that for a wave traveling from right to left, an electron leaving the cathode while a positive voltage peak passes through the



FIG. 1—Schematic diagram of a theoretical tube



FIG. 2—Gain-loss characteristics for tube of Fig. 1



FIG. 3—Setup for measuring space-charge coupling

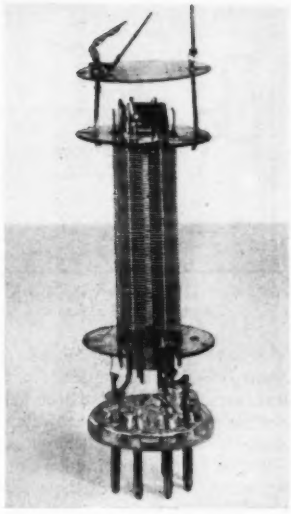

In the miniature traveling-wave tube, uhf signals enter through button base, travel through helix to the top

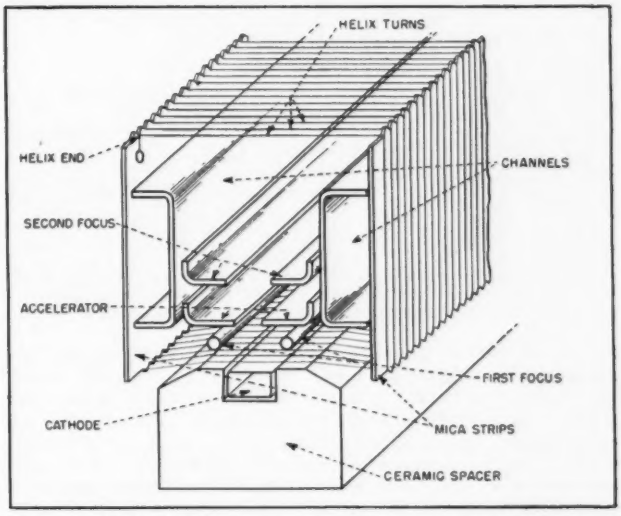

Cross-sectional view of the construction of the miniature traveling-wave tube. Tube is true traveling-wave type in which energy is carried from input to output along a transmission line with the signal increasing exponentially along the way

grid helix next to it, will rejoin the same positive peak upon reaching the anode helix.

For waves traveling from right to left, the bend in the electron trajectories wipes out the effect of transit time. No matter what the frequency, the point on the anode helix where an electron lands has the same phase which its take-off point under the grid helix had. The phase shift caused by the finite speed of wave travel cancels the phase shift caused by electron transit time. Each section acts like a triode with feedback from plate to grid. The resulting attenuation remains the same irrespective of frequency.

The case is different for wave travel from left to right. With the electrons swerving against the direction of wave travel, the two phase shifts no longer cancel; instead, they add up. At a frequency where it takes the electrons one-quarter cycle to reach the anode helix, the point where they land is one-quarter wavelength closer to the generator. The phase at that point is one-half cycle different from what it was on the grid helix at take-off. A negative resistance load now appears across each section of the tube, producing gain for signals traveling from left to right.

Gain Considerations

Full gain is only obtained for the frequency at which the two phase shifts—electron transit and wave travel—add up to one-half cycle. At other frequencies, the phase angle of the apparent feedback in each short section varies in proportion. Fig. 2 illustrates the resulting performance. The maximum forward gain is numerically equal to the constant loss in the reverse direction. There is no need for additional damping to insure stability.

The gain per unit length at the optimum frequency may be found as follows: The apparent resistance between line and ground is one-half the characteristic impedance Z_o. The voltage increase in a short section of transconductance Δg_m is thus $\frac{1}{2}Z_o\Delta g_m$. Over many such sections the voltage increases exponentially; the voltage gain is $\epsilon = 2.718$ or 8.6 db over a length for which $\frac{1}{2}Z_o g_m$ is unity. The gain of the entire tube is $4.3Z_o g_m(db)$, where g_m indicates the total transconductance.

A g_m of 1,000 micromho per cm length is not unusual and a helix with turns closely spaced to make a good control grid may have $Z_o =$ 1,000 ohms. Therefore, gains of the order of 4 db per cm or 10 db per inch may be expected. Much higher gain is possible if a higher g_m per unit length is assumed.

It was mentioned before that the double-helix model of Fig. 1 does not represent a practical tube. This is true because when waves travel along a pair of mutually intercoupled helices, two separate modes of wave propagation appear.[1] They may be described as the push-pull and in-phase modes. Here, the interest is in the in-phase mode. Unfortunately, the push-pull mode also exists on the same helices and analysis shows that it would tend to render the tube unstable.

Two separate helices were needed because a grid and an anode must carry different d-c potentials. If a mechanism were available which would permit the same potential on control grid and receptor electrode, a single helix could be used for both functions. Fortunately, such a mechanism does exist; it reaches its greatest efficiency in the range of a few hundred megacycles. It is the effect known as space-charge coupling.

Figure 3 shows how this effect can be observed with a simple



FIG. 4—Two sections through an early model of a traveling-wave tube



FIG. 5—Gain-loss characteristics for tube of Fig. 4



FIG. 6—Tube construction virtually free from parasitic effects

tetrode. An electron stream leaves the cathode, is subjected to intensity control by the first grid, accelerated by a positive electrode which may be a screen or, better, a solid plate with an opening for the beam, and then again retarded by a receptor electrode at cathode potential. After approaching the receptor electrode, the electrons turn around and are eventually absorbed by the positive electrode.

In the vicinity of the receptor electrode a concentrated negative space charge is set up which varies in accordance with the signal voltage on the control grid. Electrostatic induction generates a corresponding charge in the receptor electrode and a charging current flows through the tuned load circuit back to the cathode.

The charging current increases with frequency and reaches a maximum when the electron transit angle from the positive electrode to the receptor electrode is 180 deg. The transconductance for space charge coupling is then slightly higher than the conventional transconductance, measured with the receptor electrode strongly positive.

A 90-degree phase advance is the trade mark of space charge coupling; it is maintained at all frequencies. To match the output phase of a triode amplifier with a 90-deg transit angle, a space-charge coupled amplifier must have a 180-deg transit angle. A substantial part of the total transit time may be taken up by the trip from the positive electrode to the receptor electrode, so that the condition for optimum transconductance is almost realized.

Figure 4 shows two sections through an early model of a traveling-wave tube designed to utilize space-charge coupling in a single helix. The helix is wound on a frame of square cross section in such a manner that its top and bottom surfaces remain exposed. The bottom surface forms the control grid; the cathode runs alongside below this surface. A simple flat screen grid is positioned inside the helix. Electrons pass through grid and screen, approach the top surface of the helix which acts as the receptor electrode of a space-charge coupled amplifier, and finally return to the screen.

A weak magnetic field is directed across the tube to deflect the electron trajectories. The effect of the field is best visible on the left in Fig. 4.

The electron paths are so bent that at the frequency for which the transit angle is an optimum—180 deg from cathode to receptor electrode—the displacement of the turning point from the starting point corresponds to one-quarter wavelength. With these relations, maximum gain is obtained for wave travel from left to right; simultaneously, a corresponding loss appears for waves traveling in the opposite direction.

Gain-Loss Curves

Figure 5 shows gain-loss curves for such a tube. Compared to Fig. 2, the useful band is narrowed. At low frequencies, both forward gain and reverse loss vanish. At frequencies above twice the design frequency, gain seems to exist in both directions so that one might expect instability. In practice, factors arise which prevent oscillation. The wavelength along the helix becomes too short compared to the transverse dimensions of the helix. Scattering of electron trajectories also helps to destroy undesired gain.

Tubes built according to Fig. 4 proved the existence of the sought-for effect. They also showed a wide variety of parasitic phenomena, traceable to the poor accuracy with which electron paths were defined. The two trajectories shown on the right in Fig. 4 may be highly desirable but many others are possible. A large number of electrons pass the screen again on their return trip, induce signals on the grid and some may even go back and forth several times.

Experience gained in the development of the gated-beam tube had shown that multiple return trips can be almost entirely eliminated if the screen is replaced by a solid electrode with a narrow slot through which an electron sheet is focused. This approach led to a tube virtually free from parasitic effects, shown in section in Fig. 6.

This is an experimental construction. Two auxiliary focusing electrodes are used to provide maximum freedom of adjustment. The first focusing electrode, formed by two parallel wires located closely adjacent to the grid surface, is held negative in order to direct the entire beam through the narrow slot in the accelerator. The second focusing electrode, a wider slot, is strongly positive. It accepts the bulk of the return current. The outgoing beam misses it completely. The two channels, supporting mica strips on which the helix is wound, are operated slightly positive.

In the range from 300 to 400 mc,



FIG. 7—Single-ended version of miniature traveling-wave tube



FIG. 8—Drawing of a tilted helix form of traveling-wave tube



FIG. 9—Cross section of a beam-deflection system for tube

such tubes give gain of the order of 6 to 8 db over a band 40-mc wide and some gain over about 100 mc. With such short tubes, the gain is hardly high enough to be useful. The tubes are strictly of experimental value.

To operate in this frequency range, 100 to 150 volts are applied to accelerator and second focus. The combined drain of the electrodes is about 4 ma for a tube with 2-cm active length. For longer tubes, proportionately more current is needed, at the rate of ½ ma per db maximum gain. The transverse magnetic field is only about 10 to 15 gauss.

The magnetic field intensity required depends on the dimensions of the tube but not on the frequency for which operating voltages are selected. This comes about because the electron transit time across the helix and the amount of deflection produced by a fixed magnetic field both vary the same way—with the inverse square root of the potential.

With tubes providing about 8 db of gain, followed by a triode mixer, noise figures of 10 and 12 db have been measured at 320 and 370 mc. It is interesting to note that the helices in these tubes had 100 turns per inch. It would be rather difficult to obtain noise figures of the same order in conventional triodes with such coarse grids.

Other Tube Forms

It may be of interest to review some alternative forms of the tube. Figure 7 shows a single-ended version in which both sides of the cathode are used, so that the active length of the tube is doubled. Because the electrons in the two helices travel in opposite directions, a transverse magnet field of proper polarity produces gain from left to right in one helix and from right to left in the other. With this construction, at least 20 db of gain can probably be obtained in a single-ended miniature tube. The frequency response might be flattened by making the two halves slightly different (stagger-tuning).

Figure 8 shows a form of the tube in which the tilt of the electron trajectories is replaced by an opposite tilt in the turns of the helix. The double arrow indicates the position of one turn. The principle of operation remains unchanged. The design is of interest because it requires no magnet field to develop directional properties. It bears a superficial resemblance to tubes described by L. M. Field early in 1950[2]. The mode of operation, however, is quite different and the two types should not be confused.

The combination of grid control and space-charge coupling is not the only known means for operating a control element and a receptor element at a common d-c potential. Another combination consists of a pair of beam-deflector electrodes followed by a pair of push-pull anodes, both pairs operating at a common positive potential. The transconductance of a beam-deflection system is inferior to that of a grid but a factor of two, gained from push-pull operation, makes up for part of the loss. Application of this principle leads to surprisingly simple designs as shown in Fig. 9 and 10. Such tubes have been built successfully. Because of their inherently low gain, their value remains in doubt.



FIG. 10—Simplified version of the tube shown in Fig. 9



Measured transmission characteristics for typical adjustment of tube. Curve marked cold shows imperfections of termination, curve marked hot is with tube biased off, forward curve is normal operation and reverse curve is for normal operation with magnetic field reversed

Thanks are due to E. C. Ewing for intricate experimental models and to J. G. Spracklen for measuring equipment and measurements.

REFERENCES

(1) J. R. Pierce, Traveling Wave Tubes, D. Van Nostrand Co., Inc., p 44.
(2) L. M. Field, Recent Developments in Traveling Wave Tubes, ELECTRONICS, 23, p 100, Jan. 1950.

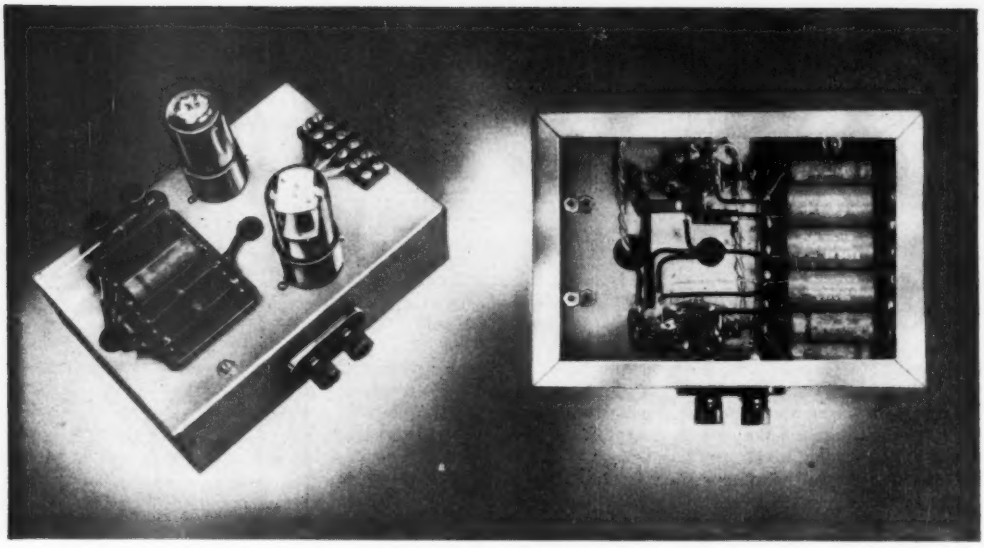

Experimental oscillator chassis. Top view shows Thyrite resistor network mounted on strip with thermistor between binding posts

WIDE-RANGE SWEEPING OSCILLATOR

Wobbled audio output or variable single tone is obtained over a 20-to-1 frequency range by means of Thyrite or Varistor elements in a modified Wien-bridge circuit. A thermistor stabilizes bridge amplitude

By **LOUIS A. ROSENTHAL**

Asst. Professor of Electrical Engineering
Rutgers University
New Brunswick, N. J.

THE variable-frequency audio oscillator described uses a modified Wien network with silicon carbide nonohmic resistors as part of the frequency-determining element. By controlling direct current through the nonlinear resistors the frequency of oscillation can be varied through a range of better than 20 to 1. A nonlinear thermistor element in the bridge stabilizes the amplitude of oscillation and insures good sinusoidal waveform. Although the equipment was designed for telemetering, it can be applied wherever large frequency deviations are required.

A number of articles [1, 2, 3] have described various methods, most of which are incapable of large deviations or lack amplitude stabilization. Without amplitude control poor waveform may result, because distortion will adjust the loop gain to unity. Vacuum tubes have been used as variable-impedance elements but do not allow simple circuit configurations and are limited in the range of nonlinearity.

Basically all schemes consist of an amplifier, feeding back regeneratively through a variable phase-shift network. The circuit oscillates at a frequency at which the loop phase shift is zero and the loop amplification is unity. The phase shift network must be modulated so as to vary the phase shift and so the frequency. Since the phase-shift network may also change its attenuation with frequency, the loop gain will have to readjust itself automatically. The phase-shift network described is found to have



FIG. 1—Modified Wien phase-shift network used for frequency control



FIG. 2—Static and dynamic resistance as a function of voltage for GE 8399401G1 Thyrite

a constant attenuation and is readily phase modulated.

Phase-Shift Network

Figure 1 is the a-c equivalent of the phase-shift network used. Resistor A is necessary for modulation purposes and resistors R are actually silicon-carbide nonohmic resistors called Thyrite by General Electric and Varistor by Western Electric[4]. The frequency at which the network produces zero phase shift is

$$\omega_0 = \frac{1}{RC}\left(1+\frac{2R}{A}\right)^{\frac{1}{2}} \qquad (1)$$

and the voltage attenuation at this point is

$$\frac{V_0}{V_1} = \frac{1}{3+R/A} \qquad (2)$$

The modulating resistor A will change the attenuation as R changes; the minimum attenuation is ¼. Since R has a usable upper limit the presence of A increases the lowest frequency obtainable. These limitations can be eliminated by making A another Thyrite element identical to the other two. The equations are then

$$\omega_0 = \sqrt{3}/RC \qquad (3)$$

and

$$V_0/V_1 = 1/4 \qquad (4)$$

The frequency varies inversely with R and the attenuation is a constant of 0.25 providing the individual Thyrite elements track one another.

The resistance R is actually the dynamic resistance at the static operating point for the Thyrite. Although the dynamic resistance changes with voltages, keeping the phase-shift network at a low voltage amplitude point in the feedback loop minimizes the harmonic generation. Thyrite is a voltage sensitive nonlinear element. Its volt-ampere characteristic is very closely of the form

$$V = kI^n \qquad (5)$$

where n is generally between 0.2 and 0.4. The static resistance is

$$R_s = V/I = kI^{n-1} \qquad (6)$$

and the dynamic resistance or slope of the volt-ampere characteristic is

$$R_d = dV/dI = knI^{n-1} = nR_s \qquad (7)$$

It can be seen that the dynamic resistance is n times the static resistance. The dynamic resistance is the resistance to be used in the frequency equations since it represents the a-c impedance at the operating point. Figure 2 is a plot of the experimentally-determined static and calculated dynamic resistance as a function of d-c voltage. For the Thyrite used (GE 8399401-G1) the static characteristic was very closely $V = 80\ I^{.27}$. An applied voltage of 20 volts will dissipate the rated power of 0.1 watt and it would appear that the usable dynamic resistances can vary from 1,000 ohms up to infinity. Actually because of the modulation scheme the maximum voltage was about 16 volts and the minimum 2 volts. Two volts corresponds to a current of about 4 microamperes flowing through the Thyrite (R_d = 130,000) and is the best cutoff condition for the modulator tube (e_c = −10 volts). This very large variation of resistance will allow corresponding frequency changes.

The three Thyrite elements are connected in series with the supply voltage and a triode modulator tube as shown in Fig. 3. The same direct current passes through all three elements and it was observed that the d-c voltage drops followed one another within 5 percent. Negative voltages applied to the grid of the modulator will reduce the current flowing through the Thyrite, increase the dynamic resistance, and so decrease the frequency.

Amplitude Stabilization

Since the nonlinear elements do not track perfectly, the attenuation can change from the theoretical value of 0.25. Amplitude stabilization will keep the oscillation level constant and insure good waveform. For a simple approach, a nonlinear bridge is used. Referring to the circuit diagram, the bridge consists of two 1,000-ohm arms, a thermistor and a comparison resistor of 470 ohms. The bridge is fed through a phase inverter. Initially the cold thermistor resistance is high and the bridge

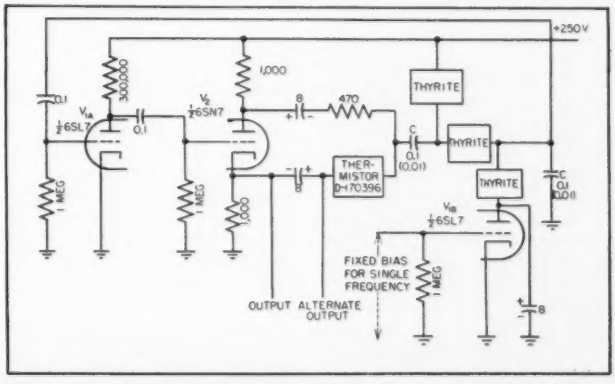

FIG. 3—Complete circuit diagram of the oscillator. Range is changed by choice of capacitors (C). See Fig. 5 for frequency characteristics

is unbalanced, resulting in a high loop amplification. Oscillations build up, increasing the power dissipated in the thermistor, decreasing its resistance, and bringing the bridge closer to balance. At the stable operating point the loop amplification is unity. Any tendency for the amplitude to increase or decrease will be offset by the bridge output decreasing or increasing, respectively.

The mechanism can be further explained by referring to Fig. 4, which shows the bridge characteristic as experimentally determined. It is plotted in terms of output voltage as a function of applied voltage. It requires about 3.35 volts to balance this particular bridge. The thermistor operates in its negative-temperature-coefficient and negative-differential-resistance region and reduces its resistance as the power dissipated in it increases. The remaining loop amplification, which is the product of the amplifier gain and loss in the phase-shift network, is superimposed as a straight line of slope equal to the reciprocal of loop amplification. The common intersection is the operating point resulting in the bridge being sufficiently unbalanced to produce an output of 0.22 volt. As the loop amplification varies, the bridge output, as well as operating amplitude, will change to a much lesser degree depending on the slope of the bridge characteristic at the operating point. A greater slope and higher loop amplification result in greater stability. The rapidity with which the amplitude stabilizes depends on the thermal time constant of the thermistor. Elements such as lamps with positive temperature coefficients can be used if the positions of the comparison resistor and nonlinear element are reversed.

However, elements with negative-differential-resistance regions result in bridges with better stabilization properties. If the loop gain were not to change with frequency there would be no readjustment in amplitude necessary and correspondingly no limit to the rate of frequency modulation. It should be noted that the bridge nonlinear element is really linear at the frequency of oscillation and is nonlinear only to average amplitude or power instead of instantaneous amplitude as in the case of Thyrite.



FIG. 4—Amplitude stabilizing bridge characteristic with superimposed loop amplification. The bridge operates at the common intersection with an output of 0.22 v and applied voltage of 2.8 v

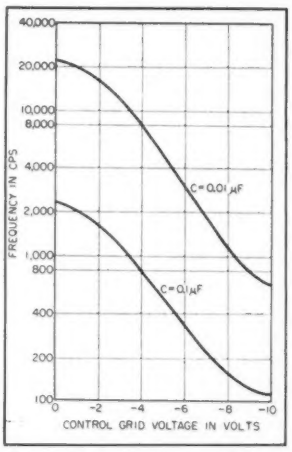

FIG. 5—Frequency versus control-grid potential for two different phase-shift network capacitances

Practical Circuit

In the circuit of Fig. 3, a triode voltage amplifier with a gain of 52 drives the amplitude-stabilizing bridge through a phase inverter. The bridge contains two electrolytic capacitors in order to eliminate d-c and keep the bridge balanced. The bridge and phase inverter offer a low impedance to the phase-shift network whose impedance level can vary considerably. The modulator tube is bypassed so as to put the shunt Thyrite element at a-c ground potential. After the phase-shift network, the loop is closed. It is important that the amplifier proper have negligible phase shift for the variable frequency range so that all phase shift takes place in the frequency-determining network. Voltages measured at various points in the circuit for a frequency of 1 kc were as follows: input to V_1, 0.051 v; output V_1, 2.66 v; bridge output, 0.208 v; phase-inverter cathode, 1.48 v. The gain of the amplifier is therefore 52.2, the phase-shift network attenuation is 0.245 and the bridge is operating close to the point described in Fig. 4. Frequency curves are shown in Fig. 5 for the control voltage variations between 0 and −10 volts. At low grid voltages, the Thyrite resistance is changing at a lesser rate and below −8 volts cutoff is approached gradually. In the center region the frequency variation is logarithmic. By self-biasing the control tube, the curve can be made to start at any convenient frequency. Like the capacitors the curves represent a 10-to-1 ratio down to low frequencies where the amplifier phase shift becomes a limiting factor.

The waveform is excellent at all times and the amplitude never changes by more than 2 percent in these typical frequency ranges. Frequency stability depends on the power-supply regulation and the temperature coefficient of the Thyrite which is about −0.5 percent per degree centigrade[5]. The particular circuit described was used up to 100 kc and with better high-frequency amplifier characteristics the range can undoubtedly be extended. Other nonlinear elements can provide a variety of frequency characteristics.

Thanks are extended to the United States Air Force, Watson Laboratories, who sponsored this work under Contract No. AF28-(099)-33. The assistance of H. Zablocki, Research Assistant at Rutgers University, is appreciated.

REFERENCES

(1) M. Artz, Frequency Modulation of Resistance-Capacitance Oscillators, *Proc. IRE*, p 409 June 1943.
(2) H. S. McGaughan, and C. B. Leslie, A Resistance-Tuned Frequency Modulated Oscillator for Audio Frequency Applications, *Proc. IRE*, p 974, Sept. 1947.
(3) T. A. Peterson, Jr., A Method of Transmitting Voltage Information by Means of Frequency Modulation, unpublished Master's thesis, Rutgers University Library, 1949.
(4) F. Ashworth, W. Needham, and R. W. Sillars, Silicon Carbide Non-Ohmic Resistors, *IEE Journ.*, 93, p 385, 1946.
(5) Thyrite, a General Electric Resistance Material, Bulletin GEA 4138A.

High-Power UHF-TV KLYSTRON

Two-stage klystron provides power gain of 250 with bandwidth of 5.6 mc between 1-db points in uhf television band. Special bombardment cathode design permits replacement of worn out cathodes to extend life of tube almost indefinitely

By The Engineering Staff of Varian Associates
San Carlos, California

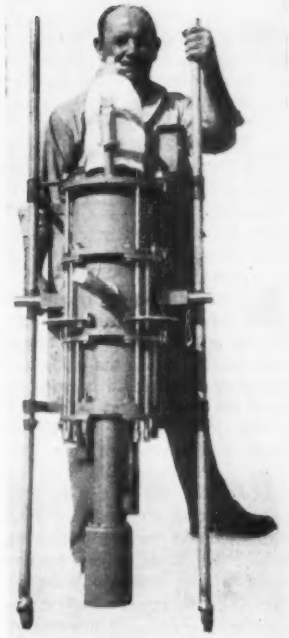

Amplifier, complete with cavities, is shown ready for shipping

EXPANSION of present television broadcasting facilities to include the uhf band is imminent. One of the main stumbling blocks lying in the path of uhf-tv has been the lack of power tubes capable of operating at these frequencies and having other properties necessary for the final amplifier of a television transmitter.

Conventional tubes designed for uhf operation require small sizes and spacings, requirements inconsistent with high power. Transit time becomes a major problem, and low gain per stage adds complexity in both construction and operation. A successful final amplifier tube should combine high power capability with high power gain and bandwidth. The klystron has proved to be capable of such performance.

High-power uhf klystrons have been built. In 1939, John Woodyard of Stanford University built a two-cavity oscillator that had a power output of 250 watts continuous at 750 mc. A three-cavity amplifier tube with two kilowatts output at 750 megacycles was used in a c-w radar, type TPS-7, in 1943. A 5-kw tube for 500 mc was designed and built independently by R. Warnecke in the Research Laboratories of the Compagnie Generale de Telegraphie Sans Fil in Paris at about the same time that the work described below was initiated but no data are available concerning the performance under field conditions.

General Design

The tube to be described was developed by Varian Associates to specifications provided by General Electric. It is now part of the GE uhf-tv transmitter described in the June 1951 issue of ELECTRONICS.

As a starting point in the adaptation of the klystron for television transmitter service, the following specifications were set up: (1) 5 kw c-w output, (2) power gain of 100, and (3) bandwidth of 6 mc between 1-db points. The proposed power output and gain were chosen to take advantage of conventional 50-watt driver tubes of the lighthouse and planar electrode types.

Other important requirements were linearity and freedom from noise and spurious modulation. In both these respects the klystron has inherent advantages. The output of a klystron varies with the input as a Bessel function of the first order. For low levels this is exactly linear, and it does not depart much from linearity until the out-

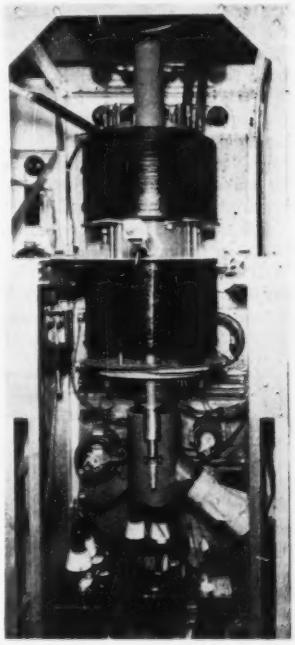

Five-kilowatt uhf-tv klystron is shown installed in transmitter

put is approximately 80 percent of the maximum power. Even this last 20 percent of power need not be wasted, however, since only the synchronizing peaks occur at this level, and these can be predistorted to give the desired output shape. Thus, in the range where linearity is needed for picture clarity, the klystron is inherently linear and the full peak power can be utilized in a transmitter.

Random noise and spurious modulation present no problems in a klystron operating at transmitting power levels. Since the grids have been eliminated, there is no partition noise. All the tube structures are big and rugged, making the tube insensitive to vibration. The heater for the cathode is at one end of the tube, far removed from the interaction space, so the alternating current in the heater can produce no hum. The greatest source of spurious modulation appears to be the power supply ripple, but even the simplest filtering reduces this to a point more than 60 db below the carrier.

In connection with the power supply, there is another advantage of a klystron amplifier to be noted. Since the current drain from the power supply is independent of the r-f level, a regulated or low-impedance power supply is not required to handle modulation peaks.

Development of a klystron at the low end of the uhf band (instead of at a higher frequency such as 800 or 900 megacycles) was a case of attacking the harder problem first. To klystron designers, 500 mc is a very-low frequency rather than an ultra-high frequency and presents special problems. Cavity sizes at this frequency tend to become excessive. Tubes similar to the one described here have produced more than 5 kilowatts of c-w power at over 1,000 mc. Thus it is clearly practical to produce an amplifier with more than 5 kilowatts output at any frequency between 500 and 1,200 mc.

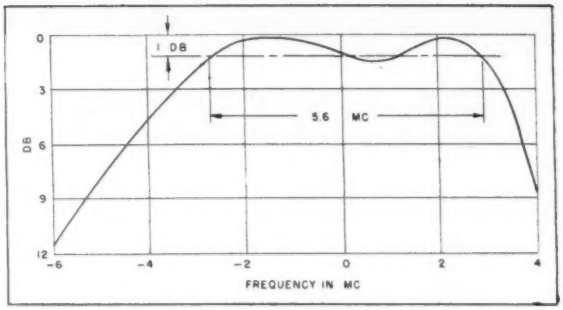

FIG. 3—Response curve shows bandwidth of amplifier

Figure 1 is a schematic diagram of the new tube, showing how the design problem reduces to three separate and distinct parts. First, there is the problem of producing a direct-current beam of electrons of suitable size and density. This is accomplished by the cathode assembly. Second, there must be structures for the radio-frequency interaction with the beam. These are the cavities. Finally, the disposal of the residual energy of the electrons is accomplished in the collector.



FIG. 2—Bombardment cathode is free from poisoning and may be replaced periodically to make new tube out of old

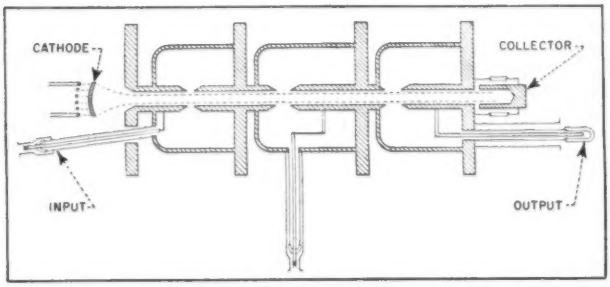

FIG. 1—Schematic of triple-cavity (two-stage) klystron amplifier shows inherent simplicity and straightforward arrangement of elements

In the triple-cavity or cascade klystron, the first stage, as shown in Fig. 1, can be likened to a voltage amplifier and the stage between the second and third cavities acts as a power amplifier. The efficiency of the cascade klystron is about the same as the conventional two-cavity (single-stage) klystron, but the gain is much higher, being approximately the product of the gains of two single-stage klystrons. The electrons are actually used twice to obtain a very high gain from a given expenditure of power.

Cathode Structure

Expected efficiency, r-f considerations and physical convenience determine the diameter and length of the drift tube as well as the voltage and current of the beam. For this tube, the figures came out to be 2 amperes and 10,000 volts to pass through a tube 1 inch in diameter and 24 inches long. A cathode design to produce such a beam is straightforward, using the so-called Pierce gun techniques. A magnetic field of approximately 200 gauss, produced by coils outside the resonators, is used to keep the beam from spreading to the walls of the drift tube.

The physical design of the cathode is interesting, in that it departs from the usual oxide emitting surface. One of the prime requirements of the amplifier is long life, and since practically everything else except the cathode consists of

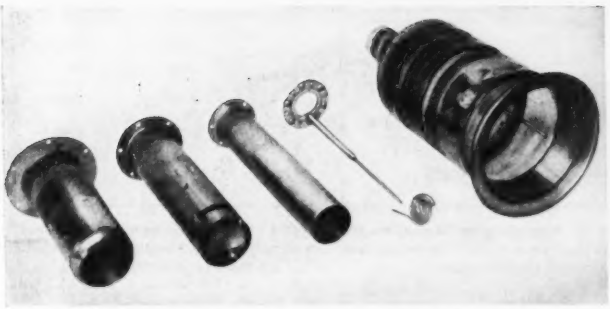

Disassembled view shows components of cathode structure

Complete cathode assembly

heavy copper machined parts with essentially infinite life, the limiting factor on tube life is the cathode itself. To eliminate the troubles associated with oxide cathodes, our engineers developed a form of what is called a bombarded cathode. The schematic diagram of Fig. 2 illustrates such a cathode.

The emitting surface of the cathode is a piece of tantalum sheet 0.1 inch thick, supported by tabs from the end of a molybdenum tube. The moly tube, is supported in a kovar-to-glass ring seal. A focussing electrode is similarly supported at this point on another cylinder. Behind the tantalum cathode button is mounted a heater of tungsten wire. Radiation from the heater is insufficient to heat the tantalum to an emitting temperature, so a direct voltage is applied between the heater and the cathode. This causes a current to flow, as in a diode, and the electron bombardment of the back of the cathode button heats it to an emitting temperature.

Bombarded cathodes have been used in several klystrons, and they give long, trouble-free life. The limiting factor on life seems to be the evaporation of the tungsten heater, but if the heater is operated somewhat temperature limited (in the bombarding diode) life approaching 10,000 hours can be achieved. An advantage of this type of cathode is that it does not poison. The tube can be let down to air for repairs and repumped without damage to the cathode.

The usefulness of this tube is not limited to the 10,000-hour life of the cathode. Even though all possible care has been taken in designing both cathode and filament, failure in one or the other must occur eventually. When this happens, it is not necessary to scrap the entire tube structure since the cathode mount has been so arranged that it can be easily removed and replaced with a new assembly. This operation costs approximately one-sixth the original value of the tube. A tube which has been fitted with a new cathode is literally as good as new. The operation can be repeated, and there is no apparent limit to the number of times the cathode can be replaced.

In connection with cost considerations, it is important to realize that the klystron reaches the user completely fitted with its tank circuits. The klystron is actually a complete final amplifier requiring only the connection of power supply voltages and cooling water to put it into operation.

Collector

The collector is cooled by a stream of water flowing at approximately 5 gallons per minute. It is insulated from the body of the tube by a glass seal for the purpose of metering the relative currents lost to the drift tube and reaching the collector. Both the body of the tube and the collector are at ground potential (both d-c and r-f) since the cathode is operated below ground. This provides the maximum safety to operating personnel and avoids the usual troubles of electrolysis and of insulation for d-c and r-f potentials in the water hoses.

The bandwidth of a cascade klystron is approximately the same as that of a single-stage klystron. It can be increased beyond that corresponding to the Q's of the cavities either by loading the cavities to reduce their Q's or by stagger tuning. Stagger tuning is generally a preferable way of trading gain for bandwidth. The three cavities are tuned to different frequencies in such a manner that the band over which gain is obtained is increased, but gain is reduced.

Test results for the tube have shown that satisfactory performance can be obtained by an appropriate stagger tuning scheme in which there is no external loading on the center cavity. This permits an appreciable simplification of construction of the tube since the need for a coaxial line coupled to the center cavity is eliminated. In addition, the radio-frequency power which inevitably would have been lost in the band-widening load on the center cavity is conserved.

An actual measurement of the response curve shows a bandwidth of 5.6 mc between 1-db points. This curve is plotted in Fig. 3. The power gain corresponding to this curve was about 24 db or 250 times. This can be considered a typical performance for a cascade amplifier klystron in the uhf television band. The adequacy of this performance for television purposes was demonstrated by the General Electric Company when they actually used the klystron to amplify a television picture. The quality of the picture was essentially unchanged by its passage through the klystron amplifier.



FIG. 1—Cross-section of compression-type accelerometer having self-generating piezoelectric element



FIG. 2—Free vibrations of compression-type unit when excited by a transient applied force



FIG. 3—Vibration system of accelerometer and equivalent electrical circuit having output voltage *E*

SELF-GENERATING

Characteristics and advantages of compression and bender-type accelerometers using piezoelectric barium titanate elements. Useful range of typical unit is from 0.022 g to 600 g; corresponding voltage output range of 1 mv to 27 v is readily measured conventionally

THE PIEZOELECTRIC principle is particularly suited for accelerometers used in industrial vibration studies ranging from machinery balancing to performance testing of guided missiles because the reaction force of a vibrating body is proportional to its acceleration. A relatively new ceramic piezoelectric is essentially composed of polycrystalline barium titanate, which combines sufficient piezoelectric sensitivity, high capacitance and good electrical stability.

The voltage sensitivity of the ceramic is not as high as that of Rochelle salt, which exhibits the highest sensitivity of all known materials. This disadvantage, however, is outweighed by a number of desirable features. The conversion characteristic is hardly affected by temperature and humidity. The mechanical strength is greater than that of Rochelle salt crystals. The dielectric constant is higher, which gives the transducer a larger electrical capacitance. This makes it easier to match its electrical output to the input of electrical measuring equipment and permits the use of a long cable between transducer and equipment. Finally, the material can be manufactured easily in any desired size and shape. No precisely made cuts, as in the case of a single crystal, are necessary.

Ceramic barium titanate already had been used for microphones and phonograph pickups. It was believed that the characteristics of the material could be utilized to an even larger extent in applications where adverse atmospheric and temperature conditions were encountered. The use of the material for electromechanical transducers was studied by the Signal Corps. The investigation resulted in the development of several types of barium titanate accelerometers.

Accelerometer Design

These instruments may be designed in different ways, depending upon the kind of stress to which the piezoelectric element will be subjected. Figure 1 shows a compression-type accelerometer. The base plate of the instrument is rigidly attached to the vibrating body under test. The ceramic element has silvered plane parallel surfaces, the bottom surface resting on the base plate. A weight is pressed against the top surface by means of a spring. The output terminals are connected to the two surfaces of the element.

If the vibrating body moves with a given acceleration, the weight will also be subjected to this acceleration, and the accelerating force is thereby transmitted through the ceramic element. Thus a compressional force, proportional to the acceleration, is exerted upon the element. Because of the piezoelectric properties of the material, the compressional force generates a charge at the terminals of the accelerometer which can be measured.

From a general viewpoint, the accelerometer represents a spring-mass system having a spring constant which is mainly determined by the stiffness of the ceramic element. The theory of such systems shows that the force which is exerted upon the spring element is proportional to the acceleration of the base plate, provided the natural frequency of the spring-mass system is high compared with any of the frequencies at which accelerations are to be measured. The electrical output of the device is proportional to the force applied to the element and, therefore, is a true indication of the acceleration of the base plate, if the above conditions can be maintained.

Since the natural resonant frequency of a compression-type accelerometer is very high, such a de-



FIG. 4—Variation of sensitivity with frequency for two Gulton compression-type accelerometers



FIG. 5—Attenuation characteristic of two-stage low-pass filter used to avoid resonant-peak errors



FIG. 6—Amplitude characteristic of Gulton type A-403 accelerometer, showing linearity up to 600 g

ACCELEROMETERS

By G. K. GUTTWEIN and A. I. DRANETZ

Signal Corps Engineering Laboratories, Fort Monmouth, N. J.

Gulton Mfg. Corp., Metuchen, N. J.

vice can measure accelerations correctly up to high exciting frequencies. The magnitude of the resonant frequency can be evaluated from Fig. 2, which gives the electrical output of a compression-type accelerometer when subjected to a transient blow with a lead hammer. The output voltage of the accelerometer was recorded on an oscilloscope having a pulse-triggered sweep. Since a vibrating system which is excited by a single pulse continues to oscillate at its resonant frequency, the above method is a convenient way of finding such resonant frequencies. It can be seen from Fig. 2 that the natural frequency of this particular unit is higher than 6,000 cps.

The existence of such a high resonant frequency is explained in Fig. 3A. Here the vibrating system is reduced to its essential parts—the mass M, the biasing spring K_1 and the ceramic element of stiffness K_2, where K_2 is determined by the dimension of the element and its elastic modulus. Figure 3B gives the analogous electrical circuit for the mechanical system. Masses are represented by inductances and springs by capacitors, the capacitance C being related to the spring constant K as $C = 1/K$. Since C_2 is small compared with C_1, the resonant frequency is determined by M and C_2 and is barely affected by C_1.

Initial Pressure

The spring is only an auxiliary element in the basic function of the accelerometer. If the acceleration to be measured never exceeds that of gravity (1 g), the weight exerts sufficient pressure upon the mass to insure close contact at all times (provided the unit is always used in a vertical position) and no spring is needed. For the measurement of an acceleration greater than 1 g, an initial pressure is necessary which must be equivalent at least to the maximum acceleration force encountered in the signal. The spring is a convenient means for obtaining this pressure.

It has been possible to obtain natural frequencies ranging between 5,000 cps and 25,000 cps with the compression-type accelerometer. This is due to the high spring constant of the ceramic element, which is of the same order as that of a solid piece of metal. For this reason, it is possible for the mass and elasticity of the housing to introduce parameters which will affect the output of the accelerometer, and particular attention must be paid to the construction of the accelerometer.

A compression-type accelerometer constructed by the Gulton Manufacturing Corp. for Signal Corps Engineering Laboratories has a sensitivity of 45 millivolts per g and a capacitance of 1,500 μμf. The natural frequency surpasses 6,000 cps, as shown by Fig. 2, which was obtained with this instrument.

The frequency characteristic (open-circuit voltage versus frequency) of these accelerometers can be expected to be flat from the lowest frequency up to one-half the resonant frequency. In Fig. 4, the results of measurements made on two compression-type accelerometers are presented and show a very flat characteristic. The measurements were carried out with an electrodynamic vibrator. No attempts were made to damp the resonant peak. In normal applications, the frequency range of interest for the investigator seldom exceeds 1,000 cps, which is far below the resonance frequency.

If desired, an electrical low-pass filter can be inserted in the measuring circuit to eliminate errors caused by the resonant peak. A circuit diagram and frequency charac-

teristic of such a filter are given in Fig. 5. It can be seen that the filter attenuates the frequencies above 2,500 cps. By the use of low-Q coils and resistors inserted in the circuit, resonant frequencies of the filter itself are damped and no ringing of the filter will occur.

The amplitude characteristic of the accelerometer is linear as long as the elastic limit of the elements and other components is not exceeded. Another condition for linearity requires that the voltage generated in the element should always be small compared with the polarizing potential as otherwise the remanent polarization could be affected. Both linearity requirements can easily be met by proper design. Figure 6 shows the amplitude characteristic as obtained with an impact-type shock tester.

The temperature characteristic of the compression type units compares very favorably with any other type of accelerometer. Figure 7A gives the results of measurements where the accelerometer was excited mechanically with a constant amplitude of 60 cps and its output voltage observed at different temperatures. The deviations between 20C and 80C were very small. The units should not be used above 100C because the barium titanate employed in the elements has a Curie point at 125C. At this temperature, the crystalline structure changes and the material loses its piezoelectric property. At low temperatures, a decrease of sensitivity can be expected but the instruments are usable to approximately −50C.

Amplifier Requirements

In considering the overall characteristics of any transducing device, one must consider the equivalent electrical circuit as seen by a recording device. The equivalent circuit of a piezoelectric transducer is given in Fig. 7B. The transducer is represented by a constant-voltage generator in series with its internal capacitance C_A. The transducer is connected by means of a shielded cable, which itself has the capacitance C_c, to an indicating instrument such as a vacuum-tube voltmeter, cathode-ray oscilloscope or recorder preceded by a vacuum-tube amplifier. If the resistive load into which the accelerometer feeds is too low to obtain proper matching at the low-frequency end, the amplifier input may be shunted with the matching capacitor C_M. The lower half-power frequency f_o will occur where the impedance of $C_M + C_A + C_C$ equals the input resistance of the amplifier. For $R = 1$ megohm and $f_o = 10$ cps, the matching capacitor becomes $C_M = 0.02$ μf. This value is much larger than the source capacitance of the generator and a decrease of sensitivity will result. The voltage E_A applied to the input of the amplifier is related to the generated voltage E_G by $E_A = E_G\, C_A/(C_A + C_C + C_M)$.

To obtain a high sensitivity and a good response at low frequencies, it is desirable to employ an amplifier having a high input resistance. Figure 7C shows the circuit diagram of a cathode follower amplifier which uses a grid leak resistance of 15 megohms and provides, due to the cathode follower action, an input resistance of about 100 megohms. When a transducer with 1,500-μμf capacitance is connected to its input, a flat frequency characteristic (3-db loss point) down to 1.2 cps is obtainable. In cases where extremely good amplitude and phase characteristics at low frequencies are desired, a matching capacitor can be employed. When $C_M = 0.02$ μf is used, the 3-db point is decreased to 0.08 cps and a 5-degree phase deviation will occur at 0.9 cps.

The low-frequency response can be extended considerably in this manner, so that all requirements for normal shock and vibration work can be met easily with this type of accelerometer. No static measurements can be made, however, since a piezoelectric transducer has no d-c response.

Compression-type accelerometer having resonant frequency of 12,000 cps, capacitance of 1,500 μμf and sensitivity of 10 mv per g, and individual parts used in its construction

Bender-Type Accelerometers

In a bender-type accelerometer, a strip of phosphor-bronze is clamped at one end of a solid structure which is connected to the vibrating body, as shown in Fig. 8A. Due to its inertia, the beam vibrates and generates stresses in the barium titanate element attached to the beam. The two surfaces of the element are connected to the output terminals. The element can be made very thin, in the order of 1/100 of an inch, and hardly affects the flexibility of the beam.

The natural frequency of such an arrangement is normally several hundred cycles. Figure 8B shows the fundamental resonance frequency of a 0.1-inch phosphor-bronze cantilever beam plotted against its length. The graph indicates that the natural frequency of such bender systems is much lower than for compression-type devices. A means of damping the system, such as with silicone oil, should therefore be provided.

Many variations may be employed in the construction of a bender-type accelerometer. The dimensions of the beam and the sensitive element can be changed. Small weights may be attached to the end of the beam. Clamping may be provided in the center or at both ends. The ceramic element itself

may be used as a beam.

It is not possible, however, to employ a homogeneous piece of barium titanate. In the latter case, the upper portion of the beam would be in compression and the lower portion in tension, or vice versa. The charges generated in these two parts would have opposite polarity and would cancel each other. This difficulty is overcome by using a laminated element. For example, the beam may consist of two sheets of barium titanate, each 0.01 inch thick, which are soldered to a 0.003-inch copper armature. The natural frequency of such a laminated beam is also plotted in Fig. 8B.

The temperature characteristic of bender-type accelerometers is not as good as for compression-type units. A decrease in sensitivity of about 0.5 percent per degree C was observed with rising temperature. This effect is probably caused by the bond between element and armature. Another temperature effect is introduced by the damping fluid.

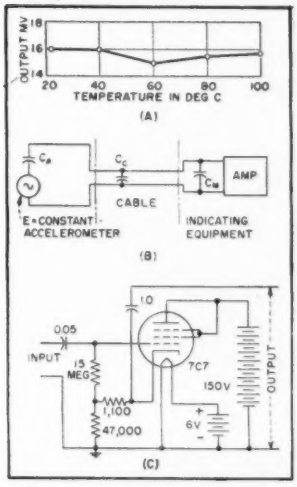

FIG. 7—Temperature characteristic of compression-type accelerometer, block diagram of complete transducer system, and cathode-follower amplifier circuit suitable for matching a piezoelectric accelerometer to electrical measuring equipment

Bender Applications

Despite these facts and the very satisfactory performance of the compression-type units, it can be expected that bender-type accelerometers will be helpful in applications where special requirements must be met. Such requirements are:

(a) High capacitance to obtain very low frequency response with an indicating device having only medium input impedance. It has been possible to build benders with a capacitance as high as 0.1 μf.

(b) High sensitivity but a limited frequency range. A cantilever beam, with small weights attached to its end, was built for this purpose. A sensitivity of about 200 millivolts per g was obtained. The frequency characteristic of an experimental model of such a unit is given in Fig. 8C.

(c) Very small dimensions. One accelerometer designed to this specification measures only 1½ x ½ x ⅜ inches. Its laminated barium titanate element operates as a bender. The sensitivity is 8 mv per g and the natural frequency approaches 3,000 cps. Silicone fluid is used as a damping medium. The miniature-unit curve in Fig. 8C shows the frequency characteristic of this unit.

(d) Capability of measuring extreme high accelerations, of the order of 10,000 g. By using a bender type for such an application, it is possible to obtain a design where a sturdy armature takes the full impact of the shock. The ceramic element, which can be made very thin and light, is attached to the armature and measures its deformation.

Conclusions

A very desirable feature of all barium titanate accelerometers is the extremely wide range of acceleration which they can indicate. One model can withstand 600-g shocks which will generate an output voltage of 27 volts. On the other hand, for measurement of small accelerations, it is possible to read an output of about 1 millivolt, because this voltage is still above the noise level of normal measuring equipment. Consequently, an acceleration range from 600 g to 0.022 g (27,000 to 1) can be covered; this is an excellent figure for a measuring instrument. Another desirable feature is the fact that the accelerometers are self-generating, which makes their output independent of external supply voltages. Barium titanate accelerometers have already been used in many tests in the laboratory and in the field. The instruments have operated satisfactorily under all conditions and have shown reliability and ease of handling.

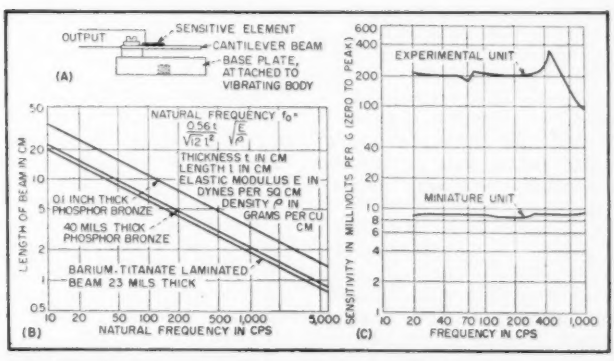

FIG. 8—Bender-type accelerometer construction, relationship of its natural frequency to cantilever beam length, and frequency characteristics of two different bender units

BIBLIOGRAPHY

G. N. Howatt, J. W. Crownover and A. Dranetz, A New Synthetic Piezoelectric Material, ELECTRONICS, p 97, Dec. 1948.

H. W. Koren, Application of Activated Ceramics to Transducers, *Jour. Acous. Soc. Amer.*, **21**, p 198, May 1949.

L. G. Hector and H. W. Koren, Ceramic Phonograph Pickup, ELECTRONICS, p 94, Dec. 1948.

D. E. Weiss, Design & Application of Accelerometers, *Proc. Soc. Exp. Stress Analysis*, Cambridge, 1947, **IV**, No. 2, p 89.

W. P. Welch, A Proposed New Shock Measuring Instrument, *Proc. Soc. Exp. Stress Analysis*, Cambridge, 1947, **V**, No. 1, p 39.

Automatic BROADCAST

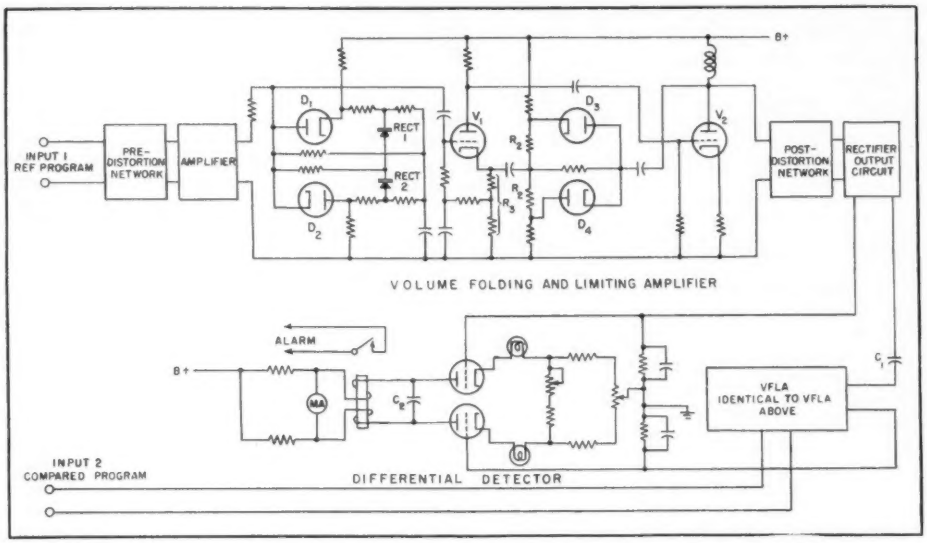

FIG. 1—Basic circuit of the automatic monitor used for comparing signals at two points geographically close

Program monitor compares recovered audio from transmitter signal with that from studio monitor and sounds alarm if it detects undue noise or distortion. For remote comparison, a processed information signal is sent out on same lines with audio but at higher frequency

IN ENGLAND, the British Broadcasting Corporation produces some ten different sound programs that are fed over wire lines to nearly 100 transmitters. Monitoring is required at the several pickup points, as well as at intermediate points to insure maintenance of level and quality of program. The equipment to be described provides automatic monitoring at the intermediate points so that the technical staff can be freed for other duties.

The automatic monitor compares program characteristics at two separate points in the transmission chain. When the two programs differ by a predetermined amount, the monitor sounds an alarm. Often, the programs to be compared are available in the same building. In other cases, it is necessary to convert the information to a signal that can be sent back and compared with the characteristics of a similarly processed signal. The simple comparison equipment is known in the BBC as "automatic monitor minor" and the remote comparison system as "automatic monitor major."

Since the major monitor, not yet in general use, is based upon the equipment that is used in the minor monitor, the latter will be described first. Both types are designed to operate an alarm on an arbitrary magnitude of defect with respect to: transmission equivalent (including complete break); background noise (including crosstalk); frequency-amplitude response; and overload or nonlinearity.

By a comparison measurement, all these defects may be recognized in terms of amplitude. For instance, a falling-off in response at the upper frequencies will be discerned as a reduction in amplitude of the top notes of music or the sibilants in speech. In the low-volume passages or gaps in program, noise will also appear as an amplitude difference. Such amplitude comparison is the basic principle on which these monitors are designed.

The transmission circuit may include a long line or several amplifiers. In either case the envelope

PROGRAM MONITOR

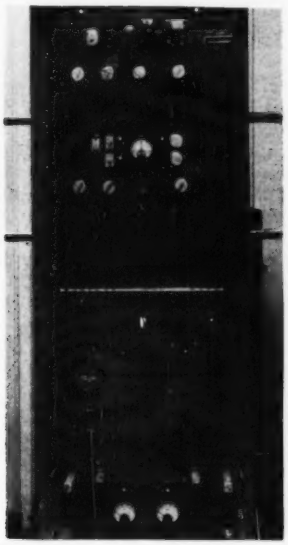

Automatic monitor equipment in rack

of the signal is likely to be distorted by phase change, and such systems differ in this respect only by the degree of phase change. As long as the phase or delay distortion is within the rather wide limits that the ear cannot detect, no correction for this is normally made.

The automatic monitor must compare two envelopes, one of which is distorted, and show a balance so long as no defect is aurally noticeable. In this respect it must contend with a time delay in the arrival of a pulse of signal and a distortion of the envelope of the pulse. An instantaneous comparison of the amplitude of the signals is not possible. There must be integration over a period long enough to negate the error due to phase-delay distortion.

If the integration period is too long, however, the automatic monitor will be insensitive to the distortion it is intended to disclose. Although many periods of amplitude distortion apparent to the listener will be of short duration, there will be a number lasting several milliseconds at least. If the integration period does not exceed about ten milliseconds, such periods occur often enough to give reasonable operation of the monitor on fault conditions.

Although the rms value of the wave might give an ideal comparison, it is more practical to use rectifiers with suitable time constants. The discharge time has been made longer than the charge time, so that comparison of amplitude difference may be delayed until both program-pulses approximate their maximum values. This method of measurement normally produces good monitor balance on fairly short transmission circuits if there is no audible distortion between the points at which the program is being compared.

Bridge-Balance Detector

Voltages from the reference signal supply one arm of the bridge shown in Fig. 1 and those of the compared signal feed another arm. The output of these arms is applied to the tubes of a differential detector. Detector output (zero if both voltages are so nearly alike as to produce no appreciable unbalance) operates a relay that actuates a buzzer or bell. Thus, a warning is given when the compared signal suffers a predetermined amount of deterioration, owing to any of the factors mentioned.

The whole volume range of reference or compared signal is not needed to detect defects. Signals in the larger volume levels give indications of overload and defects in frequency response and transmission equivalent. The low-volume levels disclose the faults mentioned but show noise rather than overload distortion. Intermediate volume levels are not required, for they convey no information not given by the others.

The requirement for an amplifier with two different gains inspired the development of the volume-folding-and-limiting amplifier (VFLA). This apparatus receives voltages resulting from the whole range of volume levels. For a fault just serious enough to mar reception by the average listener it must have the same output whether the indications are conveyed by the high-volume of low-volume portions of the signal. Overall response of the VFLA must approximate that of the ear of the average listener. It must be able to gloss over faults (such as brief overloads) that would not distress the listener, but it must be infallible in calling attention to defects that annoy him.

The term "volume" applies here

Broadcasting in the United Kingdom is different in several respects from that to which engineers in the United States and Canada are accustomed. Among others, the American engineer is accustomed to feeding an audio program at a certain maximum level into a telephone line and having it come out at the other end, often many hundreds of miles away, with predetermined level and characteristics. The problems of maintaining the standard of transmission have been paid for according to Telephone Company rates previously approved by the Federal Communications Commission.

In Great Britain, where the British Broadcasting Corporation operates all broadcasting on funds collected by the government from receiver owners, the Corporation must in many cases maintain long-line audio levels and quality. In addition, the BBC is allowed to operate remote, unattended transmitters in a manner not permitted in the States by the FCC.

Automatic monitoring equipment of the type used by the British and described here may find interesting applications in the fields of telemetering, microwave relay, and remote control of satellite f-m broadcast transmitters, in addition to the application for which the system was devised

to signal indicated by the peak program meter used at the BBC. This measures the rectified peak value of signal with a charge time-constant of 2.5 milliseconds and a discharge time-constant of 1 second.

The two different gains at which the VFLA operates are selected by the amplitude of the applied input signal. This is accomplished by diodes D_3 and D_4 (Fig. 1) in the negative-feedback path of the amplifier section of V_1 and V_2. The diodes are back-biased from the high-voltage supply so that, below a predetermined signal amplitude, they do not conduct.

When they are not conducting, the gain of the amplifier is approximately $1 + R_1/R_3$ where R_3 is the resultant cathode-to-ground resistance. When the applied input signal is large enough to cause the diodes to conduct, the gain of the amplifier is reduced to approximately $1 + (R_1R_2)/R_3(R_1 + R_2)$. The amplifier formed by V_1 and V_2 has approximately a linear input-output law at low-volume input and represents an amplifier of less gain above the volume at which the diodes operate.

The differential detector operates when a certain output-voltage difference between the two VFLA's is reached or exceeded. This value of voltage is to be attained for the same input volume difference, whether this occurs at low or high volumes. The critical value of voltage difference for operation is fixed by the volume at which noise should cause operation and that at which the diodes in the feedback path of the amplifier containing V_1 and V_2 switch to reduce gain.

This is seen more clearly by the following example:
Let the volume at −40 db give the 6-volt output necessary for the detector to operate. Let a 3-db difference (or an excess of this difference) between the reference program v_1 and the compared program v_2 be required to cause the detector to operate. The gain of the amplifier must be reduced at that critical volume above which a change of 3 db in input gives more than a 6-volt change in output.

$$20 \log v_2/v_1 = -3 \text{ db}$$
$$v_1 - v_2 = 6 \text{ v}$$
$$v_1 = 21 \text{ v (approximately)}$$

This output voltage corresponds to an input volume of about −29 db and this is the point at which diodes D_3 and D_4 operate.

The effective ratio between the gain of the amplifier with the diodes operated and that without the diodes operated will determine the higher volume at which a 3-db difference between v_1 and v_2 will again provide 6 volts in output. Above such a volume there must again be a reduction in gain, or this 3-db sensitivity will be exceeded. In the automatic monitor, this reduction is provided by rectifiers 1 and 2. These are back-biased so that they conduct at, and above, this second critical volume and place a shunt across the amplifier input containing V_1 and V_2.

Maximum Gain Reduction

A further and final reduction in gain occurs at the maximum input level to be experienced, or zero volume. At this level, diodes D_1 and D_2 conduct and almost short-circuit the input of the amplifier. This final limiting of the sensitivity of the monitor to the maximum value of signal that can be handled by the transmitter reduces its monitoring sensitivity to overload distortion at such volumes. This reduced sensitivity is compensated by an auxiliary device.

The amplitude input-output law of the VFLA unit has been described without regard to the frequency of the input signal. If the monitor is to correspond in its operation to the audibility of defects, it must be suitably graded in sensitivity with respect to frequency. The predistortion network determines the lowest volume with respect to frequency at which the VFLA gives sufficient rectified output to operate the differential detector. Its response is designed so that operation of the alarm corresponds approximately to aural sensitivity at noise volume.

The circuit to be monitored may contain about a hundred miles of cable. In such circumstances, the rectified outputs of VFLA units will not synchronize, and will provide momentary amplitude differences. The action of the differential detector is therefore delayed by C_2 of Fig. 1. Although programs are monitored at their source, so that compression of peaks at the transmitter is kept at a reasonable minimum, the frequency of compression on some types of program is relatively high. It is not desirable that the automatic monitor should give alarms on such defects unless they become abnormal. Silencing of the alarm by action of D_1 and D_2 brings an integrator into operation so that, if this kind of defect is too frequent or persistent, the alarm is sounded. The circuit used if a transmitter is included in the chain is shown in Fig. 2.

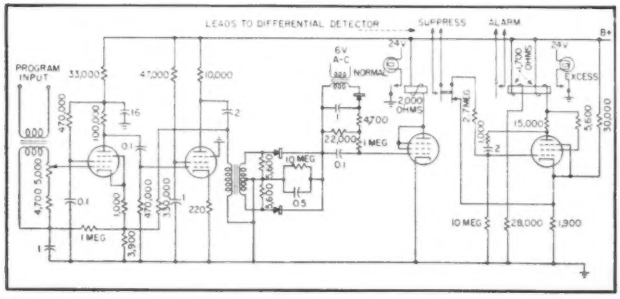

FIG. 2—Overmodulation-alarm suppressor prevents warning on occasional peaks but allows alarm to operate if they are frequent

Overmodulation-Alarm Suppressor

The program is amplified and rectified to provide opposing bias to a back-biased detector. At a critical volume of program, the current in the anode of the detector operates a relay, the contacts of which are interconnected with the alarm circuit in the differential detector unit. When this relay operates, the differential detector alarm is sup-

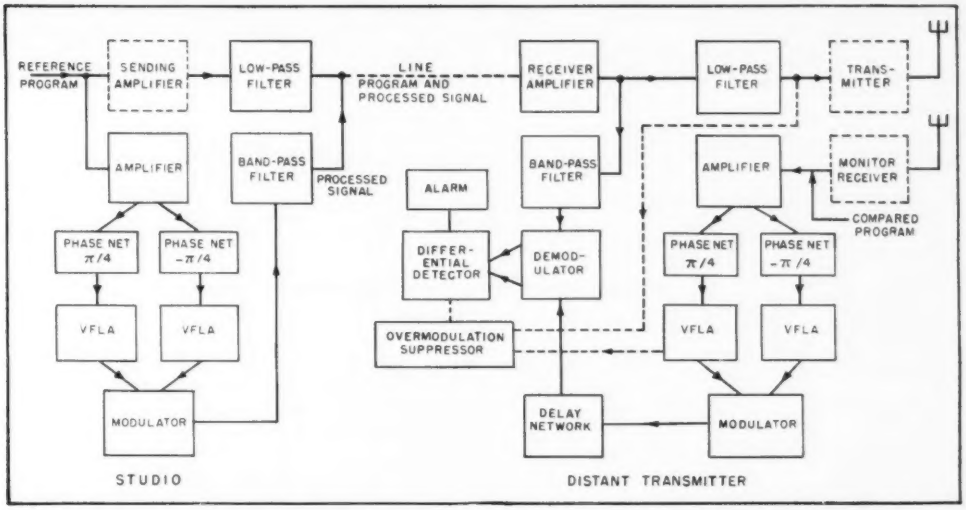

FIG. 3—Automatic monitor used to compare signals separated by long telephone lines. Essential information is encoded by modulator

pressed. A time delay in the relay operation in the differential detector circuit is provided for this purpose. If, however, this plate relay operates with undue frequency of persistency, the capacitor in the grid-plate circuit of the integrator (final stage of Fig. 2) has its standing charge sufficiently disturbed to operate its plate-circuit relay, giving an alarm. A supervisory lamp indicates the nature of the fault.

When a radio link returns the program to be compared, it is desirable to prevent static from operating the monitor alarm. A second receiver fed from the monitoring receiver antenna is tuned to a nearby wavelength on which there is normally no appreciable background signal. The audio output of the static receiver is connected to a circuit similar to that of the overmodulation-alarm suppressor. Incoming static will thus operate a relay and suppress the monitor alarm, but an integrator circuit is again included, so that persistent or unduly frequent suppression from any cause sounds the alarm.

Automatic Monitor Major

The major monitor has been designed to perform a function similar to that of the minor, but uses specially derived signals rather than regular program for its monitoring function. In practice, both program and a low-level reference signal are sent over the program line. The block diagram of a representative major monitor system is shown in Fig. 3. The program is sent out on the line through a low-pass filter and at the same time through a pair of phase networks into two VFLA units similar to those used in the minor monitor system.

The combined rectified outputs are fed into a modulator that converts the signal into an a-m carrier between 7 and 8 kc. Bandwidth of the resultant signal is about ±150 cycles. The processed signal is fed onto the program line through a band-pass filter at a level some 20 db below that of the program. At the transmitter end, the program as picked up on a monitor receiver is similarly processed, put through a delay network and compared with the incoming processed signal. Any marked discrepancies of quality cause the differential detector to operate the alarm.

To keep the reference signal stable and avoid the effects of transmission-equivalent drift a special form of automatic gain control with a long time constant is employed. This agc provided by the reference signal keeps the balance constantly adjusted. It is made to operate only at low volume and so does not mask defects that need correction.

Another problem of some magnitude is that if the program signal contains two frequencies such that $f_2 \pm nf_1$, a low-frequency amplitude modulation may be produced in the reference signal. This is counteracted by making the processed signal the sum of two signals with a phase shift between them of $\pi/2$. It is for this reason that pairs of VFLA's are used in major monitor systems for dealing with both reference and compared signals.

Acknowledgements

In preparing this article the writer has made use of some of the information and diagrams in a paper entitled "The Automatic Monitoring of Broadcast Programmes" by H. B. Rantzen, F. A. Peachey and C. Gunn-Russell, which is to be published as Paper No. 1045R in the Proceedings of the Institution of Electrical Engineers, Part III, proofs having been made available to the public in August, 1950.

Thanks are extended to Ralph W. Hallows of Berkhamsted, Herts, England, for pointing out the salient features of this new technique and its associated equipment and circuits.—A. A. McK.

Universal Direct-Coupled

By LEONARD GOLDBERG
Reeves Instrument Corp.
New York, N. Y.

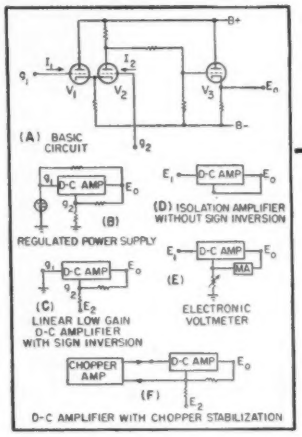
(A) BASIC CIRCUIT
(B) REGULATED POWER SUPPLY
(C) LINEAR LOW GAIN D-C AMPLIFIER WITH SIGN INVERSION
(D) ISOLATION AMPLIFIER WITHOUT SIGN INVERSION
(E) ELECTRONIC VOLTMETER
(F) D-C AMPLIFIER WITH CHOPPER STABILIZATION
D-C AMP
CHOPPER AMP
MA

FIG. 1—Basic amplifier and examples of present uses


SOURCE IMPEDANCE
OPEN-LOOP OUTPUT IMPEDANCE
D-C AMP
Z_i = INPUT Z, CLOSED LOOP, LOOKING INTO AMP AT g_1
Z_o = OUTPUT Z, CLOSED LOOP, LOOKING BACK INTO AMP AT E_o
DRIFT REFERRED TO
CLOSED LOOP

FIG. 2—Equivalent circuit of isolation amplifier without sign inversion

DIRECT-COUPLED negative-feedback amplifiers are commonly used in analog computers and elsewhere to obtain a constant closed-loop gain and a low output impedance. One of the more basic characteristics of this type of circuit is the fact that the gain is negative. Whereas the necessity to accept this sign inversion is frequently undesirable, it heretofore has been considered an inevitable feature of feedback circuitry.

This paper presents a universal amplifier that may, with or without sign inversion, attain a constant closed-loop gain and low output impedance. Some of the mathematical operations made possible through the use of this circuit are listed and described. Circuit properties are derived, and test data is given for an actual circuit.

Basic Amplifier

The circuit herein described consists of a basic direct-coupled amplifier with two input terminals and one output terminal, as illustrated in Fig. 1. The manner in which the input and overall loop feedback are connected determines the function the amplifier is to perform. This type of circuit is currently employed to perform a limited number of its potential functions, as illustrated by the block diagrams in Fig. 1. This paper extends the use of this valuable basic circuit to include several new applications.

As used in this paper, the definition and requisites of a basic amplifier are that it be direct coupled and use a differential first stage with both grids thereof accessible. The gain to the output is positive from input grid g_1 and negative from input grid g_2. The output voltage is sensitive only to the difference between the two inputs and not to their absolute level relative to ground. The circuit will be analyzed for three different operating conditions, wherein the closed-loop gain is $+1$, greater than $+1$ and less than $+1$.

Closed-Loop Gain = +1

To attain a gain of one so that $E_o = E_1$, simply connect the grid of V_2 directly to the output, as in Fig. 2. No additional resistors are required. To calculate the closed-loop gain G without external load, assume that load resistance R_L is ∞ and that grid current I_1 is 0, so that $E_{g1} = E_1$ and $E_{g2} = E_o$. The basic circuit equation is $(E_{g1} - E_{g2})$ $A = E_o$, where A is the open-loop gain of the basic amplifier. For unity gain, this becomes $(E_1 - E_o)$ $A = E_o$. The closed-loop gain is then $G = E_o/E_1 = A/(A + 1)$. If A is made sufficiently large, this figure closely approximates 1.

To calculate output impedance Z_o, assume only that $I_1 = 0$, so that $E_1 = E_{g1}$. Then $(E_1 - E_o)$ $A = E_o$, and $E_o = E_o R_L/(R_L + Z_o)$. This gives the exact expression

$$\frac{E_o}{E_1} = \frac{R_L}{(Z_o/A) + \frac{R_L(A+1)}{A}} \qquad (1)$$

If A is made sufficiently large, the term $[(A + 1)/A]$ approximates 1 and the equation becomes

$$\frac{E_o}{E_1} = \frac{R_L}{\frac{Z_o}{A} + R_L} = \frac{R_L}{Z_o + R_L} \qquad (2)$$

This shows that the closed-loop output impedance is equal to the open-loop output impedance divided by the open-loop gain of the amplifier, or $Z_o = Z_o/A$. This value is very low, which is characteristic of negative-feedback amplifiers.

In the amplifier under consideration, Δ is the drift referred to the grid; in other words, with one input grid grounded, it is the voltage necessary at the other input grid to maintain $E_o = 0$, to accommodate for drift due to such factors as power supply variations, temperature and aging. Δ_i is the drift referred to the input, or the voltage necessary at the input to a closed-loop circuit to maintain $E_o = 0$. Δ_o is the drift referred to the output, or the voltage variation at the output of a circuit, where the input is grounded.

Differential Amplifier

Analysis of basic circuit capable of providing constant closed-loop gain and low output impedance, with or without sign inversion, for applications requiring a high-gain differential amplifier. Mathematical uses in analog computers are summarized

Then $\Delta_o = G\,\Delta_i$. The designation d refers to a change; thus, I_{2d} means the change in I_2.

The total drift (zero shift) of the circuit of Fig. 2 (Δ_o and Δ_i) is equal to the sum of the drifts contributed by grid current in the first stage, and by Δ (where Δ is an independent variable not affected by external circuitry).

To calculate the drift due to Δ, observe that since the input signal is fed directly in g_1, to which point Δ is referred, Δ_i of necessity is equal to Δ and $\Delta_o = \Delta_i = \Delta$.

To calculate the drift due to grid current, observe that: (a) I_2 will cause no zero shift, as g_2 is connected to E_o which is a source of low impedance; (b) I_1 will cause a constant zero shift of amplitude I_1R_o, which effect may be completely nullified by the setting of a manual zero adjustment within the amplifier; (c) I_{2d} will cause no zero shift for the same reason as in (a); (d) I_{1d} will cause a zero shift referred to the input equal to $I_{1d}R_o$, hence it is desirable that the source impedance be kept to a minimum; (e) should the source impedance vary by an amount R_{sd}, it will cause a zero shift equal to I_1R_{sd}. It is therefore desirable that the grid current in the first stage be kept to a minimum.

The total drift of the amplifier from all causes is $\Delta_o = \Delta_i = \Delta + I_1R_{sd} + I_{1d}R_o$, which for most actual circuits is approximately Δ.

Since the input is fed onto a grid whose only ground return is through the source itself, the input impedance Z_i is infinite, excepting the effects of grid current which may in most cases be considered negligible.

An infinite input impedance is of particular advantage where the source impedance is variable, for the gain is completely independent of the value of the source impedance and therefore of any change in source impedance.

Summarizing these results, the characteristics of the circuit of Fig. 2 are: (a) Function is that of an isolation amplifier, where accuracy and output impedance requirements will not allow for the use of a cathode follower; (b) gain $G = A/(A+1)$; (c) output impedance $Z_o = Z_o/A$; (d) drift $\Delta_o = \Delta_i = \Delta + I_1R_{sd} + I_{1d}R_o$; input impedance $Z_i = \infty$.

Closed-Loop Gain $> +1$

To attain a gain greater than one, two precision resistors are required, connected as in Fig. 3A. The exact expression for gain in this case is

$$\frac{E_o}{E_i} = \frac{R_3 + R_4}{R_4 + \dfrac{R_3 + R_4}{A}} \qquad (3)$$

If A is made sufficiently large,

$$\frac{E_o}{E_i} \cong \frac{R_3 + R_4}{R_4} \qquad (4)$$

Observe that the amplifier will always adjust itself such that $E_{g1} \cong E_{g2}$. Utilizing this information as a tool for calculation, Eq. 4 and many other circuit properties may be less rigorously calculated with greater ease.

To calculate Z_o, which is dependent upon open-loop gain, a more rigorous approach is needed. Figure 3B represents the equivalent circuit when closed-loop gain G without external load is greater than 1, where R_L is the total load from E_o to ground. Here the exact expression for gain is

$$\frac{E_o}{E_i} = \frac{G\,R_L}{(Z_o\,G/A) + R_L\,(A+G)/A} \qquad (5)$$

If A is made sufficiently large, the



FIG. 3—Circuit connections and equivalent circuit giving gain greater than one



FIG. 4—Amplifier connections giving gain less than one, with attenuation at output and with attenuation at input



FIG. 5—Circuit action for integration of instantaneous, pulse and step functions

equation becomes

$$\frac{E_o}{E_1} \cong \frac{G\,R_L}{(Z_o\,G/A) + R_L} = \frac{G\,R_L}{Z_o + R_L} \quad (6)$$

from which it is determined that the closed-loop output impedance is equal to the open-loop output impedance divided by the ratio of open to closed loop gain, or $Z_c = Z_o G/A$. For $G = 1$, this value is identical to that previously derived.

To calculate Δ_i (drift referred to the input), the same reasoning may be applied as for the case where $G = 1$, with almost identical results, the only difference being in the case of grid current in V_2. As before, any steady grid current I_g may be counteracted by the manual zero adjustment, whereas the zero shift due to I_{g4} is simply I_{g4} times the parallel impedance offered by R_3 and R_4. Because R_3 and R_4 must be precision resistors to maintain constant gain, it may be safely assumed that no zero shift is to be expected from their change. However, in the event of any change, the zero shift is $I_g\ [R_3R_4/(R_3 + R_4)]_d$.

The total drift of the amplifier from all causes is

$$\Delta_i = \Delta + I_{1d}R_s + I_1R_{sd} + I_{g4}\left(\frac{R_3R_4}{R_3+R_4}\right) + I_2\left(\frac{R_3R_4}{R_3+R_4}\right)_d \quad (7)$$

Then $\Delta_o = G\Delta_i$, which for most actual circuits is approximately $\Delta_i = \Delta$.

Closed-Loop Gain $< +1$

Two methods of attaining a gain of less than one are illustrated in Fig. 4. Because of its low drift factor, the circuit of Fig. 4A is recommended for all cases where R_L is constant, since any change in R_L alters the output voltage accordingly; here $E_o = E_iR_b/(R_L + R_b)$. The circuit of Fig. 4B is recommended for use with a variable load.

For the same overall gain G, the circuit of Fig. 4A yields better performance in terms of drift and input impedance, whereas the circuit of Fig. 4B is better in terms of output impedance. The applicable circuit must therefore be chosen to fit individual requirements.

Some of the operations made possible through the use of this type of amplifier are listed in Table I, along with pertinent equations. A wider variety of functions may be had by using more complex external circuitry. The book "Electronic Time Measurements", Radiation Laboratory Series, p 292–293, contains an unusually long list of functions made available through use of the conventional inverse gain amplifier. The universal amplifier may be used to yield all of these functions by grounding input grid g_1, plus at least an equal number of functions by ungrounding g_1 and feeding an input signal thereto.

Mathematical Operations

Table I, example 1 is the conventional feedback circuit as illustrated in Fig. 1C. It yields any desired inverse gain.

Examples 2, 3, 4 and 5, all previously described, yield any desired gain without sign inversion.

Example 6 is the general case of subtraction of two variables, each with its own constant of multiplica-

Table I—Partial List of Mathematical Operations Made Available Through Use of Universal Amplifier

MATHEMATICAL FUNCTION AND CIRCUIT EQUATION	CIRCUIT
(1) MULTIPLICATION BY A NEGATIVE CONSTANT $E_0 = -GE_2$	
(2) MULTIPLICATION BY A POSITIVE CONSTANT LESS THAN ONE $E_0 = GE_1$	
(3) MULTIPLICATION BY A POSITIVE CONSTANT LESS THAN ONE $E_0 = GE_1$	
(4) MULTIPLICATION BY ONE $E_0 = E_1$	
(5) MULTIPLICATION BY A POSITIVE CONSTANT GREATER THAN ONE $E_0 = GE_1$	
(6) MULTIPLICATION OF TWO VARIABLES, ONE BY A POSITIVE CONSTANT AND ONE BY A NEGATIVE CONSTANT $E_0 = G_1E_1 - G_2E_2$	

MATHEMATICAL FUNCTION AND CIRCUIT EQUATION	CIRCUIT
(7) SPECIAL CASE OF EXAMPLE 6 $E_0 = (G+1)E_1 - GE_2$	
(8) SIMPLE SUBTRACTION $E_0 = E_1 - E_2$	
(9) MULTIPLICATION OF n VARIABLES, EACH BY A POSITIVE OR NEGATIVE CONSTANT $E_0 = (G_1E_1 + G_2E_2 + \dots G_nE_n) - (G_\alpha E_\alpha + G_\beta E_\beta + \dots G_\delta E_\delta)$	
(10) INTEGRATION $E_0 = E_i + \frac{1}{RC}\int_{t=0}^{t} [E_1(t) - E_2(t)]\,dt$	
(11) DIFFERENTIATION $E_0 = E_i + RC\frac{d}{dt}[E_1(t) - E_2(t)]$	

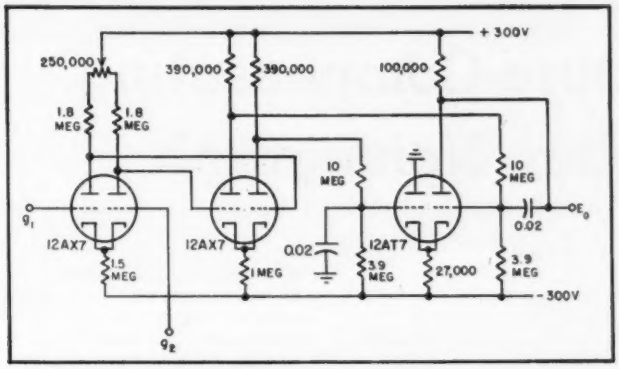

FIG. 6—Universal direct-coupled negative-feedback differential amplifier circuit used to verify the mathematical analysis



FIG. 7—Curves showing zero shift at various input levels for three combinations of tubes

tion. The equation is valid only when G_1 is less than $(G_2 + 1)$. When it is desired that $G_1 = (G_2 + 1)$, the input-shunting resistor becomes infinite, and the circuit is transformed into the special case illustrated as example 7.

In order to make G_1 greater than $(G_2 + 1)$, the inputs must be reversed and resistors adjusted accordingly. The sign of the output will then be inverted.

Example 8, for simple subtraction, is merely a special case of example 6 where $G_1 = G_2 = 1$.

Example 9 is the most general example of subtraction, wherein any number of inputs may be multiplied, each by its own constant, and mutually added and subtracted. The same limitation for gain is valid for this circuit as for example 6.

Example 10 yields either positive or negative integration, or, using two inputs as shown, integration as a function of the difference between two variables. Grounding input E_1, a conventional negative-going integrator is obtained, with both E_1 terms dropping out of the equation.

Grounding input E_2, the E_2 term drops out and the circuit equation is no longer a case of simple integration. Circuit action under this condition is shown in Fig. 5. Note that as an integrator, the output remains constant at whatever voltage it happens to be whenever the input is zero.

Example 11 yields either positive or negative differentiation, or using two inputs as shown, differentiation as a function of the difference between two variables. If input E_1 is grounded, both E_1 terms drop out of the equation. Similarly, with E_2 grounded the E_2 term drops out.

Test Results

Figure 6 shows the circuit of an amplifier which was constructed and thoroughly tested, and which gave results according to theory. Open-loop gain $A = 10{,}000$; $I_1 = I_2 = 10^{-10}$ amp; $I_{c1} = I_{c2} = 10^{-11}$ amp; $Z_o = 12{,}000$ ohms; Δ as a function of variation of the +300-v supply $= \pm 0.4$ mv per v; Δ as a function of variation of the −300-v supply $= \pm 0.35$ mv per v; Δ as a function of variation of the filament supply $= \pm 5$ mv per v; Δ as a function of variation in ambient temperature $= \pm 0.1$ mv per deg C.

The zero shift as a function of the level of the input signal (common mode effect), when connected for $G = 1$, is shown in Fig. 7. Observe that the amplifier operates over an input range of from −50 to +50 volts. Curve A shows the theoretical input-output curve when $A = 10{,}000$ and tubes V_1 and V_2 have identical characteristics. Curve B shows the actual results of the amplifier using a random 12AX7 in the first stage, while curve C shows the corresponding results using the same tube in reverse position. The deviation of curves B and C from curve A is caused by tubes V_1 and V_2 not having identical characteristics throughout the operating range of the first stage.

Note, however, that the amplitude of the zero shift for input signals of ±30 volts is only 2, 10, 17, or 25 millivolts in Fig. 7; this is at worst an error of less than 0.1 percent.

The primary purpose of presenting a particular circuit with test results is to make clear the fact that no trick circuitry is required, and that it is a simple matter to construct a reliable, low-drift amplifier.

Conclusion

In essence, the new circuit design lies in the use of a differential first stage wherein both grids are employed to receive input signals, rather than grounding one grid as is conventional in inverse gain circuitry. Since it is a basic open-loop amplifier, the circuit is capable of great versatility, and may be operated to perform any one of a multitude of functions by the proper choice of external circuitry. Some of the functions available are addition, subtraction, multiplication by a positive or negative constant, positive or negative integration or differentiation, and when connected open-loop, a high-gain differential amplifier.

Bibliography

"Vacuum Tube Amplifiers," Edited by G. E. Valley, Jr. and Henry Wallman, Vol. 18, MIT Radiation Laboratory Series, p 484, Fig. 11.63 on p 480.

Edwin A. Goldberg, Stabilization of Wide-Band D-C Amplifiers for Zero and Gain, *The RCA Review*, June 1950.

Temperature-Compensating Capacitor Nomograph

By THOMAS T. BROWN

Aircraft Transmitter Department
Marconi's Wireless Telegraph Co.
Writtle, Essex, England

Gives directly with one setting of a celluloid triangle the capacitance values required when two temperature-compensating capacitors are paralleled. Solves problem of compensating a tuned circuit when a single capacitor having the required temperature coefficient is not available

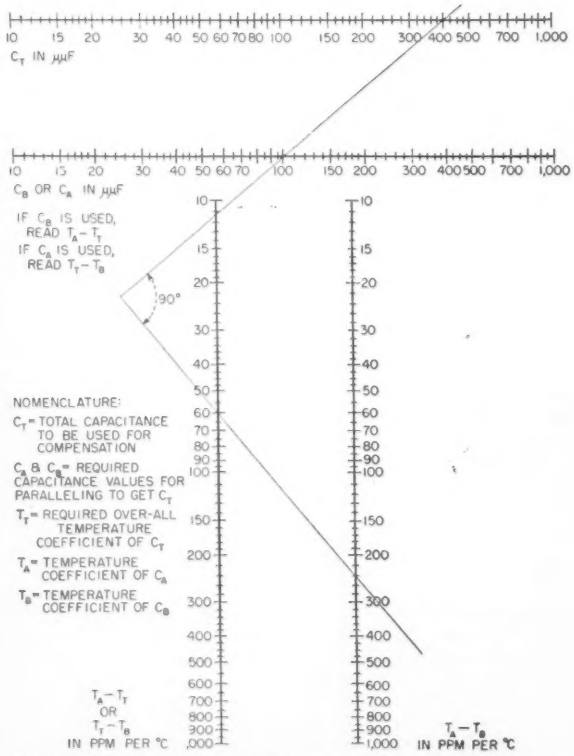
10 15 20 30 40 50 60 70 80 100 150 200 300 400 500 700 1,000
C_T IN $\mu\mu$F
10 15 20 30 40 50 60 70 100 150 200 300 400 500 700 1,000
C_B OR C_A IN $\mu\mu$F
IF C_B IS USED, READ $T_A - T_T$
IF C_A IS USED, READ $T_T - T_B$
90°
NOMENCLATURE:
C_T = TOTAL CAPACITANCE TO BE USED FOR COMPENSATION
C_B & C_A = REQUIRED CAPACITANCE VALUES FOR PARALLELING TO GET C_T
T_T = REQUIRED OVER-ALL TEMPERATURE COEFFICIENT OF C_T
T_A = TEMPERATURE COEFFICIENT OF C_A
T_B = TEMPERATURE COEFFICIENT OF C_B
$T_A - T_T$ OR $T_T - T_B$ IN PPM PER °C
$T_A - T_B$ IN PPM PER °C

Set-square nomograph, used with right-angle sides of any celluloid triangle

ONE of the most common ways of compensating for the effect of temperature coefficients of coils or capacitors on the frequency of a tuned circuit is by the use of ceramic capacitors of large negative coefficient in parallel with the normal mica or air-spaced capacitor. The values of these components are usually estimated by proportion and trial and error to get an overall temperature coefficient of zero. The accompanying chart gives these values directly.

To use the chart, set a triangle or set square to join two known values on two parallel scales. Then move the triangle back or forward along the line of intersection until its right-angle edge cuts the third value on the other scale. The unknown value is then read off where this edge cuts the remaining scale; i.e., each side intersects two values. A setting of three values on one edge is not valid.

The algebraic sign of an unknown value obtained from a vertical scale will be the same as that of the known value on the other vertical scale.

The range of the chart can be readily extended by multiplying the scales by factors of ten in any of the following four ways: all four scales, two parallel scales, top horizontal and right vertical or lower horizontal and left vertical pairs of scales.

Example 1

A fixed-frequency oscillator is tuned by a 400-$\mu\mu$f capacitor to 2 mc. The coil has a temperature coefficient of +40 parts per million per degree C, and it is required to compensate this to zero drift. Capacitors rated at

(Continued on page 134)

MANY ELECTRONIC COMPONENT "FIRSTS" ARE THE PRODUCT OF **CINCH** ENGINEERING AND MANY ELECTRONIC ENGINEERS MAKE **CINCH** COMPONENTS FIRST CHOICE—

CINCH facilities and engineering experience and ability assure the satisfactory fulfillment of any assignment for an electronic component.

The terminal strip designed by CINCH in the early days of sound transmission, then a "first", is today a standard electronic component.

CINCH invites you to submit your specific need, or problem, for immediate consideration and recommendation. Consult CINCH.



Cinch ELECTRONIC COMPONENTS

Consult CINCH

CINCH MANUFACTURING CORPORATION
1026 South Homan Ave., Chicago 24, Illinois
Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

Available at leading electronic jobbers— everywhere.

Temperature-Compensating Capacitor Nomograph (continued from page 132)

+20 ppm and −220 ppm are available. What are the values required?

Solution. $C_T = C_A + C_B$. $T_T = -40$ ppm, $T_A = +20$, $T_B = -220$ and $C_T = 400$, so that $T_A - T_T = +60$ and $T_A - T_B = +240$.

With one of the right-angled sides of a set-square or triangle on the nomograph, join the point 60 on the $T_A - T_T$ scale with 240 on the $T_A - T_B$. Now advance the perpendicular edge of the set-square until it cuts the C_T scale at 400 $\mu\mu$f, still keeping the other two points intersected, and read the required value of C_B as 100 $\mu\mu$f at the intersection on the C_B scale. The required values are thus a 100-$\mu\mu$f capacitor with −220 ppm temperature coefficient and a 400 − 100 = 300 $\mu\mu$f capacitor with +20 ppm coefficient, connected in parallel.

Example 2

In a particular wave analyzer, the low-frequency waveform is heterodyned by an oscillator working between 500 and 550 kc, and the harmonic components of the modulated wave are separated by a crystal filter. It is desirable to have this oscillator free from frequency variation due to changes in ambient temperature. The tuning capacitor to be used has a range of 50 to 300 $\mu\mu$f with the low-temperature coefficient of +20 ppm. The coil is wound on a ceramic form and has a coefficient of +80 ppm.

Since only a 10-percent frequency sweep is required, it will be necessary to pad out the capacitor to reduce the capacitance sweep to 20 percent; at the same time this capacitor can be used to provide temperature compensation. A 950-$\mu\mu$f unit in parallel with the variable capacitor gives a sweep of 1,000 to 1,250 $\mu\mu$f providing slight overlap at the ends of the scale. Exact temperature compensation is to be provided at the center of the band, which is 1,125 $\mu\mu$f.

Solution. Let $C_T = 1{,}125$ $\mu\mu$f, $C_A = 950$ $\mu\mu$f, $C_B = 175$ $\mu\mu$f, and $T_B = +20$.

The overall coefficient of the capacitor combination to compensate for the +80 ppm of the coil will be given by $T_T = -80$, and therefore $T_A - T_B = -100$.

Multiplying scales C_T and C_A by a factor of 10, with 112.5 $\mu\mu$f on the C_T scale joined to 95 $\mu\mu$f on the C_A scale by one edge of a right-angle triangle, the other edge is advanced to intersect 100 on the $T_T - T_B$ scale, whence $T_A - T_B$ is read as 118. (Note that since the scales are logarithmic, the signs of the products of the right and left hand scales will be the same; thus $T_A - T_B = -118$ since $T_T - T_B = -100$. Should the corner of the triangle fall between the scales, as happens in this case, the perpendicular edge can be extended by bringing a rule or another triangle up to it. Scales C_A and $T_T - T_B$, and scales C_B and $T_A - T_T$ may only be used together, otherwise incorrect results will be obtained.)

Now $T_A - T_B = -118$, so that $T_A = -98$ ppm, which is the required coefficient for the 950-$\mu\mu$f capacitor.

It is interesting to check the total drift at the two ends of the band. When $C_T = 1{,}250$ $\mu\mu$f, $C_A = 950$ $\mu\mu$f and $T_A - T_B = -118$ and from the nomograph $T_T - T_B = -90$ and $T_T = -70$ ppm.

When $C_T = 1{,}000$, $C_A = 950$ $\mu\mu$f, $T_A - T_B = -118$ and from the chart $T_T - T_B = -114$ and $T_T = -94$ ppm.

Therefore, adding these values to the +80 ppm of the coil, it is seen that the drift varies over the band from −14 to +10 ppm, being zero at the center frequency. Frequency drift would be half these figures.

A 950-$\mu\mu$f capacitor with a negative coefficient of 98 ppm is not readily available, so this again will have to be another parallel combination of two capacitors. Since a silvered mica capacitor is generally a more stable component than a ceramic capacitor, it will be better to use a large mica capacitor with a low positive coefficient and a small ceramic with as large a negative coefficient as is available. Assume this to be −680 ppm, and that of the silvered mica to be +20 ppm. Then $T_A - T_B = 700$ and $T_A - T_T = 118$, and from the nomograph $C_B = 100$ $\mu\mu$f (ceramic) and $C_A = 950 - 160 = 790$ $\mu\mu$f (mica).

Appendix

Considering the incremental change in capacitance of two capacitors in parallel having different temperature coefficients, the following relationship holds: $C_A = nC_B = [n/(n+1)]\,C_T$, where $n = (T_B - T_T)/(T_T - T_A)$. By taking logs and putting $x = \log C_T$, $y = \log (T_A - T_B)$ and $z = \log C_B$, four simultaneous equations of the form $Ax + By + Cz + D = 0$ are obtained, which in determinant form are

$$\begin{vmatrix} 1 & 0 & 0 & -\log C_T \\ 0 & 1 & 0 & -\log (T_A - T_T) \\ 0 & 0 & 1 & -\log C_B \\ 1 & 1 & -1 & -\log (T_A - T_B) \end{vmatrix}$$

These can be converted into

$$\begin{vmatrix} \log (T_A - T_B) & 1 & 1 & 1 \\ \log (T_A - T_T) & 0 & 1 & 1 \\ \log C_T & 1 & 0 & 1 \\ \log C_B & 0 & 0 & 1 \end{vmatrix}$$

and are now in standard determinant form

$$\begin{vmatrix} f(a) & g(a) & 1 & 1 \\ f(b) & g(b) & 1 & 1 \\ f(c) & g(c) & 0 & 1 \\ f(d) & g(d) & 0 & 1 \end{vmatrix}$$

satisfying the conditions of colinearity of the coordinates of any four variables a, b, c and d to permit the construction of a set-square nomograph. The second determinant can thus be interpreted as two vertical pairs of logarithmic scales spaced unit distance apart, in the x, y and jx, jy planes respectively.

Service Beyond The Sale!

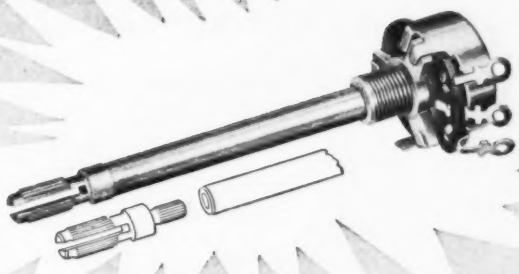

MALLORY MIDGETROL DUAL

1. Combines two quiet, compact controls on concentric shafts.
2. Insulated for the higher voltages encountered in television.
3. Special low-drift resistance element meets temperature-humidity drift problem.
4. Only dual control with two-point shaft suspension, which means—shorter bushing may be used, more stable resistance values are obtained, less danger of damage in assembly, longer life, longer shafts may be safely specified.
5. Available now for prompt delivery, competitively priced.

Add Adaptability To The Pace-Setting Features Of The

Mallory Midgetrol*

Once again Mallory engineering gives you extra service . . . this time, by providing the Mallory Midgetrol with outstanding new versatility in its applications.

Smooth tapers, quiet operation, accurate resistance values are now enhanced by the incorporation of a tubular, universal shaft. It can be made to conform quickly and inexpensively to your standard knobs, in any specified shaft length. As a result, your emergency orders . . . for production fill-in or for replenishing service stock . . . can be handled in a minimum of time and at low cost. Available in resistance values from 1,000 ohms to ten megohms, for loads up to ½ watt, the Mallory Midgetrol is more than ever before the carbon control that satisfies your specific needs, quickly and at low cost.

That's service beyond the sale!

Mallory's electronic know-how is at your disposal. What Mallory has done for others can be done for you! *Trade Mark

Precision Electronic Parts—Switches, Controls, Resistors

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Electromechanical Products
Resistors *Switches*
TV Tuners *Vibrators*

Electrochemical Products
Capacitors *Rectifiers*
Mercury Dry Batteries

Metallurgical Products
Contacts *Special Metals*
Welding Materials

TUBES AT WORK

Including INDUSTRIAL CONTROL

Edited by RONALD K. JURGEN

A-C Null Indicator 136
Synchronized Pulse Generator 164
X-Ray Liquid-Level Gage 172
Gated-Beam Mixer 196
Nylon Tubing for Thermistors 212
Application of Tubes in Heating Equipment 216
Electronics Aids Sugar-Beet Growth 240

A-C Null Indicator

BY JOSEPH C. FROMMER

Electronic Consultant
Cincinnati, Ohio

Earphone null indicators provide an audible signal from low power but tie the operator to the apparatus. Speakers are more convenient in use but neither speakers nor earphones indicate phase or direction of the unbalance and the presence of uncancellable harmonics often makes it difficult to locate the exact null with the minimum of sound.

The advantages of observing the output of a-c-bridges on a cathode-ray tube were recognized early. To obtain information on the phase and the direction of the unbalance, the deflecting signal has to be synchronized with the bridge input. Figure 1 shows a block diagram of synchronized deflection. If the bridge input voltage is applied unchanged as a deflecting signal, without being altered by the deflection circuit, the pattern on the crt screen assumes the shape of an ellipse.



FIG. 1—Block diagram of setup used to obtain synchronized deflection of crt

To get full advantage of synchronous deflection, the phase shift of the amplification of the signal to the horizontal plates has to be made equal to the phase shift of the signal to the vertical plates of the crt. With such an arrangement, the ellipse degenerates into a straight slanting line when the bridge output is in phase with the bridge input or when the bridge is properly balanced for phase and needs adjustment for ratio only. The principle axes of the ellipse are horizontal and vertical when the bridge output is 90-deg off phase, then the bridge is properly adjusted for ratio and needs readjustment only for phase.

Sketches *a*1 to *a*5 of Fig. 2 show

RADAR PICTURES CALIFORNIA HARBOR

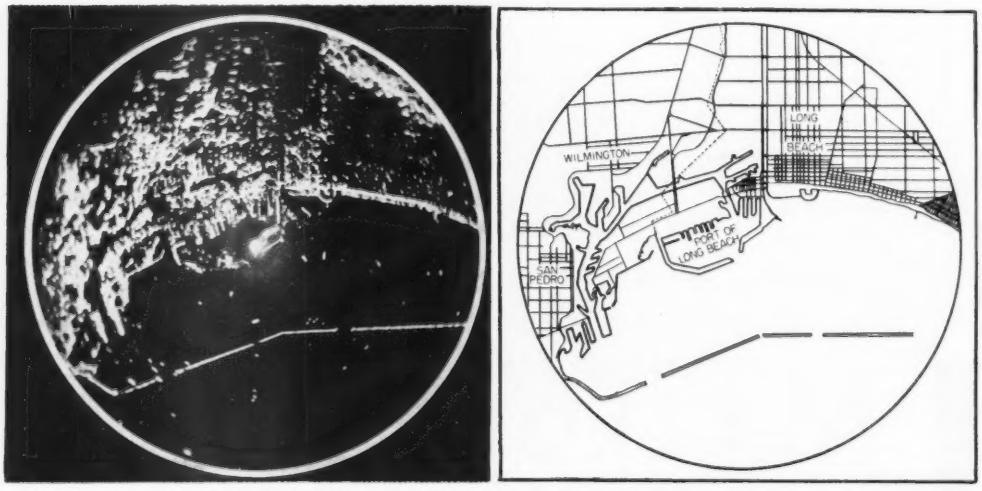

Radar presentation of Long Beach Harbor (left) as compared with map of harbor (right). Outlines of breakwater, shore line and the many ships in the water are visible. Sperry Mark II, Model O radar used operates in the 3-cm band with frequency range of 9,320 to 9,430 mc, pulse rate 1,000 per sec. 0.25 μsec in width. Antenna on 120-foot tower has 4-ft reflector with beam width of 2 deg

NEW KESTER "44"
RESIN CORE SOLDER

ESPECIALLY FOR TV . . . RADIO WORK . . . EVERYTHING ELECTRONIC

In speed of action for fast soldering, this product far surpasses anything in the Industry today. Unbelievably more active and mobile . . . absolutely non-corrosive and non-conductive.

For an actual demonstration in your plant, contact Kester's Technical Department.

KESTER SOLDER

Conforms with following specifications:
Federal QQ-S-571b
Army-Navy-Air Force Mil-S-6872 (AN-S-62)
U. S. Air Force No. 41065-B-Method 31

KESTER SOLDER COMPANY
4204 Wrightwood Ave., Chicago 39
Newark, N. J. • Brantford, Canada

THE FRONT COVER

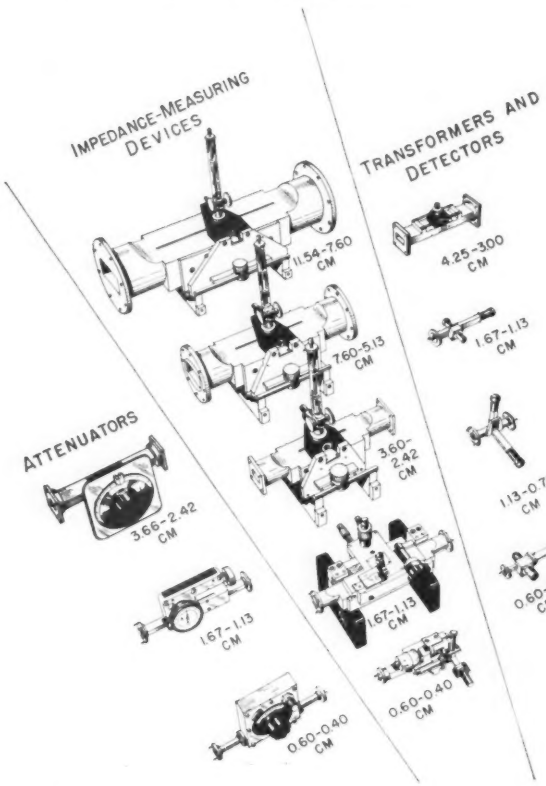

THE PRECISELY FABRICATED test-equipment items shown were developed and produced by the Polytechnic Research and Development Company, Brooklyn, N. Y., for use in the design and testing of the waveguide components of microwave radar and communications systems. The smallest units, operating in the so-called millimeter region of the electromagnetic spectrum, find additional use as components of microwave spectroscopes for the detection of molecular resonances.

The equipment pictured includes items in most of the commonly used waveguide sizes having major inner dimensions from approximately 3 inches for the largest to slightly over ½ inch for the smallest. Item identification and the operating ranges in wavelength are shown on the accompanying drawing.

the patterns obtained when the sine wave shown in sketch *a* is applied both to the bridge input and to the horizontal deflection. Sketch *a*, as well as sketches *b* and *c*, is drawn with a vertical time axis; the various bridge outputs are shown on sketches 1 to 5 with horizontal time axes. The patterns in the body of the figure are obtained by horizontal projection of points of the bridge output curve and vertical projection of the points of the deflecting signal curve pertaining to the same instant.

Sketch *a*1 shows the pattern obtained when the bridge is substantially off balance both for ratio and phase; *a*2 shows the pattern after balance of ratio is obtained without balance of phase; *a*3 shows the balance of phase without the balance of ratio; *a*4 shows a position very close to balance and *a*5 shows perfect balance.

The ultimate zero does not show up as sharply as could be desired, because the slightly slanting line *a*4 is very little different from the perfectly horizontal line *a*5, and a slight movement of the crt with respect to the graduated screen in front of it may cause a corresponding error in zero reading.

To obtain an unmistakable sharp indication of zero, the patterns *a*1 to *a*5 may be "folded over" into those of *b*1 to *b*5 by inverting the polarity of one half of the deflecting signal *a* as shown in sketch *b*. Any slight unbalance as shown in *b*4 shows up clearly against perfect balance, *b*5. Patterns *b*1 to *b*4 however give no information on the polarity of the unbalance, in other words in which direction adjustment has to be made to approach balance. Such information speeds up the operation of the bridge, especially if it is desired to apply agc to the vertical amplifier or if it is impossible to balance the bridge perfectly and interpolation has to be made between the two nearest values.

To obtain information on the direction of the unbalance it is necessary to tell one leg of the pattern from the other. This can be

(Continued on p 156)



FIG. 2—Patterns obtained on cathode-ray tube. Explanation is given in text

SOLA

CONSTANT VOLTAGE

TRANSFORMERS

are used in the A.E.C.'s plant at

OAK RIDGE

APPLICATIONS UNLIMITED FOR THE SOLA CONSTANT VOLTAGE PRINCIPLE

REPRESENTATIVE TYPES — STANDARD AND CUSTOM

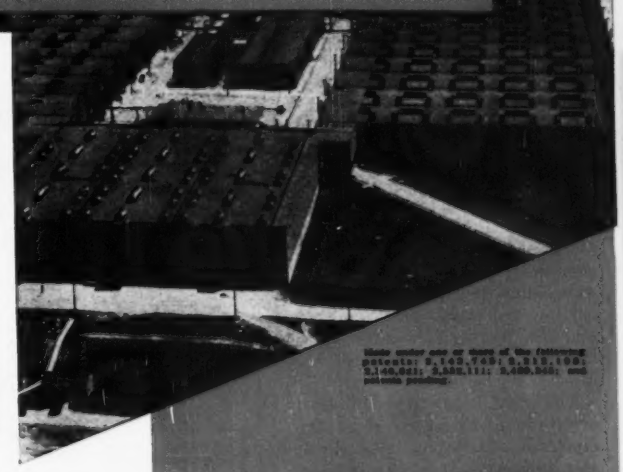

Many laboratory and production control instruments at Oak Ridge require closely regulated supply voltages for proper performance. Scores of SOLA Constant Voltage Transformers of various types have already been delivered to Oak Ridge. This application of SOLA regulators indicates their reliability and the degree to which they stabilize voltage under the most exacting requirements.

SOLA voltage regulating transformers, as a built-in or accessory unit, guarantee output ±1% with line voltage fluctuations as great as 30%. SOLA Constant Voltage Transformers are ideal for production lines and laboratories in defense plants in addition to use in military components since they: regulate automatically and instantaneously . . . contain no moving or expendible parts . . . require no manual adjustment or maintenance . . . and are self protecting against overload. Write to us for specific information regarding your requirements. Your inquiry will be promptly answered.

SOLA *Constant Voltage* **TRANSFORMERS**

SOLA DISCIPLINES VOLTAGE

Transformers for: Constant Voltage • Fluorescent Lighting • Cold Cathode Lighting • Airport Lighting • Series Lighting • Luminous Tube Signs Oil Burner Ignition • X-Ray • Power • Controls • Signal Systems • etc. • SOLA ELECTRIC CO., 4633 W. 16th Street, Chicago 50, Illinois

THE ELECTRON ART

Edited by JAMES D. FAHNESTOCK

Checking Calibration of Loop Antennas 140
R-F Standard Capacitors for Minute Increments 250
A New Damper Diode 262
Floating-Core Capacitor AFC System 270
Barium Titanate Accelerometer 274

Checking Calibration of Loop Antennas

BY P. C. GARDINER

General Engineering Laboratory
General Electric Company
Schenectady, N. Y.

FIELD-INTENSITY instruments, with loop antennas, are generally calibrated out in the open where field distortion is certain not to introduce error. A laboratory method of checking calibration, where loops are involved, developed in the General Engineering Laboratory of the General Electric Company has proved very satisfactory.

The usual laboratory calibration of field-intensity instruments using dipoles is satisfactory if the dipole signal output is simply replaced by a low-impedance signal generator output through a dummy impedance to obtain the gain of the instrument. The known dipole factor is then multiplied into this signal generator figure. The dipole is checked visually for change or damage. In the case of loops the loop-coupling transformer and associated circuits generally require an overall check of the calibration. Since an overall check including the loop normally involves a loop setup out in the open rather than in the confined copper-lined space of the laboratory, such a check is often omitted unless thought to be absolutely necessary.

The National Bureau of Standards uses the spaced-loop method to establish a standard free-space quasi-static magnetic field, Fig. 1, with a single turn transmitting loop of a 10-cm radius wherein the current is measured by means of a thermocouple. Loops are in parallel planes at right angles to axis through loop centers. This calibrating setup is made in a cleared space where a distance of at least three times the spacing between the loops exists to the nearest metal wall or large metal object.



FIG. 1—Spaced loop arrangement



FIG. 2—Close-coupled loop arrangement

The following expression is used to give field intensity at the receiving loop:

$$E = \frac{60\,\pi\,N_1\,r_1^2\,I_1}{(D^2 + r_1^2 + r_2^2)^{\frac{3}{2}}\sqrt{1 + \left(\frac{2\,\pi\,D}{\lambda}\right)^2}} \qquad (1)$$

where

E = equivalent free-space electric field, in microvolts per meter, (effectively at the receiving loop),
r_1 = radius of transmitting loop, in meters. To keep a uniform current in the transmitting loop make $r_1 < 0.02\lambda$,
r_2 = radius of receiving loop, in meters. If receiving loop is rectangular use equivalent radius of circle having same area,
D = spacing between loops, in meters,
I_1 = transmitting loop current, in microamperes.
N_1 = number of turns in transmitting loop, and
λ = wavelength, in meters.

FIG. 3—View of typical 12-inch diameter receiving loop showing temporary jig-mounted primary coil at approximate center

The expression under the radical is usually neglected below 10 megacycles and is less than 1.05 below approximately 15 megacycles. This formula gives approximately one-percent accuracy up to 30 megacycles.

The first term of the expression generally is not accurate for much closer spacing than 1 meter. On the other hand the distance D appears under the radical in such a way as to make it desirable to use D as small as possible for higher frequencies.

The mutual inductance between two such spaced loops may be calculated by formula 187 of Bureau of Standards Circular 74 and then used as described later in this article to calculate the effective field intensity at the receiving loop, as an alternative in place of the procedure with Eq. 1.

Close-Coupled Loop Method

Centering the primary loop within the receiving loop, with a jig mounting, provides a convenient

A Conductance Measuring Instrument

G meter

Type 192-A

MEASURES:

- **Conductance values of low loss dielectric materials.**
- **Q of small high quality capacitors.**
- **Capacitance of dielectric materials and capacitors.**
- **RF resistance of large value resistors.**
- **Dynamic impedance of resonant circuits.**

The G Meter, 192-A, may be used to obtain values of dielectric constant and power factor of test samples to the degree of refinement required in standard testing methods such as ASTM specification D-150-47T. Test samples with very small losses and capacitances may be accurately measured. The instrument is self-contained and requires no external generator or detector for its operation.

The G Meter, 192-A, employs a crystal controlled oscillator to supply a constant amplitude voltage to a high quality reference tuned circuit. A calibrated precision loss circuit and a differential VTVM are internally connected across the resonant circuit. External means are provided for connecting test samples across the same resonant circuit. By substituting internally connected values of calibrated loss and capacitance for the test sample, to secure a reference voltage, the conductance and capacitance of the sample may be determined. The differential VTVM provides very great sensitivity to changes from the reference voltage allowing very accurate settings of the conductance and capacitance dials.

SPECIFICATIONS

CONDUCTANCE RANGE: 0 to 35 micromhos—Direct reading in seven ranges.

CAPACITANCE RANGE: 0 to 100 micro-micro-farads—Direct reading. (Simple indirect method allows measurements to 1000 mmf.)

FREQUENCIES: 1 mc. and 30 mc. crystal controlled.

SENSITIVITY: 10% Deflection of Panel Meter results from conductance change of 0.003 micromhos at 1 mc. and 0.03 micromhos at 30 mc.

VOLTAGE ON TEST SAMPLE: 20 to 35 volts RMS.

LINE VOLTAGE: Internal regulation permits operation over range of 105-125 volts.

Write for further information

BOONTON RADIO Corporation
BOONTON, N.J. U.S.A.

arrangement with a signal generator that can be set up in the laboratory so rapidly and easily that loop-calibration-check may be used as a routine rather than as an exceptional elaborate measurement.

This procedure, of course, depends upon whether or not such close coupling of the primary constants can be kept from appreciably influencing the receiving loop circuit constants and further on whether or not close metal wall reflection can be avoided. A high primary circuit impedance is obtained with the use of considerable primary resistance and wall reflection is found to be negligible at two or more loop diameters.

Figure 2 represents the relative proximity of the two loops and emphasizes that with this arrangement it is not necessary to use a transmitter nor a thermocouple meter. In a radio laboratory one thing above all others that must be depended upon is the signal generator. A calibrated voltmeter may also be used across the signal-generator output terminals.

The primary (the signal generator loop) does not need to transfer appreciable proportion of its constants into the receiving loop. If the receiving loop is not shielded, special precautions must be taken to avoid capacitive effect, such as the balancing of both loops.

In the cases of primary concern here, namely where the receiving loop is shielded to eliminate antenna effect, both loops may be unbalanced with only the precaution that the primary loop should be of one turn and of approximately 6-inch diameter in the range 100 kc to 30 mc. Below approximately 100 kc the use of several turns in the primary loop does no harm.

It is well known in radio transformer design that a primary winding, placed concentrically and coaxially with the secondary, is not critical as to exactness of position. Such a primary loop may therefore be mounted with a jig for rapid placement into the center of the receiving loop for quick laboratory calibration. The jig mounting may be simple, consisting of two hooks for hanging and a stop-arm at the bottom for three-point support as shown in Fig. 3.

The basic relationship giving the effective field intensity delivered to the receiving loop by this primary loop is:

$$E = \frac{V}{H} = \frac{\omega M\, 10^{-6}\, I}{1.35\, A\, N\, f\, 10^{-11}}$$

$$= \frac{2\pi f M \left(\frac{e_g}{R}\right)}{1.35 \pi r_1^2\, N\, f\, 10^{-5}}$$

$$= 148{,}000\, \frac{M\, e_g}{r_1^2\, N\, R} \qquad (2)$$



FIG. 4—Actual performance of sample jig-mounted calibration loops shown as percent deviation from standard obtained with method of Fig. 1

$$= 23{,}600\, \frac{V}{r_1^2\, N\, f\, 10^{-6}}$$

where

- V = induced signal value in receiving loop in microvolts and may be measured directly thereby avoiding the use of M,
- H = effective height of receiving loop in meters,
- A = area of one turn of receiving loop winding in square inches,
- N = number of turns in receiving loop,
- f = frequency in cycles,
- M = mutual inductance between transmitting loop and receiving loop in microhenrys,
- R = resistance in series with primary loop, in ohms,
- I = current in transmitting loop in microamperes, and
- e_g = signal generator output in microvolts.

Compairing Eq. 1 and 2 it is evident that in Eq. 1 the only constant of the receiving loop that must be known is the effective radius, and that value may be very approximate where the loop spacing is substantially greater.

In Eq. 2 the number of receiving loop turns must be known and this is generally available. The mutual inductance between the two loops must be calculated or measured, but once this is obtained, the measurements thereafter are extremely simple.

The disadvantages with the spaced loop method are namely: (1) the open space set up for every calibration, (2) the accurate spacing between loops, (3) the requirement of a low radiation transmitter, (4) the careful use of a thermocouple meter, all add up to more than offset the original ascertain-

(Continued on p 244)

HEAT MEASUREMENTS ON LIMPING HOG AID MEDICAL RESEARCH

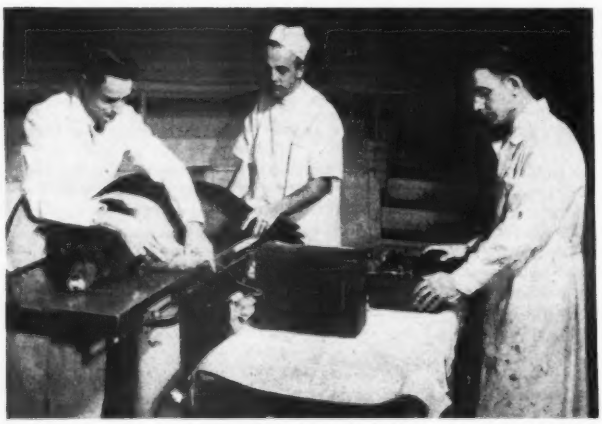

Seeking information on causes and cures for arthritis has led a group of Purdue University researchers to use electronic measuring equipment to determine the heat within the joints of an afflicted hog. Tests show similarity between symptoms displayed by humans and hogs

AN approved (3303-1)



R-B-M

ELECTRONIC AND COMMUNICATION RELAYS

Now Hermetically Sealed

AN approved (3304-1)

● Hundreds of thousands of R-B-M telephone type relays saw Government service in World War II. Now most of these relays are available in hermetically sealed enclosures designed to meet AN specifications.

R-B-M hermetically sealed telephone type relays are available in contact forms up to and including 4-pole, double throw, 3 ampere, 28 Volts D.C. construction. Also 10 ampere rating up to and including 2-pole double throw at 28 Volts D.C. All relays available with approved AN plug connector, or solder connections.

Engineers! What is YOUR hermetically sealed relay requirement? R-B-M is developing new and smaller relays to meet Armed Services requirements. Perhaps one of these will solve your problems. Write giving complete relay specifications, application, quantity and AN specifications applying. Address Dept. F-10.



R-B-M Production and Engineering facilities in two plants, located in different states, (over a quarter million square feet), can assist you in the development and production of special electro-magnetic devices for Armed Services application.

RBM

R-B-M DIVISION ESSEX WIRE CORP.

Logansport, Indiana

MANUAL AND MAGNETIC ELECTRIC CONTROLS – FOR AUTOMOTIVE, INDUSTRIAL, COMMUNICATION AND ELECTRONIC USE

NEW PRODUCTS

Edited by WILLIAM P. O'BRIEN

Instrument Production Continues Strong . . . Latest Components and Accessories Are Featured . . . Read Twenty-Two Reviews of Industry Literature

Midget Chopper

AIRPAX PRODUCTS CO., Middle River, Baltimore 20, Md., has released a new midget 400-cycle chopper, similar to its regular chopper but smaller and lighter. Weight is 37 grams. Model C747, illustrated, has a 6-volt 400-cycle drive, spdt contacts, contact phase angle of 65 deg and residual noise less than 1 mv. It is hermetically sealed and is designed to comply with AN specifications.



Magnetic Sound Film Projector

RADIO CORP. OF AMERICA, Camden, N. J. Model 400 recorder-projector provides a means of directly recording sound magnetically on the edge of 16-mm picture film. In addition to recording and reproducing magnetic sound it can also be used to reproduce optically recorded sound. Three main features are: (1) To record it is necessary only to turn a switch and talk or play music into a plug-in microphone. (2) After completing the recording another control may be set for immediate playback. (3) If revisions are needed or re-recording desired, an electronic erase head may be activated by another control. The equipment permits recording and reproduction of sound over a frequency range of 80 to 7,200 cycles with background noise virtually eliminated.



High-Speed Oscillograph

OFFNER ELECTRONICS INC., 5320 North Kedzie Ave., Chicago, Ill. The Dynograph, a direct-writing, high-speed oscillograph, designed for applications where there is a need for simultaneous recordings of rapid transients, is capable of replacing photographic recording of many variables. Features include a pen-deflection linearity of 1 percent with pen response of 1/120th of a second; sensitivity of 150 μv d-c per cm of pen deflection; stability and drift-free operation through a special chopper-type amplifier; no extra equipment needed with reluctance-type pickups and true differential input obtained through special transformer coupling.



Preamplifier

FISHER RADIO CORP., 41 E. 47th St., New York, N. Y., has designed model PR-4 high-quality preamplifier to meet the need for a self-powered, moderate-cost unit. It can be used with low-level magnetic pickups of any make, and can also be used as a microphone preamplifier. Outstanding features are: hum level better than 60 db below 1-v output in both phonograph and microphone use; frequency response, uniform within 2 db from 30 to 20,000 cycles on all applications; high-gain—on phonograph, 20 mv input to produce one-volt output, and on microphone, 5 mv input to produce one-volt output. Complete installation and service manual, as well as all necessary connecting plugs, are supplied with each unit.



Flexible Coax Cables

COLUMBIA TECHNICAL CORP., 5 E. 57th St., New York 22, N. Y., has available a line of German-made coaxial cables designed for installation in electronic apparatus and in transmission systems particularly around bends and where space is limited. These flexible cables fea-

RAYTHEON

GERMANIUM CRYSTAL DIODES

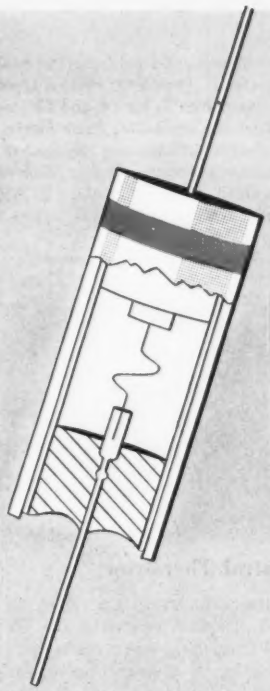

PERFORMANCE FEATURES:

Superior humidity characteristics

No wax or filler to affect operation even up to 100° C.

Improved Resistance-Temperature characteristics

Small size — 9/64" diameter, 25/64" length

Distinctive color coding

Smaller, more flexible leads for easier wiring

Completely insulated body for compact assembly

PERFORMANCE FACTS:

The following types are available in production quantities at Newton and Chicago, and in smaller quantities at our 310 Special Tube Distributors.

	CK703 General Purpose	CK706 Video Detector	CK707 50 V. dc Restorer	CK708 100 V. dc Restorer	CK710 UHF Mixer	1N66† General Purpose	1N67† High Back Resistance	1N68† 100 V. dc Restorer
MAXIMUM RATINGS (at 25°C.)								
DC Inverse Voltage (volts)	60	40	80	100	5	60	80	100
Average Rectified Current (ma.)	50	35	35	35	25	50	35	35
Peak Rectified Current (ma.)	150	125	100	100	75	150	100	100
Surge Current (for 1 sec.) (ma.)	500	300	500	500		500	500	500
Ambient Temperature for all types	— 50 to +100°C.							
CHARACTERISTICS (at 25°C.)								
Max. Inverse Current at — 0.5 volts (ma.)					0.2			
Max. Inverse Current at — 5 volts (ma.)			0.008				0.005	
Max. Inverse Current at — 10 volts (ma.)	0.05					0.05		
Max. Inverse Current at —50 volts (ma.)	0.8		0.10			0.8	0.05	
Max. Inverse Current at —100 volts (ma.)				0.625				0.625
Min. Forward Current at +1 volt (ma.)	5.0		3.5	3.0		5.0	4.0	3.0
Min. DC Reverse Voltage for Zero Dynamic Resistance (volts)	70	50	100	120		70	100	120
Shunt Capacitance (uuf)	1.0	1.0	1.0	1.0		1.0	1.0	1.0
Rectification Efficiency at 54 mc (approx. %)		60						
Rectification Efficiency at 100 mc (%)						35 (min.)		
Oscillator injection current (ma.)					0.75*			

*Conversion loss at 500 mc. and noise factor comparable with 1N21B

†1N66, 1N67 and 1N68 must also pass humidity tests.

Other types are available for special applications.

RAYTHEON MANUFACTURING COMPANY

SPECIAL TUBE SECTION — Newton 58, Massachusetts

SUBMINIATURE TUBES • GERMANIUM DIODES and TRIODES • RADIATION COUNTER TUBES • BUDDOS, KOMO, LIFE TUBES

RAYTHEON

Excellence in Electronics

ture a semi-solid polyethylene base dielectric. At present several types of coax cables in the 50 and 70-ohm groups are available, their electrical characteristics and physical dimensions corresponding to those of American type RG58U, RG5U, RG8U, RG59U and RG11U cables.



Control Thyratron

GENERAL ELECTRIC CO., Syracuse, N. Y., is now producing the GL-6044 heavy-duty thyratron designed especially for the exacting requirements of airborne electronic-control equipment. Instead of the usual prong-type base, it has contact terminals extending at right angles from heavy support rods at the bottom on the tube. This helps secure bolting to a control panel and avoids vibration trouble. The tube will operate efficiently from temperatures as low as −55 up to 120 C at normal atmospheric pressure. It is inert-gas-filled and has a current rating of 6.4 amperes. The indirectly heated cathode is rated at 2.5 volts at 17 amperes.

Grid Dip Meter

SYLVAN ELECTRONIC LABORATORIES, INC., Broadalbin, N. Y. Type GDO-1 grid dip meter covers the frequency range from 1.5 to 300 mc, with 7 plug-in coil ranges. The unit features a probe-type oscillator, built-in coil storage compartment, a large easily-read 4½-in. microammeter, internal modulation and a calibration accuracy of 0.02 percent measured at 30 mc.



Regulated Power Supply

UNIVERSAL ELECTRONICS CO., 2012 South Sepulveda Blvd., Los Angeles 25, Calif. Model 100A compact regulated power supply furnishes from 0 to 200 ma at voltage continuously variable from 0 to 325 v d-c without switching. Bias voltage supplied can be varied from 0 to 150 v with 2 ma maximum. Also furnished from the unit are two independent outputs of low a-c voltage that may be used separately or combined to furnish either 12.6 v at 3 amperes or 6.3 v at 6 amperes. The high voltage varies less than 0.2 v from no load to full load. Internal impedance is less than 1 ohm d-c and less than 0.2 ohm from 20 cycles to 50 kc.



UHF Radio Noise & Field Strength Meter

MEASUREMENTS CORP., Boonton, N. J., has incorporated the "slide-back" technique in the vtvm circuit of their model 58 uhf radio noise and field strength meter. This new feature makes possible more accurate noise measurements of short pulses having a slow repetition rate, or a random variation in magnitude over a considerable period of time. The unit, covering the 15 to 150-mc range is widely used for the measurement of steady carrier voltages or fields; line loss; front-to-back ratios of directional antennas; signal-to-noise ratios of antennas; effectiveness of noise filters and for the investigation of ignition and other types of radio noise.



TV Replacement Unit

STANDARD TRANSFORMER CORP., 3578 Elston Ave., Chicago 18, Ill. The A-8130 horizontal deflection output and high-voltage transformer is for use in pulse-operated single-rectifier power supplies to deliver up to 14,000 volts of anode potential with adequate sweep for full horizontal scan of 65 to 70 deg kinescopes having up to 24-in. screens. It may be used for conversion of older tv receivers to take newer picture tube types, and requires 3-27 mh width control coil. Overall height of the unit is 4⅝ in., with a base area of 2¾ in. × 2⅝ in.



Balanced-Armature Relays

ELECTRO-MECHANICAL SPECIALTIES CO., 6819 Melrose Ave., Los Angeles 38, Calif., has announced a line of relays emphasizing balanced armature and available up to 3-pole

(Continued on page 278)

Announcing

GLASSEAL

REG. TRADE MARK

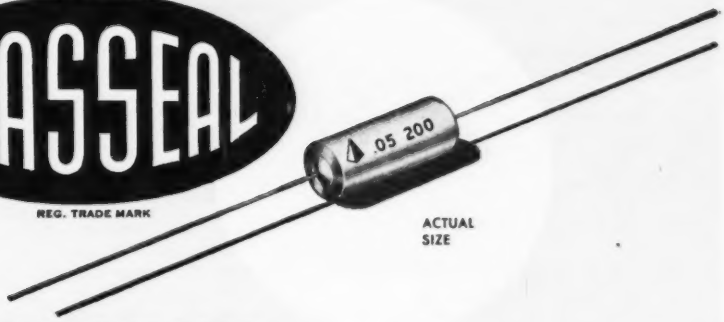

ACTUAL SIZE

HERMETICALLY-SEALED *Miniature* TUBULAR PAPER CAPACITORS by PYRAMID

Pyramid Type PG "GLASSEAL" miniature paper capacitors are assembled in metal tubes with glass-metal terminals. They will fully meet the most exacting demands of high vacuum, high pressure, temperature cycling, immersion cycling and corrosion tests.

TEMPERATURE RANGES: −55° to +125°C.

CAPACITANCE RANGE: .001 mfd. to 1.0 mfd.

VOLTAGE RANGE: 100 to 600 v.d.c. operating

Your inquiries are invited

PYRAMID Electric Company

GENERAL OFFICES and PLANT NO. 1
1445 HUDSON BLVD. • NORTH BERGEN, N. J.

PLANT NO. 2
155 OXFORD ST. • PATERSON, N. J.

NEWS OF THE INDUSTRY

Edited by WILLIAM P. O'BRIEN

Air Force Commissions Available

AN OPPORTUNITY to step directly from civil life into a commission in the Air Force Reserve has been held out to men with a university degree and qualifying experience in electrical, communications, radio or electronics engineering, or who have a science degree and majored in one of the foregoing engineering fields.

These men, according to Major Charles D. Morat, director of personnel procurement of the First Air Force, at Mitchel Air Force Base, N. Y., will, if they qualify, be commissioned from second lieutenants to majors, depending on age, as Electronics Officer, Air. Applicants for second lieutenants must have a master's degree in one of the specified fields, or a bachelor's degree plus a full year of qualifying experience.

Further inquiries should be addressed to: Dept. of Military Personnel Procurement, Headquarters, First Air Force, Mitchel Air Force Base, New York.

Mobile Relay Stations

THE Federal Communications Commission has adopted final rules to govern the licensing of Mobile Relay Stations in the Industrial and Railroad Radio Services. The stations themselves will be fixed but will relay signals from one mobile unit to another. With such stations, never before licensed, it will be possible to relay messages automatically between cars or locomotives up to 50 miles apart.

In general, such relay operation will be confined to messages received on frequencies above 47 mc in special situations where the applicant for such service can show a real need. In addition, the new relay stations must, in general, select for transmission only those messages specifically directed to them.

Details of the proposed operation will be resolved after hearings for which all notices must be filed by October 15, 1951.

TRANSCONTINENTAL TV-PLUS

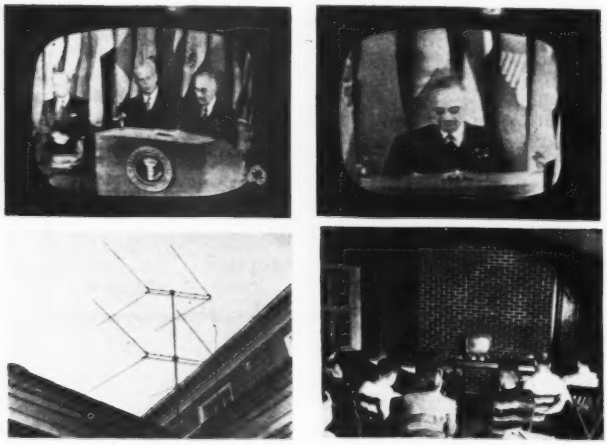

These images of the opening of the Japanese Peace Treaty Conference, photographd by Don Fink while on vacation in the White Mountains, represent the end of the line during the inauguration of the A. T. and T. transcontinental microwave relay system on September 4th. Involved in the transmission were 107 relay stations from San Francisco to New York, plus seven similar microwave stations from New York to Boston, plus a 140-mile direct hop on channel 7 to the Summit House atop Mount Washington (altitude 6,293 feet). The last hop was terminated in a double-V antenna (lower left) which fed a standard 17-inch table model receiver (lower right) without benefit of booster

Tube Salvage Announced

IT is now possible to salvage used Eimac tubes, according to a recent announcement by Eitel-McCullough, Inc., San Bruno, Calif. Maximum salvage values have been listed for 54 tube types, ranging from 25 cents to 30 dollars, depending on the type.

Some of the better known types in the tube list are: 2-150D, 2C39, 3C24, 3X2500A3, 4-125A, 4-1000A, 6C21, 35T, 75TH, 100TH, 100TL, 250R, 304TH, 450TH, and 1000T.

In order that customers may get the maximum allowance for tubes returned, the company advises that (1) no salvage value is attached to the glass envelope, but metal parts must be received in good condition; (2) filaments are not repairable and hence a broken filament does not detract from the salvage value; (3) tungsten leads and supports are used and the plate may usually be reprocessed; therefore, these should be received in good condition.

Manpower Convocation

A CONVOCATION of engineers, educators and industrialists to discuss what must be done to maintain and increase the national supply of engineers needed both for the civilian economy and the armed services will be held September 28. The meeting has been organized by the Engineering Manpower Commission of Engineers Joint Council and will take place in Stephen Foster Memorial Hall on the campus of the University of Pittsburgh, Pittsburgh, Pa.

Purpose of the convocation is to establish a grass-roots program to convince the general public of the vital importance of the technical

BSR *rotocam range*

G.U.4. (3 SPEED) PHONOGRAPH UNIT

M.U.14. (3 SPEED) PHONOMOTOR

M.U.15. (78 rpm) PHONOMOTOR

The BSR range of Phonographs now leads the field in both design and appearance. The resources of a modern factory coupled with years of experience enable us to make these claims and still sell at competitive prices.

MODELS ILLUSTRATED

GU4. Three speed Phonograph unit with high fidelity pick-up and automatic stop. The pick-up is complete with two permanent sapphire stylii and the turntable is fitted with removable rubber mat. MU14. Three speed Phonomotor. Speed change is effected merely by rotation of the speed change knob. The turntable diameter is 10 inches. MU15. Phonomotor for 78 R.P.M. only, employs an 8 inch diameter turntable and is extremely robust, reliable and inexpensive.

Further details available on application.

U.S. Warehouse and Offices.

SAMCO PRODUCTS COMPANY

36 Oak Avenue, Tuckahoe, N. Y.

Telephone: Tuckahoe 3-9391

Made by Birmingham Sound Reproducers Ltd., Old Hill, Staffs. England Grams: 'Electronic Old Hill, Cradley Heath.'

man to our way of life. Representation will include educators and engineering delegations from other areas throughout the country.

According to reliable estimates, with present schedules the total likely engineering graduates available in 1955 will be less than 20,000, whereas our expanded industrial and military personnel needs may require anywhere from 45,000 to 80,000.

Audiometer Standard Published

MANUFACTURERS and laboratories testing audiometers for general diagnostic purposes now can rely on a newly published American Standard to assure a uniform method of testing. The new American Standard Specifications for Audiometers for General Diagnostic Purposes was developed under the sponsorship of the Acoustical Society of America, and approved by the American Standards Association.

This document describes a standard audiometer and standard procedure for measuring hearing that will give doctors and others using such audiometers a dependable comparison with the normal threshold of audibility, as a basis for prescribing hearing aids or other remedial measures.

The threshold values by which normal hearing is measured are based on a study made in 1935–36 by the National Health Survey. This survey contains the only authoritative data to date available on this subject.

The audiometer described in the new Standard is an electroacoustic generator with associated air- and bone-conduction receivers, and provides pure tones of selected frequencies and intensities which cover the major portion of the auditory range. The results of measurements with this audiometer determine an individual's auditory threshold as a function of frequency.

Copies of the American Standard, designated Z24.5–1951, can be obtained from the American Standards Association, 70 E. 45 St., New York 17, N. Y., at 50 cents each.

MEETINGS

OCT. 2-4: Twenty-Eighth Annual Session of the Communications Section of the Association of American Railroads, Chateau Frontenac, Quebec, Canada.

OCT. 4-6: Fourth Conference on Gaseous Electronics, General Electric Research Laboratory, Schenectady, N. Y.

OCT. 8-10: Joint Meeting of the U.S.A. National Committee of URSI and the IRE Professional Group on Antennas and Propagation, Cornell University, Ithaca, N. Y.

OCT. 8-10: AIEE Conference on Aircraft Equipment, Hollywood Roosevelt Hotel, Los Angeles, Calif.

OCT. 15-19: 70th Semiannual Convention of the Society of Motion Picture and Television Engineers, Hollywood Roosevelt Hotel, Hollywood, Calif.

OCT. 22-24: 1951 National Electronics Conference, Edgewater Beach Hotel, Chicago.

OCT. 22-26: AIEE Fall General Meeting, Hotel Cleveland, Cleveland, Ohio.

OCT. 29-31: Radio Fall Meeting, sponsored by IRE and RTMA, King Edward Hotel, Toronto, Ontario, Canada.

Nov. 1-3: Third Annual Convention and Audio Fair Exhibition of the Audio Engineering Society, Hotel New Yorker, New York City.

Nov. 12-15: NEMA Convention, Haddon Hall, Atlantic City.

DEC. 10-12: Joint AIEE-IRE Computer Conference, Benjamin Franklin Hotel, Philadelphia, Pa.

FCC ENGINEERS VIEW UHF TV

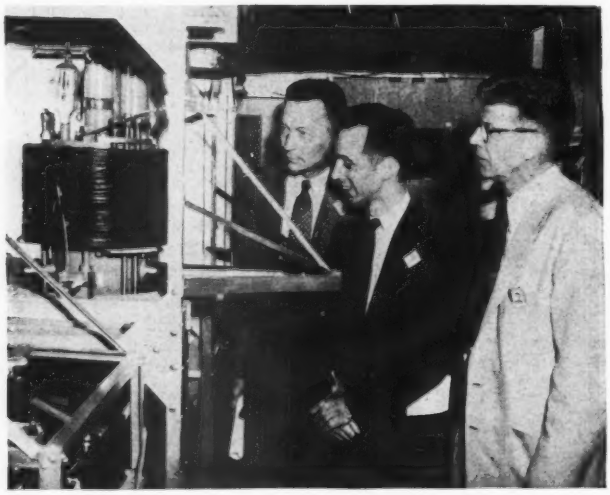

George F. Metcalf (right), manager of the GE Commercial and Government Equipment Department, explains operation of world's most powerful uhf tv transmitter operating experimentally at Electronics Park to Edward W. Allen (left), FCC chief engineer, and Curtis B. Plummer, chief of the FCC broadcast bureau, during a recent visit to the Park

Aircraft Channel Discontinued

DESPITE the fact that use of 111.1 mc for reply to private aircraft was discontinued effective August 1, some pilots still fail to listen on the new frequency of 122.2 mc. The new channel is now in use by all interstate airways communications service stations (INSACS) that do

(Continued on p 312)

PREMIUM PERFORMANCE SUBMINIATURES . . .

SYLVANIA OFFERS A COMPLETE LINE FOR GOVERNMENT CONTRACTORS

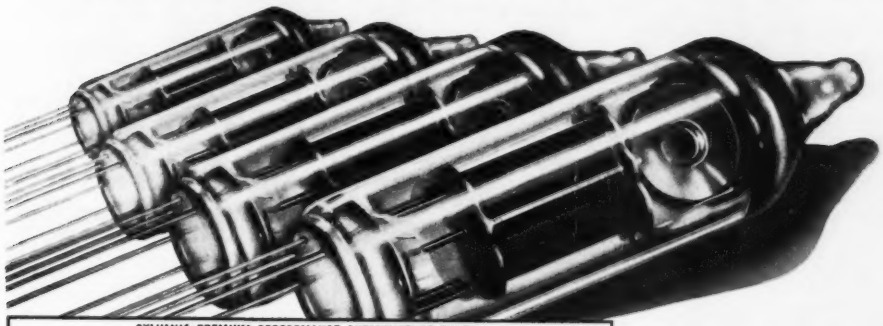

SYLVANIA PREMIUM PERFORMANCE SUBMINIATURE TUBES
*Armed Services Preferred Types

Type	Description	Ef (Volts)	If (ma)	Eb (Volts)	Ec2 (Volts)	Gm (μmhos)	μ	Po (Watts)
PENTODES								
5636	Pentode Mixer	6.3	150	100	100	1250 (Gc)		
*5639	Video Pentode	6.3	450	150	100	9000		1.0 (RL = 9000Ω)
*5840 (5901)	Sharp Cut-off UHF Pentode	6.3	150	100	100	5000		
*5899 (5900)	Semi-remote Cut-off UHF Pentode	6.3	150	100	100	4500		
*5902	Audio Beam Power Pentode	6.3	450	110	110	4200		1.0 (RL = 3000Ω)
*5905	Sharp Cut-off UHF Pentode	26.5	45	26.5	26.5	2850		
*5906	Sharp Cut-off UHF Pentode	26.5	45	100	100	5000		
*5907	Remote Cut-off UHF Pentode	26.5	45	26.5	26.5	3000		
*5908	Pentode Mixer	26.5	45	26.5	26.5	1000 (Gc)		
*5916	Pentode Mixer	26.5	45	100	100	1290 (Gc)		
TRIODES								
*5718 (5897)	Medium Mu UHF Triode	6.3	150	100		5800	27	0.9 (500 Mc Osc)
*5719 (5898)	High Mu Triode	6.3	150	100		1700	70	
5977	Medium Mu Triode	6.3	150	100		4500	16	
5987	Low Mu Power Triode	6.3	450	100		1850	4.1	
*5904	Medium Mu UFH Triode	26.5	45	26.5		4700	20	0.06 (400 Mc Osc)
6021	Medium Mu Double Triode	6.3	300	100		4800	35	
6111	Medium Mu Double Triode	6.3	300	100		4750	20	
6112	High Mu Double Triode	6.3	300	100		1850	70	
DIODES								
*5641	Single Diode	6.3	450	930 peak inverse plate volts 50 ma dc output				
*5647	Single Diode (T1)	6.3	150	460 peak inverse plate volts 10 ma dc output				
*5896	Double Diode	6.3	300	460 peak inverse plate volts 10 ma dc output per plate				
*5903	Double Diode	26.5	75	460 peak inverse plate volts 10 ma dc output per plate				
6110	Double Diode	6.3	150	460 peak inverse plate volts 4.4 ma dc output per plate				
GAS TUBES								
5643	Tetrode Thyratron	6.3	150	Average Anode Current = 22 ma Peak Anode Current = 100 ma				
*5644	Voltage Regulator	–	–	Operating Voltage = 95 volts Operating Current = 5-25 ma				

Long life . . . fatigue tested . . . High "g" vibration tested . . . Impact resistant . . . stabilized by burn-in period.

Twenty-five different types of Premium Performance Subminiature Tubes are now offered by Sylvania.

All are cathode types and are suitable for use in military communications equipment operating up to 400 mc. Engineered to function under severe conditions of vibration, shock, and high temperatures, they are excellent for rugged duty in guided missiles as well as in military signal equipment, fire control, etc.

Manufactured with either long or short leads in circular arrangement. At present, available only on DO or CMP rated orders. For complete data concerning characteristics and applications, mail the coupon now!

SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Sylvania Electric Products Inc.
Dept. R-1110, Emporium, Pa.

Please send me illustrated folder describing the complete line of Sylvania Subminiature Premium Performance Tubes.

*Name*_____

*Company*_____

*Street*_____

*City*_____ *Zone*____ *State*_____

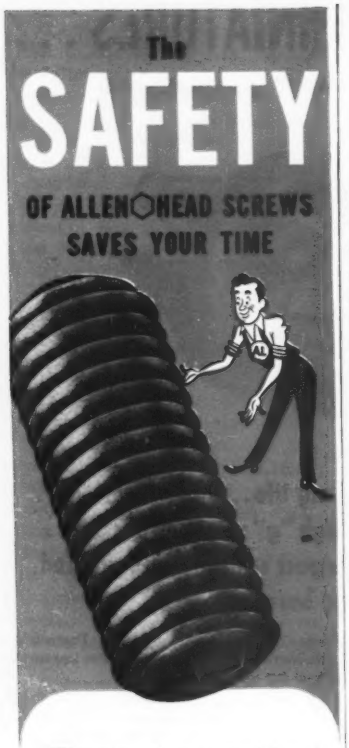

There's safety in positive, non-slip driving, weld-like grip under vibration and stress and absence of protruding heads. These features protect your own employees, the product you make and the people who use it. Allen Head screws and keys help keep both men and machines on the job.


WARNING
Allen-Type screws aren't necessarily Allen-Made.
Get genuine "Pressur-Formed" Allen Head screws in this black and silver box.
THE
ALLEN
MANUFACTURING COMPANY
Hartford 2, Connecticut, U. S. A.

NEW BOOKS

Servomechanisms and Regulating System Design

By Harold Chestnut and Robert W. Mayer. *John Wiley & Sons, Inc., New York*, 1951, 505 *pages*, $7.75.

This first volume of a two-volume series written in the interest of the Advanced Course in Engineering of the General Electric Company is an extremely worthwhile contribution to servomechanism literature. It is so definitely written as an advanced textbook, however, that it suffers severely from its interdependence with the associate volume and required instructor clarification, when considered as a possible engineering college classroom text.

This book provides an exceptionally fine presentation of the mathematics applied to servomechanisms and servo-systems, including that of La Place Transforms and the Nyquist Stability Criterion. The completeness of this presentation is greater than this reader has found in any other text or reference on the same subject.

Presentation of the subject matter is well done with many graphs and block diagrams treating several theoretical basic regulating systems and servomechanisms. However, in spite of 505 pages of comprehensive text material, this volume is inadequate in coverage or scope for use as a textbook capable of standing alone as a complete independent text for a course in servomechanisms.

The book is lacking in the definitive requirements of a text for training unpracticed engineering students in design of servomechanisms. There is no mention or explanation of the common building block components essential to such design theory, such as synchros, resolvers, rate generators and low-inertia induction motors. In short, a student taught strictly by this text would not recognize by sight or description a large majority of servomechanism components or systems in common use for the past 15 years.

This volume would have been better entitled Servomechanisms and

(continued on page 320)

CHECK OUT
WITH SIGNAL GENERATORS
by
AIRCRAFT RADIO Corporation



TYPE H-14 108-132 MEGACYCLES

Standard signal source for complete testing of VHF airborne omnirange and localizer receivers in aircraft or on the bench is ARC's Type H-14 Signal Generator. It checks up to 24 omni courses, omni course sensitivity, to-from and flag-alarm operation, left-center-right on 90/150 cycle and phase-localizers, and all necessary quantitative bench tests. Permits quick, accurate, check-out of aircraft just before take-off. For ramp checks RF output 1 volt into 52 ohm line; for bench checks, 0-10,000 microvolts. AF output available for bench maintenance and trouble shooting.

Price $885.00 net, f.o.b. Boonton, N. J.

Type H-12 VHF Signal Generator 900—2100 mc—source of cw or pulse amplitude-modulated RF. Power level 0 to −120 dbm. Internal pulse circuits with controls for width, delay, and rate, and provision for external pulsing. Frequency calibration better than 1%. Built to Navy specs for research, production testing. Equal to Military TS-419/U.

ARC

Price: $1,950.00 net f.o.b. Boonton, N. J.

AIRCRAFT RADIO CORPORATION
Boonton New Jersey
Dependable Electronic Equipment Since 1928

Looking for a material to withstand

EXTREME THERMAL SHOCK?

STUPALITH

is your answer!

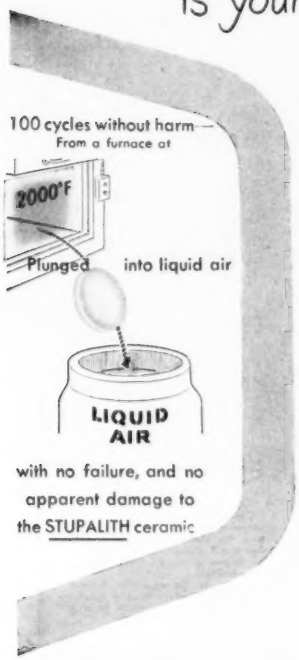
100 cycles without harm—
From a furnace at
2000°F
Plunged into liquid air
LIQUID AIR
with no failure, and no apparent damage to the STUPALITH ceramic

Remarkably low thermal-expansion characteristics make STUPALITH *ideal* for applications where conditions of extreme thermal shock are present.

Stupalith may be formulated and processed to possess Zero, Low-Positive and Low-Negative expansitivities. Formed by conventional methods—pressing, extrusion or casting—STUPALITH may be machined or ground to precision tolerances. Can be safely used at temperatures up to 2200° F.

The demonstration described in the illustration at the left shows the amazing ability of STUPALITH to withstand thermal shock.

We will be glad to send you a copy of Bulletin 849, which gives full details of this remarkable group of ceramics.

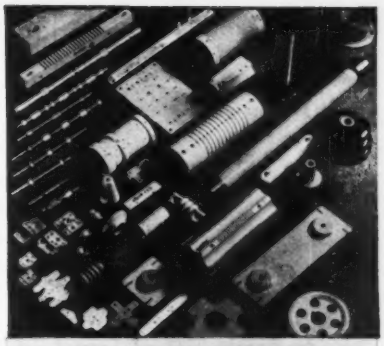

STUPAKOFF PRODUCTS

For Electrical and Electronics Applications

ASSEMBLIES—Stupakoff assemblies include Induction COILS for radio receivers and transmitters; SHAFTS for air-tuning condensers; METALLIZED PLATES for making fixed rigid assemblies.

CERAMICS—Stupakoff has long been a leading supplier of ceramic products for a wide variety of electrical and electronic applications—precision made for all voltages, frequencies and temperatures.

RESISTOR CERAMICS—Stupakoff Temperature-Sensitive Resistors are used for temperature indicating or measuring equipment such as Radiosonde, for infra-red light source and for heating elements. Supplied complete with terminals, in the form of rods, tubes, discs, bars, rings, etc.

SEALS—KOVAR METAL TO GLASS—Terminals; Lead-ins; Standoffs—for hermetically sealing for mechanical construction in radio, television, electronic and electrical apparatus. Single or multiple terminal units, in a wide variety of sizes and artings.

KOVAR METAL—Kovar is the ideal alloy for sealing to hard glass. Used for making hermetic attachments for electrical and electronic products. Available in the form of rod, wire, sheet, foil—or as cups, eyelets or other fabricated shapes.

STUPAKOFF

CERAMIC AND MANUFACTURING CO.

Latrobe, Pa.

It's *Dependability!*

TYPE BH6A
RANGE: 1.4 - 75.0 mc
Supplied per Mil type CR-18; CR-19; CR-23; CR-27; CR-28; CR-32; CR-33; CR-35; CR-36 when specified.

Dependability is a composite virtue that Bliley builds into all crystals. From raw quartz to finished crystal, exacting inspection assures *dependable* performance. That's why Bliley methods and techniques are a "natural" for military as well as civilian applications.

★ TYPE MC9
RANGE:
1.0 - 10.0 mc
Supplied per Mil type CR-5; CR-6; CR-8; CR-10 when specified.



★ TYPE SR5A
RANGE:
2.0 - 15.0 mc
Supplied per Mil type CR-1A when specified

★ TYPE AR23W
RANGE: 0.080 - 0.19999 mc
Supplied per Mil type CR-15; CR-16; CR-29; CR-30 when specified.

★ TYPE BH7A
RANGE:
15.0 - 50.0 mc
Supplied per Mil type CR-24 when specified.

Bliley
CRYSTALS

BLILEY ELECTRIC COMPANY
UNION STATION BUILDING
ERIE, PA.

Backtalk

This department is operated as an open forum where our readers may discuss problems of the electronics industry or comment upon articles which ELECTRONICS has published.

More Information

DEAR SIRS:

A FEW months ago we undertook an instrumentation problem for which ceramic dielectric capacitors of the type designed to have zero temperature coefficient appeared ideally suited. Specifically, we were investigating the use of Wein-bridge oscillators and associated power units for operating synchronous motors to drive our telescopes at precisely controlled rates. Rate-stability of about 10 parts per million per degree C within a temperature range from −10 C to +20 C was required. Since it is necessary to vary this rate over a span of about 2 percent to accommodate differential atmospheric refraction at various telescope orientations, a temperature-stabilized Wien-bridge oscillator appeared to be the simplest solution.

Using suitable wire-wound resistors together with an array of capacitors made by a well-known manufacturer, we constructed an experimental model designed for a central frequency of 50.137 cps. However, the frequency of this oscillator was found to be unstable and to possess a scandalous temperature coefficient. With makeshift apparatus, temperature testing is slow and tedious; much time was consumed testing and retesting in an effort to find the source of the difficulty. Since we trusted the capacitors, every other possible fault was checked first. Finally as a last resort, we checked the capacitors and found them to have an average temperature coefficient of roughly 6,000 ppm per deg C positive, which

(Continued on page 328)

DC - AC
CHOPPER

A model for every use.
10 — 500 cycles AC
Meets AN Specifications
also 60 cycles
Single pole and double pole
Make-before-break contacts
Contacts in air or in liquid



These Choppers convert low level DC into pulsating DC or AC so that servo-mechanism error voltages and the output of thermocouples and strain gauges, may be amplified by means of an AC rather than a DC amplifier.
They are hermetically sealed, precision vibrators having special features which contribute to long life and low noise level.

WRITE FOR THESE CATALOGS . . .
#280 10-500 cycles
#246A 60 cycles

STEVENS ARNOLD
INCORPORATED

22 ELKINS STREET
SOUTH BOSTON 27, MASS.

Solve YOUR LAMINATED PLASTICS PROBLEMS AS EASY AS . . .

1 2 3

It's as simple as that when you rely on Taylor *full-line* service. Here's how and why:

1. If your problem demands *vulcanized fibre* that is exceptionally tough, high in dielectric strength, light in weight, easily machined, attractive in appearance, insoluble to most solvents and withstands abrasion, you can solve it with Taylor Vulcanized Fibre in sheets, rods, strips, or coils.

2. If your problem calls for *phenol fibre* or *glass melamine and silicone laminates* to meet specific electrical, physical, chemical or mechanical characteristics, you'll find the material you need in our wide range of grades. These versatile materials, too, are available in sheets, tubes, rods and strips.

3. If you are looking for a dependable source of supply for parts fabricated to your specifications, Taylor Fabricating Service is equipped to turn out precision-made parts on time, ready for your production line.

Next time you require laminated plastics, remember Taylor's *full-line* service—you'll save yourself time, trouble, money, and a lot of worry!

Taylor

TAYLOR FIBRE CO.
NORRISTOWN, PENNSYLVANIA
WEST COAST FACTORY: LA VERNE, CALIF.
OFFICES IN PRINCIPAL CITIES

Here is the new Taylor 62-page catalog. It contains specifications and description of Taylor Laminated Plastics. See for yourself how you can make your product or part better with the use of these plus-value materials. Write today for Catalog E10.

PREPAREDNESS PRODUCTION Enlists AMPHENOL

RG CABLES produced by Amphenol are backed by years of manufacturing experience. The majority utilize polyethylene which possesses exceptional dielectric properties — low loss, flexibility, mechanical stability. Teflon dielectric, developed for the needs of jet aircraft and guided missiles, is used in others designed to operate efficiently up to 500° F.

RF CONNECTORS for instruments, test equipment and all types of radio circuits. Extensive research and manufacturing facilities have made Amphenol RF Connectors outstanding in design. They have longer leakage paths, lower loss resulting in outstanding performance.

AN CONNECTORS for power, signal and control circuits in aircraft and electronic equipment. Amphenol, by far the largest supplier of quality connectors, leads with the broadest availability listing of AN Connectors for all MIL-C-5015 shell styles and applications. Amphenol's AN Connectors insure lowest milivolt drop, extra high tensile strength, polarized shells and simple assembly.

Now Available

Catalog D2 contains complete engineering data on Amphenol RF Cables and Connectors. This catalog will be sent upon receipt of a request on company or government agency letterhead.

AMERICAN PHENOLIC CORPORATION
1830 South 54th Avenue
Chicago 50, Illinois

TUBES AT WORK

(continued from page 138)

achieved by brightness control of the spot so synchronized with the bridge input that one half of the pattern appears substantially brighter than the other[1]. Such brightness control necessitates departure from the optimum compromise between visibility and tube life and usually detracts from the sharpness of definition for either the brighter or the dimmer portion. Optimum brightness and optimum definition can be maintained if discrimination is made by extending one leg beyond the other in the horizontal direction, as shown in sketches *c*1 to *c*5.[2] This is achieved by bringing one crest of the deflecting wave slightly beyond the other crest of the deflecting wave and by bringing the furrow following the first half wave slightly beyond the furrow following the second half wave, as shown in sketch *c*. Whether the portion extending farther to the right on patterns *c*1 to *c*4 is above or below the portion extending less far toward the right tells whether the ratio adjustment has to be done in one direction or the other. Whether the portion extending farther to the left is above or below the portion extending less far toward the left tells whether the phase adjustment has to be done in one direction or the other.

A circuit to obtain a deflecting wave as shown in sketch *c* of Fig. 2 is shown in Fig. 3. It comprises a 6SN7 twin triode acting as a phase splitter and a 6H6 twin diode to select one phase in one half



FIG. 3—Circuit used to obtain a deflecting wave as shown in *c* of Fig. 2

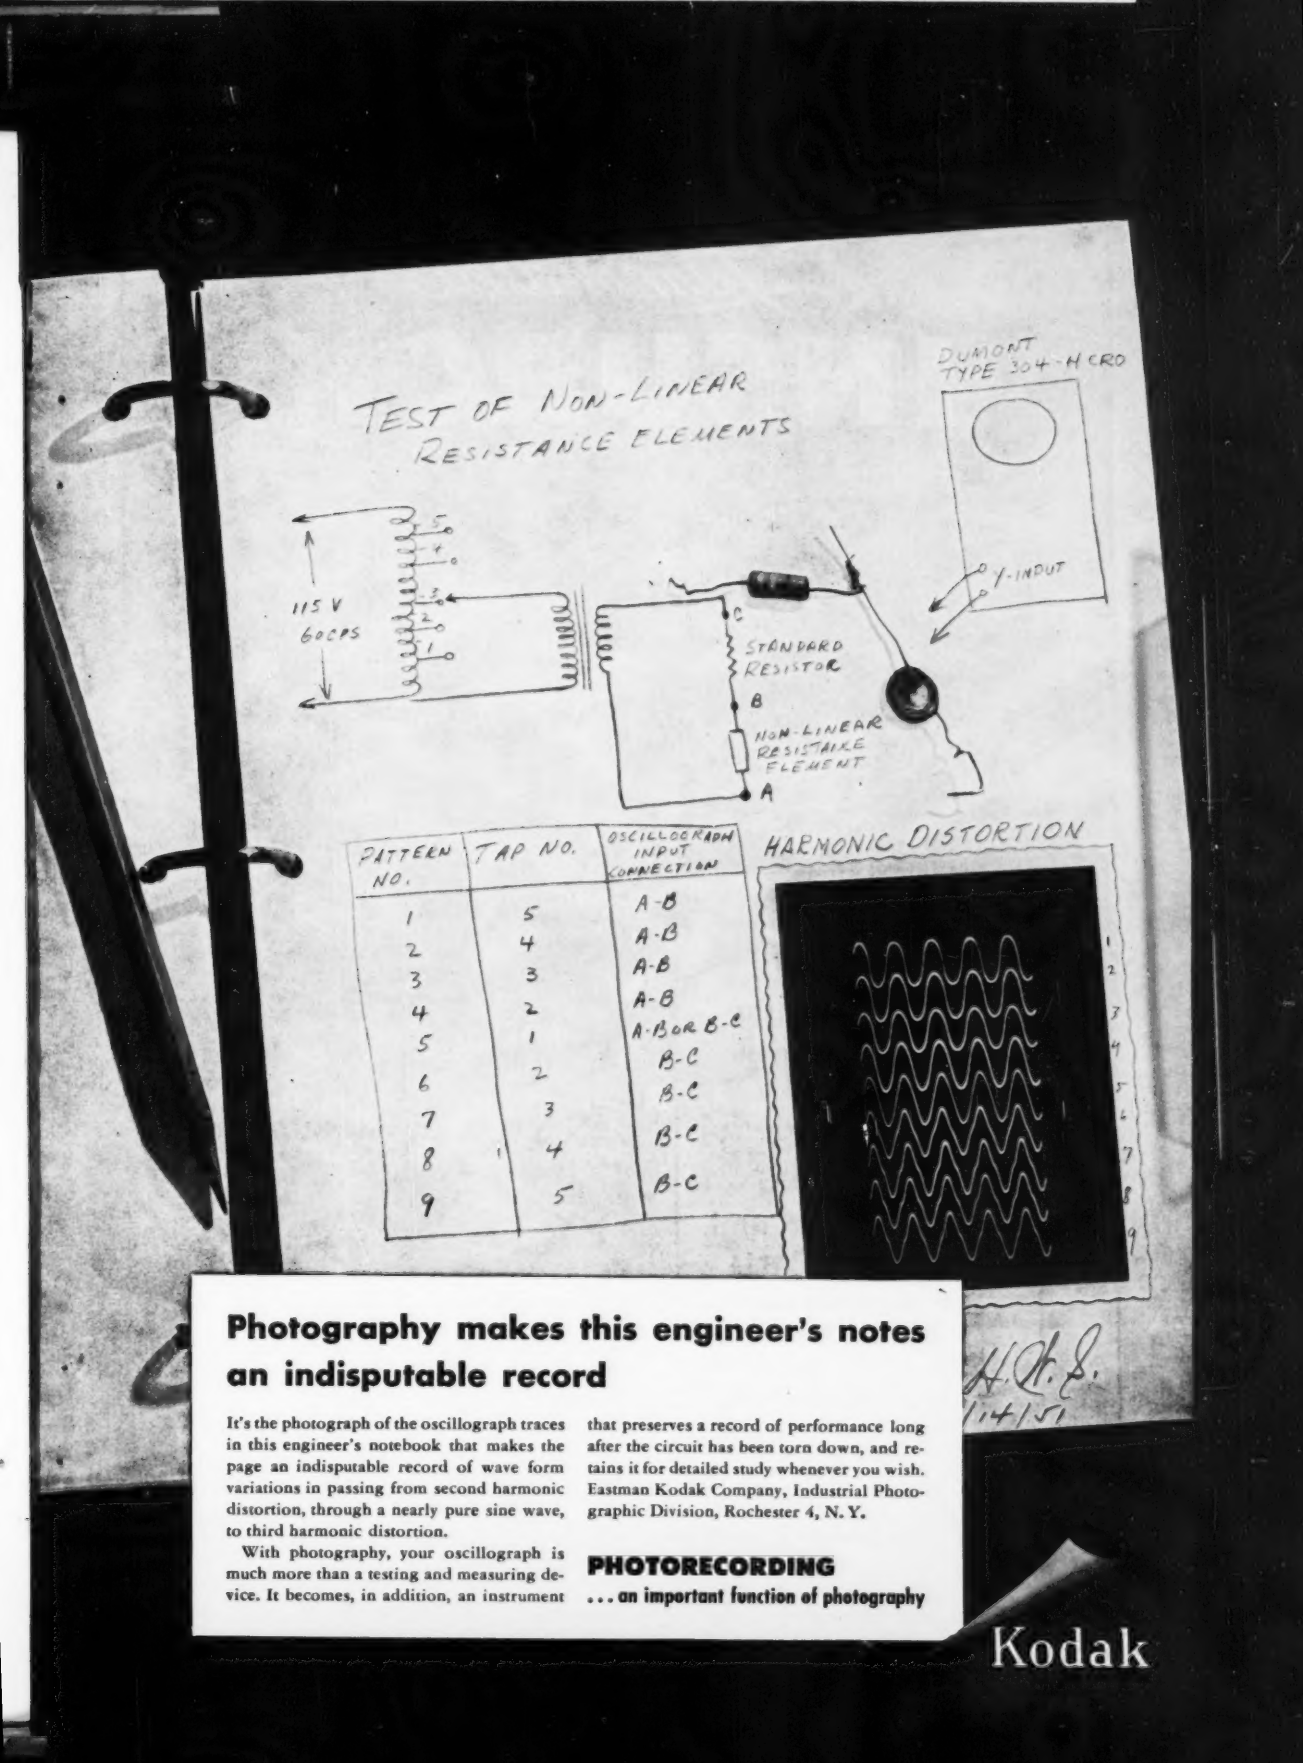

Photography makes this engineer's notes an indisputable record

It's the photograph of the oscillograph traces in this engineer's notebook that makes the page an indisputable record of wave form variations in passing from second harmonic distortion, through a nearly pure sine wave, to third harmonic distortion.

With photography, your oscillograph is much more than a testing and measuring device. It becomes, in addition, an instrument that preserves a record of performance long after the circuit has been torn down, and retains it for detailed study whenever you wish. Eastman Kodak Company, Industrial Photographic Division, Rochester 4, N. Y.

PHOTORECORDING

... an important function of photography

Kodak

Laminated
INSUROK®

AVAILABLE IN

SHEETS

RODS, TUBES

PUNCHINGS

GEAR BLANKS and Fabricated Parts

In Many Grades and Sizes



INSUROK laminated plastics comprise a great family of valuable materials with many diversified uses in the electrical, mechanical, and chemical industries. These precision-made laminates are available in more than fifty grades, including NEMA grades, grades that meet the requirements of military specifications, and *special* grades —a few of which are described on the opposite page. Each special INSUROK laminate has a combination of properties developed by Richardson engineers for superior performance in specific applications. Further information on these special grades, or on any INSUROK laminate, is available without obligation.

A FEW INSUROK GRADES FOR SPECIALIZED PURPOSES

ELECTRICAL GRADES (1/16" Thickness)

GRADE	DESCRIPTION	Moisture Absorption (24 hrs.)	Power Factor	Dielectric Strength (v/ = i) Short Time	Dielectric Strength (v/ = i) Step by Step	Insulation Resistance (Megohms)	Loss Factor at 1 MC	Dielectric Constant
T-805	A paper base NEMA PC laminate, for cold-punched electrical and mechanical parts involving nominal voltage-frequency-humidity relationships.	4.0%	0.060	550	425	400	0.30	5.0
T-838	A paper base laminate, suitable for many electrical applications. Meets requirements for NEMA Grade XX. Has good machinability.	1.3%	0.040	700	500	2,000	0.20	5.0
T-640	A paper base laminate, for electrical and mechanical uses. Possesses low moisture absorption, excellent mechanical strength and machinability.	0.67%	0.0312	675	590	30,000	0.147	4.70
T-725	A paper base laminate, for superior high-frequency electronic insulation. Maximum stability under varying humidity. Hot-punches into intricate shapes.	0.42%	0.030	700	600	121,000	0.134	4.46
T-606	A fabric base laminate, meeting NEMA Grade CE requirements. For electrical applications requiring greater moisture resistance than Grade C provides.	2.2%	0.055	360	280	100	0.28	5.0
T-712	A continuous-filament Fiberglas laminate, bonded with melamine resin. Its high arc resistance is valuable in many electrical applications.	1.6%	0.013	475	375	25,000	0.08	6.4

MECHANICAL GRADES (½" Thickness)

GRADE	DESCRIPTION	Tensil Strength (psi) Main Direction	Tensil Strength (psi) Cross Direction	Flexural Strength (psi) Main Direction	Compressive Strength (psi) Flatwise	Impact Strength Main Direction (Ft. lb/in.) Flatwise	Impact Strength Main Direction (Ft. lb/in.) Edgewise	Moisture Absorption (24 hrs.)
T-689	A fine-weave fabric base laminate especially suited for intricate parts requiring great strength, such as fine-pitch gears. Good dimensional stability.	18,000	11,200	29,000	42,000	---	---	0.5%
T-733	A linen base NEMA Grade L laminate, for mechanical and electrical parts requiring fine machining, dimensional stability, and physical strength.	14,000	9,500	22,000	38,000	4.6	2.3	0.7%
T-815	A cotton-fiber, mat base laminate, featuring uniform strength in all directions in the plane of the sheet surface. For smooth, high-strength, machined parts.	15,000	15,000	22,000	45,000	3.0	1.4	0.7%
T-601	A strong, tough, fabric base laminate, suitable for gears and other mechanical parts subject to high impact loads. Meets requirements for NEMA Grade C.	11,000	11,000	21,000	40,000	4.2	2.5	0.9%
T-682	A fabric base laminate, designed for valve discs, pump valves, agitator paddles, etc., handling hot or cold water, gasoline, oil, and some mild acids.	10,700	9,700	19,800	37,400	4.2	2.5	0.8%
T-602	A canvas base laminate, with a high natural graphite content. Especially suitable for bearings and other parts subject to friction.	8,000	7,000	16,500	35,000	2.6	1.8	0.5%

The RICHARDSON COMPANY

FOUNDED 1858—LOCKLAND, OHIO

2797 Lake St., Melrose Park, Illinois (Chicago District)

SALES OFFICES: Cleveland • Detroit • Indianapolis • Lockland, Ohio • Los Angeles
Milwaukee • New Brunswick, (N. J.) • New York • Philadelphia • Rochester • St. Louis

Write for
20-Page Booklet "Laminated Plastics" or a Data Sheet on Any Specific Grade

√ Lower losses
√ Higher efficiency
√ Lower operating temperatures
√ Lighter weight . . . smaller sizes
√ Less corona effect
STACKPOLE
√ Higher permeability
Ceramag
ELECTRONIC COMPONENTS DIVISION
STACKPOLE CARBON COMPANY, St. Marys, Pa.
FIXED RESISTORS • VARIABLE RESISTORS
IRON CORES • CERAMAG CORES • LINE
and SLIDE SWITCHES • MOLDED COIL
FORMS • GA "GIMMICK" CAPACITORS, etc.

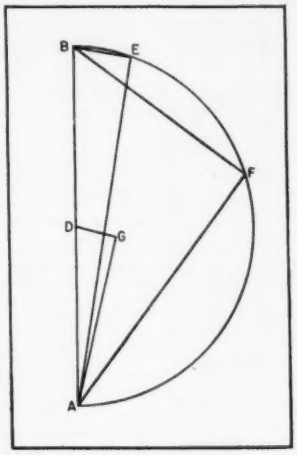

FIG. 4—Vector diagram used for phase determination

period and the other phase in the other half period. Discrimination of one half wave against the other is achieved by the capacitor-resistor combination C_4 R_2.

Terminals A and B of Fig. 3 are connected to the bridge input terminals. The network C_1, C_2, C_3, P_1 and R_1 provides a voltage of the same frequency but of adjustable phase between points F and G. Referring to the vector diagram shown in Fig. 4, the endpoint of the vector of the voltage at F may move along the arc AFE when P_1 is varied from zero to maximum resistance. The endpoint of the vector of the voltage at point G of the circuit would be at point D of Fig. 4 if conventional voltage halving would be done by C_1 C_2 alone. It is seen that the vector DF can turn by only less than 180 deg, so that in this way phase compensation can not be obtained for all possible phase shift angles in the vertical amplifier.

Resistor R_1 shifts the position of the endpoint of the vector of the voltage at point G of the circuit to point G of Fig. 4. When the vector endpoint F travels on arc AFE, the voltage vector between points F and G covers over 180° and allows phase balancing for all possible values of phase shift in the vertical amplifier.

The two grids of the 6SN7 and capacitance coupled to points F and



TYPE 2001-2, BASIC UNIT

Frequencies 200 to 2500 cycles. Dividers and Multipliers available for lower and higher frequencies. Miniaturized and JAN construction. Output, 6 volts.

TYPE 2005, UTILITY UNIT

Consists of Type 2001-2 and booster to provide 10 watts at 110V at precision frequencies from 50 to 500 cycles at input power frequencies of 50 to 500 cycles, 45 watts.



TYPE 2121-A, LAB. STANDARD

Outputs, 60 cycle, 0-110 Volts, 10 Watts; 120-240 cycle impulses. Input, 50-400 cycles, 45 Watts.

Precision FREQUENCIES

GUARANTEED ACCURATE TO 1 PART IN 100,000 (.001%)

TYPE 2111, POWER UNIT

50 Watt output. 0-110-220V at 60 cycles, or any frequency 50 to 1000 cycles. Input, 50-100 cycles, 275 watts.

THE basis of these frequency standards is an electronic fork which is temperature-compensated and hermetically sealed against humidity and barometric pressure.

Type 2001-2 and similar units are available independently. Complete instruments of our manufacture are used extensively by industry and the armed forces where unvarying, dependable high precision is required, such as for bombsights and fire control.

WIDELY USED IN SUCH FIELDS AS:

Aviation
Astronomy
Ballistics
High-Speed Photography
Viscosity Measurement
Nuclear Physics
Telemetering
Radiation Counting
Fluid Flow
Chemical Reaction
Navigation
School Laboratories
Industrial Research Labs.
Accurate Speed Control

WHATEVER YOUR FREQUENCY PROBLEMS, OUR ENGINEERS ARE READY TO COOPERATE. PLEASE REQUEST DETAILS BY TYPE NUMBER.

American Time Products, Inc.

580 Fifth Avenue OPERATING UNDER PATENTS OF WESTERN ELECTRIC COMPANY ***New York 19, N. Y.***

a versatile **High Vacuum "Packaged System"** for leak detecting, gas filling, sealing

● DPi's 10-PORT VACUUM MANIFOLD SYSTEM is greatly improving the efficiency of processing sealed relays, small containers, and delicate mechanisms in the electronics industries.

Used specifically for leak detecting, gas filling, and sealing, it is particularly effective in checking units for microscopically small leaks. (A Consolidated Leak Detector, which is connected to the system, can sound an alarm for a leak so small that a thimbleful of air would take 30 years to get through.)

The Vacuum Manifold System is a completely contained "packaged unit," designed to operate from any 110-volt, 60-cycle line capable of handling 35 amperes.

Two mechanical pumps serve as the roughing and the backing pumps for the unit. The roughing pump evacuates the ports to a pressure within the operating range of the diffusion pump. The backing pump maintains a forepressure on the diffusion pump that is well below the required pressure for efficient diffusion pump operation. And three electrically energized solenoid valves on each port of the manifold permit continuous operation of the diffusion pump during the entire processing cycle.

This diffusion pump, DPi model MC-275, is capable of producing an ultimate vacuum of approximately 5×10^{-5} mm Hg.

The unit is equipped with a two station Pirani gauge and a PHG-1 Philips gauge.

If you would like complete technical data on this unit, or perhaps information on some of the many other ways in which DPi is putting high vacuum at industry's service, simply write to ***Distillation Products Industries,*** Vacuum Equipment Department, 727 Ridge Road West, Rochester 3, N. Y. (Division of Eastman Kodak Company).

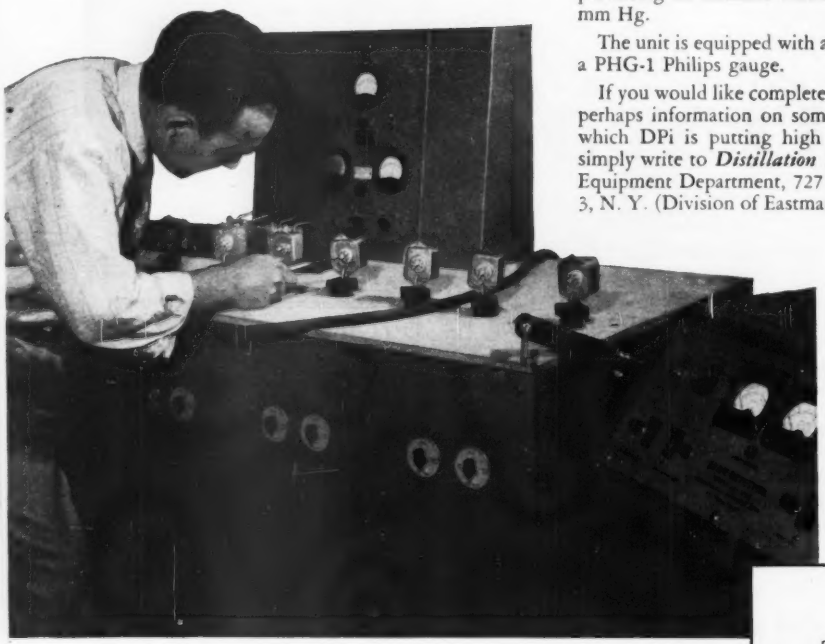

DPi's 10-Port Vacuum Manifold System in use at Barber-Colman Company, Rockford, Illinois.

high vacuum research and engineering

DPi

Also . . . vitamins A and E . . . distilled monoglycerides . . . more than 3400 Eastman Organic Chemicals for science and industry

you can be sure if it's AMP

Wire termination in military equipment can be just as important as each mission, each flight or each engagement. Successful operation depends on the proper function of every part. That's why AMP solderless terminals and precision installation tools are specified and approved for all critical installations. Write for new TECHNICAL DATA CATALOG and approval lists.

AMP PRE-INSULATED DIAMOND GRIP* Solderless Terminal

U.S. Patent Nos. 2,410,321, 2,379,567, 2,405,111, 2,468,169, other U.S. Patents Pending

AMP SOLISTRAND* Solderless Terminal

U.S. Patent No. 2,535,013, other U.S. Patents Pending

*Trade-Mark
AMP Trade-Mark Reg. U.S. Pat. Off.

AMP

AIRCRAFT-MARINE PRODUCTS INC.
2100 Paxton Street, Harrisburg 10, Pa.

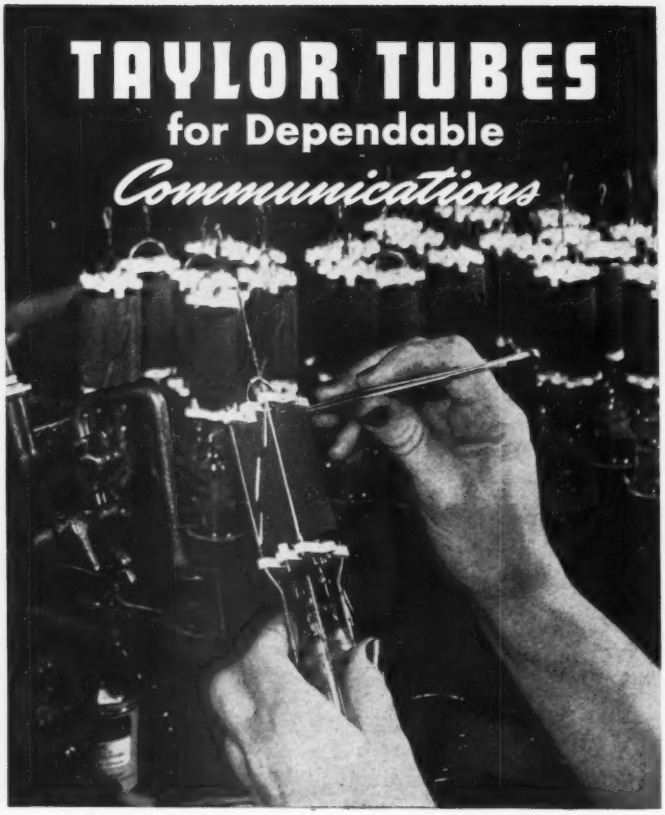

Into the manufacture of every Taylor Custom Built Tube goes an extra measure of careful and detailed consideration. We call this determination of trying to do every job just a little better, the "TQS"—Taylor Quality Standard. It takes a little more effort this way, but after all, knowing they're right for the jobs they have to do is what counts most with us and with you.

★ TRANSMITTING ★ INDUSTRIAL
★ RECTIFIER ★ ELECTRONIC

As always, Taylor is producing tubes of superior quality and outstanding performance. The Taylor Representative nearest you is ready and willing to discuss your particular requirements. Call on him for information any time.

Taylor HEAVY CUSTOM BUILT DUTY Tubes

TAYLOR TUBES INC., 2312-18 WABANSIA AVE., CHICAGO 47, ILL.

Export: Royal National Company
75 West St., New York 6, N. Y.

NATVARNCO, NEW YORK

G. The d-c potential of the grids is held at +150 volts. The two cathodes are interconnected and are connected through 47,000 ohms to the zero line. They assume a voltage substantially equal to the average between the signals on the two grids. The grid to cathode signals appearing in the two triode systems therefore will be equal in magnitude and opposite in phase. These two signals cause two equal waves of opposite polarity on the two plates. The two waves are brought to the diode plates through capacitor coupling.

The two diode cathodes are interconnected, so that the common point assumes the voltage of that diode anode which is more positive, the positive half of one triode plate's signal during one half of the cycle and the positive half of the other plate's signal during the other half of the cycle. The plate resistors of the diode are connected to the B^+ line to prevent periods in which both anodes would be more negative than the common cathode. The magnitudes of the two half waves are equalized by a potentiometer. In this way a waveshape as shown in sketch b of Fig. 2 is obtained on the diode cathodes. To increase one crest above the other and to make one furrow deeper than the other, a 45-deg wave is added through C_4 and R_5. Resistor R_5 between diode cathodes and output terminal provides the impedance necessary for proper mixing ratio. The waveshape on the output terminal will be the one shown in sketch c of Fig. 2.

With this simple deflection circuit it is possible to speed up the operation and to increase the accuracy of null detection.

REFERENCES

1) D. G. C. Luck, U. S. Patent No. 2,328,985.
2) J. C. Frommer, U. S. Patent No. 2,566,699.

Synchronized Pulse Generator

HIGH-SPEED PHOTOGRAPHY, employing spark gaps and flash tubes, often necessitates the use of bulky and expensive components for high-voltage circuitry. Ordinarily, in such cases, the high-voltage pulse

For the Best .. Call Cleveland

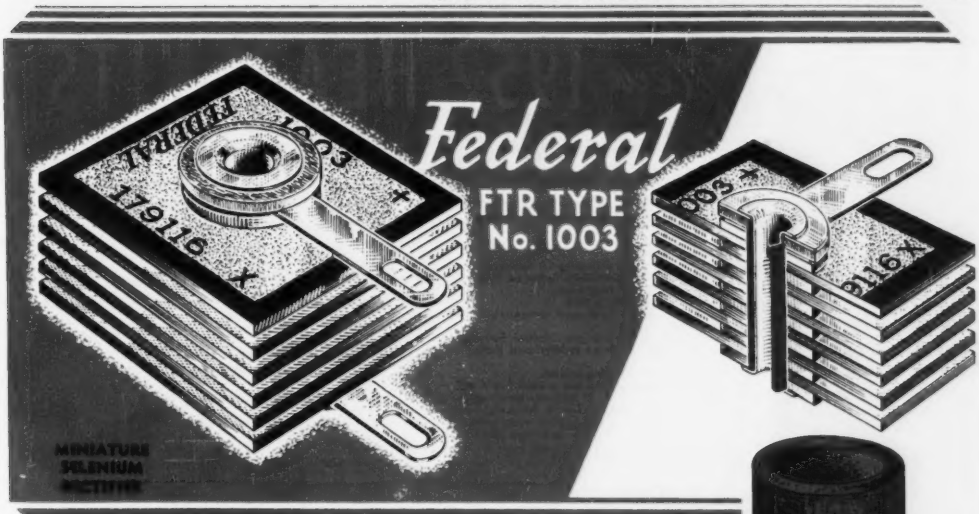

CLEVELITE*

is used in Federal Selenium Rectifiers to insulate the live electrical parts of the rectifier from the central eyelet upon which the rectifier is mounted.

Federal Telephone and Radio Corporation is known as America's oldest and largest manufacturer of Selenium Rectifiers.

CLEVELITE and COSMALITE* high quality . . . low cost Phenolic Tubing is the first choice of the Radio and Television Industries.

Low Moisture Absorption . . . Dimensional Stability . . . High Dielectric Strength . . . Low Loss . . . Great Physical Strength . . . Good Machineability . . . Why Pay More?

★

Your inquiry will receive immediate attention.

Our tubing is available in . . .
Diameters ⅛ inch to 8 inches.
Lengths ⅛ inch to 8½ feet.
Wall thicknesses, .008" to .0250".
Colors: Natural and Black.

FREE SAMPLE made to your exact specifications gladly furnished.

*Trade Marks

The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO

PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Ogdensburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario

REPRESENTATIVES

NEW YORK AREA R. T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND R. S. PETTIGREW & CO., 10 N. MAIN ST., WEST HARTFORD, CONN.
CHICAGO AREA PLASTIC TUBING SALES, 5315 N. RAVENSWOOD AVE., CHICAGO

New 1952 HEATHKITS



Heathkit TELEVISION GEN. KIT $39.[illegible]

Heathkit ELECTRONIC SWITCH KIT $19.[illegible]

Heathkit AUDIO GEN. KIT $34.[illegible]

Heathkit CONDENSER CHECKER KIT $19.50

Heathkit R. F. SIGNAL GEN. KIT $19.50

Heathkit A.C. VOLTMETER KIT $29.50

Heathkit SQUARE WAVE GEN. KIT $29.50

Heathkit INTERMODULATION ANALYZER $39.50

Heathkit AUDIO FREQ. METER KIT $34.50

Heathkit 5" OSCILLOSCOPE KIT

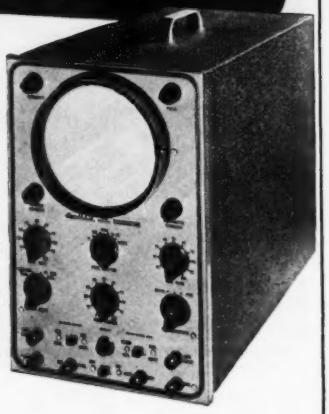

- New "spot shape" control for spot adjustment — to give really sharp focusing.
- A total of ten tubes including CR tube and five miniatures.
- Cascaded vertical amplifiers followed by phase splitter and balanced push-pull deflection amplifiers.
- Greatly reduced retrace time.
- Step attenuated — frequency compensated — cathode follower vertical input.
- Low impedance vertical gain control for minimum distortion.
- New mounting of phase splitter and deflection amplifier tubes near CR tube base.
- Greatly simplified wiring layout.
- Increased frequency response — useful to 5 MC.
- Tremendous sensitivity .03 RMS per inch Vertical .6V RMS per inch Hor.
- Dual control in vernier sweep frequency circuit — smoother acting.
- Positive or negative peak internal synchronization.
- Multivibrator type Wide Range Sweep Generator.

A brand new 1952 Heathkit Oscilloscope Kit with a multitude of outstanding features and really excellent performance. A scope you'll truly like and certainly want to own.

The kit is complete with all parts including all tubes, power transformer, punched and formed chassis, etc. Detailed instruction manual makes assembly simple and clear — contains step-by-step instructions, pictorials, diagrams, schematic, circuit description and uses of scope. A truly outstanding value.

MODEL O-7
SHIPPING WT. 24 LBS.

$43.50

Heathkit VACUUM TUBE VOLTMETER KIT



- New styling — formd case for beauty.
- New truly compact size — Cabinet 4⅛" deep x 4-1/16" wide x 7⅜" high.
- Quality Simpson 200 microamp meter.
- New ohms battery holding clamp and spring clip — assurance of good electrical contact.
- Highest quality precision resistors in multiplier circuit.
- Calibrates on both AC and DC for maximum accuracy.
- Terrific coverage — Reads from ½V to 1000V AC, ½V to 1000V DC, and .1 to over 1 billion ohms resistance.
- Large, clearly marked meter scales indicate ohms, AC Volts, DC Volts, and DB — has zero set mark for FM alignment.
- New styling presents attractive and professional appearance.

The 1952 Model Heathkit Vacuum Tube Voltmeter! Newly designed cabinet combines style and beauty with compactness. Greatly reduced size to occupy a minimum of space on your work-bench. Covers a tremendous range of measurements and is easy to use. Uses only quality components including 1% precision resistors in multiplier circuit for greatest accuracy. Simpson 200 microamp meter with easy to read scales for fast and sure readings.

All parts come right with kit, and complete instruction manual makes assembly a cinch.

MODEL V-5
SHIPPING WT. 5 LBS.

$24.50

YOU SAVE BY ORDERING DIRECT FROM MANUFACTURER

ROCKE-INTERNATIONAL CORP
13 E. 40th ST.
NEW YORK CITY (16)

The HEATH COMPANY
. . . BENTON HARBOR 14, MICHIGAN

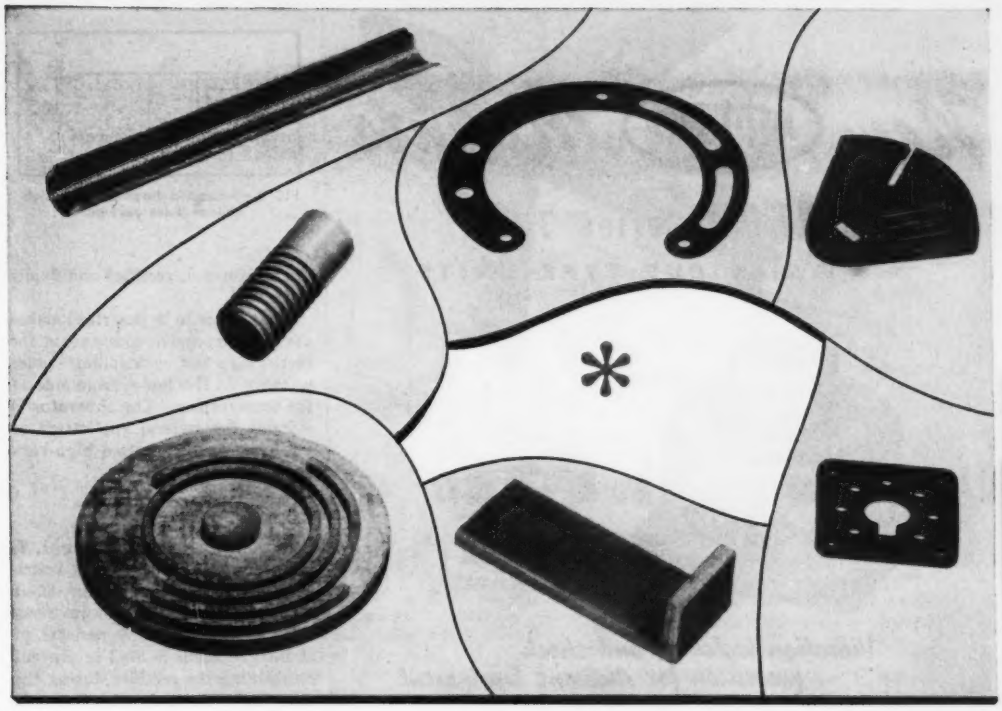

to solve the shortage puzzle

replace key pieces with * Lamicoid®

- High Dielectric Strength
- Low Power Factor
- Heat Resistance
- Low Moisture Absorption
- High Impact Resistance
- Dimensional Stability
- Light Weight
- Tensile Strength
- Resistance to Abrasion

LAMICOID, a thermosetting plastic laminate, has already proved itself for such uses as terminal blocks, panels, dials and many other applications.

The same qualities that make it adaptable to these uses may also provide practical answers to your material shortage problems . . . and perhaps even bring you savings or improvements!

For example, you can obtain LAMICOID in a wide variety of forms and grades which are almost certain to possess the exact characteristics your product requires. This versatility is possible because LAMICOID is produced through the use of many different fillers such as glass, nylon, fabric, paper, etc. with a variety of resins.

LAMICOID is supplied in standard sheets, rods and tubes, or fabricated into parts to your specification. We will be pleased to put our 58 years of experience to work on *your* electrical insulation problems. Send your blueprints and specifications today for a prompt quotation.

MICA *Insulator* COMPANY

Schenectady 1, New York

Offices in Principal Cities

LAMICOID (Laminated Plastic) • MICANITE (Built-up Mica) • EMPIRE (Varnished Fabrics and Paper) • FABRICATED MICA

New MET-L-FLEX Mounts

ROBINSON Series 7001

#1 SIZE CUP TYPE UNITS





ACTUAL SIZE

Vibration isolation and shock protection for Airborne Equipment

For the first time, dependable MET-L-FLEX all-metal mounts are available for many different applications requiring #1 cup type units. New standards of equipment performance, previously unattainable with conventional mounts, can be obtained without sacrificing weight or cost. High damping and axial-lateral stability, inherent features of MET-L-FLEX, provide added protection for delicate avionic equipment. Write today for full performance and engineering data on the complete line of Robinson MET-L-FLEX vibration isolation and control systems.

- **Load ranges from ½ lb. to 10 lbs. per mount.**
- **Built-In damping with auxiliary cushioning for overload and shock.**
- **Overload and underload capacity as great as 50%.**
- **Minimum ultimate structural strength 700 lbs. per unit.**
- **Temperature range −90°C to +175°C.**

Available in complete Unit Mount Bases including the popular S-1 and S-2 mounting tray sizes. Write today for information.



ROBINSON AVIATION INC.

TETERBORO, NEW JERSEY

Vibration Control Engineers



FIG. 1—Schematic diagram of the high-voltage pulse generator

is transformed, rectified and finally controlled.

The system to be described makes use of inexpensive components for rectifying and controlling pulse voltages on the low-voltage side of the transformer. The apparatus is suitable for general application as a source of synchronized high-voltage pulses.

Circuit Analysis

In the circuit shown in Fig. 1, T_1 is an ordinary power-supply transformer used to charge the 80-μf capacitor C through a full-wave rectifier to 375 volts. A resistor of at least 50 ohms is used to prevent overloading the rectifier during the charging cycle or in case C should become short-circuited.

The capacitor discharges through the primary of a six-volt automobile ignition coil whenever switch S is closed to remove bias from the thyratron. Discharge of C is rapid because of the low resistance of the primary circuit and, as a result, a high voltage appears across the terminals of the T_2 secondary as long as current flows in the primary. The open-circuit form of the high-voltage pulse is essentially rectangular and is unidirectional. The maximum voltage obtainable with the circuit elements shown is about 35 kv as evidenced by sphere-gap measurements at A-B.

A capacitor may be added across terminals A-B or from terminal A to the cathode terminal of the thyratron in order to decrease the discharge time for photographic applications involving the type of transient phenomena for which a flash tube is particularly suited. With the additional capacitor added to the circuit, the discharge time is controlled by the value of the added capacitor and the resistance of the spark discharge path. The maximum voltage obtainable is reduced

"You've heard it too . . ."

There you are, stretched out in perfect comfort. Feet up—pipe lit—a glass of the "brew that cheers" close by. You lean a little to the left, turn the knob, and your favorite program comes in. Just as the results from Santa Anita start — silence — then music and this announcement—"Due to circumstances beyond our control . . . " Only an annoyance to you, but a major concern to the broadcasting studio. You won't learn what happened, but the studio executives will make it their business to find out. Woe to the equipment manufacturer if it was just a vital piece of electrical insulation that hadn't been able to stand the gaff.

Electrical equipment is only as good as the insulation which protects it. Over 37,000,000 feet of BH Extra Flexible Fiberglas* Sleeving are safeguarding products of American industry. Heat, cold, age or vibration have little effect on BH Ex Flex (as it is known to the trade). Patented manufacturing processes make it non-fraying and non-raveling, even when cut in short lengths.

Flexibility is constant through a temperature range of -70° F to +1200° F, because no hardening varnish is used. The easy-to-handle tubular shape expands readily to cover knobs, terminals and irregular obstructions.

Tough and long lasting, BH Ex Flex is available in colors, with color retention up to 300° F.

BH Extra Flexible Fiberglas Sleeving is one of a family of electrical insulations, each designed to meet particular conditions in service. Give us a few facts about your requirements — products, temperatures, voltages — we will gladly furnish free samples for testing purposes.

Address Dept. E-10

Bentley, Harris Manufacturing Co.
Conshohocken, Pa.

BH *Fiberglas** SLEEVINGS

*BH Non-Fraying Fiberglas Sleevings are made by an exclusive Bentley, Harris process (U. S. Pat. No. 2393530). "Fiberglas" is Reg. TM of Owens-Corning Fiberglas Corp.

What DC Power Equipments do You Need for Military End-Use?

You can meet your requirements with—

Federal

SELENIUM RECTIFIERS

TYPICAL MILITARY EQUIPMENTS
DESIGNED AND PRODUCED BY *FEDERAL*

Aircraft

Portable and stationary ground power units • Airborne power supplies and voltage regulators • Engine starters • Transformer rectifiers

Ground

Automatic and manually-controlled battery chargers • Filtered and regulated power supplies • Radar power supplies • Transmitter power supplies • Telephone battery eliminators • Teletype and telegraph power supplies

Naval

Shipboard and shore power supplies • Regulated power supplies • Power supplies for electronic equipment with magnetic amplifier control

Manufactured to Military Specifications ...to provide ANY DC OUTPUT!

WHEREVER your government specifications call for conversion of AC to DC—be sure to give the job to a *Federal* Selenium Rectifier Equipment . . . compact, rugged, completely self-contained . . . ready to connect to AC . . . ready to deliver *dependable* DC power!

Today, Federal Equipments are serving in a wide range of applications . . . from aircraft to submarines . . . from special subminiature to heavy-duty power equipment . . . operating quietly, efficiently, reliably. All are powered by Federal selenium rectifiers . . . famous for long life and trouble-free service . . . without expendable parts that require frequent replacement.

MAIL your specifications to *Federal* today! Get the benefit of Federal's years of experience in selenium rectifier design and production. Remember, *Federal* is the *pioneer* company—the *first* to introduce selenium rectifiers to American industry. For quick service, write Dept. E-713A

America's Oldest and Largest Manufacturer of Selenium Rectifiers



Heavy-duty Federal Selenium Rectifier



FTR 3414-AS Ground Aircraft Power Supply



FTR 3146-BS Aircraft Power Supply



FTR 3141-CS-03 Clip-in Voltage Regulator

FEDERAL TELEPHONE & RADIO — FTR — An IT&T Associate

Federal Telephone and Radio Corporation

SELENIUM-INTELIN DIVISION, 100 KINGSLAND ROAD, CLIFTON, NEW JERSEY
In Canada: Federal Electric Manufacturing Company, Ltd., Montreal, P. Q.
Export Distributors: International Standard Electric Corp., 67 Broad St., N.Y.

CROLOY RADIO RODS
Replacing coiled loops. Spell new reception standards. Permit mounting on chassis, and final test before placement in cabinet. "Q" of order of 220 as against 80 for small loops. Usual Croloy radio rod is 8" l. by ½" d. Other sizes available.

CROLOY CORES
Molded in widest range of shapes and sizes. Deflection yokes expand TV-tube deflection angles without corresponding voltage increase. Croloy cores slash TV transformer bulk.

CROLOY RADIO CORES
Croloy slug tuners and I.F. coils reduce cost and raise gain. Made in widest variety of designs, sizes and modifications. With screw inserts; with threaded bodies; cup-shaped; tiny closed cores; etc. Choice of compositions to meet electronic characteristics.



EXTRUDED CROLITE
From tiny tubes no bigger than pencil lead and with one or two longitudinal holes, to tubes, rods and blocks up to 6" dia. Widest variety of cross-sectional shapes. The Crowley extrusion technique minimizes machining.



PRESSED CROLITE
Formed in standard or custom molds into the widest choice of shapes and sizes, thereby minimizing machining. High degree of accuracy to fit with metal parts in any assembly. Plain or glazed finish.

MACHINED CROLITE
Elaborate shapes, including grooves, bobbins, holes, threads, fins and other features, can be included in Crolite machined pieces. Precision machined tools in the hands of skilled specialists, insure the matching of rigid mechanical specifications.

parts from powders

Consider Crowley your No. 1 source of supply for magnetic and ceramic pieces. For here, under one roof, are specialists who have pioneered the "parts from powders" art for the radio-electronic industry.

Crowley means production facilities that have supplied the major portion of magnetic cores in peace and war alike. Here are extrusion, molding and machining facilities that can provide steatite and other severe-service insulators in the widest range of characteristics, sizes, shapes.

By all means try Crowley! You can save time, money and trouble, just as other electronic designers, engineers and production men are doing.

Let us collaborate on your TV, radio or electronic problems. Samples, engineering aid, and quotations, on request.

HENRY L. CROWLEY & COMPANY, INC.
Pioneering POWDER-IRON and STEATITE products
1 Central Avenue
West Orange, N. J.

MILO
RADIO
COMPLETE SOURCE
for
JAN-TYPE
COMPONENT
PARTS
MEET JOINT ARMY-NAVY SPECIFICATIONS !
MOST COMPLETE STOCK IN THE NATION!
UG and AN CONNECTORS
RG CABLE and WIRE
JAN CONDENSERS
JAN RESISTORS
JAN TRANSFORMERS
JAN and SPECIAL PURPOSE TUBES
JAN SWITCHES
JAN RELAYS
JAN PARTS of ALL TYPES
MILO has Everything!
MILO stocks the products of over 200 nationally-known electronic equipment manufacturers, including their complete lines of JAN parts, which meet the rigid Joint Army-Navy Specifications. No matter what your need in any electronic category, MILO has it!
IMMEDIATE DELIVERY —from STOCK!
All Types SYLVANIA SILICON CRYSTALS
GERMANIUM XTAL DIODES
Avoid production delays! We stock all standard types and sizes — for all applications.
NEW 1952 CATALOG! READY SOON! Over 1100 Pages!
Purchasing Agents! Chief Engineers!
Reserve your copy NOW of our new 1952 catalog, listing all the latest equipment in the industry. Over 75,000 items, 7000 illustrations. An invaluable aid in your work. Write on your company letterhead, stating your official position. Address Dept. OE.
MILO offers SERVICE!
PRICES and INFORMATION ON REQUEST
• PHONE—15 TRUNK LINES
• DIRECT W.U. WIRE—MILO-WUX-N.Y.
• TELETYPE—TWX-NY1-1839
Send Today for This Valuable Book!
MILO RADIO & ELECTRONICS CORP.
200 GREENWICH STREET, NEW YORK 7, N. Y. • Tel. BEekman 3-2980
Cable Address MILOLECTRO • The ONE Source for ALL your electronic needs

to about 12 kv with the addition of a 0.02-μf capacitor but spark intensity is enhanced since the capacitor will discharge through a needle gap in air in less than one microsecond.

The switch S may be a microphone, photocell or other sensing instrument whose signal is suitably amplified to the lift bias of the thyratron for single-shot synchronization. For electrical synchronization, attention must be paid to the over-all delay through the apparatus. This delay is essentially controlled by the value of C and the setting of A-B. The delay is short enough to be compensated for in the usual way by adjusting the position of the sensing instrument along the time axis of the phenomenon under observation.

The material in this article was abstracted from an article entitled "A Synchronized High Voltage Pulse Generator" by C. F. Johnson which appeared in the July 1951 issue of *The Review of Scientific Instruments* on page 541.

X-Ray Liquid-Level Gage

By John E. Jacobs and R. F. Wilson

Coolidge Laboratory
General Electric X-Ray Corp.
Milwaukee, Wisconsin

Gaging of the level of liquids in opaque or inaccessible vessels imposes many problems in technique used as well as associated instrumentation. This discussion will be limited to those problems which at the present time are dependent on the use of x-ray for their solution.

The objective of the gage to be described is to measure the height of fill of large vessels or to control the process by which they are filled. In most cases the problem is to fill or check height of fill of vessels in an inaccessible location under conditions which render contact-type instruments unsuitable. Instrumentation in the gage may be arranged to operate an audible or visual indicator, to actuate reject or control mechanisms or to record inspection information.

The gaging of liquid levels by use of x-ray absorption places rather strict requirements on the x-ray detectors used. In most applications, wall thickness of the container



Quick Switches







are a

DAVEN SPECIALTY



And the "specialty of the house" is double-barreled . . . first, choose from hundreds of standard units to satisfy your needs—for quick switch delivery . . . second, Daven can effect quick 'switches' or changes from standard units to special switches, by using components at hand. Standard parts can be adapted for your switch. That too makes for speed, dependability, economy. Write for more detailed data.

Here's Why Daven Switches Excel

- Low and uniform contact resistance.
- Minimum thermal noise.
- High resistance to leakage.
- Trouble-free operation and long life.
- Roller-type positive detent action.
- Depth of unit not increased by addition of detent.

Standard Daven Switches may be the answer to many of your problems. Therefore, check this list below for many of the popular types that are readily available.

Type	Operation	Maximum No. of Positions (per pole)	Maximum Poles per Deck	Deck
G1A	Make before break	24	1	1 3/8"
C1A	Make before break	31	1	1 3/4"
C2B	Break before make	15	1	1 3/4"
D1A	Make before break	47	1	2 1/4"
D7A	Make before break	14	4	2 1/4"
D8B	Break before make	7	4	2 1/4"
D9A	Make before break	9	5	2 1/4"
E3A	Make before break	47	2	2 3/4"
E8B	Make before break	12	4	2 3/4"
E11A	Make before break	15	6	2 3/4"
F1A	Make before break	60	1	3"

It's Free!

Your copy of Daven's complete, new bulletin on switches. Write for it today.

THE DAVEN CO.

191 CENTRAL AVENUE • NEWARK 4, NEW JERSEY

NEW Miniature Telephone Type Relay

NEW LK RELAY

MOUNTING: End mounting for back of panel or under-chassis wiring. Interchangeable with standard "Strowger" type mounting.

COIL POWER: From 40 milliwatts to 7 watts D.C.

CONTACTS: Standard 2 amperes, special up to 5 amperes. 2 amperes up to 6 P.D.T. 5 ampere contacts (low voltage) up to 4 P.D.T. Special 20 ampere power contacts S.P.S.T., normally open, paralleled.

DIMENSIONS:
1⅝" HIGH, 2 7/32" LONG,
1 3/32" WIDE

These are the dimensions for the 6 pole relay.

Will meet Army and Navy aircraft specifications as a component unit.

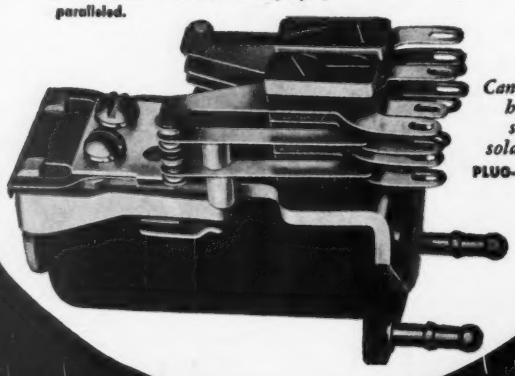

Can be furnished hermetically sealed with solder terminals.
PLUG-IN MOUNTING—SPECIAL.

SK RELAY

MOUNTING: Front of panel mounting and wiring.

COIL POWER: From 100 milliwatts to 4.5 watts D.C.

CONTACTS: Same as "LK".

DIMENSIONS: 1½" HIGH, 1 1/16" LONG, 3/32" WIDE.

These are the dimensions for the 4 pole relay.

Will meet Army and Navy aircraft specifications as a component unit.

CAN ALSO BE FURNISHED HERMETICALLY SEALED WITH SOLDER TERMINALS. PLUG-IN—SPECIAL.



SK, HERMETICALLY SEALED

ALLIED CONTROL CO. INC. 2 EAST END AVE., NEW YORK 21, N. Y.

TUNG-SOL CHANGES ITS NAME . . .

same trademark . . . . . ts

same tradename . . . . . **TUNG-SOL**

same products . . 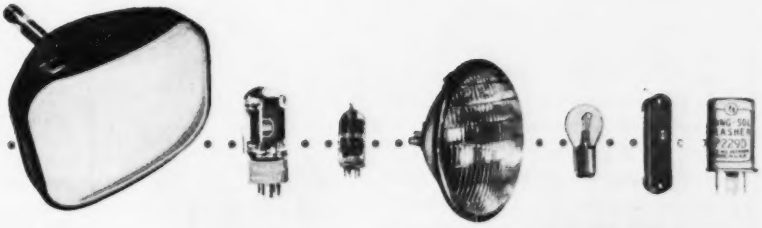

same quality . . . . . 

same service . . . . .

but a brand new corporate name . . **TUNG-SOL ELECTRIC INC.**

(FORMERLY TUNG-SOL LAMP WORKS INC.)

THAT RARE JEWEL IN BUSINESS

..A SOURCE
YOU CAN DEPEND UPON!

It isn't just a matter of supplying high quality products . . . or keeping delivery promises . . . or being ready to render a special service upon occasion. What we have in mind when we speak of a dependable source is a supplier whose facilities, manpower and technical standards are such that you can always turn a difficult engineering and manufacturing problem over to that source . . . and DEPEND upon that supplier to follow through.

Our exceptionally complete and modern plant, competent engineering staff and comprehensive test equipment qualify us to offer such service to a group of top manufacturers in the electrical and electronic fields. We invite you to unload that defense-urgent coil, transformer or magnet wire problem on us.

MAGNET WIRE
COILS
COMMUNICATIONS EQUIPMENT
TRANSFORMERS

WHEELER

MAKES THESE PRODUCTS A Specialty

THE WHEELER INSULATED WIRE CO., INC., 1101 EAST AURORA ST., WATERBURY 20, CONN.
Division of The Sperry Corp.



FIG. 1—Magnified view of a cadmium-sulfide crystal

reaches a value where only x-radiation of short wave length is transmitted. All of the information as to the location of the liquid level is contained in the radiation transmitted, therefore, the detector used should be an efficient absorber of short-wave-length radiation.

The commonly used electronic detectors of x-radiation are the gas-filled ionization chamber and the fluorescent-screen photomultiplier combination. The gas-filled chamber exhibits extremely low absorption of the radiation encountered. The fluorescent-screen photomultiplier tube is better in this respect if the phosphor layer is made thick enough. However, this system suffers from the fact that the impinging radiation must first excite light in the phosphor, this light then being used to eject the photo electrons which constitute the usable signal. Practically, the two systems described are essentially large-angle detectors in that they function satisfactorily only if a relatively large beam area is scanned. In some applications where relatively low angular resolution is needed they will serve as a satisfactory detecting unit.

Semiconductors

Recently, semiconductors have received considerable attention as radiation detectors because of their unique properties as compared to the commonly used x-ray detectors.[1] Inasmuch as the gage described by this paper is made possible by the use of cadmium-sulfide crystal detectors, it is though advisable at this time to briefly describe the properties of cadmium sulfide when used as a detector of x-radiation.

The fact that CdS changes its re-

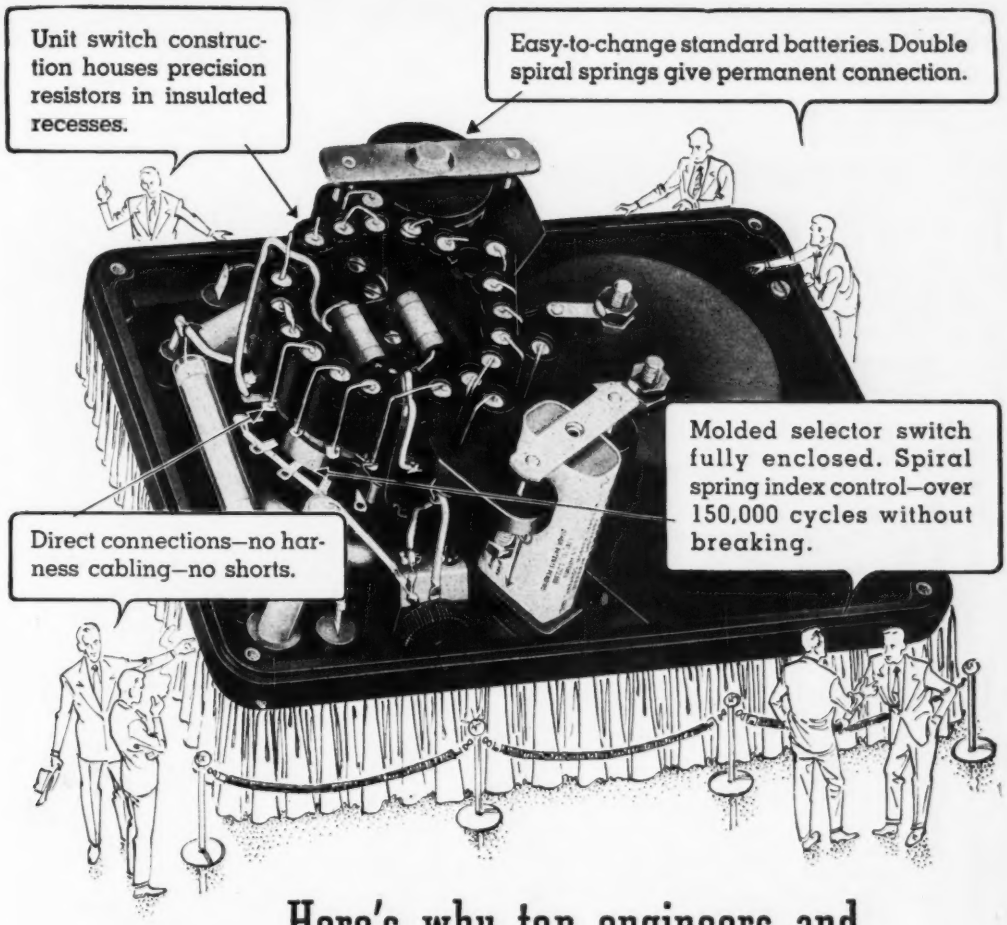
Unit switch construction houses precision resistors in insulated recesses.
Easy-to-change standard batteries. Double spiral springs give permanent connection.
Molded selector switch fully enclosed. Spiral spring index control—over 150,000 cycles without breaking.
Direct connections—no harness cabling—no shorts.

Here's why top engineers and technicians use Model 630

Features like those shown above are what make this popular V.O.M. so outstandingly dependable in the field. The enclosed switch, for instance, keeps the silvered contacts *permanently clean*. That's rugged construction that means stronger performance, longer life. And tests show that the spiral spring index control, after more than 150,000 cycles of switch rotation, has no disruption or appreciable wear! Investigate this history-making Volt-Ohm-Mil-Ammeter today: 33 ranges, large 5½" meter.

ONLY
$39.50
AT YOUR DISTRIBUTOR
PRICES SUBJECT TO CHANGE

FOR THE MAN WHO TAKES PRIDE IN HIS WORK

Triplett

TRIPLETT ELECTRICAL INSTRUMENT COMPANY · BLUFFTON, OHIO U.S.A.

NOW THERE ARE 3

They do everything you want!

They make tough jobs easy!

E-V Slim-Trim DYNAMICS

for TV... Broadcasting... Recording... PA

... for wide range high fidelity response ... for fixed position or man-in-motion ... for ruggedness and versatility ... for exclusive Acoustalloy diaphragm ... for pop-proof pick-up indoors and outdoors

You see ... and hear ... the E-V Slim-Trim on network and local telecasts and broadcasts. You find it in studios and on remote hook-ups. You find it on important PA jobs, too. And you know it's there *because* it has met the most exacting tests... *because* it serves so superbly in every way for voice and music. *First* in dynamic, it has features only *Electro-Voice* can provide. 3 models meet every need!

Ask your E-V Distributor or Send for Full Facts Now!

FOR TELECASTING-BROADCASTING

"635"—Response 40-15,000 c.p.s., ±2.5 db. Power rating -53. Omnidirectional. Changeable low impedance. Removable swivel. List **$200**

"654"—Response 50-14,000 c.p.s., substantially flat. Power rating -55. Omnidirectional. 50-250 ohm impedance selector. Swivel head. List **$90**

FOR PUBLIC ADDRESS

"636"—Response 60-13,000 c.p.s., substantially flat. Power rating -55. Omnidirectional. High or low impedance. Swivel head. List **$65**

Electro-Voice

401 CARROLL ST. • BUCHANAN, MICHIGAN

Export: 13 E. 40th St., N.Y. 16, U.S.A. *Cables:* Arlab

MICROPHONES · PHONO PICKUPS · HI-FI SPEAKERS · SELF-THRUING TV BOOSTERS

ONLY SPECIFIC COILS CAN DO THIS JOB-



The monstrous Joy Continuous Coal Miner "snakes" through the earth gathering 2 tons of coal per minute. This production miracle is dependent on highest quality components. Not the least of these is the rugged 2½ lb. solenoid coil, shown below, which actuates the controls and is made from non-corrosive and inert materials to withstand the extreme voltage differentials, moisture, dampness, and acidity encountered in operation.

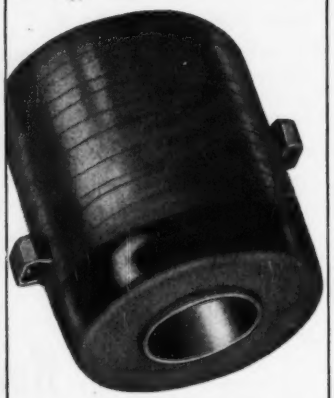

Coto SINCE 1917

Builds Them!

When you need electrical coils, why not take advantage of 34 years of experience, engineering competence, and modern production facilities. Coto coils are built for you, to your specifications.

COTO-COIL CO. inc.

COIL SPECIALISTS SINCE 1917

65 PAVILION AVE

PROVIDENCE 5, R.I.

Boeing B-47

One OF A LINE...

FOR ARMED FORCES

COMMUNICATIONS...

"GUARD-A-SEAL" CONTROLS »»

SERIES 795 D.C. TELEPHONE TYPE RELAY

Guardian engineering developments of hermetically sealed containers specifically designed for aircraft.



A. N. CONNECTOR SCREW TERMINAL LUG HEADER OCTAL PLUG

NEW CATALOG on Hermetically Sealed Guardian Relays with various containers is yours for the asking.

In presenting the Series 795 D. C. Telephone Type Relay, Guardian Electric offers to designers of finest precision communications equipment a relay that integrates ideally with every communications circuit... *hermetically sealed* to withstand vibration, impact, heat, cold, moisture, salt air, sand, dust and mold. Name your need —"Guard-A-Seal" relays to fly the mighty B-47 or a tiny sub-miniature control assembly; jet fighter flight switches or switches for vending control; mechanisms for a giant big-league scoreboard or a compact liquid level control—get them all at GUARDIAN. Over 35,000 standard parts to speed orders—plus a TOP ENGINEERING STAFF to solve "special problems". The Series 795 D. C. is available in Lug Header containers and to specifications in A.N. Connector, Screw Terminal or Octal Plug housings. Also obtainable with open mountings.

AN-3320-1 D.C.

AN-3324-1 D.C.

Series 595 D.C.

Series 610 A.C.—615 D.C.

Series 695 D.C.

ALSO MINIATURE AND SUB-MINIATURE CONTROLS—WRITE

GUARDIAN ELECTRIC

1625-L W. WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN INDUSTRY

PLACE
BRAND QUALITY
IN THE HANDS OF MEN
AT THE BENCH

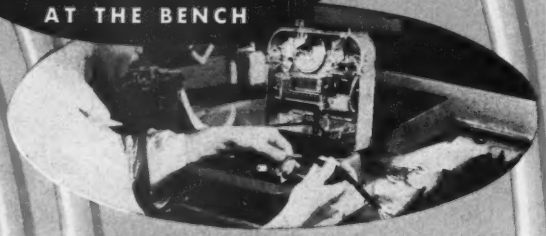

LET PERFORMANCE PROVE
Extruded
TURBO PLASTIC TUBING
Outstanding
FOR QUALITY • EASE OF HANDLING
COST REDUCTION

The TURBO line of extruded plastic tubing is being specified and used by more and more people interested in tough, flexible and versatile tubing to form a deterioration resisting dielectric barrier.

HEAT RESISTANT TUBINGS Turbotrans 105 and Turbotherm 105 are U. L. recognized 105°C. tubing. Turbotrans 105 is a specially processed tubing highly recommended for potting, baking and similar applications involving high heat.

LOW TEMPERATURE TUBING Turbozone 47 provides unusual flexibility in sub-zero temperatures and is specially compounded to meet AAF 12047A specifications.

GENERAL PURPOSE TUBING Turbolex 63 meets MIL-I-631 specifications. While not recommended for high heat or oil applications, it features low temperature properties, and good dielectric with flexibility. Turbolex 85 is an ideal general purpose tubing used where moderate heat and occasional exposure to oil may be encountered.

Available in 36 popular sizes from .022" to 1.5" inside diameters in continuous lengths and in 7 standard colors plus transparent.

WRITE FOR TUBING SAMPLES AND DESCRIPTIVE LITERATURE COMPLETE WITH PHYSICAL AND ELECTRICAL PROPERTIES, DIAMETERS, TOLERANCES AND COLORS.

TURBO
THE WILLIAM BRAND AND CO., INC.
INSULATING MATERIAL SPECIALISTS SINCE 1920
106 VALLEY STREET, WILLIMANTIC, CONNECTICUT, U. S. A.

Plastic Insulated Wire • Multi-conductor Cables
Extruded Tubing • Varnished Tubing • Saturated Sleeving
Glass Sleeving and Tubing • Cambric Cloths,
Tapes and Papers • Mica Products • Wiring Harnesses

SALES REPRESENTATIVES IN PRINCIPAL CITIES

sistance when irradiated with x-rays was first noted in 1946 by a German physicist, Dr. R. Frerichs.[2] He further noted that the current passed by the crystals is of greater magnitude than one would expect from primary ionization of the crystals by the incident x-radiation.

Natural occurring CdS in the form of the mineral, Greenockite, is so rare that crystals must be produced artificially.[3] This is best done by vaporizing cadmium metal in an atmosphere of hydrogen sulfide so that CdS is produced in the vapor phase. This vapor then is caused to seed out forming hexagonal crystals shown in Fig. 1. The CdS produced by reaction in aqueous solution is of the cubic form and does not exhibit photoconductivity.

There are several advantages gained by using a solid detector of the CdS type for detection of x-radiation. The most outstanding being the high efficiency of absorption of the incident energy.

On the basis of pure absorption of energy, only 7.4 mm of CdS is needed to absorb 99 percent of the energy at 0.13A, a wave length which corresponds to approximately 100 kvp, while to achieve the same efficiency with an air chamber requires a chamber 300 meters long.

A second factor in the conversion of incident x-ray energy to useful current is that the electrons in the case of CdS are released in the crystal itself, as compared to the several intermediate steps of the photocell combination.

The crystals have a further advantage of exhibiting a natural amplification which in many cases exceeds 10⁶. This is best illustrated by placing a crystal in the basic circuit shown by Fig. 2. With an applied crystal potential of 100



FIG. 2—Basic circuit for use of CdS crystal as a detector

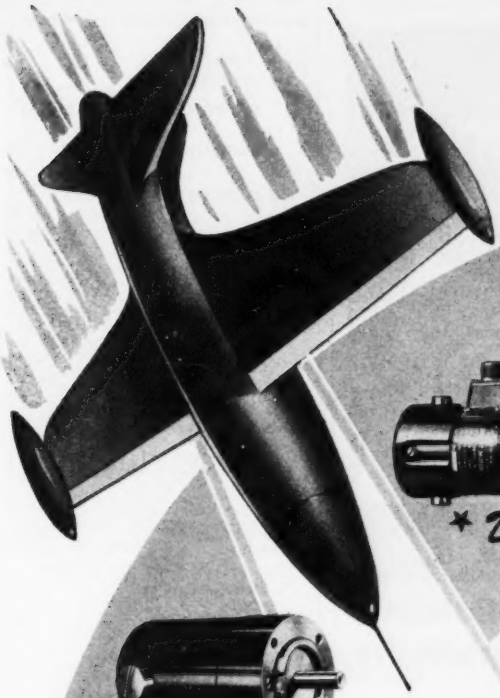

Oster

REG. U.S. PAT. OFF

★ Economy

★ Quality

★ Dependability

★ Precision



★ Performance



★ Torque Inertia

★ Power Weight

A FOLLOW THROUGH PROGRAM GEARED TO KEEP PACE WITH

YOUR PROGRESS

You are constantly searching for improved methods of electro-mechanical power conversion to suit the changing demands of the aviation industry. We offer an engineering and production skill you can use! A staff of trained field engineers is at your disposal to work with you . . . to follow up and follow through on your problems. Electric motors have been our specialized business for more than 25 years. Call on us to help you select the motor best suited to your job.

JOHN OSTER
MANUFACTURING COMPANY
AVIATION DIVISION
RACINE, WISCONSIN

use S.S. WHITE Flexible Shafts

. . . for greater reliability, added economy, extra adaptability

S.S.White remote control flexible shafts satisfy every need for easy installation and smooth dependable service in all types of electronic equipment. And this applies whether the distance involved is a few inches or 50 feet or more.

Especially engineered for remote control service, S.S.White flexible shafts require no alignment or adjustments. They give you all the freedom you need in locating coupled parts where desired to conserve space, to simplify assembly and servicing, or to provide more convenient operation. With proper application they'll give you any required degree of sensitivity, since their design and construction insures minimum "backlash" in either direction of rotation.

GET THE FACTS!

Bulletin 5008 has essential facts and data on flexible shafts and how to select and apply them. Write for a copy today.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. E, 10 East 40th St.
NEW YORK 16, N. Y.

Western District Office • Times Building, Long Beach, California

- **ELECTRONIC DESIGN ENGINEERS**
- **TECHNICAL WRITERS**
- **DESIGN DRAFTSMEN**
- **PHYSICISTS**

Westinghouse offers you SECURITY AND OPPORTUNITY

EE's and ME's with over 3 years experience . . . a number of excellent positions are now available in our Electronic & X-ray and Air-Arm Divisions for work on:

- Broadcast Transmitters
- Power Line Carrier Communication Equipment
- Railroad Radio
- Radio Frequency Heating
- Medical and Industrial X-ray
- Commercial Radar
- Balancing Equipment
- Military Radar (ship, ground, airborne)
- Military Transmitters
- Specialized Electronic Equipment
- Fire Control Systems
- Automatic Pilots
- Guided Missiles

Check These Outstanding Benefits: Top pay, ideal working conditions, advancement on merit, graduate study opportunities, employee scholarships, paid re-location expenses, Baltimore location.

Send resume of experience and education to: Manager of Industrial Relations, Westinghouse Electric Corp., 2519 Wilkens Ave., Baltimore 3, Md.

YOU CAN BE SURE...IF IT'S Westinghouse

practical imagination

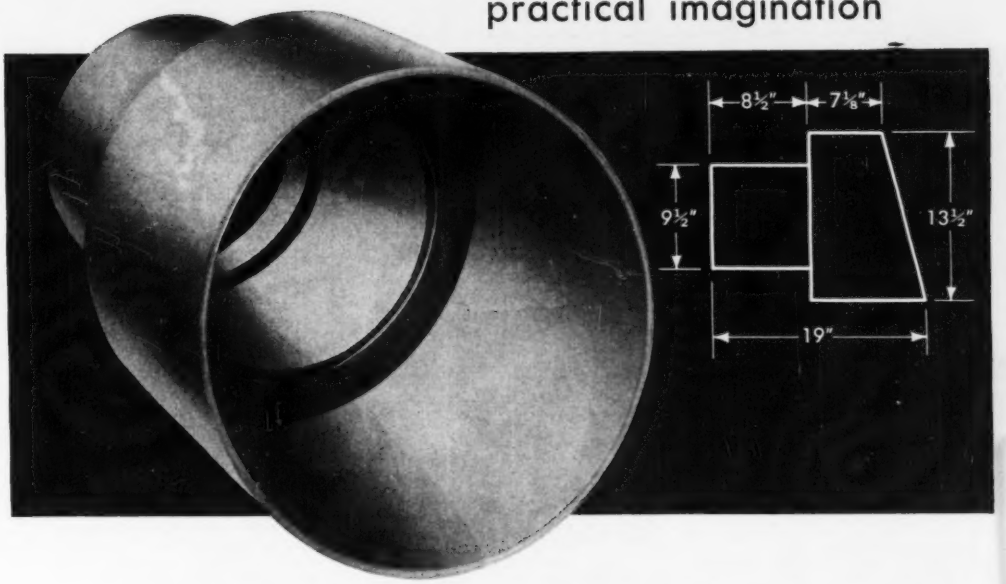

"welded" assembly makes large plastic parts practical and economical

Look at this large, laminated plastic part. It is 19" long with two concentric diameters of 13½" and 9½" connected by a flat ring. Think of the cost of molds for making such a piece—and then consider the fact that only a few such parts are required. The cost would be prohibitive.

It is on problems like this that Continental-Diamond's knowledge of plastics and their fabrication pays off for you. C-D engineers took two Dilecto tubes of the required diameters and wall thicknesses and then cut a ring from a sheet of Dilecto to just fit the O.D. of the smaller tube and the I.D. of the larger.

These three parts were then literally "welded" together into a strong, low cost part. The material used to do the "welding" is one of the compounds developed by C-D in their vast experience of fabricating parts of Fibre, Vulcoid, Celoron, Micabond, Dilecto and combinations of all of them.

If you have a problem—or a standard application for plastics, it will pay you to check with your nearest C-D office.

your partner in producing better products

DILECTO (Laminated Thermosetting Plastic)
CELORON (Molded High-Strength Plastic)
DIAMOND FIBRE (Vulcanized Fibre)
VULCOID (Resin Impregnated Fibre)
MICABOND (Bonded Mica Splittings)

DE-5-51

BRANCH OFFICES: NEW YORK 17 • CLEVELAND 14 • CHICAGO 11 • SPARTANBURG, S. C. • SALES OFFICES IN PRINCIPAL CITIES
WEST COAST REPRESENTATIVE: MARWOOD LTD., SAN FRANCISCO 3 • IN CANADA: DIAMOND STATE FIBRE CO. OF CANADA, LTD., TORONTO 8

Continental Diamond FIBRE COMPANY

Established 1895. . Manufacturers of Laminated Plastics since 1911—NEWARK 16 • DELAWARE

BALLANTINE

STILL THE FINEST *in* ELECTRONIC VOLTMETERS

Ballantine pioneered circuitry and manufacturing integrity assures the maximum in

SENSITIVITY • ACCURACY • STABILITY

- All models have a single easy-to-read logarithmic voltage scale and a uniform DB scale.
- The logarithmic scale assures the same accuracy at *all* points on the scale.
- Multipliers, decade amplifiers and shunts also available to extend range and usefulness of voltmeters.
- Each model may also be used as a wide-band amplifier.

MODEL 300

MODEL	FREQUENCY RANGE	VOLTAGE RANGE	INPUT IMPEDANCE	ACCURACY	PRICE
300	10 to 150,000 cycles	1 millivolt to 100 volts	1 /2 meg. shunted by 30 mmfds.	2% up to 100 KC 3% above 100 KC	$210.
302B Battery Operated	2 to 150,000 cycles	100 microvolts to 100 volts	2 megs. shunted by 8 mmfds. on high ranges and 15 mmfds. on low ranges	3% from 5 to 100,000 cycles; 5% elsewhere	$225.
304	30 cycles to 5.5 megacycles	1 millivolt to 100 volts except below 5 K C where max. range is 1 volt	1 meg. shunted by 9 mmfds. on low ranges. 4 mmfds. on highest range	3% except 5% for frequencies under 100 cycles and over 3 megacycles and for voltages over 1 volt	$235.
305	Measures peak values of pulses as short as 3 microseconds with a repetition rate as low as 20 per sec. Also measures peak values for sine waves from 10 to 150,000 cps.	1 millivolt to 1000 volts Peak to Peak	Same as Model 302B	3% on sine waves 5% on pulses	$280.
310A	10 cycles to 2 megacycles	100 microvolts to 100 volts	Same as Model 302B	3% below 1 MC 5% above 1 MC	$235.

For further information, write for catalog.

BALLANTINE LABORATORIES, INC.

100 FANNY ROAD, BOONTON, NEW JERSEY



FIG. 3—Resolution of gaging station

v/cm under a low-intensity x-ray source, an output current of the order of hundreds of microamperes is obtained. No other device is know that will respond in this manner to x-radiation.

Physically the crystals may have an effective area in the order of a few square millimeters. It has been found that the natural amplification occurs over a distance of a few atomic spacings, therefore, the crystals may be reduced to what practically is the size of a pin head and yet retain this amplification.

Over the intensity range encountered in this application, the output current is linear with intensity. Crystals are usually operated with a potential gradient such that a current of less than 100 microamperes is obtained under operating conditions. This value of crystal current has been selected to assure that the crystal is not called upon to handle more power than 10 milliwatts per mm³ of crystal volume. It has been found experimentally that this power limit is a safe one for crystal operation.

When the crystals are properly processed there appears to be no change in crystal characteristics with use. This is to be expected as no apparent physical change may be seen in the crystals following prolonged irradiation.

Liquid-Level Detecting

The crystals, because of their small physical dimensions, permit



Mechanical drawing of the setup used with level gaging

another important first from du mont:

the tube that is always in focus

automatically

...the tube that needs no

focusing circuits or components

...the tube that replaces either

electromagnetic- or electrostatic-focusing tubes

...the tube the whole industry has

wished for...the....

DU MONT

Complete Technical Information

on Request:

CATHODE-RAY TUBE DIVISION,

ALLEN B. DU MONT LABORATORIES, INC.,

CLIFTON, N. J.

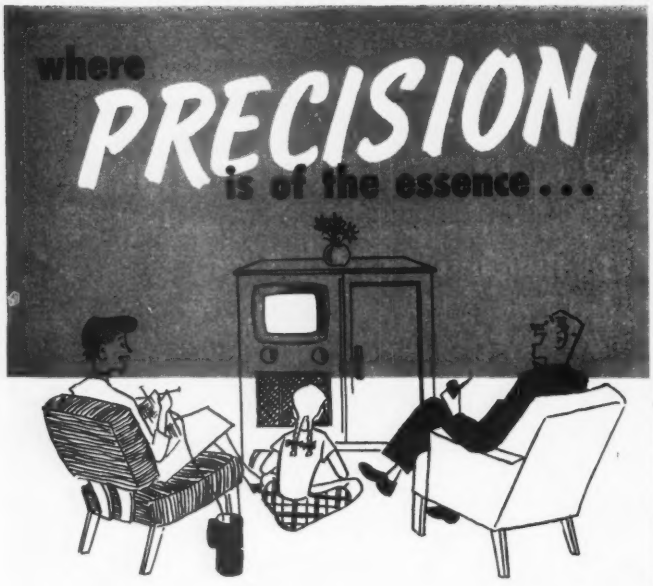

makers of the finest sets use

MOLDITE IRON CORES

Where it's a matter of protecting a maker's reputation for quality performance . . . of unquestioned dependability on the battlefield or in the community—engineers don't gamble. They specify precision-made, performance-tested cores by MOLDITE.

Samples promptly submitted upon request for design, pre-production, and test purposes

SEND FOR CATALOG 110

NATIONAL MOLDITE COMPANY

1410 Chestnut Ave., Hillside 5, N. J.

Robert T. Murray 614 Central Ave. East Orange, N. J.	Jerry Golton Co. 2750 W. North Ave. Chicago 22, Ill.	Martin P. Andrews Mott Road Fayetteville, N. Y.	Perlmuth-Colman & Assoc. 1335 South Flower Los Angeles, Cal.	Jose Luis Pontet Cardoba 1472 Buenos Aires

ULANET RUGGEDLY DESIGNED

Miniature THERMAL TIMERS

Provide timing ranges of 2 seconds to 3 minutes



★ These miniature units actually require a space less than 1⅝" x ⅝" x ½", yet the sturdy design contributes to long life.

A Steatite base provides dimensional stability while mounting is accomplished thru a Bakelite bracket which furnishes complete insulation as well as elimination of pressure on the ceramic member. Electrolytic silver contacts insure best conductivity and longer operation. Stable adjustment is provided for by the clinch-type bracket which holds the adjustment screw. Contact rating is 100 watts 115-230 volts ac.

Of course the Ulanet line includes many other Timing and Thermostat units. Why not investigate the vast line of miniature and sub-miniature designs available. State application or requirements when writing.

GEORGE ULANET COMPANY

417 MARKET STREET

NEWARK 5, NEW JERSEY

If your problem is *Heat Control* your solution is *Ulanet*—
Precision Thermostats & Thermal Timers
Exclusively Since 1931

ULANET
ELECTRIC HEAT CONTROL ENGINEERS

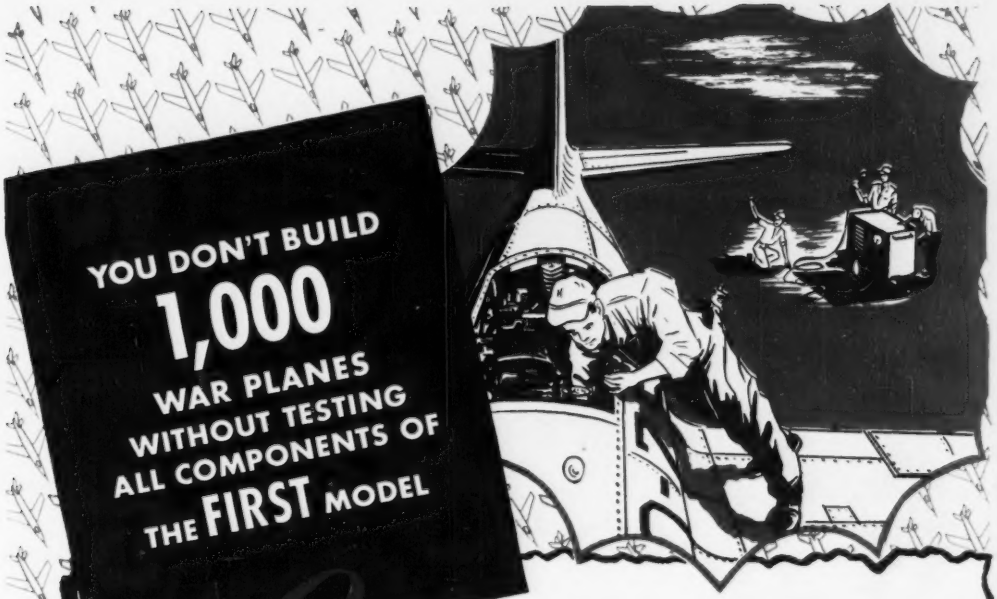

YOU DON'T BUILD
1,000
WAR PLANES
WITHOUT TESTING
ALL COMPONENTS OF
THE **FIRST** MODEL

Buy YOUR TRANSFORMERS
ON A "PROVE-IT-FIRST" BASIS

HEAVY DUTY FILAMENT TRANSFORMER



PLATE TRANSFORMER SHOWN (1 to r) WITH POWER, FILAMENT, CHOKE, DRIVER, FILAMENT AND SMALLER PLATE TRANSFORMERS ALL BUILT TO MIL-T-27 SPECIFICATIONS HERMETICALLY SEALED

It's a good feeling, when you order a quantity of GRAMER Transformers, to know that each unit is physically and electrically in keeping with your specifications. This is usually achieved by first arranging for a production sample GRAMER Transformer (hermetically sealed to MIL-T-27 Government specifications, or one of open type construction). Such procedure permits putting your GRAMER production sample to *any* test in your electrical equipment. Precision manufacturing assures physical and electrical correctness, uniformity for easy assembly and substantial savings on your quantity orders.

James M. Blacklidge
PRESIDENT

POWER TRANSFORMER SHOWS CONSTRUCTION BEFORE PUTTING IN STEEL CASE. BUILT TO MIL SPECIFICATIONS.

One good Turn—or a Million

FILAMENT
AUDIO
TRANSFORMERS
•
FILTER REACTORS
•
ISOLATION-STEP-UP
STEP-DOWN
TRANSFORMERS
•
WINDINGS

GRAMER
TRANSFORMER
CORPORATION
1632-L N. PULASKI ROAD • CHICAGO 39, ILLINOIS

SEND YOUR
B/P
SPECIFICATIONS

can old age "cripple" your important drawings?

Not if you put them on Arkwright Tracing Cloth. Arkwright Cloth is the best insurance you can get that your drawings will never become brittle or opaque with age — never get paper-frayed around the edges to spoil your work.

Arkwright's extra quality shows right from the start. You can re-ink clean, razor-sharp lines on Arkwright Tracing Cloth over the heaviest erasures without feathering or "blobbing". And you can get clean, clear blueprints — if you need to — for years and years to come.

All good reasons for you to remember: if a drawing is worth saving, put it on Arkwright Tracing Cloth. Write for samples now to Arkwright Finishing Co., Industrial Trust Bldg., Providence, R. I.

ARKWRIGHT
Tracing Cloths
AMERICA'S STANDARD FOR OVER 30 YEARS



FIG. 4—Detecting assembly of eight crystals mounted on ⅛-in. centers

high degrees of precision in gaging applications. As may be seen by reference to Fig. 3, it is relatively easy to detect the level of the liquid within ± $\frac{1}{16}$ in. of a base line. Because such a large change in crystal current is obtained as the liquid level changes, the need for regulation of the x-ray source is minimized.

The gage described in this paper was designed to indicate the level in ½-in. steps over a 1-in distance. Figure 4 shows the detecting assembly consisting of eight crystals mounted on ½-in. centers. This head is mounted with tantalum strips between the crystals to remove any scattered radiation and thus increase the resolution of the head.

The output of each crystal in the head is fed to a channel amplifier consisting of a triode and thyratron stage as shown in Fig. 5. Here again is illustrated the advantage of using the crystals having high sensitivity as the instrumentation is extremely simple.

The relay contacts for each crystal channel are used to control the filling operation to a selected height or to furnish signals to operate ejection mechanisms when previously filled containers are inspected;



FIG. 5—Circuit of an inspecting station for gage

AlSiMag® PRECISION

METAL-CERAMIC COMBINATIONS

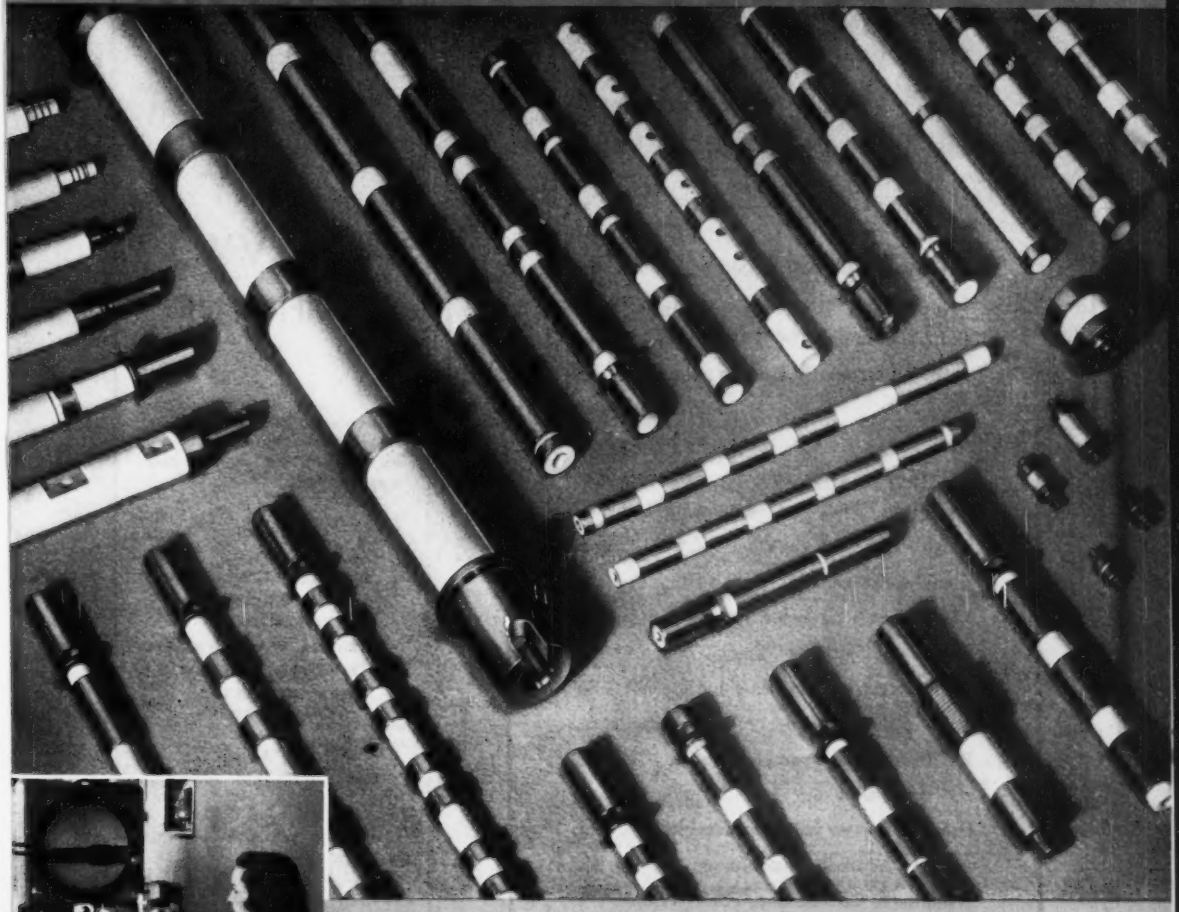

Alignment of metal ceramics checked by contour projector.

• American Lava Corporation has the skill and equipment and the experience required to produce PRECISION metal-ceramic combinations.

AMERICAN LAVA CORPORATION

50TH YEAR OF CERAMIC LEADERSHIP

CHATTANOOGA 5, TENNESSEE

OFFICES: METROPOLITAN AREA: 671 Broad St., Newark, N. J., Mitchell 2-8139 • CHICAGO, 228 North LaSalle St., Central 6-1721
PHILADELPHIA, 1649 North Broad St., Stevenson 4-2823 • LOS ANGELES, 232 South Hill St., Mutual 9076
NEW ENGLAND, 1374 Massachusetts Ave., Cambridge, Mass., Kirkland 7-4498 • ST. LOUIS, 1123 Washington Ave., Garfield 4939

DO YOU MAKE FERRITES?

If so, you'll be well repaid by getting the facts on a special group of Pure Ferric Oxides, developed by Williams and manufactured especially for this purpose.

Williams Ferric Oxides analyze better than 99% Fe_2O_3. They contain a minimum of impurities. They are available in a broad range of particle sizes and shapes. Among them, we're certain you'll find one that's "just right" for your requirements. The proper application of Ferric Oxides to the manufacture of Ferrites is our specialty. So write today, stating your requirements. We'll gladly send samples for test. Chances are good that our Ferric Oxide "Know How" can save you considerable time and money. Address Department 25, C. K. Williams & Co., Easton, Pennsylvania.

WILLIAMS
COLORS & PIGMENTS

C. K. WILLIAMS & CO.

Easton, Pa. • East St. Louis, Ill. • Emeryville, Cal.

Kenyon
TRANSFORMERS
For All
ARMY
NAVY
SPECIFICATIONS

◆

There's a Kenyon quality transformer to meet almost any standard or special application.

RADAR
BROADCAST
JAN APPLICATIONS
ATOMIC ENERGY EQUIPMENT
SPECIAL MACHINERY
AUTOMATIC CONTROLS
EXPERIMENTAL LABORATORIES

For full details— Contact Kenyon today

Kenyon
Transformer Co., Inc.
840 Barry St. New York 59, N. Y.

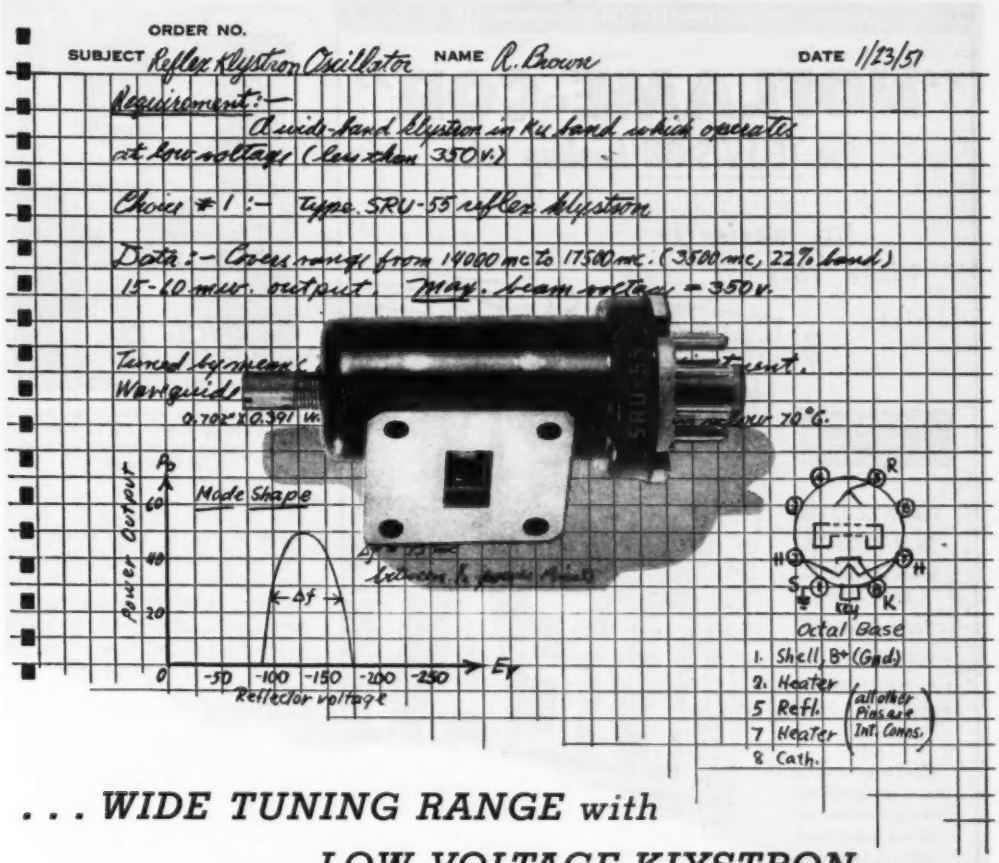

. . . WIDE TUNING RANGE with LOW-VOLTAGE KLYSTRON

14,000 to 17,500 MC at 300 VOLTS

Type SRU-55 is a low-voltage, reflex klystron oscillator with radio frequency output of 15 to 60 milliwatts, operating over the frequency range of 14,000 to 17,500 mc. This Sperry tube can be used as a local oscillator for microwave receivers or as a bench oscillator in the measurements laboratory.

Operating at a frequency of 16,000 mc with a beam voltage of 300 volts, this tube provides 25 milliwatts of output power. Under these conditions the modulation sensitivity is approximately 1.3 megacycles per volt. The electronic tuning range measured between 3 db points is 75 megacycles per second.

Physical characteristics of Sperry Type SRU-55 are: weight, 3¼ oz. – height, 3 1/16" – mounting, standard octal 8-pin socket (in any position). The r-f connection is a standard UG-419/U fitting for 0.702" x 0.391" waveguide. Its cathode is of the oxide coated, unipotential type. For ambient temperatures below 70°C, only free convection cooling is required. The tuning adjustment on this tube is driven by a ¼" shaft containing a screwdriver slot.

For additional information on Type SRU-55 and other Sperry Klystrons, write our Special Electronics Department.

MODEL SRU-55

GENERAL CHARACTERISTICS	
Freq. Range (mech. tuning)	*14,000-17,500 mc.*
Heater Voltage (ac or dc)	*6.3 v.*
Heater Current	*0.6 amp.*
MAXIMUM RATINGS	
Beam Voltage	*350 v.*
Beam Current	*35 ma.*
Reflector Voltage	*0 to −350 v.*
Heater-Cathode Voltage (peak)	*45 v.*

SPERRY GYROSCOPE COMPANY
DIVISION OF THE SPERRY CORPORATION

GREAT NECK, NEW YORK · CLEVELAND · NEW ORLEANS · BROOKLYN · LOS ANGELES · SAN FRANCISCO · SEATTLE
IN CANADA – SPERRY GYROSCOPE COMPANY OF CANADA, LTD., INTERNATIONAL AVIATION BUILDING, MONTREAL

APPROVED BY UNDERWRITERS LABORATORIES AT 90°

"NOFLAME-COR"

the TELEVISION hookup wire

fits perfectly into this picture

BEAT the HEAT

Meets government specification AN-J-C-48a

FLAME RESISTANT
HEAT RESISTANT
HIGH INSULATION RESISTANCE
EASY STRIPPING
HIGH DIELECTRIC
FACILITATES POSITIVE SOLDERING

Also
is not affected by the heat of impregnation . . . making it an ideal wire for use in connection with coil and transformer leads

CORNISH
"made by engineers for engineers"

No "Nicking" problem in using this proven wire. Not being an extruded plastic, its diameter uniformity can be absolutely guaranteed. This eliminates nicking of conductors and constant resetting of blades in the cutting process. Available in all sizes, solid and stranded, in over 200 color combinations . . . "NOFLAME-COR" assures maximum output and minimum rejects.

No "blobbing" of insulations under soldering heat, because "NOFLAME-COR" is NOT an extruded plastic. Production executives specify it as the most efficient heat-resistant wire yet developed. Save time, money and assembling headaches. Investigate!

CORNISH WIRE COMPANY, Inc.
50 Church Street, New York 7, N. Y.

Branch Offices
PHILADELPHIA BRIDGEPORT CLEVELAND CINCINNATI CHICAGO
DETROIT MINNEAPOLIS ST. LOUIS ATLANTA
DALLAS DENVER LOS ANGELES SAN FRANCISCO SEATTLE

MANUFACTURERS OF QUALITY WIRES AND CABLES FOR THE ELECTRICAL AND ELECTRONIC INDUSTRIES



FIG. 6—Control equipment for liquid-level gaging. Control box on right has eight pushbuttons for the different levels of fill desired

this is best explained by references to Fig. 6. Here the control box is seen to have eight push-button stations adjacent to indicator lamps. The height of liquid in the vessel being gaged is continuously indicated on the front panel by the illumination of the indicator lamps. In a filling operation, the push button corresponding to the level of fill desired is depressed. When this level is reached, a signal is available which will terminate the filling process.

To inspect previously filled vessels, the acceptable filled range is determined and the two push-button stations at the limits of acceptability are depressed. As the vessels pass for inspection, those falling out of the acceptable limits will be marked or rejected.

The size vessel that may be inspected or filled by this gage is determined by the x-ray generator used. Generally speaking, for thicknesses of vessel wall up to ½ in. of steel or its radiographic equivalent, an x-ray generator which runs at 100 kvp is needed. For wall thicknesses up to ¾ in. of steel or its radiographic equivalent, an x-ray generator capable of running to 250 kvp should be used. Should vessels having a thicker wall be inspected, a generator having more penetration will be needed.

As constructed, the gage is a versatile, rugged instrument that satisfies a long standing need for a precise method of determining level in remote locations or loca-

Problem •

Your present DC source gives you



What you require is



Solution • nobatron*

Sorensen NOBATRONS provide regulated DC voltage, stabilized against LOAD changes as well as LINE fluctuations. A wide range of standard models are available in capacities from 7 to 200 VDC, 5 to 350 amps.



Model E-6-15

COMMON NOBATRON SPECIFICATIONS

Input Voltage range	95-130 VAC, single ϕ, 50-60 ~ High-current units 208/115, 3ϕ, 4-wire, wye.
Output voltage range	Adjustable $\pm$ 10% with rated accuracy, —25% with lesser accuracy.
Regulation accuracy	$\pm$ 0.2% from 1/10 to full load.
Ripple voltage	1% RMS. Time constant 0.2 seconds.

*Reg. U. S. Pat. Off. by Sorensen & Co., Inc.

for maximum Flexibility the nobatron Ranger

SR-10

Nobatron-RANGERS are continuously adjustable over wide output ranges, yet provide regulation accuracy of $\pm$ 0.25%. Other specifications are identical to those of the standard NOBATRONS.

Standard models with adjustable outputs of 3-30VDC, 3-135VDC, 200-300VDC.

Write for full information on Nobatrons, Nobatron-Rangers, and other Sorensen Isotronic† products.

†Isotronic is a trade-marked word pertaining to the electronic regulation and control of voltage, current, power, or frequency.

Specify SORENSEN

Sorensen & Company, Inc. • 375 Fairfield Ave., Stamford, Connecticut

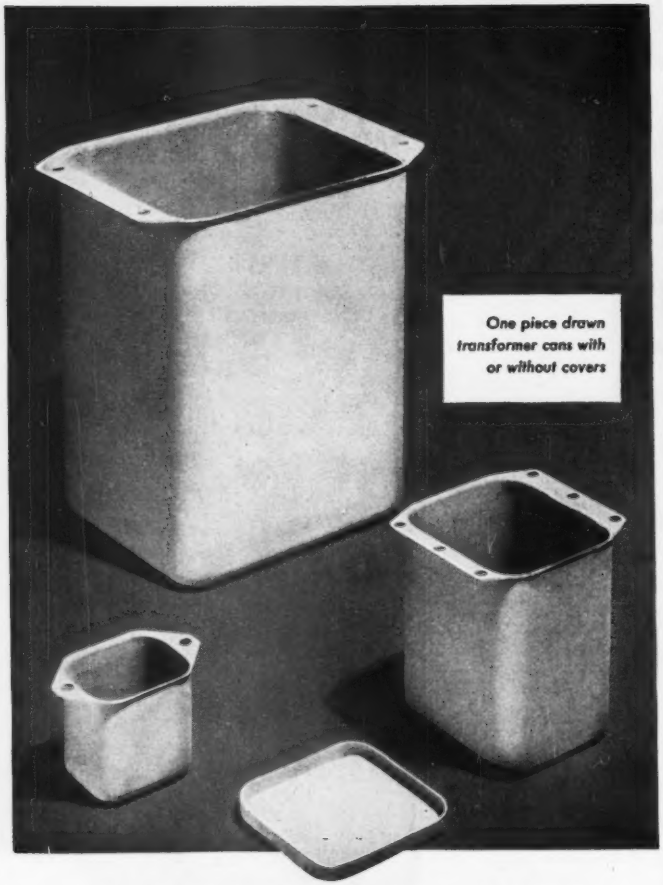

TRANSFORMER CANS

STOCKED IN STANDARD SIZES

We can save you die costs on all stock size transformer cans, and will make IMMEDIATE DELIVERY. A full range of sizes are available with or without covers. List of stock sizes and prints furnished on request.

SPECIAL SHAPES AND SIZES

We are also equipped to fabricate special sizes and shapes (round, square and rectangular) to your own specifications. Tell us your transformer can requirements and we will be glad to submit estimates.

Craft Transformer Cans are drawn in one piece.

Craft MANUFACTURING CO.
3949 W. Schubert Ave., Chicago 47
Stainless Steel Specialists

HICKOK

Laboratory
MODEL
TUBE TESTER



MODEL 539-A

Especially Accurate

- Dynamic Mutual Conductance . . . Reading in Micromhos.
- Permits choice of 3 A.C. signals, .25, .5, and 2.5 volts.
- Vernier adjustment permits accurate setting of grid voltage.
- Optional self-bias arrangement.
- Provision for insertion of plate milliammeter for measuring plate current.
- Separate A.C. meter measures line voltage at all times.
- D.C. grid bias and D.C. plate and screen voltages.
- Tube life and gas test.
- Separate voltmeter measures grid bias.
- Tests all tubes normally encountered in all phases of electronic work.
- Designed with professional accuracy for engineers and engineering technicians.

See the Model 539-A at your jobbers or write for additional information today!

The HICKOK ELECTRICAL INSTRUMENT COMPANY
10527 Dupont Ave., Cleveland 8, Ohio

HICKOK

LAMINATES News

News of General Electric Laminated Plastics that can be of importance to your business.

G.E.'S ULTRAMODERN OHIO PLANT SCENE OF LATEST LAMINATING TECHNIQUES

The General Electric Laminated Plastics Plant at Coshocton, Ohio—The latest techniques for producing laminated plastics are employed at this ultramodern, ¼-million-square-foot G-E plant.

Strict quality control, continuous research and modern manufacturing methods—at one of the country's newest and largest laminating plants—combine to give you top value in G-E Laminated Plastics.

You can depend on the complete General Electric service, including assistance in engineering, design and product development to supply you with laminates having exactly the right electrical, chemical and physical properties. *For full information, write Section Y-5, Chemical Division, General Electric Company, Pittsfield, Mass.* (Also, send ten cents for the new G-E Laminates Comparator—a quick, easy reference to grades, characteristics and uses of laminated materials.)

Extensive laboratories for research and product testing.

Air conditioning protects quality of industrial grade treated materials in this storage bay.



Presses . . . Presses . . . Presses
Medium Size . . . Big Size . . . Giant Size

THE COMPLETE LINE OF G-E LAMINATED PLASTICS FOR INDUSTRY AND DEFENSE:
Sheets, tubes, rods, and molded forms, with cloth, paper, glass fabric or special bases for a wide variety of applications.

ALSO—look to General Electric for silicone insulation, insulating varnishes, sealing and filling compounds, mica insulation, varnished cloths and tapes.

You can put your confidence in

GENERAL ELECTRIC

Leach
RELAYS
TROUBLE-FREE PERFORMANCE
"as specified"
Because all Leach Relays are quality engineered for dependable duty... they are specified first by leading manufacturers of industrial equipment of all types. If your equipment demands relays that are first and foremost, more dependable and longer lasting, specify Leach Relays ... they're more dependable... performance proves it. Whatever your relay control problem... it's a challenge to Leach. Illustrated are but a few of the wide selection Leach provides industry, as standard equipment.
RELAYS SHOWN ABOVE CAN BE SUPPLIED WITH VARIOUS CONTACT ARRANGEMENTS. WRITE FOR DETAILS.
BETTER CONTROLS THROUGH BETTER RELAYS
√MOTOR STARTING RELAY
√OVERLOAD TRIP LIGHT DUTY
√HERMETICALLY SEALED
√MIDGET LATCHING RELAY
√RADIO AND HIGH VOLTAGE
√ANTENNA TRANSFER
√MULTIPOLE RELAY
√MIDGET RELAY
√CIRCUIT CONTROL
LEACH RELAY CO.
5915 AVALON BOULEVARD, LOS ANGELES 3, CALIFORNIA
Representatives in Principal Cities of U. S. and Canada

tions where the nature of the fill makes it hazardous for personnel. It is accurate, fast in response and entirely automatic in operation.

Grateful acknowledgement is made to D. Cameli and J. Howell of the Engineering Laboratory for their valuable assistance in the construction and testing of the gage.

REFERENCES

(1) R. Hofstadtor, Crystal Counters, *Nucleonics*, **4**, p 16, April 1949; **4**, p 29, May 1949.
(2) R. Frerichs and R. Warminsky, Die Messung von beta und gamma Strahlen durch inneren Photoeffekt in Kristallphosphoren, *Naturwiss*, **33**, p 251, 1949.
(3) R. Frerichs, The Photoconductivity of Incomplete Phosphors, *Physical Review*, **72**, p 594, 1947.

Gated-Beam Mixer

BY S. RUBIN AND G. E. BOGGS
Central Radio Propagation Laboratory
National Bureau of Standards
Washington, D. C.

THE PROBLEM of isolation between the signal and oscillator circuits in a mixer is often of serious proportions for many high-frequency applications. The gated-beam tube as exemplified by the 6BN6 may be satisfactorily used as a mixer and results in improved signal circuit isolation.

With the usual mixer configurations and a high impedance in the signal grid circuit, a voltage of oscillator frequency on the signal grid may well cause grid-current flow. This will of course alter the tube characteristics. In addition, the oscillator voltage present in the signal circuit may assist in the switching or modulating of the tube and may change the shape of the switching function. If the signal circuit is returned through the avc bus, the oscillator voltage appearing on the signal grid may bias this grid thus reducing the conversion transconductance.

In practice the problems arising from poor isolation between the signal and oscillator circuits are frequently met by maintaining a low impedance in the signal grid circuit. Unfortunately, this is a poor solution, since it may drastically reduce the gain ahead of the mixer.

In tubes where the signal is injected on one grid and the oscillator on another, the coupling between

Versatility

OF AMERICAN D. C. AMPLIFIER . . . WITH THE MICROSEN BALANCE . . . CREATES NEW APPROACHES FOR RESEARCH AND PROCESS DEVELOPMENT

The American D. C. Amplifier – a new, unique electro mechanical feedback amplifier – assures stable, accurate D. C. amplification so vital in engineering and process research.

The heart of this precision instrument is the power-actuated Microsen Balance, a unit extremely sensitive to low power input – insensitive to line voltage variations. It maintains continuous equilibrium between the forces created by the input current and those resulting from the output current. Consequently, the result is precision D.C. amplification.

The American D. C. Amplifier is highly versatile. Some fields of measurement in which it is applied are: electronics, electrical bridges, electrolysis, gas analysis, photometry, and thermometry. It has been used with Pirani gauges, photocells, and ionization gauges. Standard units include Voltage, Current, and Potentiometer Amplifiers, D. C. Converters and D. C. Transformers.

The American D. C. Amplifier is low in cost, easy to operate, compact, portable. Special designs can be engineered, if specific details are supplied. Mail the coupon for complete details. →

MANNING, MAXWELL & MOORE, INC.
250 East Main Street, Stratford, Connecticut

☐ Please send me American D. C. Amplifier bulletin.
☐ Application specifications and/or specific queries attached.

NAME _____
TITLE _____
COMPANY _____
ADDRESS _____
CITY/ZONE _____ STATE _____

AMERICAN ELECTRICAL INSTRUMENTS

A product of **MANNING, MAXWELL & MOORE, INC.** STRATFORD, CONNECTICUT

MAKERS OF 'AMERICAN' INDUSTRIAL INSTRUMENTS, 'HANCOCK' VALVES, 'ASHCROFT' GAUGES, 'CONSOLIDATED' SAFETY AND RELIEF VALVES. BUILDERS OF "SHAW-BOX" CRANES, 'BUDGIT' AND 'LOAD LIFTER' HOISTS AND OTHER LIFTING SPECIALTIES.

MORE GEO. STEVENS COIL WINDING EQUIPMENT IS IN USE THAN ALL OTHER MAKES COMBINED!

• **MORE OUTPUT . . . LOWER COSTS . . .** from *EXCLUSIVE* SPEED FEATURE. Universal motors permit variable speeds without changing belts and pulleys. Coil design permitting, speeds as high as 7500 RPM are not uncommon.

• **PORTABILITY.** Conveniently carried from place to place. Machines come mounted on bases to constitute one complete unit.

• **MUCH LOWER ORIGINAL COST.** The same investment buys more GEO. STEVENS machines than any other coil winding machines.

• **LONG LIFE.** Most of the original GEO. STEVENS machines bought 14 years ago are still operating daily at full capacity.

• **MUCH FASTER CHANGING OF SET-UPS** than any other general purpose coil winding machine. Quickly changed gears and cams save time between jobs.

• **VERY LOW MAINTENANCE.** Replacement parts are inexpensive, can be replaced in minutes, and are stocked for "same day" shipment, thus saving valuable production time.

• **EASIEST TO OPERATE.** In one hour, any girl can learn to operate a GEO. STEVENS machine.

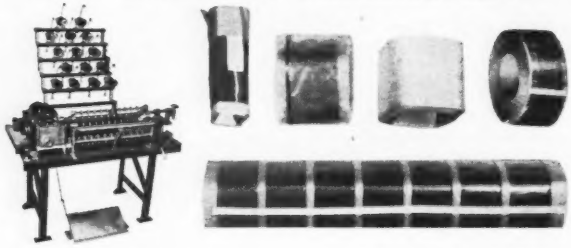

Transformer winder Model 37S multiple winds power, audio, automotive, fluorescent ballast and similar types of coils. Winds wire from No. 18 B&S to 46 B&S up to 9" O.D. Maximum economy is possible by using mandrels up to 30" long. Thirty or more coils may be wound at one time. All turns are accurately registered by Model 50 or 51 6" full vision clock face Dial Counter. Set-ups can be changed in less than 5 minutes. A gear chart is furnished to quickly determine wire spacing.

No loss of turns (an exclusive feature) and accurate margins are assured by a screw feed traverse and an electrically controlled clutch. Highly polished wire guide rollers are ball-bearing mounted for free running. Traverse is quickly adjusted from 1/16" to 6".

Paper feed:—A tilting table for pre-cut paper is furnished making paper feed simple and fast, or a new roll paper feed for extra economy is available at a small additional cost.

Motor equipment:—Variable speed, uniform torque ½ H.P. motor with foot treadle control.

Tension equipment:—12 T-1 tensions and spool rack. Tensions will handle 6" spools.

Mounting:—Ground steel channel base ensures rigidity and permanent alignment. Machine is shipped mounted on bench ready for use.

There is a GEO. STEVENS machine for every coil winding need. Machines that wind ANY kind of coil are available for laboratory or production line. . . . Send in a sample of your coil or a print to determine which model best fits your needs. Special designs can be made for special applications. Write for further information today.

World's Largest Manufacturer of Coil Winding Machines

REPRESENTATIVES

Frank Totro
6022 No. Rogers Ave., Chicago 30, Illinois
Ralph K. Reid
1911 W. 9th St., Los Angeles 6, California
R. A. Staff & Co.
1213 W. 3rd St., Cleveland 13, Ohio

GEO. STEVENS MFG. CO., INC.
Pulaski Road at Peterson
Chicago 30, Illinois

ENGINEERS DESIGNERS PHYSICISTS

THE Aerophysics & Atomic Energy Research Division of North American Aviation, Inc. offers unparalleled opportunities in Research, Development, Design and Test work in the fields of Long Range Guided Missiles, Automatic Flight and Fire Control Equipment and Atomic Energy. Well-qualified engineers, designers and physicists urgently needed for all phases of work in

Supersonic Aerodynamics,
Preliminary Design & Analysis,
Electronics,
Electro-Mechanical Devices,
Instrumentation,
Flight Test,
Navigation Equipment,
Controls,
Servos,
Rocket Motors,
Propulsion Systems,
Thermodynamics,
Airframe Design,
Stress & Structures.

●

Salaries Commensurate with training & experience.
Excellent working conditions.
Finest facilities and equipment.
Outstanding opportunities for advancement.

Write now — Give complete resume of education, background and experience

●

PERSONNEL DEPT.
AEROPHYSICS & ATOMIC ENERGY RESEARCH DIVISION
NORTH AMERICAN AVIATION INC.
12214 LAKEWOOD BLVD.
DOWNEY, CALIFORNIA

STOKES vacuum equipment... efficient, durable, economical

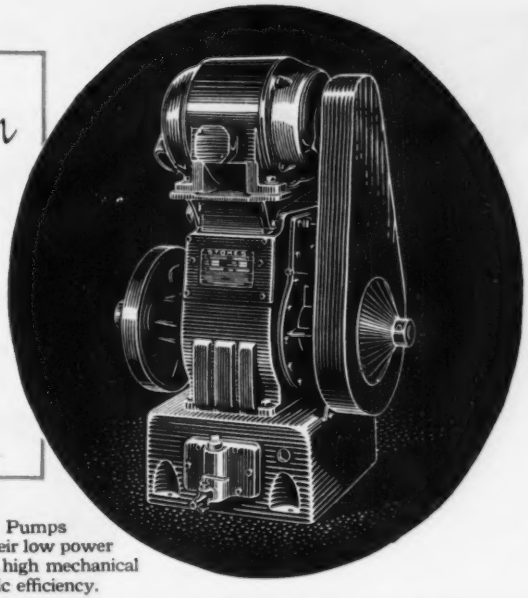

Send for FREE Stokes Vacuum Calculator. This slide rule determines needed pump capacity for any job... shows Centigrade to Fahrenheit conversion. Other useful conversion tables and scales on reverse of rule.

Stokes Microvac Pumps are known for their low power consumption...high mechanical and volumetric efficiency.

Long trouble-free service can be expected from Stokes Microvac Pumps, perfected during more than 40 years of practical experience in the development of complete vacuum processing systems.

The four simple moving parts are easily accessible. All parts are precision-finished, standard, and interchangeable. Lubrication is fully automatic to all friction surfaces.

The large full-opening exhaust valve of corrosion-resistant Teflon is highly sensitive to pressure differential . . . exhausts air completely at each stroke without re-expansion.

An Oil Clarifier and a Devaporizer are available for continuous purification of lubricating oil when dirt and solvent vapors are present.

Stokes Microvac Pumps, air-cooled in the small sizes and water-cooled in five larger sizes, range in capacity from 15 to 500 cfm.

Stokes is the only manufacturer of equipment for complete vacuum systems, including Microvac mechanical pumps, oil diffusion pumps, McLeod Gages and Valves.

Consult with Stokes on the application of vacuum to rotary exhaust machines, house vacuum systems, vacuum impregnation, vacuum furnaces, vacuum metallizing, and to other applications in which vacuum deserves exploration.

STOKES MAKES

Plastics Molding Presses,
Industrial Tableting
and Powder Metal Presses,
Pharmaceutical Equipment,
Vacuum Processing Equipment,
High Vacuum Pumps and Gages,
Special Machinery

STOKES

F. J. STOKES MACHINE COMPANY, 6646 TABOR ROAD, PHILADELPHIA 20, PA.

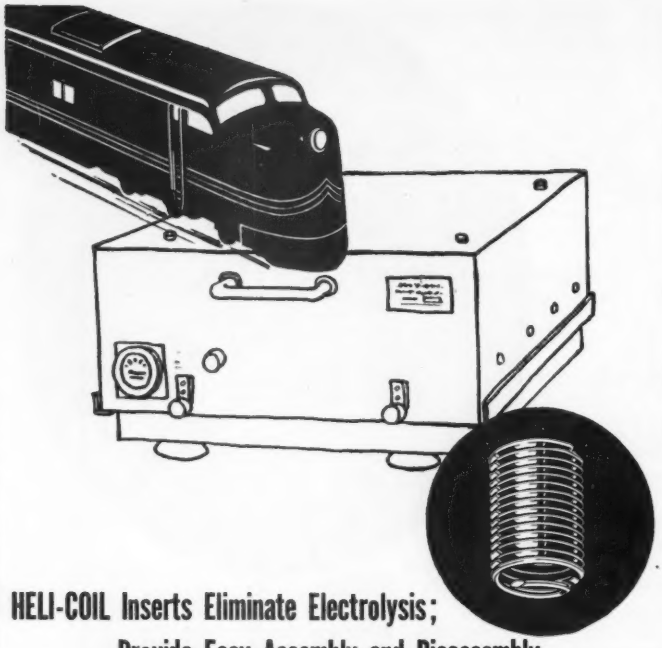

HELI-COIL Inserts Eliminate Electrolysis; Provide Easy Assembly and Disassembly

Heli-Coil Inserts, precision-formed of stainless steel or phosphor bronze wire, permit freer use of aluminum and magnesium without risk of electrolysis . . . outlast the product. They strengthen assemblies without use of heavy bushings . . . are completely free from vibration wear. Lighter assemblies and more compact designs are possible when Heli-Coil Inserts are used . . . and they never strip, gall, seize, or corrode.

In cover plates, connectors, radar pick-up screens, stroboscopic and X-ray equipment—wherever light metals are used in communications and electronic equipment—Heli-Coil Inserts allow wide use of light metals with assurance of permanent, non-wearing threads. Assembly and disassembly are quick and easy, however frequently needed. No inventory of oversize bolts, studs, and nuts is required when Heli-Coil Inserts are used . . . salvage, repair, and maintenance are simplified.

Heli-Coil Screw Thread Inserts guarantee permanent freedom from tapped thread troubles. Made in National Coarse and Fine Thread Series, Unified Thread Series, and pipe thread sizes . . . meet all industrial, military, and aircraft specifications. Class 3 fits are standard; tools and inserts available to suit pitch and major diameter for Class 2 and 2B fits.

HELI-COIL *Protecting Screw Threads for Industry*

Heli-Coil is a Registered U. S. Trademark

CORPORATION

HELI-COIL CORPORATION
Danbury, Connecticut

Please send me
☐ Bulletin 650-R on Design Data
☐ Bulletin 349 on Salvage and Service

NAME _____

FIRM _____

STREET _____

CITY _____ ZONE _____ STATE _____

grids is made up of two components, capacitance between the signal and oscillator grid and space-charge coupling. Tubes utilizing the inner grid for oscillator injection have relatively large space-charge coupling at high frequencies and hence are not suitable for applications where good isolation is imperative.

Outer-Grid Mixer

When the signal is applied to the first grid and the oscillator to an outer-grid the combination has come to be known as an outer-grid mixer. This arrangement exhibits a space-charge coupling effect of only $\frac{1}{3}$ to $\frac{1}{5}$ of that present with tubes employing inner-grid injection.[1] It should be noted that with an outer-grid mixer, the voltage induced on the signal grid, due to space-charge coupling between the two grids, adds to the oscillator voltage on the signal grid which is due to capacitive coupling. This is opposite to the effect when using inner-grid injection.

Since the 6BN6 has two rather high transconductance control grids it may be employed as either inner-grid or outer-grid mixer. Maximum isolation is obtained when the tube is used as an outer-grid mixer with the oscillator injected on the third grid. This grid fortunately will not develop a high bias since the grid current is limited by tube design. The grid-current limiting feature of this tube results in very low os-

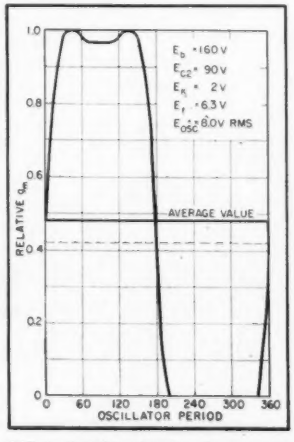

FIG. 1—Switching function characteristic for 6BN6

Our new crazeless gray enamel puts

BLUE RIBBON RESISTORS

STILL FARTHER AHEAD!

Our Blue Ribbon Resistor—designed in 1939—was the *first* flat or strip resistor in the field. And now, though there are others of similar type, the Hardwick, Hindle Blue Ribbon still holds first place—and *is still winning "blue ribbons."*

Although its basic design is the same, recent improvements assure you the finest flat resistor made.

Our new crazeless gray enamel completely eliminates the disastrous crazing which results in failure of the resistive element due to moisture penetration from humidity, salt and other severe atmospheric conditions—thus giving greater dielectric strength.

The aluminum thru-bar, in contact with the internal surface of the ceramic core, distributes the heat more uniformly along its entire length—than conventional tubular resistors.

The studs—corrosion and rust resistant—are peened to serve as mounting supports and also to permit the stacking of two or more units when space need be saved. And our unique method of fastening the tube to the thru-bar prevents loosening under vibration.

As compared to the conventional tubular resistor Blue Ribbons give you:

1. Higher wattage rating per unit space requirement.

2. Reduction in space behind the panel or mounting surface.

3. Sturdy but simple mounting, either single or stacked.

4. Lighter weight.

5. Lower induction.

Our Blue Ribbons are designed for and manufactured in accordance with JAN-R-26A specifications.

Send for our catalogue, showing these and other Hardwick, Hindle resistors of distinction.

HARDWICK, HINDLE, INC.

Rheostats and Resistors

Subsidiary of

THE NATIONAL LOCK WASHER COMPANY

Established 1886

NEWARK 5, N. J. U.S.A.

the mark *of quality*

For more than a quarter of a century

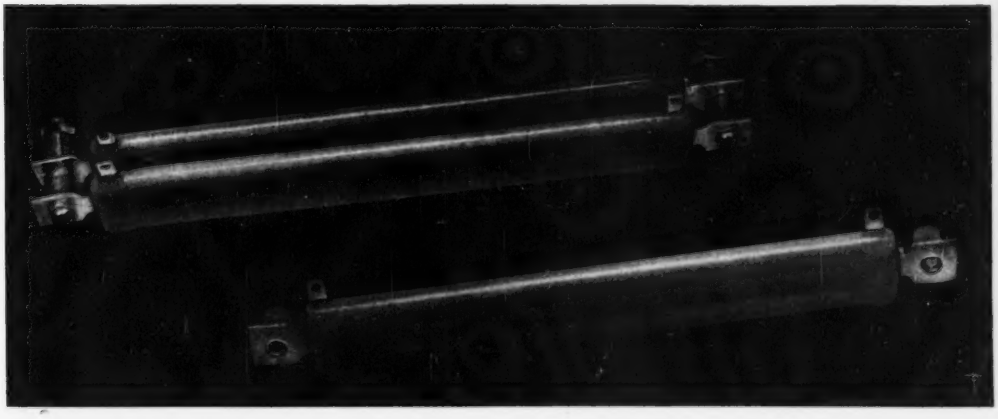

MANUFACTURERS AND DESIGNERS OF
CONTINUOUSLY VARIABLE
REGULATED DC SUPPLIES

MODEL
D6-DUAL,
HEAVY DUTY

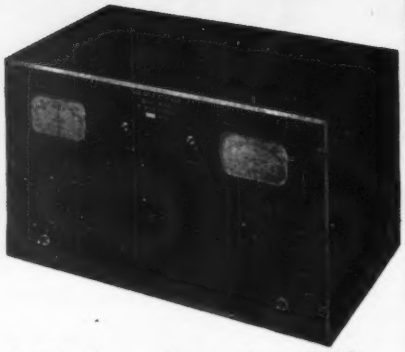

- ✓ DUAL regulated outputs, continuously variable, 0 to 600 volts.
- ✓ Maximum current 200 milliamperes each, or 400 combined.
- ✓ Regulation better than .5%.
- ✓ 6.3 volts AC at 10 amperes center-tapped.
- ✓ Ripple voltage less than 10 millivolts.
- ✓ Stabilized bias supply.
- ✓ Request Bulletin 53 for Detailed Information.

MODELS
A3 AND A3A

- ✓ Continuously variable, 0 to 350 volts.
- ✓ Ripple voltages less than 10 millivolts.
- ✓ Regulation better than .5%.
- ✓ Maximum current 200 milliamperes.
- ✓ Stabilized variable bias supply.
- ✓ 6.3 volts AC at 5 amperes.
- ✓ Request Bulletin 52 for Detailed Information.

Oregon ELECTRONICS
206 S.W. WASHINGTON ST., PORTLAND 4, ORE., U.S.A.

AIRDESIGN

Quality — Specialty
TRANSFORMERS

For years we have supplied leaders of the Electronic and Electrical industries with superior specialty transformers.

↓

Let us quote on your special commercial and military requirements.

↓

A reliable source since 1941

↓

Write us today—or telephone Granite-4-8000

AIRDESIGN, INC.
241 Fairfield Avenue
Upper Darby 2, Pa.

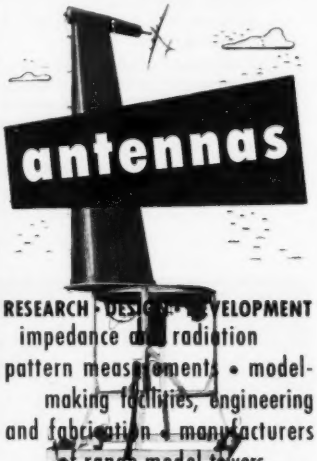

RESEARCH • DESIGN • DEVELOPMENT
impedance and radiation pattern measurements • model-making facilities, engineering and fabrication • manufacturers of range model towers and illuminators.

INQUIRIES REGARDING OUR SERVICES OR YOUR PROBLEMS ARE INVITED...WRITE TODAY!

electromagnetics
RESEARCH CORPORATION
3210 WINONA AVENUE • BURBANK, CALIFORNIA

In this panel are illustrated standard models of HELIPOT multi-turn and single-turn precision potentiometers—available in a wide range of resistances and accuracies to fulfill the needs of nearly any potentiometer application. The Beckman DUODIAL is furnished in two designs and four turns-ratios, to add to the usefulness of the HELIPOT by permitting easy and rapid reading or adjustment.

A B C

MODELS A, B, & C HELIPOTS
A—10 turns, 46" coil, 1-13/16" dia., 5 watts—resistances from 10 to 300,000 ohms.
B—15 turns, 140" coil, 3-5/16" dia., 10 watts—resistances from 50 to 500,000 ohms.
C—3 turns, 13-1/2" coil, 1-13/16" dia., 3 watts—resistances from 5 to 50,000 ohms.

D E

MODELS D AND E HELIPOTS
Provide extreme accuracy of control and adjustment, with 9,000 and 14,400 degrees of shaft rotation.
D—25 turns, 234" coil, 3-5/16" dia., 15 watts—resistances from 100 to 750,000 ohms.
E—40 turns, 373" coil, 3-5/16" dia., 20 watts—resistances from 200 ohms to one megohm.

F G J

MODELS F, G AND J PRECISION SINGLE-TURN POTENTIOMETERS
Feature both continuous and limited mechanical rotation, with maximum effective electrical rotation. Versatility of designs permit a wide variety of special features.
F—3-5/16" dia., 5 watts, electrical rotation 359°—resistances 10 to 100,000 ohms.
G—1-5/16" dia., 2 watts, electrical rotation 356°—resistances 5 to 20,000 ohms.
J—2" dia., 5 watts, electrical rotation 357°—resistances 50 to 50,000 ohms.

LABORATORY MODEL HELIPOT
The ideal resistance unit for use in laboratory and experimental applications. Also helpful in calibrating and checking test equipment. Combines high accuracy and wide range of 10-turn HELIPOT with precision adjustability of DUODIAL. Available in eight stock resistance values from 100 to 100,000 ohms, and other values on special order.

R W

MODELS R AND W DUODIALS
Each model available in standard turns-ratios of 10, 15, 25 and 40 to 1. Inner scale indicates angular position of HELIPOT sliding contact, and outer scale the helical turn on which it is located. Can be driven from knob or shaft end.
R—2" diameter, exclusive of index.
W—4-3/4" diameter, exclusive of index. Features finger hole in knob to speed rotation.

FOR PRECISION POTENTIOMETERS come to Helipot

...world's largest manufacturer of such equipment!

For many years The HELIPOT Corporation has been a leader in the development of advanced types of potentiometers. It pioneered the *helical* potentiometer—the potentiometer now so widely used in computer circuits, radar equipment, aviation devices and other military and industrial applications. It pioneered the DUODIAL*—the turns-indicating dial that greatly simplifies the control of multiple-turn potentiometers and other similar devices. And it has also pioneered in the development of many other unique potentiometric advancements where highest skill coupled with ability to mass-produce to close tolerances have been imperative.

In order to meet rigid government specifications on these developments—and at the same time produce them economically—HELIPOT* has perfected unique manufacturing facilities, including high speed machines capable of winding extreme lengths of resistance elements employing wire even less than .001" diameter. These winding machines are further supplemented by special testing facilities and potentiometer "know-how" unsurpassed in the industry.

So if you have a problem requiring precision potentiometers your best bet is to bring it to The HELIPOT Corporation, world's largest manufacturer of such equipment. A call or letter outlining your problem will receive immediate attention!

**Trade Marks Registered*

The versatility of the potentiometer designs illustrated above permit a wide variety of modifications and features, including double shaft extensions, ganged assemblies, the addition of a multiplicity of taps, variation of both electrical and mechanical rotation, special shafts and mounting bushings, high and low temperature operation, and close tolerances on both resistance and linearity. Examples of potentiometers modified for unusual applications are pictured at right.

A C

3-GANGED MODEL A HELIPOT AND DOUBLE SHAFT MODEL C HELIPOT
All HELIPOTS, and the Model F Potentiometer, can be furnished with shaft extensions and mounting bushings at each end to facilitate coupling to other equipment.
The Model F, and the A, B, and C HELIPOTS are available in multiple assemblies, ganged at the factory on common shafts, for the control of associated circuits.

B F

MULTITAPPED MODEL B HELIPOT AND 6-GANGED TAPPED MODEL F
This Model B Helipot contains 40 taps, placed as required at specified points on coil. The Six-Gang Model F Potentiometer contains 19 additional taps on the middle two sections. Such taps permit use of padding resistors to create desired non-linear potentiometer functions, with advantage of flexibility, in that curves can be altered as required.

THE Helipot CORPORATION, SOUTH PASADENA 2, CALIFORNIA

Field Offices: Boston, New York, Philadelphia, Rochester, Cleveland, Detroit, Chicago, St. Louis, Los Angeles and Fort Myers, Florida. Export Agents: Frotham Co., New York 18, N.Y.

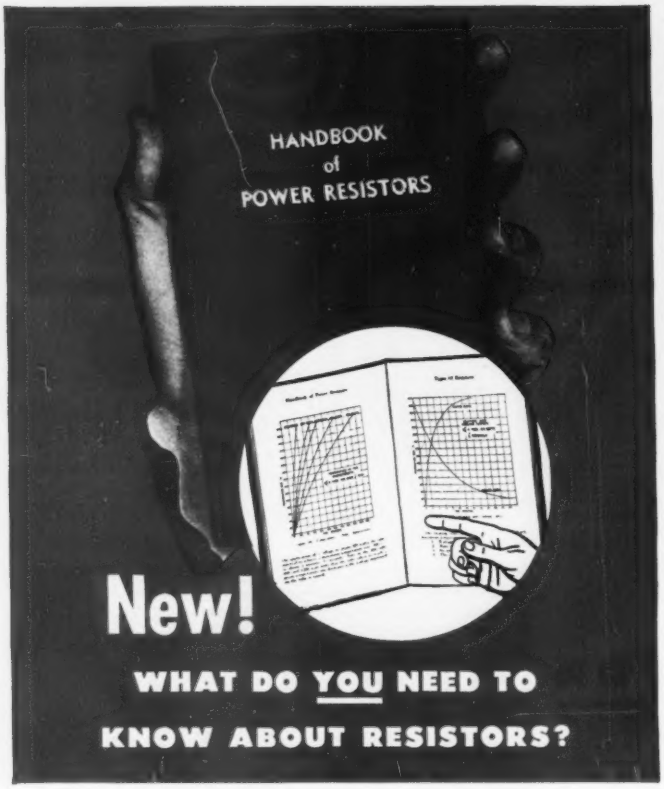

This new Ward Leonard handbook illuminates a hitherto neglected subject

Somehow—resistors, particularly power resistors, have never been given adequate attention in electrical industry literature.

Now Ward Leonard engineers have filled in the gap with the new *Handbook of Power Resistors*—nearly 200 pages packed with everyday, useful information on resistor types, characteristics, criteria for selection, other helpful data.

Example: For the 99 out of 100 applications where catalog ratings do not apply, derating curves are furnished to help you select the proper resistor for each case.

This handbook is modestly priced at $3.00. Order from WARD LEONARD ELECTRIC CO., 31 South Street, Mount Vernon, N. Y. Offices in principal cities of U. S. and Canada.

WARD LEONARD ELECTRIC COMPANY

Result-Engineered Controls Since 1892

RESISTORS • RHEOSTATS • RELAYS • CONTROL DEVICES

cillator power requirement and it is found that six to ten volts rms provides adequate oscillator excitation.

A typical switching function for the 6BN6 is shown in Fig. 1. The tube has about a 10-percent improvement in conversion efficiency compared to the 6SA7.

Transconductance

Since grid current in the 6BN6 is limited by the design of the tube, the bias voltage built up on the oscillator grid is very small, resulting in a higher value of peak transconductance. With low bias voltage on the oscillator grid, the magnitude of the grid resistor is not critical within limits. Also, the g_c is practically constant with changing oscillator excitation voltage after a threshold value has been reached, which in this case is about 8 volts.

At 30 mc, with 120 v on the plate and 70 v on the accelerator, the conversion transconductance was lower than anticipated. The low g_c is attributed largely to transit time since raising the plate and accelerator voltages to 155 and 90 v respectively increased the conversion transconductance to 790 μmhos. With a high-impedance input to the signal grid, some loading of the input circuit was observed, as would be expected with outer grid injection. While no input admittance measurements have been made, it would be reasonable to assume that good performance can be obtained with this tube in the lower vhf range.

A typical circuit used during the course of this experimental work is shown in Fig. 2. No special precautions were found necessary, but a metal shield across the tube socket between pins 4 and 5 and pins 1 and 7 is recommended to maintain low capacitance between the two signal grids.

Since the 6BN6 may be employed as an outer-grid mixer, it may be assumed that the method described by Aske[3], where a tuned circuit is placed between the plate and screen, may be used to double the conversion transconductance. If desired the single tube may be used as a converter by using the number 3 grid in an outer space-current local oscillator.

It is interesting to note that

Eight ML-5682's mounted in a Doherty high efficiency linear amplifier designed for 500 kW output.

The ML-5682

A High-Power Coaxial Triode for Full-Power Operation to 88 mc/sec.

The development and commercial production of the ML-5682, a new water- and air-cooled coaxial triode for very high power operation, is an important contribution to all phases of modern electronic development. It is of particular significance in the present effort to provide the highest possible power in international broadcast applications. It finds wide application in high power AM, FM and TV broadcasting, in particle accelerators and in electronic heating. It is the key tube type in the highest power AM transmitters being built today.*

The ML-5682 is an unusually compact, rugged, high-power electron tube ideal for all high-frequency applications. It is an all-ring-seal triode capable of long-life operation at 9kVdc plate voltage and 170 kW plate input at a frequency of 88 mc/s. Operation at 16 kVdc plate voltage and 300 kW plate input is permissible up to 30 mc/s. This tube is ideal for cavity operation and its low impedance makes it advantageous for broad-band service.

*Includes State Department's Voice of America Transmitters.

Outstanding design features include:

High-conductivity, gold plated kovar glass-to-metal seals.

Sturdy electrodes.

Integral anode water jacket.

Quick-change water coupling.

High-conductivity, heavy-wall copper anode designed to dissipate in excess of 100 kw.

Muplti-strand thoriated-tungsten filament cathode completely balanced and stress free throughout tube life.

Grid capable of unusually high heat dissipation contributing to maximum stability of tube performance and circuit operation.

For full technical information on the ML-5682 or other Machlett tube types write to Machlett Laboratories, Inc., Springdale, Connecticut, or contact your nearest Graybar or Westrex office.

Westrex
Export Distributor

Distributed by GraybaR

MACHLETT OVER 50 YEARS OF ELECTRON TUBE EXPERIENCE

ECLIPSE-PIONEER

Announces the New Line of

PYGMY SYNCHROS

Size of pygmy as compared to AY-200 series outline

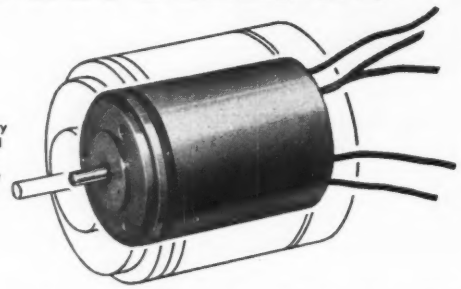

Eclipse-Pioneer has added a tiny new member to its great family of famous Autosyn* synchros. It's the new AY-500 series, a precision-built pygmy weighing only 1¾ oz. while scaling only 1.278" long and .937" in diameter (the same diameter, incidentally, as a twenty-five cent piece). Its accuracy and dependability are assured, thanks to Eclipse-Pioneer's 17 years of experience and leadership in the development of high precision synchros for aircraft, marine and industrial applications. For more detailed information on the AY-500 and other E-P Autosyns, such as the remarkably accurate AY-200 series (guaranteed accuracy to within 15 minutes on all production units), please write direct to Eclipse-Pioneer, Teterboro, N. J.

*REG. TRADE MARK BENDIX AVIATION CORPORATION

LOOK FOR THE PIONEER MARK OF QUALITY
REG. U.S. PAT. OFF.

Typical Performance Characteristics

	One AY-201-3 Driving		One AY-500-3 Driving
	One AY-500-3 Control Transformer	Two AY-500-3 Control Transformer	One AY-500-3 Control Transformer
INPUT			
Voltage	26-volts, single-phase	26-volts, single-phase	26-volts, single-phase
Frequency	400 cycles	400 cycles	400 cycles
Current	88 milliamperes	110 milliamperes	55 milliamperes
Power	0.8 watts	1.2 watts	0.9 watts
Impedance	105+j280 ohms	100+j220 ohms	290+j370 ohms
OUTPUT			
Voltage Max. (rotor output)	17.9 volts	16.2 volts	14.1 volts
Voltage at null	40 millivolts	40 millivolts	40 millivolts
Sensitivity	310 millivolts/degree	280 millivolts/degree	245 millivolts/degree
Voltage phase shift	23 degrees	26 degrees	44 degrees
System accuracy (max. possible spread)	0.6 degrees	0.6 degrees	0.75 degrees

Other E-P precision components for servo mechanism and computing equipment:

Servo motors and systems • rate generators • gyros • stabilization equipment • turbine power supplies • remote indicating-transmitting systems and special purpose electron tubes.

For detailed information, write to Dept. C

ECLIPSE-PIONEER DIVISION of

TETERBORO, NEW JERSEY

Bendix AVIATION CORPORATION

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

ENGRAVING
ROUTING
PROFILING
MODELING

GREEN ENGRAVER

Proved Profitable —

Machine Tool, Radio, Electrical and Instrument Mfrs., Sales Promotion and Advertising.

Fast, rugged, convenient—and inexpensive. The Green Engraver is tops for low-cost performance—zips out precision work on metal, plastics or wood . . . cuts four lines of letters from 3/64" to 1" on curved or flat surfaces . . . operates by tracing . . . makes anyone an expert . . . engraves panels, name plates, scales, dials, molds, lenses and instruments. (Also widely used for routing, profiling and three dimensional modeling.) Electric etching attachment available.

Special attachments and engineering service available for production work.

FREE—Fact-packed folder. Send for yours, today

GREEN INSTRUMENT COMPANY

GREEN

363 PUTNAM AVENUE
CAMBRIDGE, MASS.

A "Sound" INVESTMENT IN FINE MUSIC . . . .

50 WATTS (Peak 100)
50W-2 - - $249.50

McIntosh

WORLD'S FINEST AUDIO AMPLIFIER

50 WATT AMPLIFIER

20 WATTS (peak 40)
20W-2
$149.50

Unequalled for quality reproduction of any sound source, the McIntosh is the most advanced amplifier of the day. Its unique, compact design offers: HIGHEST EFFICIENCY — over 65%; LESS THAN 1% DISTORTION AT PEAK POWER; DYNAMIC RANGE: OVER 70 db; FREQUENCY RESPONSE: 20-20,000 cps.

AE-2 Amplifier Equalizer - $74.50

SEND FOR *Free* CATALOG Dept. B-3

McINTOSH Engineering Laboratories, Inc.
320 Water Street, Binghamton, N. Y.

Do You Have Use For Practically Pure
400 CYCLE POWER
Less than 1/2% total Harmonics?

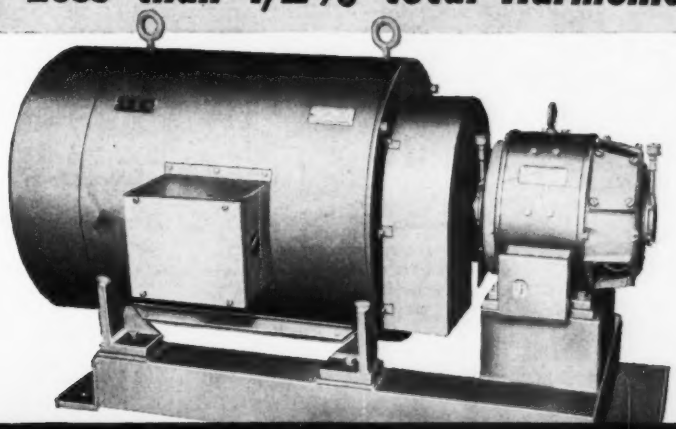

★ For use in Laboratory and Production testing of high performance electronic equipment Bogue has developed a line of single and three phase 400 Cycle Synchronous Motor-Generator Sets ranging from 3 to 100 KW with total harmonic content less than 1/2% This extreme quality in wave form is secured thru precision design, careful selection of material and quality control in manufacture.

Special units with less than 1/10% total harmonics available.

These sets can also be furnished with magnetic amplifier static voltage regulators when the utmost in reliability and constancy in voltage regulation is required. Output frequency is exactly 400 cycles at any load—no load to full load!

If you are interested in this type power, Bogue engineers will be glad to furnish oscillograms and wave analyses of typical sets built for this requirement. You can always depend on . . .

QUALITY MAGNETIC AMPLIFIER CONTROLLED

BOGUE PRECISION POWER

BOGUE ELECTRIC MANUFACTURING COMPANY

Where Precision Coordinated Design . . . Counts!

50 IOWA AVENUE • PATERSON 3, NEW JERSEY

SINCE 1892 SPECIALISTS IN FINE MOTORS & GENERATORS — Bogue

MAGNETIC AMPLIFIERS • MAGNETIC CONTROLLERS • AC & DC MOTORS
AC & DC GENERATORS • VOLTAGE & SPEED REGULATORS • SWITCHBOARDS

"Black boxes" to your specifications
RESEARCH - DEVELOPMENT - PRODUCTION



Special Test Equipment

Plotting Boards—such as the Variplotter Model 205 Series for accurately presenting X vs Y, curve following, point plotting, etc.



Computer Potentiometers

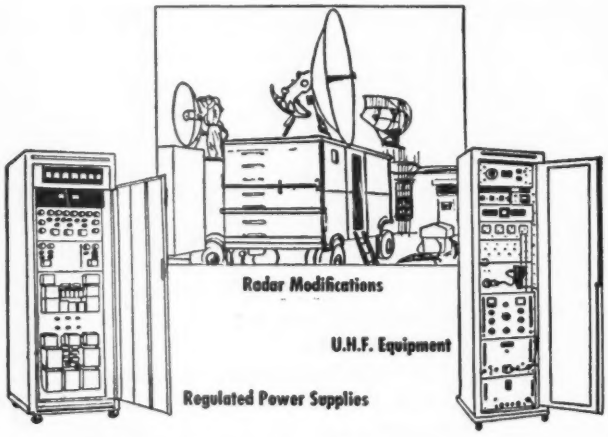

Radar Modifications

U.H.F. Equipment

Regulated Power Supplies

Electronic Associates, Inc., is a coordinated group of electronic engineering consultants fully equipped to perform electronic research, development and production. They include engineering, production, and administrative personnel capable of handling a wide range of problems including design studies, applied research, and the production of highly complex electronic devices.

Plant facilities comprise laboratories; model, welding and machine shops; paint, anodizing, and test departments; assembly and tool rooms; foundry and other contributing functions of production.

A few of the many products the Concern has manufactured are illustrated here.

See us in Booths 29-30 at the
NATIONAL ELECTRONICS CONFERENCE
Edgewater Beach Hotel, Chicago
October 22-23-24

More detailed information will be furnished on request.

ELECTRONIC ASSOCIATES, INC.
Long Branch, New Jersey



FIG. 2—Schematic diagram of the 6BN6 mixer

above a given supply voltage the conversion gain is essentially constant with increasing supply voltage. Thus in some applications it may be desirable to operate this tube at higher voltages than necessary in order to obtain good voltage stability.

If the 6BN6 is operated at very low voltages, the linearity will suffer. When grid voltages as high as one volt are necessary, the accelerator voltage should be rather high, in the order of 90 v.

Conclusion

The 6BN6 has been shown to perform well in mixer service. It is one of the very few commercially available high-transconductance tubes for outer-grid injection. The greatest advantage obtained with this tube is the reduced space-charge coupling and low capacitance between control grids. This allows higher frequency operation with a fairly low value of i-f without resulting in excessive values of oscillator voltage appearing on the signal grid.

The tube has a conversion transconductance of approximately 800 μmhos with less cathode current than that taken by many existing pentagrid tubes. In addition the 6BN6 can probably be used in the gain-doubling circuit of Aske[3] to further increase its utility. The 6BN6 exhibits positive input loading as do all outer grid mixers. At vhf the relatively high value of input conductance may result in a serious loss in gain. While no measurements have been made of input conductance, experimental results at 30 mc indicate little input loading.

In the course of the experimental work it was found that there is a considerable variation in the char-

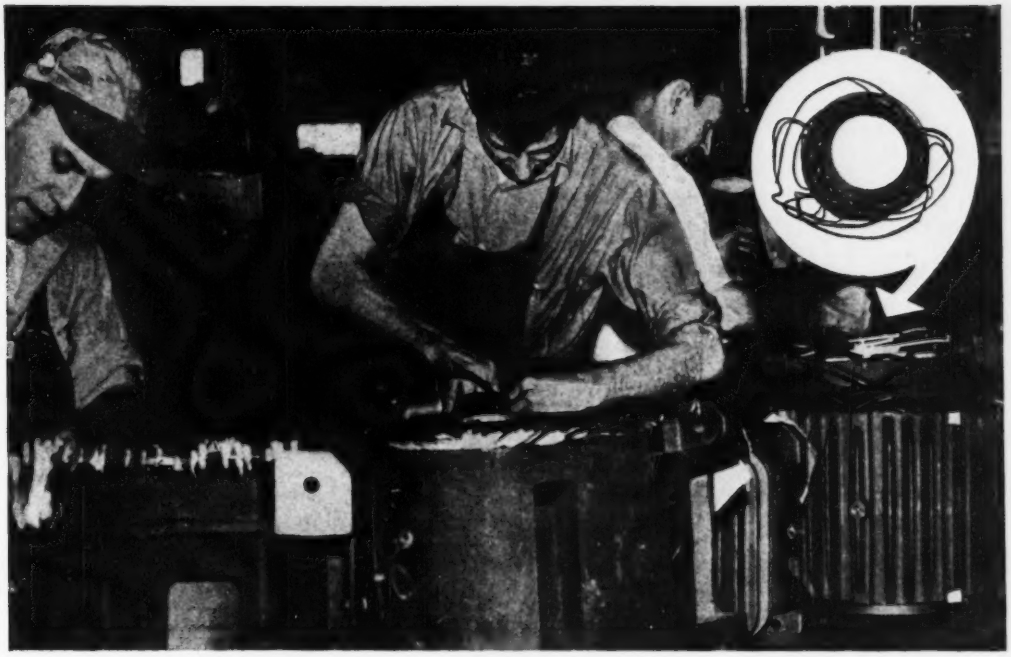

For fast *production* and fine *performance*, Allis-Chalmers uses TEMFLEX 105 TUBING

"Our No. 1 reason for using Temflex 105 Tubing," says Allis-Chalmers Manufacturing Company, "is the way it speeds up our general purpose motor production in assembling insulation on coil leads, stubs and neutral, jumper and lead connections."

Of course, that's just *one* of the advantages that Allis-Chalmers—and so many other world-famous makers of electrical equipment—get from using Irvington's Temflex 105. Temflex 105 also offers such outstanding *service* features as:

Continuous operation at temperatures *up* to 105°C.
Exceptional flexibility *down* to —40°C.
High dielectric strength of 1200 vpm.
Excellent chemical stability.

This flexible plastic tubing produced by Irvington Varnish & Insulator Company in all standard colors, is readily identified by the continuously printed name on the smooth tubing surface. Be sure *you* identify it by name when you buy! Technical literature is yours for the asking.



Send this convenient coupon now

Irvington

VARNISH & INSULATOR COMPANY

Irvington 11, New Jersey

Plants: El Monte, California **Hamilton, Ontario, Canada**

EL-10/51

Irvington Varnish & Insulator Company
6E Argyle Terrace, Irvington 11, N. J.
Gentlemen:
Please send me technical literature on TEMFLEX 105 Tubing.

Name.....Title.....
Company.....
Street.....
City.....Zone.....State.....

For Further Information, Consult pages 92-93 in the 1951-1952 Electronics Buyers' Guide

CHICAGO OIL IMPREGNATED VACUUM FILLED CAPACITORS

RECTANGULAR TYPE

APPLICATIONS
INDUSTRIAL • TRANSMITTING
POWER FACTOR CORRECTION
MOTOR CAPACITORS
SIGNAL INSTRUMENTS

CHICAGO CONDENSER'S rectangular type capacitors are hermetically sealed and tested at twice-rated voltage.

BATHTUB TYPE

APPLICATIONS
RADIO • INTERFERENCE
MOTORS • ELECTRONICS
SPECIAL TIMMING

CHICAGO CONDENSER'S bathtub type capacitors are hermetically sealed and tested at three-times voltage.

CHICAGO CONDENSER has engineering and plant facilities to meet specialized military requirements.

Drawings and specifications submitted will receive immediate attention.

CHICAGO CONDENSER CORPORATION

General Offices and Factory
3255 WEST ARMITAGE AVENUE
CHICAGO 47, ILLINOIS

GAIR

FOLDING CARTONS

Sell on Sight!

Smartly designed and brilliant multicolor Folding Cartons by GAIR are solving packaging problems for many manufacturers who are as meticulous about their packaging as they are about their famous products.

Sales, profits and prestige are increased with the SELL-ON-SIGHT magic of GAIR MULTI-COLOR CARTONS.

WRITE TODAY for samples and technical information.

GAIR

ROBERT GAIR COMPANY, INC.

155 EAST 44TH STREET, NEW YORK • TORONTO
PAPERBOARD • FOLDING CARTONS • SHIPPING CONTAINERS

MANUFACTURERS

MOLDED AND FABRICATED

INDUSTRIAL RUBBER PRODUCTS

BUMPERS • BUSHINGS • EXTRUSIONS
GASKETS • GROMMETS • MOLDS • RINGS
ROLLS • SHEET • SLAB • SPRING • SPONGE
TIRES • TUBING • VACUUM CUPS • WASHERS

THOUSAND OF ITEMS IN CHICAGO STOCK

DEFENSE ORDERS GIVEN PROPER ATTENTION

INDUSTRIAL RUBBER PRODUCTS

ATLANTIC INDIA RUBBER WORKS, INC.

571 WEST POLK STREET • • CHICAGO 7, ILLINOIS.

Write Dept. E for Complete Catalog #51—All Phones: HArrison 7-8290



The Key to SUBMINIATURE TRANSFORMER PROBLEMS

DIMENSIONS:..... 7/16" x 3/4" x 5/8"
WEIGHT:..... Less than 1/3 of an ounce
TYPES:.....input, interstage, output, reactor

These transformers fit into the smallest Mil-T-27 Case A.F.

Prompt Engineering Attention To Your Subminiature Problems

UNION ELECTRIC PRODUCTS CO.

24 EDISON PLACE NEWARK 2, N. J.

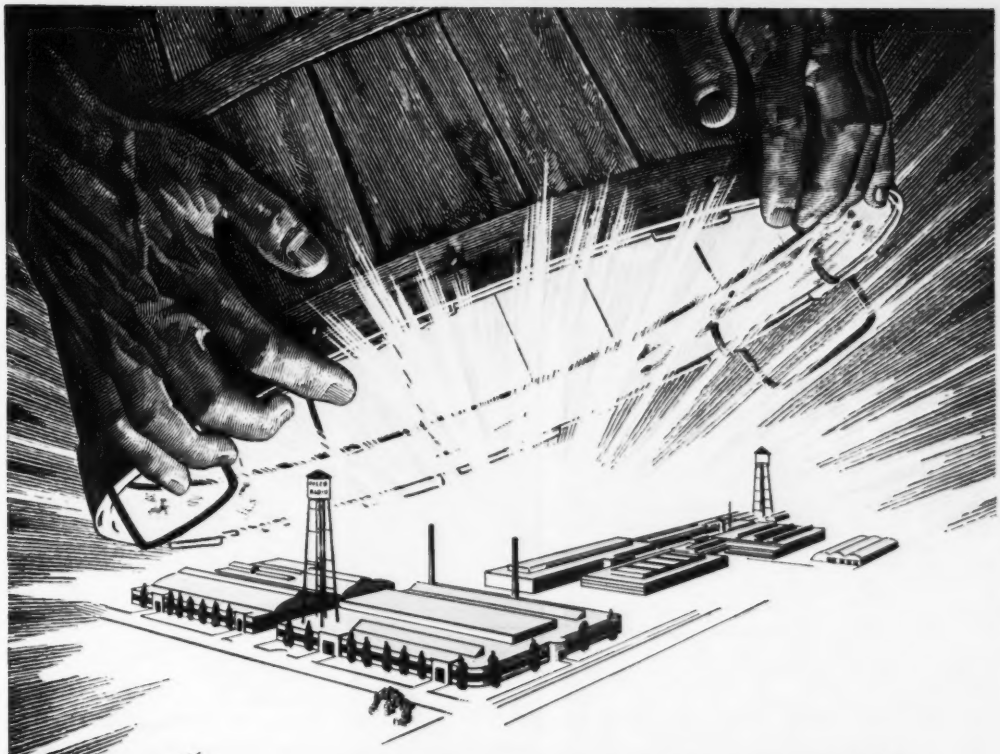

WE'RE LIFTING THE BUSHEL BASKET— AND LETTING OUT OUR LIGHT!

Probably you didn't know it because we haven't told you. BUT—for the past five years we've been building car and truck radios for General Motors. In 1950 alone we built nearly 2,000,000 radios for practically all types of vehicles. Our production tops that of any other car radio manufacturer.

Since we stopped making radio and electronic equipment for the armed forces during World War II, we've concentrated on making our facilities the largest and our products the finest in the industry. Unlike most others, we're not just an assembly plant. We make practically all the parts that go into our products. Our design and research engineers are tops in their field. Our laboratory and production equipment is the finest that can be obtained.

With our vast experience, our facilities, engineering know-how, our productive manpower bigger and better than ever before, we believe we can be of service to our country. We are ready to go to work immediately for national defense and count it a privilege to volunteer for service.

Delco Radio

DIVISION, GENERAL MOTORS CORPORATION
KOKOMO, INDIANA

precision built...
powerful...
highly efficient
Cramer
timing
motors



TYPE SX SYNCHRONOUS MOTOR

A permanent magnet type motor producing an exceptionally high torque, the Cramer Type SX Synchronous Motor is widely used with timing devices, recording instruments, communications equipment . . . and for many other applications throughout the instrument and control fields requiring a constant speed at a given frequency. Self-starting . . . operates at synchronous speed only. Compact . . . precision-built . . . available with output speeds from 60 RPM to 1 24 RPH.

TYPES SCS & SCR CLUTCH MOTORS

Designed to meet the needs of many timing, recording, indicating, and switching applications where an accurate reset operation is essential, Cramer Clutch Motors combine the Type SX Motor and a differential gear drive. Two basic types . . . Type SCS equipped with direct-acting clutch . . . Type SCR with reverse-acting clutch . . . each available in a wide range of speeds.

Cramer motors are also available as Reversible and Chart Drive Types. Write for complete information.

THE R. W. CRAMER CO., INC.

BOX 3, CENTERBROOK, CONN.

Builders of dependable timing devices for more than 25 years.

INTERVAL TIMERS • TIME DELAY RELAYS • RESET TIMERS • CYCLE TIMERS
PULSE TIMERS • RUNNING TIME METERS • PERCENTAGE TIMERS

acteristics between different tubes. In particular, the signal-grid transfer characteristic exhibited considerable variation. This is no doubt due to the fact that this tube is not tested for this type of service. It may, therefore, be suggested that the 6BN6 could be rated for mixer or converter service by the manufacturer and a portion of these tubes sold for this purpose.

While the 6BN6 makes a very satisfactory mixer for many applications, it is thought quite possible that a gated-beam tube could be developed which would have superior characteristics for mixer applications.

REFERENCES

(1) E. W. Herold, The Operation of Frequency Converters and Mixers for Superheterodyne Reception, *Proc. IRE*, 30, p 84, Feb. 1942.
(2) V. H. Aske, Gain-Doubling Frequency Converters, ELECTRONICS, 2., p 92, Jan. 1951.

Nylon Tubing for Thermistors

EXTRUDED NYLON TUBING is now being used with thermistors. Tubing about the diameter of an ordinary lead pencil is used to encase one type of glass-enclosed bead thermistor used in time-delay circuits.

The thermistor is inserted in a length of tubing and the ends of the tubing pressed flat under heat in a hydraulic press for a given length of time to give the Nylon the "set" desired. Figure 1 shows the Nylon tube, the thermistor and the completed assembly.

Connecting leads extend outside the Nylon casing. The tubing provides mechanical protection of the glass bulb, electrical insulation (no metal end caps are required) and protects against staining the glass

FIG. 1—Nylon tubing, thermistor and assembly of the two components

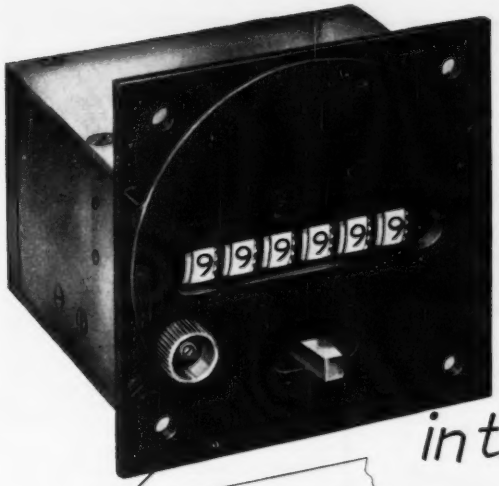

...and here's a Counter that talks to Jet-Testers in their own language...

Added Evidence that—

Everyone Can Count on VEEDER-ROOT

This technician is reading an electrically operated counter, used to record data in test instruments that check aircraft performance.

And this counter is one of innumerable Veeder-Root specials now on duty in every arm of the service. If you can use such counters (or need counters of special design) on D-O—rated orders, then you can count on Veeder-Root to help you with all possible dispatch.

VEEDER-ROOT INCORPORATED
"The Name That Counts"
HARTFORD 2, CONN. • GREENVILLE, S.C.
Montreal 2, Canada • Dundee, Scotland
Offices and agents in principal cities

VEEDER-ROOT COUNTERS *"Count Everything on Earth"*

Send for this informative brochure

The Story of Laminated Material
...ITS IMPORTANCE AND APPLICATION TO MODERN INDUSTRY
The Home of IMPROVED Service
The IMPROVED SEAMLESS WIRE COMPANY
775 Eddy Street, Providence 5, Rhode Island

This new IMPROVED brochure presents an interesting background of the lamination process and its application to industry, particularly in the field of electrical parts and equipment manufacture. We invite you to send for your copy.



The Home of IMPROVED Service

The IMPROVED SEAMLESS WIRE COMPANY
INCORPORATED 1898

Dept. 1-A 775 Eddy Street, Providence 5, Rhode Island

Brush *presents* MAGNETIC RECORDING RUBBER *synthetic*

- Recording medium of amazing versatility
- Practically no wear factor, either to recording head or magnetic medium
- Permanently self-lubricating
- For sound and pulse recording

RECORDING COMPONENTS

Brush makes a full line of magnetic recording components, from single, wafer-thin, to multichannel heads. For information about stock or made-to-specification magnetic recording components, write

THE BRUSH DEVELOPMENT COMPANY
3405 PERKINS AVENUE
CLEVELAND 14, OHIO

"Our business is the future"

New BIRTCHER TUBE CLAMP FOR MINIATURE TUBES

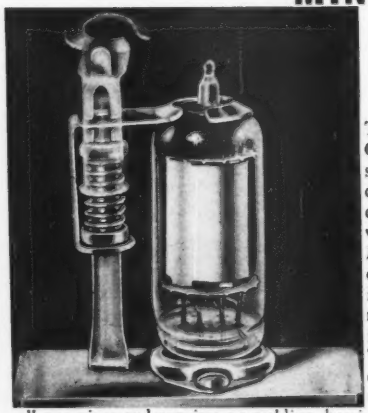

POSITIVE PROTECTION AGAINST LATERAL AND VERTICAL SHOCK!

The *New* Birtcher Type 2 Tube Clamp holds miniature tubes in their sockets under the most demanding conditions of vibration, impact and climate. Made of stainless steel and weighing less than ½ ounce, this *New* clamp for miniature tubes is easy to apply, sure in effect. The base is keyed to the chassis by a single machine screw or rivet...saving time in assembly and preventing rotation. There are no separate parts to drop or lose during assembly or during use. Birtcher Tube Clamp Type 2 is all one piece and requires no welding, brazing or soldering at any point.

If you use miniature tubes, protect them against lateral and vertical shock with the Birtcher Tube Clamp (Type 2). Write for sample and literature.

Builder of millions of stainless steel Locking Type Tube Clamps for hundreds of electronic manufacturers.

The **BIRTCHER** *Corporation*

FREED

TRANSFORMERS & INSTRUMENTS

"PRODUCTS OF EXTENSIVE RESEARCH



NO. 1060 VACUUM TUBE VOLTMETER INPUT IMPEDANCE 50 MEGOHMS



NO. 1030 LOW FREQUENCY "Q" INDICATOR

HIGH FIDELITY TRANSFORMERS ½ DB 20 CPS TO 30 KC

DISCRIMINATORS 10 CPS TO 1 MC



COMMERCIAL COMPONENTS QUALITY — DEPENDABILITY — PRICE

NO. 1140 NULL DETECTOR COMPLETE WITH SELECTIVE CIRCUITS

NO. 1020 MEGOHMMETER 2,000,000 MEGOHMS DIRECT READING

HERMETICALLY SEALED COMPONENTS TO MEET MIL-T-27 SPECS

TOROIDAL INDUCTORS 60 CPS TO 1 MC

MINIATURE INDUCTORS 1000 CPS TO 100 KC



NO. 1210 NULL DETECTOR & VACUUM TUBE VOLTMETER

DECADE INDUCTORS 30 CPS TO 300 KC

SUB MINIATURE HERMETICALLY SEALED TOROIDAL INDUCTORS

SUB MINIATURE HERMETICALLY SEALED COMMUNICATION COMPONENTS

SLUG TUNED COMPONENTS 1000 CPS TO 1 MC



NO. 1150 UNIVERSAL BRIDGE 5 A.C. BRIDGES IN ONE UNIT



NO. 1010 COMPARISON BRIDGE FAST, ACCURATE, RELIABLE



STEPDOWN TRANSFORMERS 50 WATTS TO 3 KW

PULSE TRANSFORMERS FROM WATTS TO MEGAWATTS



POWER TRANSFORMERS RUGGED, DEPENDABLE, INEXPENSIVE.

1170 D.C. SUPPLY DIRECT CURRENT UP TO 500 MA.

NO. 1110-A INCREMENTAL INDUCTANCE BRIDGE A NECESSITY FOR EVERY LAB

PRECISION FILTERS 10 CPS. TO 1 MC.



CHANNEL MOUNTING INEXPENSIVE—RELIABLE



FREEDSEAL TREATMENT ANE-19 SPECS.

SEND FOR LATEST CATALOG!

FREED TRANSFORMER CO., INC.

DEPT. OE 1718-36 WEIRFIELD ST., (RIDGEWOOD) BROOKLYN 27, NEW YORK

ELECTRONIC INSTRUMENTATION

for LABORATORY *or* PRODUCTION LINE!



DECIMAL COUNTING UNIT, MODEL 700 is a direct reading electronic counter capable of operating at speeds up to 30,000 counts per second. Digits from 0 to 9 are presented on illuminated front panel. Electrical reset to zero. Plug-in octal mounting for easy interchangeability. The counter operates on input pulse of 100 volt neg. with 2 microsec. max. rise time. Output will drive following unit in cascade. Dimensions 1⅜" x 5" x 5¼". Wt. 12 oz. Other models to a million counts per second.

ELECTRONIC COUNTER, MODEL 10 was developed to meet the need for a rugged industrial counter operating at speeds up to 6000 counts per minute. Total count is displayed on the Decimal Counting Unit and the mechanical register to a maximum capacity of 9,999,999. Unit may be operated from closing contacts, photocell, or any means that will supply a positive potential of at least 3 volts. All circuitry moisture and fungus proofed. Unit is available in a variety of vapor-proof and explosion-proof housings to meet individual requirements. Dimensions 6¼" x 7¼" x 6½". Weight approximately 6 lbs.

PRESET COUNTER consists of a series of scale-of-10 electronic counting units each in parallel with a 10-position push-button switch. This instrument accepts counts in the conventional manner at rates up to 10,000 cps. Any number from 0 to maximum capacity may be preset merely by depressing appropriate push-button in each column. Upon reaching the preset count, the unit supplies an output pulse to drive a register, close a gate, divert a production line or perform any other desired function. It then resets to 0 and recycles automatically. Available in any desired capacity.

EVENTS PER UNIT TIME METER, MODEL 554 will automatically count and display the number of events that occur during a precise one second interval at rates up to 100,000 events per second. Accuracy is ± one event. Will operate either manually or automatically to count any mechanical, electrical, or optical occurrences, regularly or randomly spaced, that can be converted into changing voltages. Instrument counts for one second and displays the results on illuminated five-digit panel. Will recycle continuously on automatic operation. Convenient test switch permits 2 second self-check of entire unit. Dimensions 20¾" x 10½" x 15". Weight approximately 68 lbs.



TIME INTERVAL METER, MODEL 510 provides a direct reading of elapsed time between any two events in the range of 0.000010 to 1.00000 seconds. Accuracy is ± 10 microseconds. Any occurrences that can be translated into changing voltages may be so timed. Timing may be started and stopped by independent voltages, the polarity of which may be selected by means of toggle switches. Sensitivity control permits selection of the amplitude of start or stop voltages at optimum level for elimination of interference. Dimensions 20¾" x 10½" x 15". Weight approximately 58 lbs.

SINGLE/DOUBLE PULSE GENERATOR MODEL 903 is a general purpose laboratory instrument that supplies either single or paired pulses individually variable in amplitude, width and polarity. Pulse spacing is continuously variable from 0 to 10 microseconds, pulse width from 0.10 to 1.6 microseconds and pulse amplitude from 200 volts maximum negative and 50 volts maximum positive for 1000 ohm load, and 10 volts maximum negative and 50 volts maximum positive for 50 ohm load. Single or double pulses are available through separate panel connectors. Repetition rate internally controlled 1 to 1000 cps. Push-button control single cycle. External signal control for any rate up to 1000 cps.

These are basic descriptions of representative standard instruments. A variety of modifications, both standard and special, are available to meet specific requirements. For complete details write Dep't. E.

Berkeley Scientific Corporation

2200 WRIGHT AVE. • RICHMOND, CALIF.

A NATIONAL ORGANIZATION

bulb through flexure of the connecting leads. Nylon readily takes the shape desired and is heat resistant. Assembly is rapid and simple and cost reduction have been achieved by using the Nylon tubing instead of a phenolic cartridge with metal end caps.

Heat resistance is important because the connecting leads are soldered during assembly into circuits and the apparatus in which the thermistors are used must operate properly over a wide range of temperatures.

The thermistor application is just one of many possible uses for the tubing in the electronic industry. The tubing itself is manufactured by Anchor Plastics Company, New York, N. Y.

Application of Tubes in Heating Equipment

By H. J. Dailey and C. H. Scullin

Electronics Engineering Department
Westinghouse Electric Corp.
Bloomfield, New Jersey

One of the major problems confronting the designers of induction and dielectric heating equipment is to provide for the tubes a physical and electrical environment which will favor long life and maximum reliability.

Load Variations

An important consideration in the usual r-f heating setup is the effect of expected load variations on tube-element dissipations and emission requirements. As the loading increases, the plate and grid voltage swings decrease and the plate current increases. The tube draws more power input so that the anode dissipation increases. Thus, the maximum load variation above normal should be such that neither the maximum plate dissipation nor maximum plate-current ratings are exceeded. The latter are of particular importance in the case of thoriated-tungsten filaments.

As the loading decreases the plate swing, the grid swing and the grid current both increase to give rise to higher grid dissipations and require higher peak emission currents from the cathode. In extreme cases, the

RMC CERAMIC DISCAPS

. . . THE MONEY-SAVING REPLACEMENT FOR MICA AND CERAMIC TUBULAR CONDENSERS

RMC DISCAPS are approved and used by leading manufacturers of TV sets and tuners, radio receivers and high frequency electronic equipment. In addition to their lower cost, they offer the advantages of small size, low self inductance, low power factor, high working voltage, greater mechanical strength and faster production line handling.

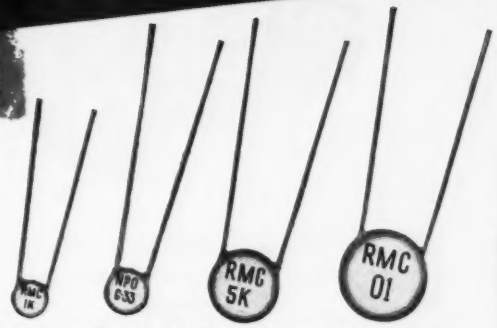

TYPE B DISCAPS

GMV By-Pass Series

Type B DISCAPS are the finest high frequency by-pass capacitors available and are engineered to exceed guaranteed minimum capacity at 85° C with 250 applied V.D.C. Capacity change between room temperature and 65° C is only +18%, —0%. Available in all standard capacities from .001 MFD to .02 MFD and in a number of dual capacity types.

SPECIFICATIONS

POWER FACTOR . . . . . 1.5% at 1 KC
WORKING VOLTAGE . . . . . 600 V.D.C.
TEST VOLTAGE . . . . . 1200 V.D.C.
INSULATION Durez Phenolic—Vacuum Waxed
RESISTANCE . . . . . Initial 7500 Megohms
After Humidity 1000 Megohms
LEADS . . . . #22 Tinned Copper (.026 DIA.)
CAPACITY TOLERANCE . . . . . GMV

TYPE C DISCAPS

NPO and TC

Type C DISCAPS are ideally suited to coupling and tuned circuit applications. Their capacity will not change under voltage. Available in a wide range of capacities and temperature coefficients conforming to the RMA specifications for Class I ceramic condensers.

SPECIFICATIONS

POWER FACTOR . . . . . Less than .1% at 1 Megacycle
WORKING VOLTAGE . . . . 600 V.D.C.
TEST VOLTAGE . . . . . 1200 V.D.C.
INSULATION . . . . . Durez Phenolic—Vacuum Waxed
RESISTANCE . . . . Initial 7500 Megohms
After Humidity 1000 Megohms
LEADS #22 Tinned Copper (.026 DIA.)
CAPACITY TOLERANCE . . . . ±5%, ±10%, ±20%

TYPE D DISCAPS

STABLE CAPACITY

Specify Type D DISCAPS when a more stable capacity is required for coupling and by-passing filter networks. Available in a capacity range between 150 MMF and 5000 MMF. They feature a very small capacity change between +25° C and +85° C.

SPECIFICATIONS

POWER FACTOR . . . . . 1% at 1 KC
WORKING VOLTAGE . . . . . 600 V.D.C.
TEST VOLTAGE . . . . . 1200 V.D.C.
INSULATION . . . . . Durez Phenolic—Vacuum Waxed
RESISTANCE . . . . Initial 7500 Megohms
After Humidity 1000 Megohms
LEADS . . . #22 Tinned Copper (.026 DIA.)
CAPACITY TOLERANCE . . . . ±20% at +25° C

NEW! RMC DEPENDABLE HI-VOLTAGE DISCAPS

ACTUAL SIZE

SPECIFICATIONS

CAPACITY . . . . . 500 MMF + 50% — 20%
WORKING VOLTAGE . . . . . 20,000 V.D.C.
TEST VOLTAGE . . . . . 30,000 V.D.C.
POWER FACTOR . . . . . 1.5% Max. at 1 KC
LEAKAGE RESISTANCE . . . . . Initial 7500 Megohms
After Humidity . . . . . 1000 Megohms
INSULATION . . . . . Moulded Plaskon

SEND FOR SAMPLES AND TECHNICAL DATA

DISCAP CERAMIC CONDENSERS

RADIO MATERIALS CORPORATION

GENERAL OFFICE: 3325 North California Avenue, Chicago 18, Illinois

TWO PLANTS IN CHICAGO, ILL. AND ATTICA, IND.

Two RMC Plants Devoted Exclusively to Ceramic Condensers

—of "Standard's" UNBRAKO *Standards*
Write on your business letterhead, today.

SOCKET UNBRAKO SCREWS

"Standard" recommends Standards

-SPS STANDARD PRESSED STEEL CO.
JENKINTOWN 10, PENNSYLVANIA

A.W. Haydon Timing

again "PREFERRED WHERE PERFORMANCE IS PARAMOUNT"

The A. W. Haydon Motor was chosen to drive the Airesearch Rate of Change Control. This instrument regulates the rate at which pressure in an airplane's cabin changes, and positive timing is of prime importance. Other aircraft applications in which similar Haydon Motors are used include gun door controls, vacuum tube protector circuits, controls for wing and propeller de-icing, propeller feathering, camera intervalometer, hydraulic bypass, fuel tank purging as well as recorder chart drives, trim control, telemetering and destructor control.



The A.W. HAYDON COMPANY
235 NORTH ELM STREET
WATERBURY 20, CONNECTICUT

Spincraft
SKILL WILL DO IT

provides *a low cost source* for the Production of Electronic Parts

Stainless conical envelope for cathode ray assembly. 1/8" 446 chrome iron, 16" dia., 11½" deep.

Corona shield — 1/8" 2SO aluminum, 20" long.

Rectangular TV envelope — mass produced of 1/8" 430 chrome iron, 24" wide, 16" high, 9" deep.

Beaded static shield — 18 U. S. ga. cold rolled steel, 8" dia.

STUDY these illustrations of Spincraft "engineering" — interesting examples of a high order of ability to "work" metal by spinning and fabricating. Best of all, these methods pay off in time gained — and substantially lower costs, both on large and small runs.

Progressive new Spincraft techniques may help simplify your production problem in any metal — just as they have helped others in the electronics industry. Your inquiry is welcome — and you are invited to send for the new Spincraft Data Book, a stimulating source of ideas for engineers, designers and plant production men. Write today.

Spincraft
SKILL WILL DO IT
INCORPORATED

4143 W. State St. Milwaukee 8, Wis.
Heretofore known as
Milwaukee Metal Spinning Co.

BROWN INSTRUMENTS ACCELERATE RESEARCH

Simultaneously Records Two Independent Variables

ON ONE CHART

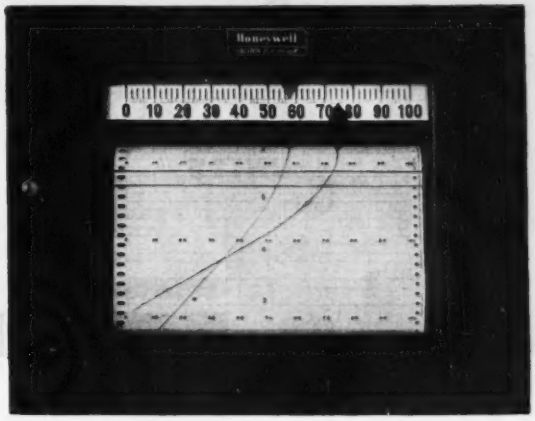

...the *ElectroniK* Duplex Recorder

Check these IMPORTANT FEATURES

- *Continuous Balance measuring systems, with electronic non-cyclic balancing.*
- *Auxiliary switches can be supplied on one pen for control or signaling.*
- *A solenoid-actuated third pen can be provided to register in time conformance with one of the standard pens.*
- *Unit construction eliminates delicate mechanical linkages . . . assures long operation with minimum of maintenance.*

For further details, write for Data Sheet No. 10.0-6

THE BURDEN of tedious, time-consuming, and often inaccurate, cross reference of comparison measurements need no longer be tolerated! Now, on a single chart, the *ElectroniK* Duplex Recorder provides a clear, easily read record of the measurement of practically any combination of two independent variables. Standard chart drive mechanism permits both variables to be recorded as a function of time . . . and with a Selsyn motor, they may be recorded as a function of either motion or displacement.

Operating on the "continuous balance" principle, the recorder incorporates two separate measuring systems . . . both standardized simultaneously by the push of a button. Each pen traverses the full eleven inches of the chart width without interference. Simplicity, sensitivity and dependability make this versatile instrument a "natural" for such applications as atomic energy, acoustics, stress analysis, central station dispatching. Particularly useful in before and after comparisons made by recording a measurable characteristic of a substance as it enters and emerges from a processing stage or reaction.

MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division*, 4428 Wayne Ave., Philadelphia 44, Pa.

MINNEAPOLIS **Honeywell**

Brown Instruments

One Source...
One Responsibility
for
everything
in
QUARTZ
CRYSTAL
UNITS

Reeves-Hoffman Quartz Crystal Units faithfully do the work they are designed to do . . . the exacting job of providing accurate frequency control.

They are manufactured to meet all military and commercial specifications . . . from 16 kc to 100 mc.

THE FINEST NAME IN CRYSTALS

REEVES-HOFFMAN
Corporation
CARLISLE 2, PENNSYLVANIA
LICENSED UNDER PATENTS OF THE BELL SYSTEM

plate-voltage swing can become larger than the d-c plate voltage and even become great enough to cause the tank circuit or the tube to arc over.

One satisfactory method of preventing excessive plate-voltage swing in high-power oscillators is a circuit which automatically adjusts the filament voltage so that the peak emission is limited enough to just maintain a normal plate-voltage swing. The plate-voltage swing is measured by a peak-reading diode-voltmeter circuit and variations in this voltage are used to control a filament regulator which adjusts the emission to give normal plate-voltage swing again. This method is limited to use only on tubes with pure tungsten filaments. It has the added advantage of increasing filament life since the filament is always operated at a temperature just high enough to supply the desired emission.

Other methods are based on circuits which automatically adjust the load coupling to maintain more or less constant load on the tube over the heating cycle. This system has not been too satisfactory because of cost and limited operating range.

Cutouts

The control of filament current is a preferred method where it can be used. The use of adequate plate and grid meters having regions of excessive currents clearly marked is of some help in avoiding excessive currents. Properly adjusted current overload relays in both circuits are a necessity in prolonging tube life. With overload relays alone for protection there is often a tendency to "set it up a little higher" when the set shuts itself off too frequently from repeated overloads.

It is quite probable that there is a more real economic justification for the added costs of some of these automatic circuits than is commonly realized by the prospective purchaser. It should be noted that overload relays provide very necessary protection in cases outside the control range of automatic systems in case of failure of such systems.

Many times premature tube failures are caused by improper operating conditions which are not as

TURN FIRST TO BUSS FUSES

—when your problem is Electrical Protection

BUSS offers a complete line of fuses — for television . . . radio . . . radar . . . instruments . . . controls . . . avionics — as well as for all home, industrial and commercial uses. Its easy to select the *right* BUSS fuse.

Behind the unquestioned high quality of BUSS fuses are 37 years of specializing in nothing but fuses and the world's largest fuse research laboratory and fuse production capacity.

Every BUSS fuse is electronically tested

So that you can depend on every BUSS fuse to operate properly under all service conditions, each fuse is tested in a highly sensitive electronic device that records whether or not; the fuse is correctly calibrated — properly constructed — and right in physical dimensions.

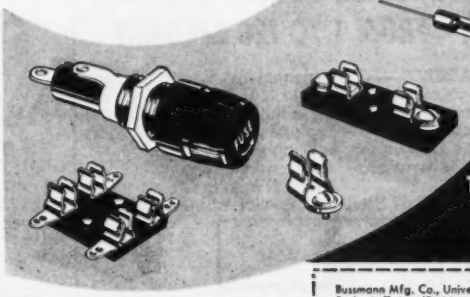

To get the facts— USE COUPON

If your problem is "New and Different" turn first to BUSS

We welcome requests to help you in selecting the proper fuse or in designing the special type of fuse or fuse mounting best suited to your conditions.

Submit sketch or description showing type of fuse contemplated, number of circuits, type of terminals, and the like.

Our staff of fuse engineers is at your service.

BUSSMANN MANUFACTURING CO., UNIVERSITY AT JEFFERSON, ST. LOUIS, MO.
DIVISION MCGRAW ELECTRIC COMPANY

Bussmann Mfg. Co., University at Jefferson
St. Louis 7, Mo. (Division McGraw Electric Co.)

Please send me Bulletin SFB containing complete facts on BUSS Small Dimension Fuses and Fuse Holders.

Name_____

Title_____

Company_____

Address_____

City_____ State_____

ELRC-1051

TELEX LISTENING COMFORT

HEARING AT ITS BEST!

Modern, lightweight, durable—Telex Quality Headsets are easy on the ears . . . No uncomfortable ear pressure . . . Easily adjustable and built for hard usage . . . Telex Headsets effectively block out background noises . . . 5 ft. standard cord or special cord with built-in volume control . . .

C.A.A. Approved

TWINSET *

Nothing Touches the Ear

Weighs only 1.6 oz.

MONOSET *

Direct Signal for Both Ears

Weighs only 1.2 oz.

*Trademark

WRITE FOR FREE FOLDER—OR SEE YOUR PARTS JOBBER.

ELECTRO-ACOUSTIC DIVISION

DEPT. H-15, TELEX PARK, ST. PAUL 1, MINN.

In Canada, Atlas Radio Corporation, Toronto

STANDARD OF THE WORLD FOR QUALITY HEADSETS

AMPERITE

THERMOSTATIC METAL TYPE

Delay Relays

PROVIDE DELAYS RANGING FROM 1 TO 120 SECONDS

FEATURES: — Compensated for ambient temperature changes from —40° to 110° F . . . Hermetically sealed; not affected by altitude, moisture or other climate changes . . . Explosion-proof . . . Octal radio base . . . Compact, light, rugged, inexpensive . . . Circuits available: SPST Normally Open; SPST Normally Closed.

PROBLEM? Send for *"Special Problem Sheet"*

Regulators



Amperite REGULATORS are the simplest, lightest, cheapest, and most compact method of obtaining current or voltage regulation . . . For currents of .060 to 6 Amps. . . . Hermetically sealed; not affected by altitude, ambient temperature, humidity.

Write for 4-page Illustrated Bulletin.

AMPERITE CO., Inc., 561 Broadway, New York 12, N. Y.

In Canada: Atlas Radio Corp. Ltd. 560 King St. W. Toronto

NEW CIRCUIT ELEMENT THE SIGNATRON

A High Q Electro-Mechanical Resonator Of Small Size And Great Stability

SERVES YOU 4 WAYS

A TRANSDUCER

of pressure, temperature, acceleration, displacement, strain, etc. for FM telemetering systems.

AN OSCILLATOR

of near crystal stability with a wide tuning range.

A DISCRIMINATOR

to convert FM signals to amplitude variations.

A FILTER

with a Q range from 300 to 2500.

For Information Write To:

RAHM

INSTRUMENTS, INC.

12 WEST BROADWAY, NEW YORK 7, N. Y.

Manufacturers of Direct Recording Oscillographs And Telemetering Systems

There's more to television than meets the eye!

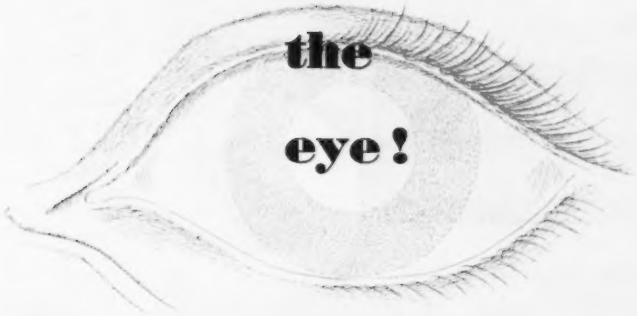

. . . but *Your Customers Never See It*

When a TV set, or any piece of electronic equipment, leaves your assembly lines, your reputation goes with it. If it works *and keeps working*, with a minimum of service, you build customer good will. If it breaks down, your service costs are high and there's no need to tell you what happens to good will.

To help you build electronic equipment *that lasts*, progressive makers of wire and cable and of molded components build "life insurance" into their products with Fiberglas* insulating materials. For example, lacquered wire made with Fiberglas yarns resists the ravages of heat, rot, even age, far longer than conventional wire. Molded plastic components, reinforced with Fiberglas materials, give you high dielectric strength, plus structural strength never before possible in such constructions.

Next time you order wire, cable or molded parts, remember to specify Fiberglas Insulating Materials. It's the cheapest "life insurance" you can buy for your products.

Owens-Corning Fiberglas Corporation, Electrical Sales Division, Dept. 860, 16 East 56th Street, New York 22, N. Y.

OWENS-CORNING FIBERGLAS *is in your life..for good!*

*Fiberglas is the trade-mark (Reg. U. S. Pat. Off.) of Owens-Corning Fiberglas Corporation for a variety of products made of or with fibrous glass.

—FOR
electronic, television, communication and electrical applications
FROM 3 COMPLETE PLANTS

Specify Mack with confidence for all your molded component requirements. One of the original plastic molders, Mack experience dates back over three decades, to the beginning of the industry. From design to final inspection, Mack manufacturing methods — keyed to the electronic industry — give assurance that each part is electrically and mechanically correct. Complete service from blueprint to finish features deliveries to meet your assembly line schedules. Inquiries will receive prompt attention; address Mack Molding Company, Inc., Wayne, N. J.

Mack
M
MOLDED EXCELLENCE
OVER 30 YEARS OF MOLDING SERVICE TO INDUSTRY

obvious to detect as excessive current on a meter. Examples of these are improper cooling conditions and improper filament connectors. Should the mineral content of cooling water for water-cooled tubes be too high, a mineral deposit will build up on the anode wall which will appreciably decrease the heat transfer from the anode to water, reduce water flow and result in anode overheating. The same result can occur due to reduced carrying capacity of the water piping when deposits build up on the pipe walls.

Solution of this problem is a clean low-mineral-content water system. For large tubes, a closed system using distilled or deionized water and a suitable heat exchanger is desirable. Flow switches and water-immersion thermal switches should be installed to protect tubes



FIG. 1—An example of power arc damage to a filament structure. Tube suffered approximately 100 times normal plate current during the arc period

against insufficient water and too high a water temperature.

In the case of air-cooled tubes, the use of adequate air filters and airflow switches are of vital importance. The air filters should be located so they can be easily changed. It cannot be too highly stressed that the users of r-f heating equipment must understand the problems of such equipment and that periodic maintenance is a good investment rather than an expense.

Another factor often overlooked in using air-cooled tubes is the tem-

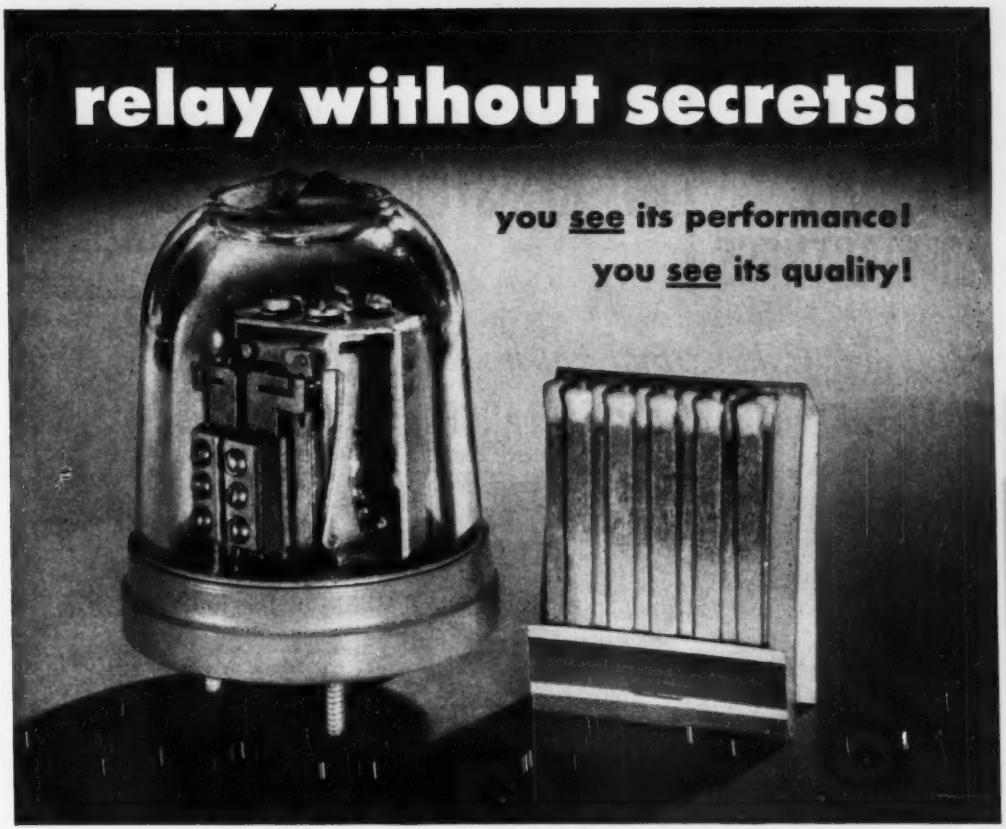

Now...hermetically sealed in glass

Automatic Electric class "S" relay

See it in operation! You can tell at a glance the excellent job this relay is doing. See that contacts are making and breaking as they should . . . check the condition of the long-wearing contact surfaces . . . observe spring travel, tension, and follow. All of these factors which indicate the relay's remaining life are readily visible through the glass enclosure. You can check them easily, and thus use *all* of the long life this relay offers.

Use it anywhere! It's small enough to mount in a minimum of space, yet it handles a large load. Hermetic sealing protects this relay from dust and corrosion; the durable glass housing protects it from accidental bumps, and blows. This is the only relay that offers you all these features! Available with a wide range of coils and contact arrangements; write for specifications and details.

Address:
AUTOMATIC ELECTRIC SALES CORPORATION
1033 West Van Buren St., Chicago 7, Ill.
Offices in principal cities

RELAYS SWITCHES
PRODUCTS OF THE INDUSTRIAL DEPARTMENT OF
AUTOMATIC ELECTRIC
CHICAGO

ECONOMY ACCURACY STABILITY COMPACTNESS

IN PRECISION

● RESISTORS

★ ★ ★

Have your Cake . . . and Eat it, too, with

JELLIFF ALLOY 1000 RESISTANCE WIRE

The new high in Resistivity—1000 ohms/cmf plus an impressive array of important electrical and physical characteristics, make our new ALLOY 1000 the most desirable material for windings in compact, precision resistors of all types. And the best thing about it is that you don't gain one characteristic at the cost of serious losses elsewhere. Write today for Bulletin 17, with the full story and technical data on

JELLIFF ALLOY 1000 RESISTANCE WIRE

THE C. O. JELLIFF MANUFACTURING CORPORATION SOUTHPORT, CONN.

E-I HERMETIC SEALING COMPONENTS

Now Available!

An extended range of types and sizes in the popular

90-G SERIES MULTIPLE HEADERS

90 G/40-HS-14

90 G/40-HS-8

90 G/P-7 (Miniature)

90 G/P-9 (Noval)

90 G/P-14

90 G/60-NS-12

The 90-G Series is now supplied in a wider range of types than ever before. These include 5 and 10 amp lead sizes with from 2 to 14 terminals as well as plug-in bases for miniature 7, noval 9, and special 14-prong sockets. Voltage ratings are 1600 peak.

Write for These Descriptive Bulletins:

849 — Hermetically Sealed Terminals
850 — Hermetically Sealed Headers
851 — Gasket Type Bushings

E-I INC. ELECTRICAL INDUSTRIES INCORPORATED
44 SUMMER AVENUE • NEWARK 4, N. J.

2 KW VACUUM TUBE BOMBARDER OR INDUCTION HEATING UNIT



For Only $650.

Never before a value like this new 2-KW bench model "Bombarder" or high frequency induction heater . . . for saving time and money in surface hardening, brazing, soldering, annealing and many other heat treating operations.

Simple . . . Easy to Operate . . . Economical Standardization of Unit Makes This New Low Price Possible.

This compact induction heater saves space, yet performs with high efficiency. Operates from 220-volt line. Complete with foot switch and one heating coil made to customer's requirements. Send samples of work wanted. We will advise time cycle required for your particular job. Cost, complete, only $650. Immediate delivery from stock.

Scientific Electric Electronic Heaters are made in the following ranges of Power: 1-2-3½-5-7½-10-12½-15-18-25-40-60-80-100-250KW.

Scientific Electric

Division of

"S" CORRUGATED QUENCHED GAP CO

107 Monroe St., Garfield, N. J.

yokes

toroids

shield cans

loop antennas

oscillator coils

i.f. transformers

metal frame padder condensers

magnet and litzendraht textile served wire

compression type mica trimmers

dual compression trimmers

output transformers

antenna coils

assemblies

rf tuners



edwin i. guthman & co., inc.
15 s. throop st. chicago . . CH 3-1600
attica, indiana .

preserving Guthman's fine product design....

Quality control by experts

For the outstanding success of finished electronic components, Guthman relies on the constant watchfulness of such long-experienced quality control engineers as Ken Briggs, chief of Quality Control, with fifteen years electronic experience at Western Electric and other major electronic companies. It is he and his staff who bring intact—through mass production—the refinements of laboratory design so carefully developed by our research engineers . . . needless to say, these experts answer only to top management! Such specialized quality control—developed over twenty years as the world's largest maker of coils and basic electronic components—is your assurance of finished products that achieve the ultimate in laboratory specifications. We heartily encourage you to consider using Guthman built parts in your next product design . . . and Guthman engineers will design components especially for you.

Write today to Dept O, for a free descriptive brochure.

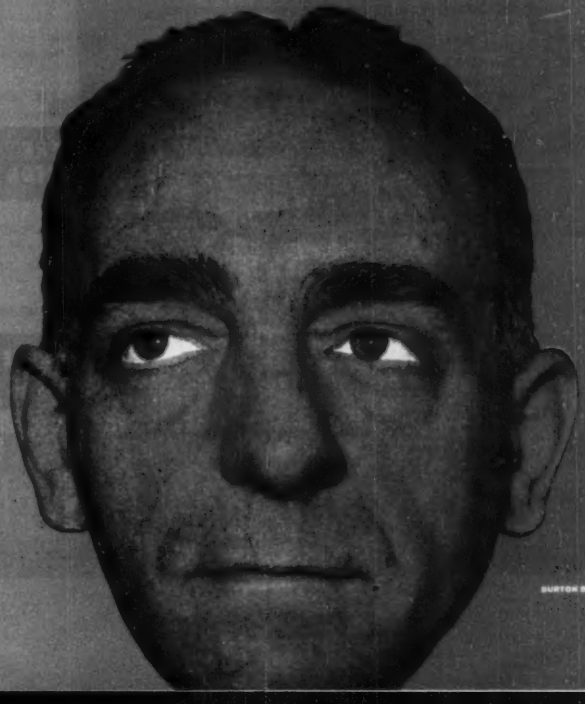

BURTON BROWNE ADVERTISING

B&W

Precise

AUDIO TESTING

for designing, production checking, research or *"proof of performance"* FCC tests for broadcasters.

A low-distortion source of audio frequencies between 30 and 30,000 cycles. Self-contained power supply. Calibration accuracy ±3% of scale reading. Stability 1% or better. Frequency output flat within 1 db, 30 to 15,000 cycles.

MODEL 200 . . . . . $138

AUDIO OSCILLATOR

For fundamentals from 30 to 15,000 cycles measuring harmonics to 45,000 cycles; as a volt and db meter from 30 to 45,000 cycles. Min. input for noise and distortion measurements .3 volts. Calibration: distortion measurements ±5 db; voltage measurements ±5% of full scale at 1000 cycles.

MODEL 400 . . . . . $168

DISTORTION METER

Combines RF detector and bridging transformer unit for use with any distortion meter. RF operating range: 400 kc to 30 mc. Single ended input impedance: 10,000 ohms. Bridging impedance: 6000 ohms with 1 db insertion loss. Frequency is flat from 20 to 50,000 cycles.

MODEL 404 . . . . . $85

LINEAR DETECTOR

Speeds accurate analysis of audio circuits by providing a test signal for examining transient and frequency response . . . at a fraction of the cost of a square wave generator. Designed to be driven by an audio oscillator.

MODEL 250 . . . . . $10

SINE WAVE CLIPPER

The instruments of laboratory accuracy

Bulletin EL-101 gives complete details

Barker & Williamson, Inc.

237 Fairfield Avenue • Upper Darby, Pa.

perature of the air entering the radiator. Most tube manufacturers limit the allowable incoming air temperature to 45C. In many installations where the air temperature in a plant is high due to nearby ovens or other such equipment and particularly where the air coming into the r-f heater passes over a hot transformer or component before being forced through the radiator of the tube, this temperature may be exceeded considerably. In difficult cases it may be very worth while to install an air duct to bring air in from outside the plant or from a cooler spot in the plant. In some cases a booster blower may be necessary to compensate for airflow losses in the duct.

Another troublesome item and one which would be the least suspected, is the filament connector. It is a fact that every year many tubes fail to perform properly and suffer premature deaths because of improperly designed and used filament connectors. A good filament connector should make contact with the tube terminal at a large number of points and should keep these contact points under a definite mechanical pressure even after it has been in use for many months. The connector should be plated with a suitable coating which remains a good electrical conductor even after many hundreds of hours at operating temperatures.

Silver is usually a satisfactory plating material as silver oxide is also a good conductor. The connector should be designed with a flexible lead which does not transmit strain to the tube terminal or glass seals. The connector should be capable of being applied or removed without the use of pliers or other tools whose abuse often results in bent terminals or cracked seals. Such connectors have been made and are in use in many equipments today.

Limiting Arc Currents

Internal arc-over in high-power tubes sometimes occurs when there is a sudden change in line voltage or loading. In certain large installations where several tubes are fed from a common power supply, a peak current several hundred times the rated d-c plate current can flow through a tube if it arcs internally;

ADLAKE RELAYS AT WORK—One of a series of advertisements on specific ADLAKE applications.

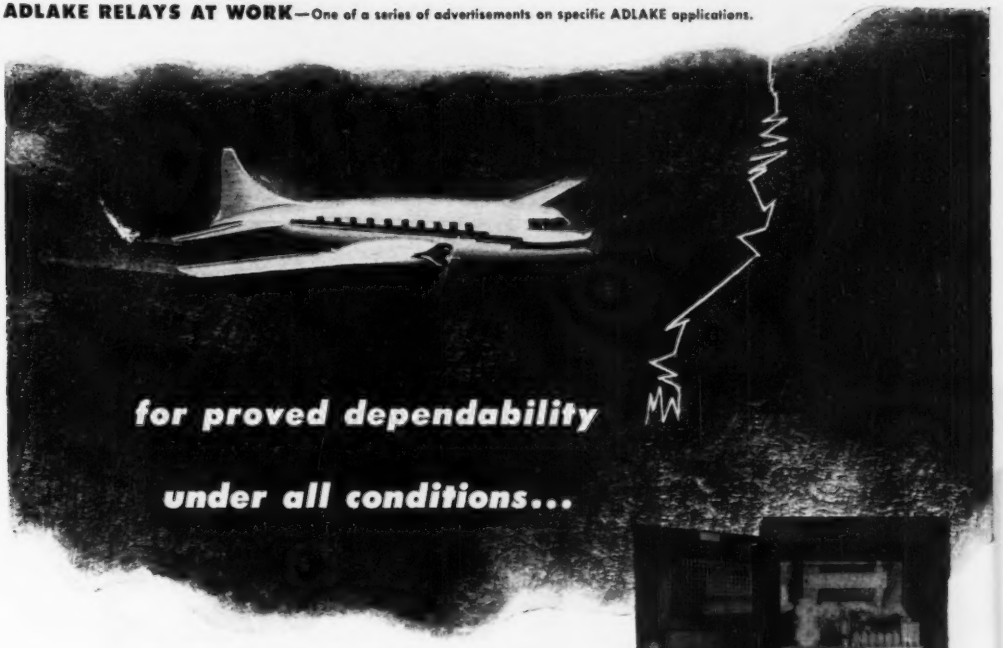

ADLAKE RELAYS

are used in

Aerocom Transmitters

When the "ceiling is zero"—when fog, rain or sleet pulls visibility down and runs flying risks up—then aeronautical transmitters must not fail. Their reliability under all conditions makes ADLAKE Relays the choice of Aerocom, leading electronic manufacturer of 3090 Douglas Road, Miami 33, Florida.

ADLAKE Relays are designed and built to meet the most exacting requirements. Their mercury-to-mercury contact prevents burning, pitting and sticking, and their sturdy construction armors them against outside vibration or impact. And most important of all, *they require no maintenance*, for they are hermetically sealed against dust, dirt and moisture.

Get the full story on the part ADLAKE Relays can play in your business! Write The Adams & Westlake Company, 1107 N. Michigan, Elkhart, Indiana. No obligation, of course.

EVERY ADLAKE RELAY GIVES YOU THESE ADVANTAGES:

HERMETICALLY SEALED—dust, dirt, moisture, oxidation and temperature changes can't interfere with operation.

MERCURY-TO-MERCURY CONTACT—prevents burning, pitting and sticking.

SILENT AND CHATTERLESS • ABSOLUTELY SAFE
REQUIRES NO MAINTENANCE

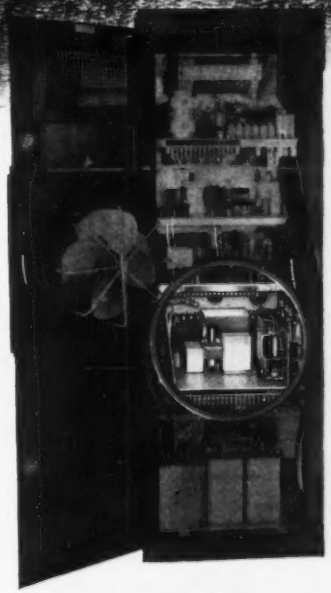

Model 12GLX-M, 1KW Beacon Transmitter, manufactured by Aerocom. Operates on a single frequency in the range 200-415 Kcs. Tone oscillator provides 30% high level modulation for identification when keyed with Aerocom's model AK-3B automatic keyer. This transmitter uses four ADLAKE Relays.

THE Adams & Westlake COMPANY

Adlake

Established 1857 • ELKHART, INDIANA • New York • Chicago
Manufacturers of ADLAKE Hermetically Sealed Relays

BI-SEAL

SELF-BONDING POLYETHELENE BASE TAPE

LONG LIFE MOISTURE-TIGHT INSULATION

Forms into a solid mass of insulation producing moisture-tight seals by means of a gasketing action on all materials.

FOR HIGH FREQUENCY HIGH TENSION ELECTRICAL INSULATION

FOR Toroids • Coils • Resistors • Deflection Yokes • Antennas

FOR Electroplating • Masking surfaces of external recessed diameters Clean edges elimin; te the need of lacquers.

FOR End Sealing of Cables.

FOR An underwater sealing mechanism both for dielectric and hermetic sealing.

CHECK THESE EXCLUSIVE FEATURES:

- √ Fuses into a non-laminar homogeneous mass.
- √ Excellent dielectric characteristics— over 1,000 volts/mil.
- √ A perfect moisture barrier and corona resistant. (Can be applied at—30° F.) Prolonged ageing without deterioration.
- √ Will not corrode metals.
- √ Easy to apply—conforms readily to odd contours.
- √ S. I. C. 2.12, P. F. .0004 @ 10 m.c.

SEND TODAY FOR FREE SAMPLE STRIP

BI-SEAL

BISHOP MANUFACTURING CORPORATION
10 Canfield Road, Cedar Grove, New Jersey
Please send BI-SEAL data.

Mr. _____

Title _____

Company _____

Address _____

Tel: VErona 8-2372

Set Screws **STAY SET** on **REO** Power Mowers since changing to... **ZIP-GRIP*** *Self-locking* **SET SCREWS**

REO uses not 1, not 2 . . . but **5** ZIP-GRIPS* ON EACH MOWER

send for **FREE**

ZIP-GRIP* Action Demonstrator

. . . and see why—

Zip-Grips* defy vibration, jolts, shocks . . . "Do Not Loosen in Normal Service", says Reo Motors, Inc., makers of "America's Biggest Selling Power Mowers".

The ZIP-GRIP* demonstrator shows you how ZIP-GRIP's* exclusive Contra-Thrust action together with Interference Fit provides positive self-locking effect in over 100 products.

Along with your FREE ZIP-GRIP* Action Demonstrator we will send you, without cost, an illustrated Data Sheet and an offer of Engineering Test Samples to help solve puzzling set screw applications on your products. Write for these, without charge or obligation.

*PAT PENDING

Makers of Socket and Headless SET SCREWS

Set Screw & Mfg. Co.

470 Main St. Bartlett, Ill. (Chicago suburb)

We specialize in Solving Puzzling Set Screw Problems.

Only with **CO-AX**

air-spaced articulated R.F. CABLES

4 mmf/ft

Patents Royal Patents Allied

THE LOWEST EVER CAPACITANCE OR ATTENUATION

We are specially organized to handle direct enquiries from overseas and can give

IMMEDIATE DELIVERIES FOR U.S.A.

Billed in Dollars Settlement by your check

Transaction as simple as any local bus

LOW ATTEN TYPES	IMPED OHMS	ATTEN db/100ft at 100 Mcs	LOADING ft at 100 Mcs	O.D"	
A1	74	1.7	0.11	0.36	HIGH POWER FLEXIBLE
A2	74	1.3	0.24	0.44	
A34	73	0.6	1.5	0.88	
LOW CAPAC TYPES	**CAPAC mmf/ft**	**IMPED OHMS**	**ATTEN db/100ft 100 Mcs**	**O.D."**	
C1	7.3	150	2.5	0.36	PHOTOCELL CABLE
PC1	10.2	132	3.1	0.36	
C11	6.3	173	3.2	0.36	
C2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	V.L.C. ★
C44	4.1	252	2.1	1.03	

★ Very Low Capacitance cable.

TRANSRADIO LTD

CONTRACTORS TO H.M. GOVERNMENT

138A CROMWELL ROAD·LONDON SW7 ENGLAND

CABLES TRANSRAD LONDON

The NEW RCA WV-97A Senior VoltOhmyst*

reading peak-to-peak voltages

ONLY $67.50 Suggested User Price

Includes direct probe and cable, dc probe, ohms lead, and ground lead

TEN WAYS BETTER!

1. Directly measures complex waves from 0.2 volt to 2000 volts, peak-to-peak.
2. Has an over-all accuracy for dc measurements of ±3% of full scale.
3. Measures dc voltages from 0.02 volt to 1500 volts.
4. Measures rms values of sine-wave voltages from 0.1 volt to 1500 volts.
5. Has 7 non-skip ranges for both resistance and voltage.
6. All full-scale voltage points increase in a uniform "3-to-1" ratio.
7. Frequency response flat from 30 cps to approximately 3 Mc.
8. Negative-feedback circuit provides better over-all stability.
9. Fully enclosed metal case shields sensitive electronic-bridge from rf fields.
10. More convenient to use because of smaller size and new slip-on probes.

The WV-97A measures peak-to-peak voltages directly. Hence, it quickly provides information essential for servicing TV receivers with their pulse-type waveforms.



The WV-97A has a range of usefulness extending beyond that of any other instrument in the field. Its quality, dependability, and accuracy make it a true laboratory instrument; it is exactly what is needed for television in the design laboratory, factory, and service shop.

The new Senior VoltOhmyst measures dc voltages in high-impedance circuits, even with ac present. It reads the rms values of sine waves and the peak-to-peak values of complex waves or recurrent pulses, even in the presence of dc. Its electronic ohmmeter has a range of ten billion to one.

Like all RCA VoltOhmysts, it features high input resistance, electronic protection from meter burn-out, zero-center scale for discriminator alignment, molded-plastic meter case, a 1-megohm isolating resistor in the dc probe, and sturdy metal case for good rf shielding.

An outstanding feature is its usefulness as a television signal tracer . . . made possible by its high input resistance, wide frequency range, and direct reading of peak-to-peak voltages.

For complete information on the new RCA WV-97A Senior VoltOhmyst, see your RCA Test Equipment Distributor, or write RCA, Commercial Engineering, Section 42JX, Harrison, New Jersey.

*Reg. U. S. Pat. Off.

SPECIFICATIONS

DC VOLTMETER:
- Seven continuous ranges: 0 to 1.5, 5, 15, 50, 150, 500, 1500 volts
- Input resistance (including 1 megohm in dc probe):
  - All ranges: 11 megohms
  - Sensitivity for the 1.5 volt range: 7.3 megohms-per-volt
- Over-all Accuracy: ±3% of full scale

AC VOLTMETER—Fourteen continuous ranges:
- Peak-to-peak ranges: 0 to 4, 14, 42, 140, 420, 1400, 4200 volts
- Maximum peak-to-peak input voltage for complex waves, 2000 volts
- RMS ranges (for sine waves): 0 to 1.5, 5, 15, 50, 150, 500, 1500 volts
- Input Resistance and Capacitance with WG-218 Direct Probe and Cable:
  - 1.5, 5, 15, 50, 150-volt ranges: 0.83 megohm shunted by 70 μμf
  - 500-volt range: 1.3 megohms shunted by 60 μμf
  - 1500-volt range: 1.5 megohms shunted by 60 μμf
- Frequency Response with WG-218 Direct Probe and Cable:
  - 1.5, 5, 15, 50, 150, 500-volt ranges flat from 30 cps to 3 Mc for voltage source having 100-ohm impedance
- Overall Accuracy:
  - 1.5, 15, 50, 150, 500, 1500-volt ranges: ±5% of full scale

OHMMETER:
- Seven continuous ranges: 0.2 ohm to 1000 megohms
- Center scale values: 10, 100, 1000, 10,000 ohms; 0.1, 1, 10 megohms

DIMENSIONS: 7⅞" high; 5¾" wide, 4½" deep

AVAILABLE ACCESSORIES:
- WG-264 Crystal Diode Probe. Extends range to 250 Mc ($7.75 suggested user price)
- WG-289 High-Voltage Probe and WG-206 Resistor to extend range to 50,000 volts. ($9.95 suggested user price)

Available from your RCA Test Equipment Distributor

RADIO CORPORATION of AMERICA

TEST EQUIPMENT — **HARRISON, N. J.**

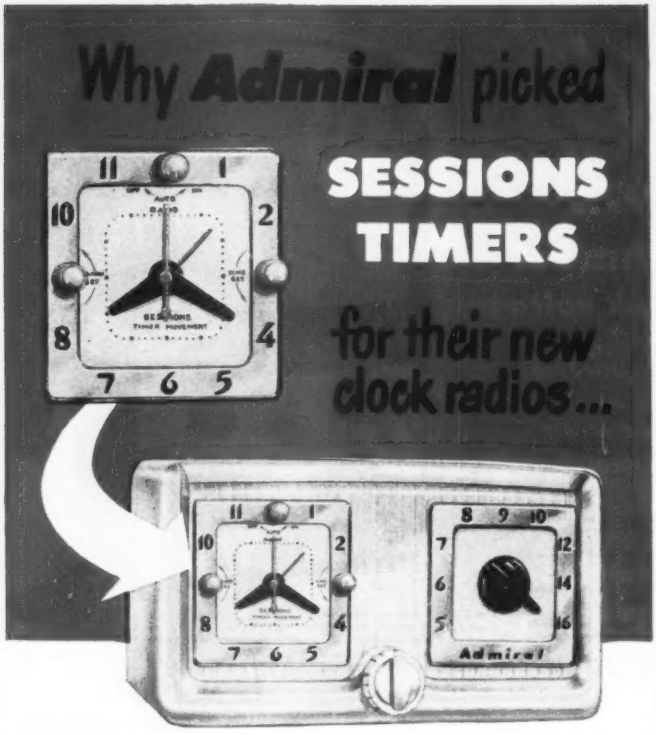

SESSIONS Timer as used in the ADMIRAL Clock Radio

LOW PRICE
Sessions Timers cost less to manufacture. They are more compact . . . need fewer moving parts. This price advantage is important in today's radio market.

UNBEATABLE ACCURACY
Sessions subsynchronous motor runs at constant speed—stays in step with power frequency. Its dependability is attested by many thousands of satisfied users.

CUSTOM STYLING
Styling and color were created to Admiral's specifications to harmonize with cabinet design.

QUIET RUNNING
No annoying buzz of high speed gears to disturb light sleepers. Sessions slow speed motors run kitten-quiet.

These benefits are yours in your new clock radio design when you specify Sessions Timers. For complete technical details, write The Sessions Clock Company, Timer Division, Dept. 410, Forestville, Conn.

this type of power arc can destroy a tube very quickly.

There are at least three principle methods of limiting arc damage. First, the overload relay and circuit breaker should open the circuit in the shortest possible time. Breakers are available which will operate in ⅛ sec or less. Second, the reactance of the rectifier transformer should be as high as feasible. Also, wherever possible, additional series reactance connected in the anode lead will help materially in limiting the current rise to a nondestructive value during the time required for the circuit breaker to open. Such reactances should be designed to limit the peak arc current to not over 20 times the normal plate current. Third, an ignitron can be connected across the power supply and arranged to short out the supply and absorb the extra energy when the current becomes excessive until the circuit breaker opens.

Figure 1 shows an example of power arc damage to a filament structure. This tube suffered approximately 100 times normal plate current during the arc period.

Line-Voltage Regulation

Variations in line voltage can, if excessive, have considerable effect on tube operation, particularly filament life. Figure 2 shows the theoretical variation of filament burnout life with filament voltage. It can be seen that a 5-percent increase in filament voltage above normal results in about 40-percent less life and a 5-percent decrease in voltage about doubles the life. These data apply only to pure tungsten filaments at constant filament voltage where the life is determined by the evaporation rate of tungsten.

For tubes having thoriated tung-



FIG. 2—Theoretical variation of filament burnout life with filament voltage



BRIDGEPORT BRASS COMPANY

COPPER ALLOY BULLETIN

"Bridgeport" BRASS CO. MILLS IN BRIDGEPORT, CONN. AND INDIANAPOLIS, IND.—IN CANADA: NORANDA COPPER AND BRASS LIMITED, MONTREAL



Upper left shows mechanism of governor for timing motor. Parts in center are for motor. Gear Box, cover plate, brush plate and commutator are shown at right.

Lower left is timing motor with cover removed from governor assembled in repeat cycle switch assembly—Courtesy The A. W. Haydon Co., Waterbury, Conn.

Clock Escapement Accurately Governs D.C. Timing Motor

The ordinary clock escapement mechanism is proving an effective governor in controlling the speed of direct-current timing motors for military and civilian timing applications. Fluctuations in voltage, load and temperature which would affect the speed of the motor are cancelled out by the governor.

The unit is used for de-icing airplane propellers and wings, electronic devices, recorders and other precision timing units.

The accuracy of this device, manufactured by the A. W. Haydon Company, Waterbury, Connecticut, is seen in an aircraft application where the drive shaft speed is 1 revolution per minute accurate to plus/minus 0.1%.

The timing motor is geared directly to a cam which oscillates the motor lever, causing the control contacts to separate, thus opening the motor circuit. When the balance wheel returns from its free swing, it releases the escapement lever and allows the control contacts to close, applying full voltage.

Thus pulses of full line voltage are applied to the motor at regular intervals controlled by the escapement. The duration of these pulses is determined by the travel of the motor. This results in a uniform travel of the motor during each swing of the balance wheel. A constant motor speed is thereby obtained. The unit always stops with contacts closed, insuring self-starting.



Schematic Drawing of Escapement-Type Governor used in Haydon Direct-Current Timing Motor.

In the governor the two plates, motor lever, balance wheel and escapement lever are made from clock brass (62.25% copper, 2% lead and balance zinc). The lead increases the machinability and facilitates clean blanking and piercing with a minimum of burr.

Where extreme accuracy is not needed, instead of using jewels for the various bearings in the governor, the leaded brass serves as an excellent bearing surface.

The hair spring is a special alloy which has a negligible expansion and contraction factor from −50 deg. to +150 deg. F. It is therefore unnecessary to compensate for varying temperatures.

Through a gear train either the 900 RPM or 2700 RPM rotor speed of the motor can be geared down to 1 revolution in two hours. The gear box is so designed that speeds can be changed through a wide range by various standard combinations of gears.

The clock brass gears and pinions are hobbed to insure accurate meshing.

The drive shaft bearing in the gear box is commercial bronze (90% copper and 10% zinc).

The commutator sections in the rotor are made from oxygen-free copper since high conductivity is needed.

The rotor bearing is free-machining brass rod and the part is produced in a screw machine. This alloy contains 61% copper, 3.4% lead and the remainder zinc, and it has the highest machinability rating of all the copper-base alloys. (6832)

PRODUCTIMETER "SPECIALS"
for Radar and Electronic Applications



Companion shutter counters used as dual direction indicators. One counter adds while the other subtracts. Shutter blanks out counter which is on negative side of 000.



"Y" 2-figure Rotary Counter used in navigating instruments.



High-speed, non-reset "Y" type counter for building into radar instruments.

Special Model "Y" with window at rear designed for use in radar equipment.

These are a few of the "specials" developed by Durant for Radar and Electronic applications. When one of the many standard Productimeters is not the exact answer to a problem, Durant engineers modify, combine, or develop entirely new counters to meet the particular requirements of the job.

Write for Bulletin

DURANT MFG. COMPANY
1912 N. Buffum St. 112 Orange St.
Milwaukee 1, Wis. Providence 3, R.I.
Representatives in Principal Cities

PRODUCTIMETERS
SINCE 1879
Speedometers OF INDUSTRY

LOW-COST Q, BUT QUICK

If you need powder-iron cores quickly, call on Lenkurt. A substantial increase in productive capacity just completed means fast deliveries and *reduced prices*, together with better mechanical and electrical control over quality.

Cylindrical iron-powder tuning-slug cores illustrated are available in all popular sizes between 0.195 and 3.375 in. diameter. Up to 1 inch O.D. with threaded inserts as required. Powder-iron assemblies in other forms — particularly toroids — are also produced for rapid deliveries.

Special sizes and types as well as standard items can be supplied in a wide range of magnetic materials to suit your application. Write today for further data or specific recommendations.

Lenkurt

LENKURT ELECTRIC CO.
SAN CARLOS • CALIFORNIA

Where the Requirements are Extreme...

Use SILVER GRAPHALLOY*

For extraordinary electrical performance

GRAPHALLOY
TRADE MARK REG. U. S. PAT. OFF.

THE SUPREME BRUSH AND CONTACT MATERIAL

for BRUSHES

- for high current density
- minimum wear
- low contact drop
- low electrical noise
- self-lubrication

for CONTACTS

- for low resistance
- non-welding character

*Graphalloy is a special silver-impregnated graphite

Accumulated design experience counts — call on us!

GRAPHITE METALLIZING CORPORATION
1055 NEPPERHAN AVENUE, YONKERS 3, NEW YORK

POPULATION-0

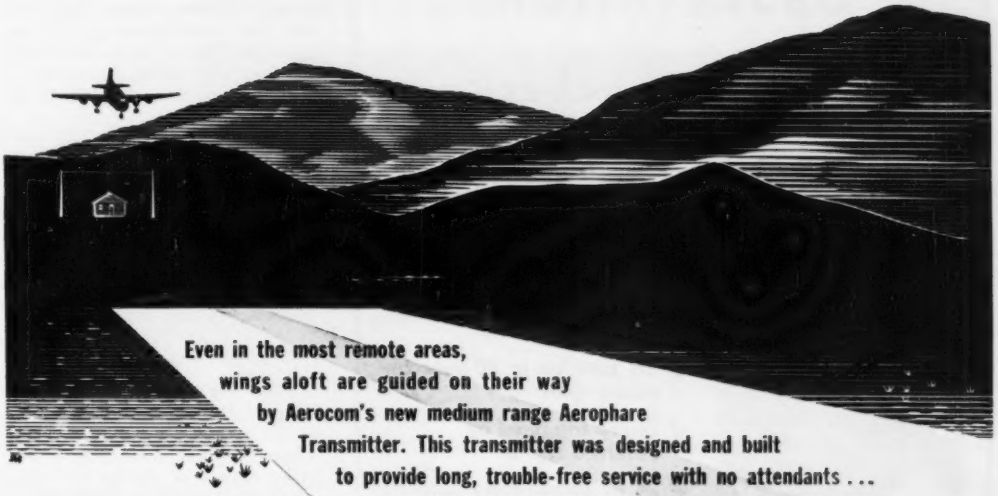

Even in the most remote areas, wings aloft are guided on their way by Aerocom's new medium range Aerophare Transmitter. This transmitter was designed and built to provide long, trouble-free service with no attendants . . . even where the total population is Zero.

AEROCOM'S

Dual Automatic Package-Type Radio Beacon

for completely unattended service. This aerophare (illustrated) consists of two 100 watt (or 50 watt) transmitters, one AK-3B keyer, one ACA automatic transfer, and an antenna tuner. (Power needed 110 volt or 220 volt – 50/60 cycles)

Frequency range 200 – 415 Kcs.: self-contained P. A. coil covers entire range; 1 "plug-in" crystal oscillator coil covers 200 – 290 Kcs., other 290 – 415 Kcs, (Self-excited oscillator coils covering same ranges are available). High level plate modulation of final amplifier is used, giving 35% tone modulation in 100 watt transmitter and 35 – 50% in 50 watt model. Microphone P-T Switch when depressed interrupts tone, permitting voice operation.

Using 866A rectifiers, unit can be operated in air temperature range 0°c to + 45°c; using 3B25 rectifiers, – 35°c to + 45°c; humidity up to 95%.

Aerocom's Automatic Transfer unit will place the "stand-by" transmitter in operation when main transmitter suffers loss (or low level) of carrier power or modulation. The characteristics of the keyed call letters are so modified on "stand-by" that a distant monitoring station can determine whether the main or "stand-by" transmitter is operating.

Unit is ruggedly constructed and conservatively rated, providing low operating and maintenance costs. Engineering data on this unit and other Aerocom communications products are available on request.

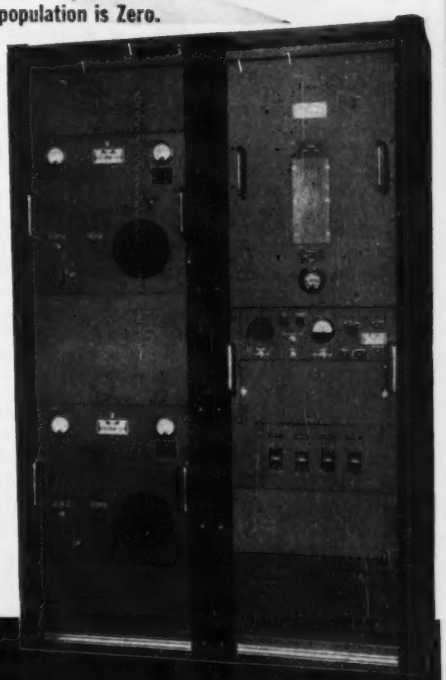

CONSULTANTS, DESIGNERS AND MANUFACTURERS OF STANDARD OR SPECIAL ELECTRONIC, METEOROLOGICAL AND COMMUNICATIONS EQUIPMENT

AER -O- COM

Reg. U.S. Pat. Off.

AERONAUTICAL COMMUNICATIONS EQUIPMENT, INC.

3090 Douglas Road, Miami 33, Florida

for

MILLIMICROSECOND PULSE OBSERVATION...

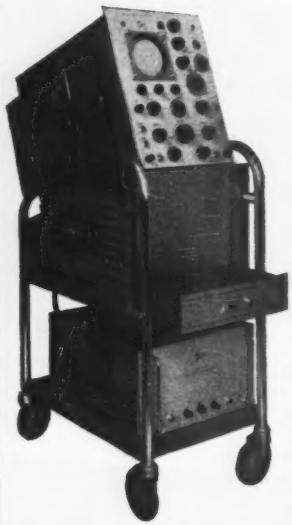

check

TEKTRONIX INC.

TYPE 517

- ✓ .007 μsec risetime
- ✓ .01 μsec/cm to 20 μsec/cm sweep rates
- ✓ Sweep triggered by observed signal
- ✓ 24 kv accelerating potential
- ✓ Metallized CRT
- ✓ .1 v/cm sensitivity

The Tektronix Type 517 Cathode Ray Oscilloscope *has been developed specifically to facilitate the observation and measurement of short duration pulses. Every effort has been made to provide a highly accurate, stable instrument of extreme utility and versatility in the field of short duration time measurement.*

Faithful representation of phenomena is made possible to an extent not heretofore readily available, by the 2% displacement error of the sweep and the .007 μsec risetime of the distributed type vertical amplifier. The 24 kv acceleration potential permits observation and photographic recording of single sweeps at the fastest sweep rate. The combination of distributed type trigger amplifier and signal delay line permits the ready observation of random pulses. External pulse operated equipment can be operated at its proper repetition rate by utilizing the trigger rate generator included in the unit. Facilities for accurate time and amplitude measurement are included.

To insure the stability and accuracy of calibration and operation, all AC and DC voltages in the indicator unit are regulated against load changes and line variations of ±10%. Exhaustive testing of the completed instruments, both by Tektronix and other organizations, has proven the reliability of these typical Tektronix specifications and features.

The Type 500 Scopemobile is included as a standard accessory.

Type 517 Oscilloscope $3500.00 f.o.b. Portland, Oregon.

For further information on the Type 517 and other Tektronix products, please do not hesitate to contact us.

TEKTRONIX, INC.

Sunset Highway and Barnes Road, Portland 7, Oregon

P. O. Box 831 • Cables: Tektronix • ATwater 6357

sten filaments, the filament voltage should be operated at the rated value and line-voltage variations should not cause the filament voltage to deviate by more than ± 5 percent from this rated value. In either type of filament if the expected line-voltage variation is very great, a filament voltage regulator will give longer tube life. In all cases the filament voltage should be determined by actual measurement with a good voltmeter connected at the tube terminals.

Applications of tubes with thoriated-tungsten filaments for continuous service should not require peak plate-plus-grid currents in excess of approximately one-fourth the total peak emission available from the filament. Exceeding this ratio will often cause premature filament emission failure.

Oscillator Circuits

There are many types of oscillator circuits which have been used for r-f heating. The best circuit for a given application depends upon a great number of physical and economic factors. However, from the point of view of tube application some general guiding rules can be deduced.

The grid voltage waveform should be fairly close to sinusoidal to prevent a saddle-shaped top on the wave which results in inefficient tube operation. It is better to have the plate tank circuit isolated from the d-c supply by a blocking capacitor so that an r-f arc-over across the tank capacitor is not followed by a d-c arc.

The circuit should be stable and free of parasitics over a wide range of load variations. Each specific case has its own problems but generally designs which keep lead inductances and stray couplings to a minimum and use grid damping resistors are best. An important factor is the load Q of tank and load circuits.

As mentioned previously it is very advantageous to have some form of automatic load-matching system or plate-swing regulation to avoid too much increase in plate and grid r-f voltages with load variation. Another approach to this problem is a circuit, Fig. 3, in which the load circuit is tuned to the same

you can depend upon **MITCHELL-RAND**

Electrical Insulation Headquarters

for.

permacel

ELECTRICAL TAPES

measure for measure

. . . by any comparison and yardstick, PERMACEL TAPES have the qualities and stamina for everlasting protection and positive cohesion. Made of cotton cloth, crepe or flatback paper, acetate film or cloth, PERMACEL TAPES have instant fingertip stickiness, elasticity, great dielectric and tensile strength, great tear resistance, maximum adhesive firmness, excellent varnish penetration . . . they resist electrolytic corrosion, oils, moisture and acids, etc.

YES. . . PERMACEL TAPES have what it takes to insulate, protect, tie and identify . . . and frequently at lower cost!

Write to MITCHELL-RAND for free samples and descriptive data.

MITCHELL-RAND INSULATION CO., INC.

A PARTIAL LIST OF M-R PRODUCTS: FIBERGLAS VARNISHED TUBING, TAPE AND CLOTH • INSULATING PAPERS AND TWINES • CABLE FILLING AND POTHEAD COMPOUNDS • FRICTION TAPE AND SPLICE • TRANSFORMER COMPOUNDS • FIBERGLAS SATURATED SLEEVING • ASBESTOS SLEEVING AND TAPE • VARNISHED CAMBRIC CLOTH AND TAPE • MICA PLATE, TAPE, PAPER, CLOTH, TUBING • FIBERGLAS BRAIDED SLEEVING • COTTON TAPES, WEBBINGS AND SLEEVINGS • IMPREGNATED VARNISH TUBING • INSULATING VARNISHES OF ALL TYPES • EXTRUDED PLASTIC TUBING

MITCHELL-RAND Electrical Insulation Headquarters SINCE 1889

SERVOTHERM PRODUCTS

BOLOMETER AND PREAMPLIFIER

Thermistor bolometers are FAST, sensitive INFRARED and HEAT detectors. Especially RUGGED for industrial, scientific, and military applications. PREAMPLIFIER provides NOISE-FREE initial amplification and mount.



THERMISTOR POWER SUPPLY

Provides voltages required by BOLOMETER bridge and PREAMPLIFIER. Regulated and filtered permitting THEORETICAL NOISE LIMITS of amplification, while operating from 60 CYCLE line.

SERVO CORPORATION OF AMERICA

DEPT. E-10 NEW HYDE PARK, N.Y.

Sylvania Offers FULL-LINE of High Quality Sockets

Sylvania now offers a full line of sockets for military and civilian requirements, manufactured in accordance to JAN and RMA specifications. Available in General Purpose and Low Loss Phenolics and Steatite, with any combination of contact materials.

Available types include 7- and 9-pin Miniature, Turret, Octal, Duo-Decal, etc., sockets. For complete descriptions write today for new illustrated catalog to: Sylvania Electric Products Inc., Dept. A-1110, Parts Sales Division, Warren, Pa.

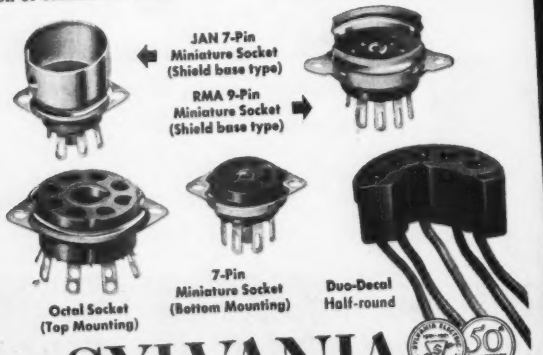
JAN 7-Pin Miniature Socket (Shield base type)
RMA 9-Pin Miniature Socket (Shield base type)
Octal Socket (Top Mounting)
7-Pin Miniature Socket (Bottom Mounting)
Duo-Decal Half-round

SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

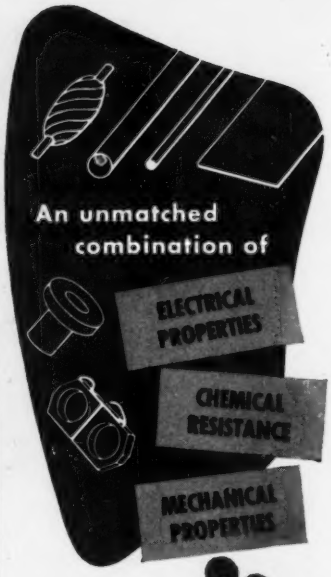

HYSOL 6000

Deriving its exceptional combination of properties from the epoxide resins (synthetic-thermo-setting), the Hysol 6000 Series is a group of versatile materials used in casting, coating, laminating, potting and for machined parts.

ELECTRICAL PROPERTIES

Hysol 6000 offers a dielectric constant of 3.49 at one megacycle; a loss factor of 0.091 at one megacycle; and a power factor of .026 at one megacycle. It has an arc resistance of 135 seconds, and a dielectric strength (step by step on ⅛ inch section) of 350 volts/mil.

SPECIAL FORMULATIONS

From the basic cast resin a wide variety of special formulations can be made to provide specific desired characteristics. The material is available in three forms —as cast rods, tubes and sheets; as a casting resin; and as a solution.

Write for Complete Technical Data.

houghton laboratories, inc.
OLEAN, NEW YORK

Plants in Olean, N. Y. and Smethport, Pa.

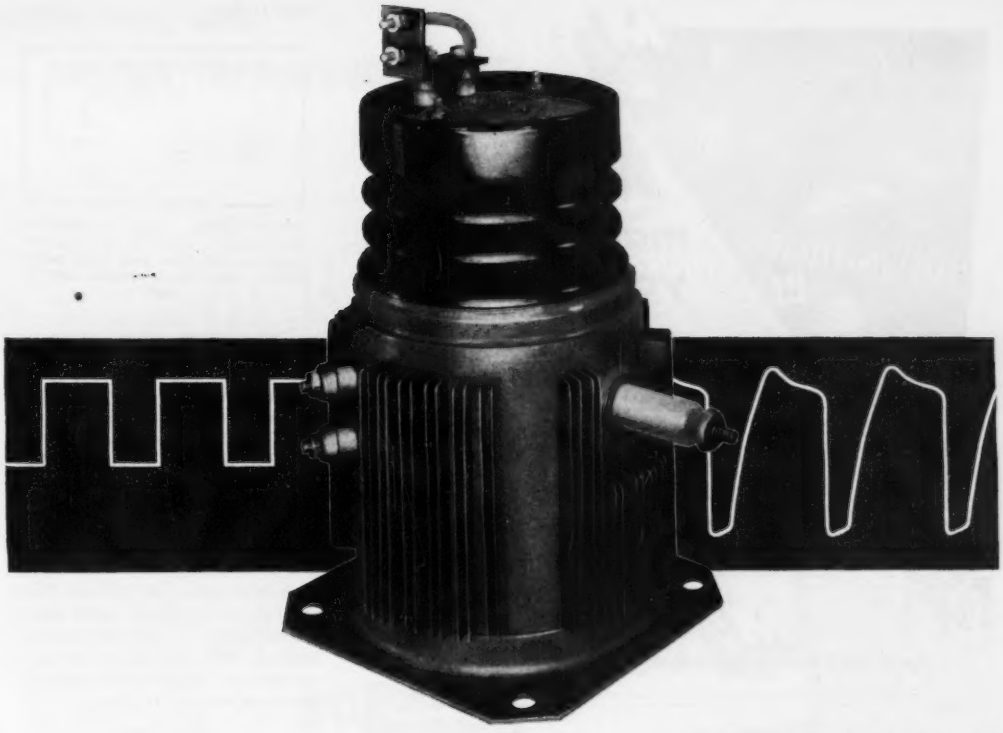

To tailor a wave more accurately...

It's a recognized principle that the smaller, more compact the pulse transformer, the more acceptable will be the shape of the output wave. That's where Westinghouse transformer engineering can offer greater advantages to the designer of electronic circuits.

In pulse transformers like the one above, for example, Westinghouse is able to produce a smaller, lighter, better performing transformer by using a two-piece HIPERSIL® type C core wound from one mil thick material. Insulation applied depends upon actual requirements . . . for instance, Fosterite® insulation on open-type transformers for adverse atmospheric conditions; silicone oil for high-temperature applications. But with an initial advantage on core size, and corresponding reduction in coils, the compactness of Westinghouse Pulse Transformers assures better wave shape, plus saving in both size and weight.

If size, weight, performance or quantity production have any bearing on your transformer problem call your Westinghouse representative. For many applications, standardized designs are available at substantial savings. Westinghouse Electric Corporation, Specialty Transformer Department, Sharon, Pa. J-70611

YOU CAN BE SURE... IF IT'S
Westinghouse
TRANSFORMERS

Carter's
BOWES SEAL FAST
SANGAMO ELECTRIC
SIMONDS
SYLVANIA ELECTRIC
CONVAIR
MARKEM®
made to make your MARK
MARKEM helps make their names famous
Under these trade marks are made products ranging from nylons to aircraft. They include garments, hosiery, knit goods and textiles, radio and TV tubes, capacitors and resistors, vulcanizing equipment, cameras, pharmaceuticals, hand grenades, cartridges and canvas goods. All over the world, Markem methods, machines, type and inks are marking the products of industry.
There is a Markem method for almost every identification purpose. Markem Equipment is used for Marking on Products, Packages, Parts, or for producing Labels.
Submit your problem in detail with a sample of the item to be marked. Markem Machine Company, Keene, 5, New Hampshire.
MARKEM
BETTER MARKING SINCE 1911

DOELCAM
GYROSCOPES
FOR MILITARY APPLICATION
WB-6 Gyroscope
The Gyroscope illustrated has been designed by Doelcam Corporation expressly for high performance military aircraft control applications. The small, accurately balanced rotor of this hysteresis type sychronous motor operates at 12,000 rpm and draws 8.5 watts from a 3 phase, 26 volt, 400 cps power supply. This unit weighs only 11 ounces.
The WB-6 Gyroscope is typical of the small, yet rugged, instruments designed and produced by Doelcam to provide necessary accuracy with a maximum of reliability. The facilities and abilities which have developed and are producing the WB-6 Gyroscope can be applied to your automatic control requirements.
DOELCAM CORPORATION
56 ELMWOOD STREET, NEWTON 58, MASSACHUSETTS
Gyroscopic Flight Test and Control Instrumentation
SYNCHROS • SERVOMECHANISMS • MICROSYNS • ELECTRONIC INVERTERS



FIG. 3—Oscillator circuit in which the load circuit is tuned to the same frequency as the plate tank circuit when loaded. Grid drive is obtained from the load

frequency as the plate tank circuit when loaded and the grid drive is obtained from the load. When the oscillator is unloaded, the load circuit is tuned to a frequency considerably different from the oscillator frequency and the load voltage is low. Since the grid voltage is derived from the load, the grid drive voltage is also low. The result is a low drive voltage at no-load and a high drive voltage at full load. Thus the tube is operating under desirable conditions at both extremes of loading. With this circuit the grid current can be allowed to approach full rated value at full load.

Conclusion

The previous discussion has set forth a number of factors which when given careful consideration by the designer and user of electronic heating equipment, will result in a more effective utilization of electronic tubes. Proper selection and application of electronic tubes for r-f heating can be summarized in two statements: Choose the right tube for the job and keep it within its ratings under all conditions of operation. Provide a healthy environment for the tubes.

Electronics Aids Sugar-Beet Growth

AN electronically-operated singling machine has been developed in France and put to use as an aid to sugar beet growers. The device thins out the plants at predetermined intervals. In front of the hoe is a feeler and an electronic arrangement which compensates for gaps where the seed has not taken hold by leaving the next few plants closer together.

Engineering Data

on ARNOLD TAPE-WOUND CORES

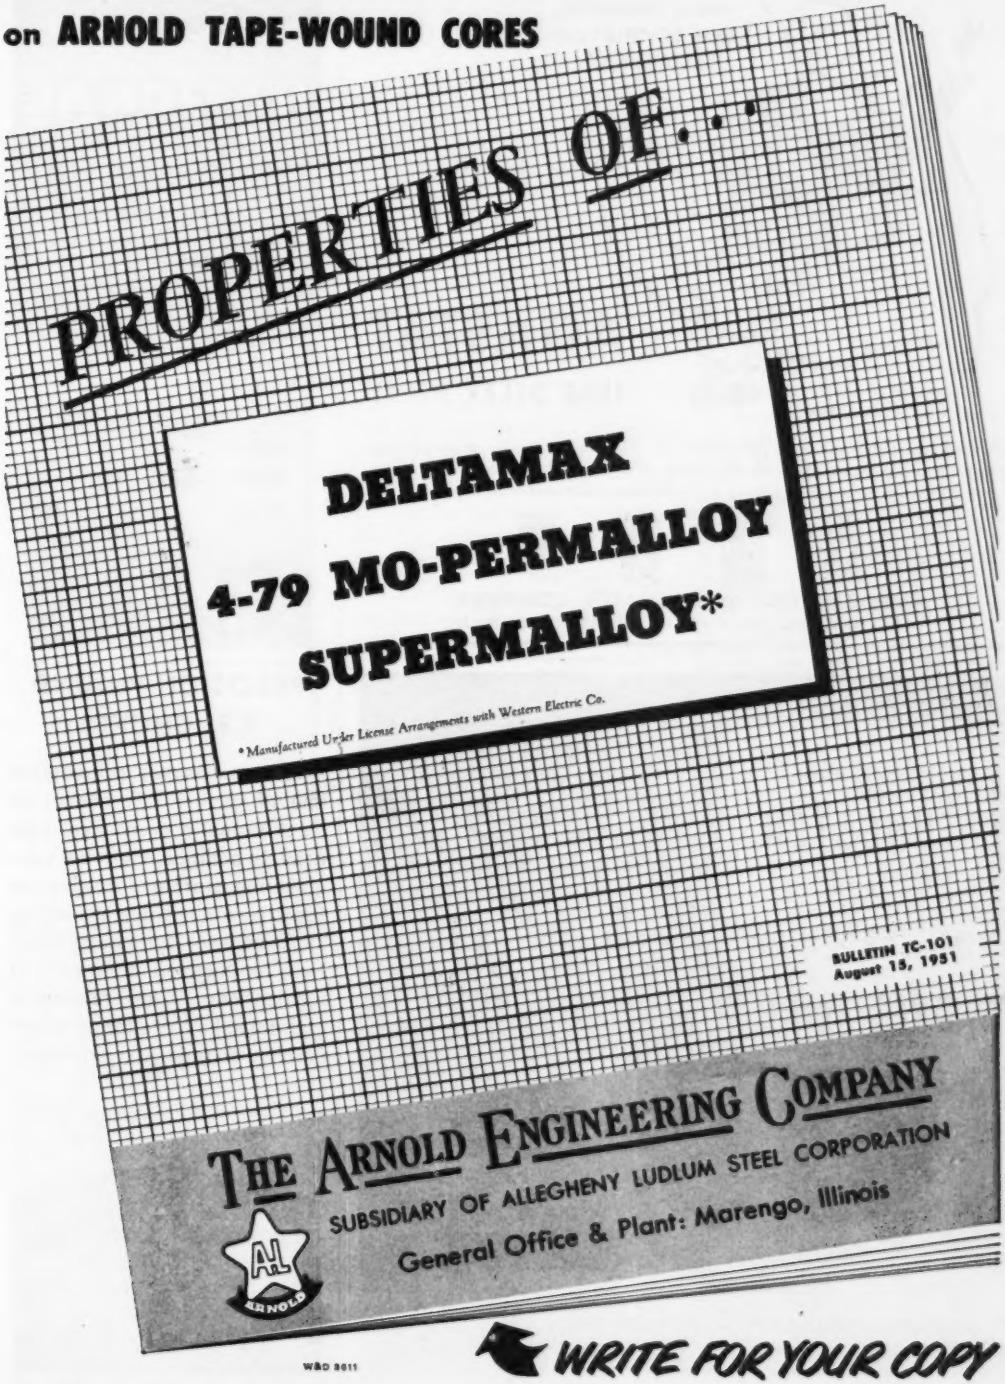

WAD 8611

WRITE FOR YOUR COPY

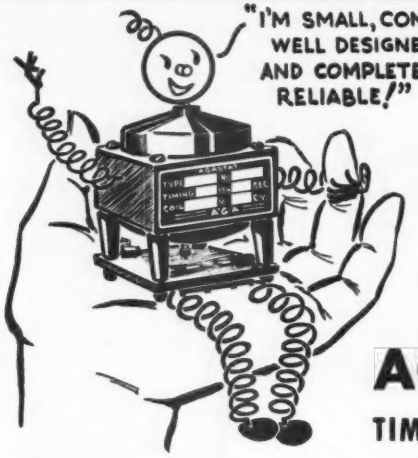

AGASTAT

TIME DELAY RELAY

Solenoid actuated – pneumatically timed. For AC and DC service. A special diaphragm and cap encase the head, providing an enclosed, dustproof timing chamber in which the air used for timing is recirculated. Low cost with dependability.

AGA AIRPORT LIGHTING · AGA SYNCHRONIC REFLECTORS · AGA MARINE LIGHTING EQUIPMENT · AGA AGASTAT TIME DELAY RELAY

AMERICAN GAS ACCUMULATOR COMPANY

1027 NEWARK AVENUE · ELIZABETH 3, N. J.

Gold Plated

TUNGSTEN and MOLYBDENUM GRID WIRE

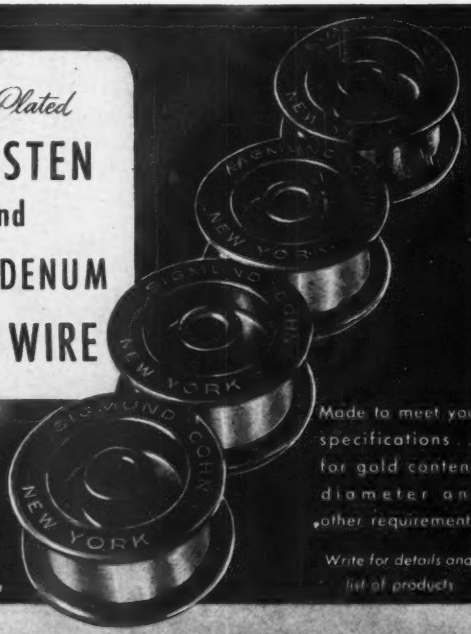

Made to meet your specifications . . . for gold content, diameter and other requirements.

Write for details and list of products

SINCE 1901

SIGMUND COHN CORP. · 44 Gold Street, New York 7

NATIONAL

- Proven
- Dependable
- Quality



PRECISION-WOUND R.F. CHOKES

National makes a complete line of quality R.F. chokes to meet virtually every electronic need. In addition, National's engineering staff and production facilities are capable of winding chokes to any set of specifications for commercial or military applications. Close tolerances guaranteed. Write for complete catalog or send your specifications.

Write for Drawings.

EXPORT DIV.—DEP'T E-1051

National

EST. 1914

NATIONAL COMPANY, Inc.

MALDEN, MASSACHUSETTS

Your voice

in Davy Jones' locker

To strengthen voices in the newest submarine cables between Key West and Havana amplifiers had to be built right into the cables themselves. With the cables, these amplifiers had to be laid in heaving seas; and they must work for years under the immense pressure of 5000 feet of water.

For this job, Bell Laboratories engineers developed a new kind of amplifier — cable-shaped and flexible, with a new kind of water-tight seal.

To serve far beyond reach of repair, they developed electron tubes and other parts, then assembled them in dust-free rooms.

The two cables — each has but two conductors — simultaneously carry 24 conversations as well as current to run the electron tubes.

With these deep-sea amplifiers, submarine cables carry more messages . . . another example of how research in Bell Telephone Laboratories helps improve telephone service each year while costs stay low.



Cutaway view of deep-sea amplifier. Tubes and other elements are housed in plastic cases then enclosed in interleaved steel rings within a copper tube. Layers of glass tape, armor wire and impregnated fiber complete the sheath. Cable ship, shown right, payed out cable over large sheave at bow.

BELL TELEPHONE LABORATORIES

• Exploring and inventing, devising and perfecting, for continued improvements and economies in telephone service.

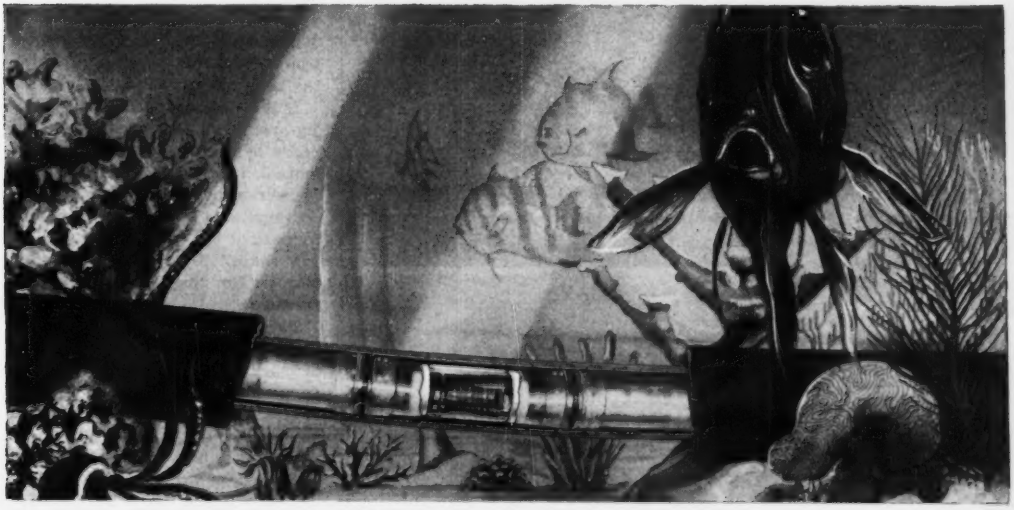

WE DON'T LIKE TO BRAG, BUT . . . modestly enough, we have reason to be proud of
the Tarzian TT-5 Tuner
It's a fact. The Tarzian TT-5 Tuner is a better tuner; made by the largest manufacturer of switch-type tuners. It's an outstanding engineering accomplishment—interference free —providing highest gain . . . lowest noise.
ALSO—
LOW OSCILLATOR RADIATION . . . GOOD MATCHING . . . GOOD INPUT BALANCE . . . UNIFORM VERNIER RANGE ON LOW AND HIGH CHANNELS . . . AVAILABLE 21 OR 41 MEGACYCLES IF.
A WORD ABOUT UHF!
We'll be glad to work with you when you're planning UHF. And, remember, Tarzian is the only manufacturer of front end tuners now supplying 41 megacycle units. As a matter of fact, we now have more than ½ million 41 mc. tuners in the field.
SARKES TARZIAN, Inc.
TUNER DIVISION
Bloomington, Indiana
OTHER TARZIAN-MADE PRODUCTS
Air Trimmers
Centre-Kooled Selenium Rectifiers
Cathode-Ray Tubes
STATIONS WTTS (5000 WATTS) AND WTTV (CHANNEL 10)
OWNED AND OPERATED BY SARKES TARZIAN IN BLOOMINGTON

THE ELECTRON ART

(continued from p 142)

ment of the mutual inductance for the close-coupled loop method.

Any undesirable transfer of primary loop constants into the receiving loop may be shown to be negligible by reference to the expressions for the total receiving loop constants: R_2' and L_2'

$$R_2' = R_2 + \left(\frac{\omega M}{Z_1}\right)^2 R_1 \qquad (3)$$

$$L_2' = \left(L_2 - \frac{1}{\omega^2 C_2}\right) - \left(\frac{\omega M}{Z_1}\right)^2 \left(L_1 - \frac{1}{\omega^2 C_1}\right) \qquad (4)$$

where the subscript 1 refers to constants in the primary loop, the subscript 2 refers to constants in the receiving loop, the R's are resistances and the L's are inductances and Z_1 is primary circuit impedance. Evidently, in both expressions the second term is small compared with the first term, where R_1 contained in Z_1 is in the order of thousands of ohms and ωM is in the order of a few ohms.

For any particular setup this should be demonstrated to be the case and if necessary the primary series resistance should be raised and the primary loop inductance should be reduced. Such demonstration is effective by receiving an independent signal and noting whether the reading is steady while bringing the primary loop into position. It is evident that if this reading remains constant, an arbitrary comparative calibration by means of such a primary loop may be obtained using a known field where the above described spaced loop method may be used to obtain the known field.

If it is desired to calibrate such a jig-mounted calibrating loop directly by means of Eq. 2, then the mutual inductance may be used. Measurement of the mutual inductance may be the most straightforward if the receiving loop is of odd shape. Otherwise calculation may be the simpler and more accurate method.

The value of R should be greater than four times the reactance of the primary loop at the highest used frequency, to keep the error below approximately 3 percent. With one six-inch turn in the primary loop, a value of R between 500 and 2,000

For precision and dependability look to Kollsman

KOLLSMAN INSTRUMENT CORPORATION

Elmhurst, New York • Glendale, California

NEW WIDE BAND D.C. AMPLIFIER

MODEL 120

A precision instrument designed for use as a preamplifier in conjunction with an oscilloscope, vacuum tube voltmeter or other instruments.

SPECIFICATIONS

FREQUENCY RESPONSE: Within ± 1 db between D.C. and 100,000 cycles per second.

GAIN: Approximately 100.

INPUT CONNECTION: Double channel, can be used for single ended and push-pull signals or as a differential amplifier.

INPUT IMPEDANCE: One Megohm shunted by approximately 15mmf in each channel.

DUAL INPUT ATTENUATOR: One to one, 10 to one, 100 to one and "off" positions in each channel immediately adjustable.

OUTPUT CONNECTION: Push-pull or single ended.

OUTPUT IMPEDANCE: Less than 50 Ohms single ended or 100 Ohms push-pull.

HUM AND NOISE LEVEL: Below 40 microvolts referred to input.

LOW DRIFT due to regulated heater voltage in input stage.

MOUNTING: Metal cabinet approximately 7" wide by 7" high by 11" deep.

Write for descriptive literature on the Model 120 D.C. Amplifier and other Furst laboratory instruments including Regulated Power Supplies.

FURST ELECTRONICS

10 S. Jefferson St., Chicago 6, Ill.

IN YOUR NEXT DESIGN... TAKE FULL ADVANTAGE OF THE SUPERIOR CHARACTERISTICS OF... DX TOROIDAL COILS



Where a circuit calls for an efficient coil of a high Q factor—when space and weight are limited, *specify DX TOROIDS.*

DX TOROIDS require less space for a given inductance. They have no coupling effects in adjacent circuits as their fields are entirely contained within the perimeter of the coils. Shielding does not affect the Q.

DX TOROIDS have a wide application in a number of electronic equipments—particularly airborne radar and miniature assemblies. Toroidal "off-center" and focus coils; band pass, high and low pass filters; inter-stage and output transformers improve performance with substantial savings in space.

DX Radio Products Company has devoted 10 years to the development of design and methods of winding TOROIDS. Our experience and extensive facilities are at your service. Just tell us your requirements. We will design your coils or build them to your exact specifications and submit samples promptly.

Write or Wire DX Today

DX RADIO PRODUCTS CO.

GENERAL OFFICES: 2300 W. ARMITAGE AVE., CHICAGO 47, ILL.

LEDEX

RELAYS and CIRCUIT SELECTORS

ROTARY SOLENOID OPERATED

- REMOTE CONTROL
- SELF-STEPPING OR EXTERNAL IMPULSING
- POSITIVE DETENT ACTION

for REMOTE CONTROL *of* MULTIPLE COMPLEX CIRCUITS

Many versatile designs of stepping, counting, adding and subtracting, latching, and *circuit selecting* relays are made possible by the combination of the Ledex Rotary Solenoid and wafer type rotary switches. Self-stepped or externally impulsed, the device is immediately adaptable to many remote control applications. A choice of wire sizes permits a wide range of operating voltages and power requirements. Various types of mountings further increase its adaptability. In addition to its positive control of multiple, complex circuits, a reserve of mechanical power is available for the performance of duties other than switching operations.

We supply to quantity users and solicit the opportunity to be of assistance in solving multiple circuit relay problems.

WRITE DIRECT TO

G. H. Leland INC.

118 WEBSTER STREET

DAYTON 2, OHIO

high-voltage
Selenium Rectifiers

See for yourself! Make your own COMPARISON TEST

Prove to yourself that G-E selenium rectifiers are superior. Once having tested them you'll decide to use them on *every* job. For G-E stacks help keep your product out front through long-term high output.

COMPARE FORWARD RESISTANCE—Comparison will show the extremely low forward resistance of G-E cells—will show you why they deliver higher output voltage—will show how you can cut costs in circuit components and design.

COMPARE BACK LEAKAGE—Comparison will show the low back leakage of G-E cells—will show you why their lower internal losses mean higher output. Lower leakages mean less heating, longer life, economical operation for General Electric high-voltage rectifiers and the equipment they ably service.

COMPARE TEMPERATURE RISE—Because of their low forward resistance and low back leakage, they are cooler operating—don't overheat nearby parts—require less ventilation—have longer life.

Write Section 461-17, *General Electric Company, Schenectady 5, New York* for a copy of GEA-5524 which gives details on comparative testing. Or, arrange for test details and sample units through an authorized G-E agent or the General Electric specialist at your local G-E office.

461-17

GENERAL ELECTRIC

...Including many stock types

FOR PROMPT DELIVERIES

In addition to production of special military designs, Struthers-Dunn continues to manufacture standard relays. Many popular types are stocked for prompt deliveries. A list of available units can be obtained from your Struthers-Dunn field engineer. Better yet, send details of your application for suitable relay recommendation.

Write today for copy of helpful 32-page "Quick Guide to Relay Selection"

STRUTHERS-DUNN

5,348 RELAY TYPES

STRUTHERS-DUNN, INC., 150 N. 13th ST., PHILADELPHIA 7, PA.

BALTIMORE • BOSTON • BUFFALO • CHARLOTTE • CHICAGO • CINCINNATI
CLEVELAND • DALLAS • DETROIT • KANSAS CITY • LOS ANGELES
MINNEAPOLIS • MONTREAL • NEW ORLEANS • NEW YORK • PITTSBURGH
ST. LOUIS • SAN FRANCISCO • SEATTLE • SYRACUSE • TORONTO

ohms is recommended and may be chosen precisely to make the value of field strength equal the signal generator output voltage or some round multiple of the output voltage.

In Eq. 2 the voltage V may be measured directly by measurement of loop output, and E, which is constant with frequency, may then be obtained by dividing V by the known effective height of the receiving loop for a given frequency. The ratio of E to e_g is constant for other frequencies and may be adjusted to unity or to a round number by the choice of R.

Coil Characteristics

Data for two sample jig-mounted calibration coils is presented in the curve of Fig. 4. For the low frequency range the receiving loop contained 36 turns with an effective diameter of 5.25 inches whereas the primary jig coil contained 25 turns of 3-inch mean diameter, a measured mutual inductance of 39 microhenrys and a series resistance of 2,320 ohms, resulting in $E = e_g$.

For the high-frequency range the receiving loop contained 2 turns with an effective diameter of 8.25 inches whereas the primary jig coil contained one turn of approximately 5-inch effective diameter, a measured mutual inductance of 0.15 microhenry and a series resistance of 655 ohms, resulting in $E = e_g$.

The mean deviation of the values shown in Fig. 4 for the low range loop is less than one percent and for the high range loop is less than two percent.

The signal generator was carefully checked for output voltage calibration. All resistors and associated measurements were also checked. The standard or known field of Fig. 4 was obtained by the general arrangement of Fig. 1, except that a signal generator was used in place of the transmitter and a series resistor of 122 ohms replaced the thermocouple meter. The primary loop was of one turn, six-inch diameter and of 20-mil solid enamelled copper wire.

The method described, which employs a loop closely coupled to the loop antenna being calibrated, is more convenient to use than the

NO- "Lavite" STEATITE IS NOT NEW..

but you should know...

...that this dielectric ceramic, featuring low loss at high frequency, is a perpetual research and redevelopment project in the Steward laboratory, with important results. Commonly used for: trimmer bases; coil forms; strain reliefs; tube base sockets; lightning arresters; bobbins for precision wire-wound resistors and others — "Lavite" Steatite parts may be extruded, pressed or machined, and may be furnished with special finishes when required. And this is important, too — our production facilities have kept pace with research so that "Lavite" Steatites have become available in larger and larger quantities — as well as better qualities and more selective varieties. You will find "Lavite" Steatites a perfect match for many of your components, regardless of size, precision or number. Send me your specifications and I will make prompt recommendations to you without obligation.

Ask for our booklet giving characteristic data on all "Lavite" Ceramics— ("Lavite" Steatites, "Lavite" Titanates, "Lavite" Ferrites and others.)

D. M. STEWARD MANUFACTURING CO.

3604 Jerrome Avenue Chattanooga, Tennessee

Sales Offices in Principal Cities

TABLE OF PROPERTIES "LAVITE" STEATITES

TYPE			STEATITES				THERMAL SHOCK RESISTANT SERIES					LAVA
							CORDIERITE			ZIRCON	PORCELAIN	(Fired Stone)
PROPERTY		UNITS	S-10	SI-5	S-201	S-300	S-40H	S-12H	R-15	Z-200	Z-300	Grade A
Specific Gravity		———	2.40	2.50	2.65	2.75	2.1	2.35	2.4	3.0	3.5	2.3
Water Absorption		%	0-0.10	0-0.05	0-0.05	0-0.05	0.0-5.0	0.0-1.0	0.0-1.0	0.-0.05	0.0-0.05	3.0
Color		———	Off White	Off White	Cream	Cream	Light Tan	Mottled Tan	Grey to Light Tan	White	White	Pink
Flexural Strength		lbs./sq. in.	20,000	20,000	21,000	21,500	7,000	11,200	11,500	23,000	26,400	10,000
Tensile Strength		lbs./sq. in.	6,000	6,500	7,000	8,000	2,500	4,000	4,000	7,500	8,000	3,000
Compressive Strength		lbs./sq. in.	75,000	77,000	81,500	80,000	31,000	35,000	45,000	90,000	100,000	20,500
Impact Strength		Ft. lbs./sq. in.	1.55	1.65	2.25	2.00	.75	.85	.95	1.90	2.50	1.45
Linear Coefficient of Thermal Expansion		20 to 100 °C	6.5×10^{-6}	6.5×10^{-6}	6.5×10^{-6}	6.0×10^{-6}	3.5×10^{-6}	2.0×10^{-6}	1.5×10^{-6}	4.5×10^{-6}	3.5×10^{-6}	2.70×10^{-6}
		20 to 400 °C	8.0×10^{-6}	8.5×10^{-6}	7.8×10^{-6}	7.0×10^{-6}	4.0×10^{-6}	3.0×10^{-6}	2.5×10^{-6}	5.5×10^{-6}	4.2×10^{-6}	3.5×10^{-6}
Safe Limit of Heating		°F.	2,350	2,350	2,350	2,300	2,400	2,350	2,250	2,250	2,250	2,000
		°C.	1,285	1,285	1,285	1,260	1,315	1,285	1,232	1,232	1,232	1,090
Dielectric Strength		Volts/mil	200	210	225	250	———	120	125	235	240	< 100
Volume Resistivity	20°C.	Ohm-Cm.	$>1\times10^{13}$	$>1\times10^{13}$	$>10^{14}$	$>10^{14}$	———	———	———	$>10^{14}$	$>10^{14}$	$>10^{13}$
	200°C.		4.6×10^{12}	6.0×10^{12}	———	2.26×10^{13}	———	———	3×10^{10}	4×10^{13}	1×10^{13}	4.5×10^{11}
	300°C.		8.0×10^{10}	9.0×10^{10}	1×10^{11}	3.10×10^{12}	———	———	8×10^{8}	1.0×10^{11}	1.5×10^{12}	7.5×10^{9}
	500°C.		8.6×10^{7}	1.3×10^{8}	2×10^{8}	1.81×10^{10}	———	———	7×10^{7}	9.0×10^{8}	3.0×10^{10}	2.5×10^{7}
	700°C.		1.2×10^{7}	9.4×10^{7}	1.7×10^{8}	1.64×10^{9}	———	———	4.5×10^{6}	2.6×10^{7}	6.0×10^{8}	2.0×10^{6}
Te Value		°C.	> 700°	> 700°	> 700°	> 700°	———	> 700°	> 700°	> 700	> 700	> 700
Dielectric Constant		At 1 MC.	6.0	6.25	5.85	6.3	———	6.5	6.0	7.5	9.0	5.2
Power Factor		At 1 MC.	0.0013	0.0012	0.0011	0.00065	———	0.012	0.011	0.0008	0.0010	0.010
Loss Factor		At 1 MC.	0.0078	0.0075	0.0065	0.004	———	0.078	0.066	0.006	0.009	0.052
Recommended General Applications			Ordinary Radio and General Medium Frequency Applications		Ultra Low Loss — High Frequency		Special Applications for Extreme Thermal Change Where a Low Linear Coefficient of Expansion Ceramic Is Required			Applications Which Require Excellent All Around Properties (1) Low Electrical Loss (2) High Mechanical Strength (3) Thermal Shock Resistant		Machined Parts Where Special Tools Are Not Required—Close Tolerances Can Be Maintained Excellent for Models

NOTE: All values given above represent averaged results of tests conducted according to ASTM testing specifications.

Type 5JP11A
Single-gun tube
Type 54SWP11
4-gun tube
H-21 Dual-channel Oscilloscope
Oscilloscope for strip-film recording
ETC
...for more accurate and efficient RESEARCH, TEST and VISUAL OPERATING CONTROL
By permitting simultaneous observation or recording of 2, 4, 6 or more different phenomena, ETC multi-gun cathode ray tubes and multi-channel oscilloscopes pave the way to farther-reaching analysis and better operation in many fields.
New catalog on request.
H-42A Strainalyzer for simultaneous analysis of 4 stresses or strains from 0 to 50,000 cycles
H-81 8-Channel Oscilloscope originally developed for recording seismographic phenomena
Type 21JHP7
Single-gun tube
Type 55JG
5-gun tube
electronic tube corporation
1200 E. MERMAID LANE, PHILADELPHIA 18, PA.

conventional method of setting up a known field. It permits calibration to be made in a small screened room with equipment usually found in laboratories where radio frequency measurements are made.

R-F Standard Capacitors For Minute Increments

By John A. Conner
Naval Research Laboratory
Washington, D. C.

At the present time there is a growing interest in the measurement of minute magnitudes of capacitance at radio frequencies. These measurements assume a great importance in such activities as the study of the inter-electrode capacitances of vacuum tubes and the study of oscillator stability. Capacitance values as small as 0.01 μμf are being measured regularly in the radio laboratory, utilizing techniques that are well established.[1] Some specialized radio-engineering activities have undertaken the problem of measuring capacitance magnitudes in the order of 0.001 μμf and even smaller. The importance of measuring minute values of capacitance is necessarily magnified as higher-frequency phenomena are encountered and where increased circuit-stability is demanded.

In conducting a laboratory study of the capacitor elements of h-f selective circuits and their frequency- drift compensation properties, a definite limitation has been found in the available techniques for measuring minute capacitance increments. The desirability of having a standard capacitor, capable of producing precise magnitudes of minute capacitance increments, was apparent. This paper is intended to present the basic analytical conclusions for the development of such a device.

Basic Arrangement

The basic electrode configuration chosen for a standard of minute capacitance increments is the simple coaxial-cylinder arrangement. This form was selected because of its mechanical simplicity, its linear capacitance variation

special **HARNESSES, CABLES, CORDS** *for Military equipment*

LENZ

If you have a wiring problem on any of your Defense Projects, consult Lenz. Here is a dependable source for Harnesses, Cables and Cords, constructed of JAN-C-76 Approved Wire, that can speed up your assembly operations.

LENZ ELECTRIC MANUFACTURING CO.

IN BUSINESS SINCE 1904 • 1751 North Western Avenue, Chicago 47, Illinois

* MAGNECORDER *Sound Performance*

(Photo by A. Alberts, 1950)

. . from "Studio A" . . . to TIMBUKTU! *

The famed traveler, Art Alberts, recently used Magnecord Tape Recorders in his search for African tribal music — never before recorded. His Magnecorders underwent 140 degrees temperature, relative humidity ranging from 8 to 99, and 5,000 miles of grueling, jouncing desert and jungle trails. Operating perfectly all the way, Magnecorders brought home faithfully accurate reproductions from the court of the Mossi Emperor, south of Timbuktu.

Whether in Timbuktu or in Studio A at KRSC, Seattle, Wash., Magnecorders handle delayed programs and "on location" recordings with constant dependability. Easy portability, precision and fidelity make Magnecorder the first choice of radio engineers everywhere.

MORE FEATURES
PT7 accommodates 10½" reels and offers 3 heads, positive timing and pushbutton control. PT7 shown in console is available for portable or rack mount.

GREATER FLEXIBILITY
In rack or console, or in its really portable cases, the Magnecorder will suit every purpose. PT6 is available with 3 speeds (3¾", 7½", 15") if preferred.

HIGHER FIDELITY
Lifelike tone quality, low distortion, meet N.A.B. standards — and at a moderate price. PT63 shown in rack mount offers 3 heads to erase, record and play back to monitor from the tape while recording.

WRITE FOR NEW CATALOG

Magnecord, INC.

360 North Michigan Avenue
Chicago 1, Illinois, Dept. EB-10

Send me latest catalog of Magnecord equipment.

Name.....

Address.....

City.....Zone.....State.....

CONSERVE VITAL MATERIALS

(with inner-electrode insertion) and the restricted extent of its fringing-flux fields. The errors introduced due to mechanical discrepancies (departures from the theoretically ideal, concentric-cylinder geometry) were investigated in general terms and a specific design was derived which will provide a useful standard of capacitance increments. For the purpose of analysis these discrepancies were divided into radial and axial deviations from the ideal electrodes. The principle radial discrepancies and

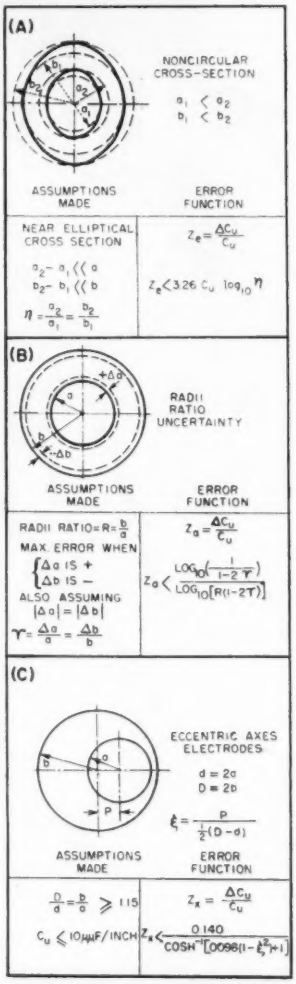

FIG. 1—Error functions for three deviations from ideally shaped electrodes for standard capacitor

FREE CATALOG on SOLDERS and SOLDERING!

LEARN HOW CORRECT TECHNIQUES CAN CONSERVE METAL AND MONEY

Government regulations have restricted the free use of tin in solder. We have been told to conserve . . . substitute . . . in effect, to solder best with what is most readily available.

Although the art of soldering appears simple, it requires considerable skill and ingenuity to produce a joint of optimum properties. Merely placing the parts together, heating and applying solder is not sufficient. A thorough knowledge of the fundamentals is needed in order to use solder efficiently and to best utilize the tin and lead allotted for this purpose.

To help you with solders and soldering, Federated Metals Division, American Smelting and Refining Company, has published a 36-page catalog presenting the properties of various solders and some of the fundamental principles governing uses and applications. Included are data on how to select a solder for a specific application . . . mechanical properties measured in terms of tensile strength, shear strength and impact strength . . . methods of cleaning preparatory to soldering . . . amounts of solder needed to obtain maximum joint strengths . . . the role of fluxes in assuring proper bonding . . . and full specification tables.

For your free copy of this timely and informative catalog . . . for help with soldering or any non-ferrous metals problem . . . write Federated NOW.

Federated Metals Division

Federated first in the non-ferrous field FMD

AMERICAN SMELTING AND REFINING COMPANY • 120 BROADWAY, NEW YORK 5, N. Y.

Here's the

Precision Construction

You've Been Looking for in CABINETS!

WHEN you buy cabinets, chassis or housings for your electronic devices from Corry-Jamestown, you can count on receiving quality equipment that matches the best electronic products you produce. We've been making top grade steel office furniture for 30 years and during World War II we supplied cabinets and metal components to some of the nation's largest makers of electronic equipment for the armed services.

So we know the value of accuracy to close tolerances—of apertures that register perfectly—of uniform precision production, whether you need a hundred, or thousands of pieces. Our staff of highly specialized engineers is ready, *right now*, to show you how our three large plants can translate your specifications into deliveries—*where* you want them—*when* you want them. We'll gladly send you more information about our facilities, capacity, etc.

CALL, WRITE OR WIRE US TODAY!

CORRY-JAMESTOWN MFG. CORP.

CORRY, PENNSYLVANIA

Makers of famous Steel-Age office furniture

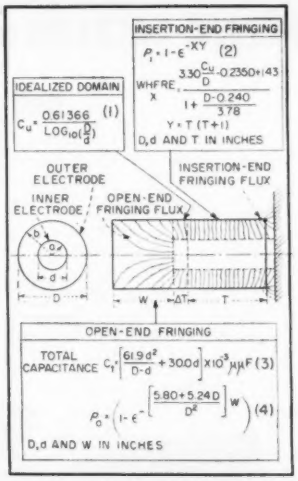

FIG. 2—Diagram and equations show cause and effect of fringing flux

the corresponding error functions which were derived, are briefly summarized in Fig. 1 and are essential modifications of the classical equation for the capacitance between ideal concentric-cylinder conductors:

$$C_u = \frac{0.61366}{\log_{10}\frac{b}{a}} \ \mu\mu \text{ f per in.} \qquad (1)$$

where a and b are the inner and outer electrode radii respectively.

One principal design consideration arises from the need to determine the extent and significance of the fringing flux between coaxial electrodes. Figure 2 shows an electric-field configuration for a simple coaxial-cylinder capacitor. It must be determined, for any given capacitor design, just how long the inner-electrode insertion T must be in order to guarantee an acceptable degree of capacitance linearity over a range of insertion ΔT.

An additional investigation is prompted by the need to keep the open end of the outer electrode removed from the extremity of the inner electrode. After making a large number of actual capacitance measurements using cylindrical electrodes, three empirical equations were derived which give sufficiently accurate limiting equations of the capacitance variations involved. The observed capacitance per unit length (of T) increases in

Simpson

INSTRUMENTS THAT STAY ACCURATE

multi-purpose
MICROTESTERS
STAY *ACCURATE!*

Here are quality microtesters priced low . . . compact, handy, on-the-spot test instruments that give you reliable, accurate readings in the field—in the laboratory—in the production plant . . . everything from testing doorbell circuits to experimental DC circuits. If you want the best combination of versatility and everyday measurements—specify Simpson Microtesters!

These instruments are 3"x5⅞"x2½"—weigh 1¼ to 1½ lbs.—shipping weight, 3 lbs. Prices shown are dealer's net. Except where otherwise indicated test leads with prods or test leads with alligator clips and insulated sleeves are $1.25 extra.

SIMPSON ELECTRIC COMPANY
5200 W. Kinzie Street • Chicago 44, Illinois
Phone: COlumbus 1-1221
In Canada: Bach-Simpson, Ltd., London, Ont.

BURTON BROWNE ADVERTISING

AC AMMETER
Model 370
(With self-contained current transformer)
(For use on 60 cycles)
RANGES:
0-1, 0-2.5, 0-5, 0-10, 0-25 Amps.
Price $19.95

OHMMETER
Model 372
RANGES
0-500 ohms (5 ohms center)
0-5000 ohms (50 ohms center)
0-50,000 ohms (500 ohms center)
0-500,000 ohms (5000 ohms center)
0-5 Meg. (50,000 ohms center)
0-50 Meg. (500,000 ohms center)
Complete with Test Leads . . . $28.50

AC VOLTMETER
Model 371
RANGES:
0-150, 0-300, 0-600 volts.
Price $18.40

DC MILLIAMMETER
Model 373
RANGES:
0-1, 5, 10, 25, 50, 100, 250, 0-1000 MA.
Price $19.95

DC MICROAMMETER
Model 374
RANGES:
0-50, 100, 250, 500, 1000 Microamps.
Price $33.00

DC AMMETER
Model 375
(Self-Contained)
RANGES
0-1, 2.5, 5, 10, 25 Amps.
Price $19.95

AC VOLTMETER
Model 376
(Rectifier Type 1000 ohms per volt)
RANGES:
0-5, 10, 25, 50, 100, 250, 500, 1000 AC volts.
Price $19.95

DC VOLTMETER
Model 377
(Resistance 1000 ohms per volt)
RANGES:
0-1, 2.5, 5, 10, 25, 50, 100, 250, 500, 1000 DC Volts.
Price $19.95

AC MILLIAMMETER
Model 378
(With self-contained current transformer)
RANGES:
0-5, 25, 100, 250, 1000 MA.
Price $22.60

BATTERY TESTER
Model 379
Price, including Test Leads and Operator's Manual—
$23.70
Leatherette covered Carrying Case, with compartment for leads
Price $6.00

. . . . World's Largest Makers of Electronic Test Equipment . . . .

JOHNSON antenna phasing equipment

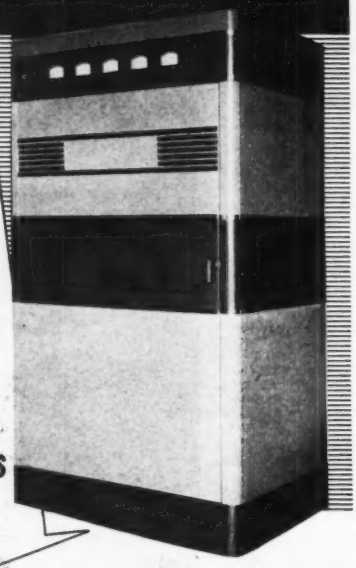

Individually Designed

TO YOUR CONSULTANT'S SPECIFICATIONS

A tremendous advantage offered by JOHNSON Antenna Phasing Equipment is that your installation is individually designed!

This means there is no need for compromises with good engineering — you get **exactly what your consultant specifies,** right down to the last detail.

JOHNSON is able to offer this because JOHNSON makes no "standard units" necessitating design changes on your part to conform.

JOHNSON manufactures nearly every component in an adequate variety of ratings and types and our engineers have available just the right material for any application.

The cost is no more — in fact, it is frequently lower than less flexible, less generously rated equipment. JOHNSON equipment offers you optimum circuit design, automatic switching from directional to non-directional operation, and a host of other advantages.

OTHER JOHNSON BROADCAST EQUIPMENT

- Adjustable phase sampling loops
- Isolation filters
- Sampling lines
- TV-FM-AM coaxial line
- Fixed capacitors
- Variable capacitors
- Standing wave indicators
- R.F. contactors
- Tower lighting filters
- Transmission line supports
- Pressurized capacitors
- Neutralizing capacitors
- Fixed inductors
- Variable inductors
- Feed-thru bowl assemblies
- Make Before Break switches

Here's a typical JOHNSON phasing unit. JOHNSON can match in design and finish any make or model of transmitter cabinet.



Featuring an interior door that remains closed during tuning adjustments, this antenna coupling unit is completely weatherproof.



Where a tuning house is used, this efficient panel mounted coupling network saves money. It is part of a 50KW installation at WJAS.

JOHNSON
a famous name in Radio
E. F. JOHNSON CO. WASECA, MINNESOTA

value as T is increased, until the idealized value of C_a is reached at infinity. The observations made showed that this variation can be described by Equation 2, shown in Fig. 2, where ρ_i is the ratio of the idealized to the actual capacitance per unit length. If a value of T is chosen which will make ρ_i differ from unity by a negligible amount then the error in C_a will be negligible.

The proximity of the open end will subtract capacitance from the idealized capacitance (with decreasing values of the length W) according to the relations of Eq. 3 and 4 (Fig. 2), where C_t is the total accumulated (fringing) capacitance and is the relative amount of the total at any given value of W. With these equations, the error resulting from the use of electrodes of a finite length can be determined to a sufficient degree of accuracy.

Final Design

Using the above analysis of the manner in which mechanical discrepancies are reflected into capacitance errors, it becomes possible to design a precision coaxial-cylinder capacitor which will provide minute capacitance increments. For capacitor-stability studies a standard was required with 0.2 μμf per inch adjustability at radio frequencies up to 5 mc. A minimum inner-electrode diameter of ⅛ inch was chosen as a basis for design. As Eq. 1 dictates an electrode-radii ratio of approximately 1,200, an outer electrode of 225 inches (18.75 ft) would be required for a simple coaxial-cylinder capacitor to provide 0.2 μμf per inch of inner-electrode insertion. Because of this impractical electrode diameter, a



FIG. 3—Mechanical arrangement of a differential, coaxial-cylinder capacitor

For Engineers...

YOUR CAREER OPPORTUNITY of A LIFETIME...at RCA-NOW!

IF YOU ARE FACING a big question: "What is the best move I can make to further my career?"—we believe you will find the answer on this page.

Today, as never before, RCA is engaged in far-reaching electronic developments that have created a need for career men of talent. This means you have the chance of a lifetime to make a permanent connection with RCA in a position offering you the opportunity of a successful career in the field of your choice. Here is what RCA offers.

Wide Choice of Projects

Unusual opportunities await qualified ELECTRONIC, ELECTRICAL and MECHANICAL ENGINEERS . . . PHYSICISTS...METALLURGISTS...CHEMICAL and CERAMIC ENGINEERS — in research, development, design and application, also in technical sales. Positions open provide qualified engineers the opportunity to choose the area of activity they like best.

POSITIONS OPEN IN THE FOLLOWING FIELDS:

TELEVISION DEVELOPMENT— Receivers, Transmitters and Studio Equipment

ELECTRON TUBE DEVELOPMENT— Receiving, Transmitting, Cathode-Ray, Phototubes and Magnetrons

TRANSFORMER and COIL DESIGN

COMMUNICATIONS— Microwave, Mobile, Aviation, Specialized Military Systems

RADAR— Circuitry, Antenna Design, Computer, Servo-Systems, Information Display Systems

INDUSTRIAL ELECTRONICS— Precision Instruments, Digital Circuitry, Magnetic Recording, Industrial Television, Color Measurements

NAVIGATIONAL AIDS

TECHNICAL SALES

ELECTRONIC EQUIPMENT FIELD SERVICE

If you qualify for any of the positions listed above, write us for a personal interview—include a complete resumé of your education and experience. Write to:

Mr. Robert E. McQuiston, Specialized Employment Division, Dept. 46V, Radio Corporation of America, 30 Rockefeller Plaza, New York 20, N. Y.

Professional Status. RCA engineers enjoy the highest professional recognition among their colleagues. You work in close collaboration with scientists and engineers who are distinguished in the industry. You receive recognition for your accomplishments.



Laboratory Facilities. At RCA, unexcelled laboratory resources and advanced technical apparatus are available. You have unlimited opportunities for the complete expression of your talents in the fields of electronics.

Good Living Conditions. You have a choice of residential locations offering suburban-convenience or quiet, countryside living. Good shopping facilities, schools, churches, medical services and modern hospitals are close by. Excellent opportunities for graduate study.

Position Security. These are not temporary positions. Activities are focused not only on the long-range national defense program, but also on a diversified line of products for commercial use. You and your family are protected by Company-paid hospital, surgical, accident, sickness, and life insurance. A modern retirement program helps provide for your future.



Rapid Advancement. Opportunities at RCA are exceptional, for you to move ahead in the career of your choice. You can advance to high-level and supervisory positions which are filled from RCA's engineering staff. Salaries, determined on the experience and ability of individual applicants, are reviewed at regular intervals for increases on a merit basis.

RADIO CORPORATION of AMERICA

Test, Grade, or Match Resistors

"as fast as you can pick 'em up!"

PRICE $585.00 F.O.B. CINCINNATI

with the new *Clippard* PR-5 RESISTANCE COMPARATOR

Just place the "unknown" resistance across the terminals of this precision, production Clippard tester. Even unskilled operators can process up to 17 resistors (of all types) *per minute.* Working to an accuracy of better than ±1% through the entire range of 100 ohms to 100 megohms, the PR-5 is a companion instrument to the famous PC-4 Automatic Capacitance Comparator. With it, radio, electrical, resistor manufacturers and large part jobbers save time and money and assure unerring accuracy of inspection.

Completely self-contained, the PR-5 requires no outside attachments other than the Standard Resistor against which unknowns are checked. Operates on 110 Volt—60 Cycle AC. Range: 100 ohms to 100 megohms; reads deviation from standard on any of three scales: −5% to +5%, −25% to +30% or −50% to +100%. Size: 18" x 12" x 12". Weight: approx. 32 lbs. For complete details, write for Catalog Sheet 10-E.

Clippard
INSTRUMENT LABORATORY INC.
1125 Bank Street • Cincinnati 14, Ohio

MANUFACTURERS OF R. F. COILS AND ELECTRONIC EQUIPMENT

design dilemma is reached which necessitates the adoption of a new approach. The utilization of a differential-capacitor arrangement seems capable of satisfying the two conflicting aims; (1) to maintain a sufficiently large inner-electrode diameter for low inductance and mechanical rigidity, and (2) to provide a reasonably small maximum outer electrode diameter. Figure 3 shows the mechanical arrangement of a differential, coaxial-cylinder capacitor designed to satisfy these design criteria.

In this unit, two concentric-cylinder capacitors are arranged coaxially with a common inner-electrode at ground potential. The longitudinal insertion of this inner electrode into one outer-electrode cavity removes its opposite extremity by an exactly equal amount from the second cavity. The unequal outer-electrode diameters provide two different capacitances per unit length, $(C_u)_1$ and $(C_u)_2$, so that the effective (total) capacitance per unit length is simply,

$$(C_u)_T = (C_u)_1 - (C_u)_2 \qquad (5)$$

If $(C_u)_1$ and $(C_u)_2$ have relative errors Z_1 and Z_2, the relative error in $(C_u)_T$ for additive errors will be Z_T, where

$$Z_T = \frac{(C_u)_1}{(C_u)_T} Z_1 + \frac{(C_u)_2}{(C_u)_T} Z_2 \qquad (6)$$

The capacitance error of a constituent capacitor enters as a component of the composite error in proportion to the ratio of the corresponding capacitance to the total effective capacitance. Consequently, it is undesirable to have two differentially-coupled capacitors with large individual capacitances and small capacitance differences. As a recommended empirical relationship between the magnitudes of



FIG. 4—Assembled capacitance standard using differential principle

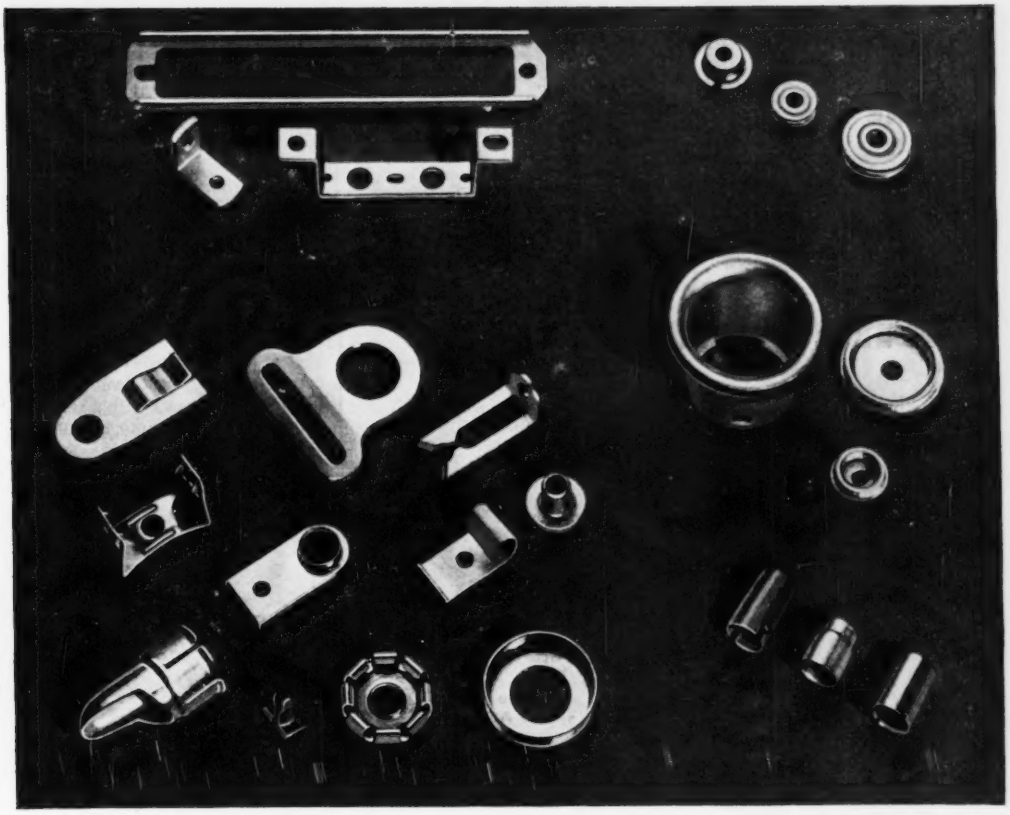

Versatility... IN METAL STAMPINGS

Versatility, sound engineering, volume production... these are the outstanding characteristics of Ucinite's service to the electronics, automotive, aviation and appliance industries. In addition to a wide variety of all-metal stampings, Ucinite designs and manufactures hundreds of different types of electrical switches and connectors as well as special parts and assemblies. If you have a problem in this field that requires reliable production facilities, you will find that it pays to consult Ucinite's staff of skilled and experienced design engineers.

Before bidding on government contracts requiring special electrical components or assemblies, consult your nearest Ucinite field engineer.

The UCINITE CO.

Newtonville 60, Mass.

Division of United-Carr Fastener Corp.

Specialists in

ELECTRICAL ASSEMBLIES,

RADIO AND AUTOMOTIVE

an A.C. relay with 16 transfers!

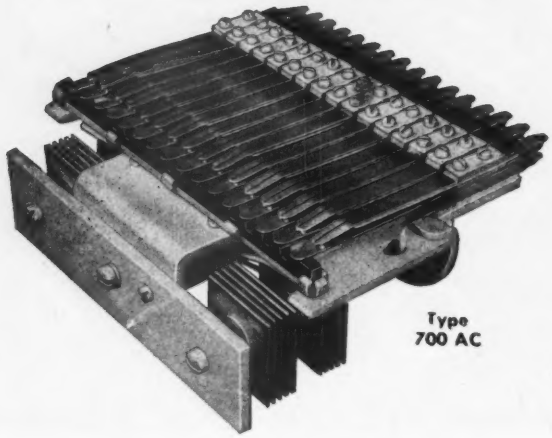

Type 700 AC

If you have been looking for a fast-acting, multi-contact relay designed *specifically* for alternating current, your search is ended. North Electric engineers, pioneers in many relay designs, developed this one to operate on 70 to 220V. AC (110V recommended) provide up to 16 make and/or break contacts and deliver 35 gramms pressure on each. Suitable for controlling up to 1.5 amps. at 32V. DC or 3 amps. at 110V. AC. Double gold-alloy points are standard. Also available with power points (⅛" silver). More than 100 contact combinations available . . . It's new, it's unique and typical of a full line of

NORTH
Industrial
RELAYS

NORTH

THE NORTH ELECTRIC MANUFACTURING COMPANY

1438T South Market Street, Galion, Ohio.

Ask for the new relay catalog

$(C_a)_T$ and $(C_a)_1$ it is suggested that for precision-capacitor design,

$$(C_a)_1 \leq 5\,(C_a)_T \qquad (7)$$

A differential, concentric-cylinder capacitor of the type described has been designed and constructed. Figure 4 illustrates the completed capacitance standard. This device produces a linear capacitance-variation at the rate of 0.200 μμf per inch of inner-electrode insertion. A detailed error and calibration analysis for this capacitor shows that at low frequencies the error in capacitance per unit length C_a, is less than 1.0 percent with a residual capacitance uncertainty of 0.00015 μμf.



FIG. 5—Equivalent circuit for differential standard capacitor of the dimensions shown

Figure 5 shows the equivalent circuit of the unit. The physical dimensions are also tabulated. The efficacy of the design of this capacitor must be tested primarily on the basis of the theoretical and empirical justification of its electrode geometry. The limits of error prescribed for such a device can be satisfied in terms of the error functions given in this paper.

This resume of the errors inherent in coaxial-cylinder capacitors provides a basis for the design of a large variety of standard capacitors. The summarizing equations were derived with a view toward eliminating, as much as possible, any duplication of effort on the part of anyone interested in the design of a specific coaxial-cylinder standard capacitor. Particular attention was given to the design of incremental-standard capacitors with variations of less

1. TYPE 5YP-

Cathode-ray TUBES you should know

Whether you relate each Du Mont cathode-ray tube with its appropriate silhouette, or find the right Du Mont Type number for each performance category, the result (See Below) is the same.

You'll find that each tube type has been carefully engineered to provide maximum performance in each important category of application . . . that new conceptions of design by Du Mont give the design and development engineer broad coverage with a minimum number of tubes, reducing materially the various tube types required to maintain a truly well-stocked laboratory.

2. TYPE 3RP-A

3. TYPE 5RP-A

4. TYPE 3JP-

5. TYPE 5XP-

1. TYPE 5YP- 5" — General-purpose, high-sensitivity. New, medium-voltage tube incorporating a unique electron-gun and deflection-plate structure that provides an increase by a factor of approximately 3 in vertical deflection sensitivity over conventional design. Deflection-plate leads are brought out through the neck to reduce capacitance, making the Type 5YP- extremely valuable for wide-band oscillography.

2. TYPE 3RP-A 3" — Flat-face, short, general-purpose. Very short, 3-inch tube. Special configuration of vertical-deflection plates overcomes the problem of trapezoidal distortion usually associated with tubes of short length and wide deflection angle. Flat face minimizes errors owing to parallax.

3. TYPE 5RP-A 5" — General-purpose, high-voltage. The *Standard* tube for high-voltage oscillography. May be operated at accelerating potentials as high as 25,500 volts, to provide the high light output and resolution required for detailed analysis of rapidly rising wave fronts or other phenomena that exhibit extremely high writing rates.

4. TYPE 3JP- 3" — General-purpose, high light-output. A short, 3-inch, intensifier-type tube that may be operated at potentials as high as 4000 volts. The Type 3JP-A provides high light output and excellent resolution with high deflection sensitivity.

5. TYPE 5XP- 5" — High-voltage, high-sensitivity. High-voltage tube having a high-vertical-sensitivity electron-gun and deflection-plate structure similar to that of the Type 5YP-. Overall accelerating potentials of as great as 25,500 volts may be applied to achieve the light output and resolution required for the study of high-speed phenomena. High vertical-deflection sensitivity greatly simplifies problems of wide-band deflection amplifier design.



3"—GENERAL-PURPOSE, HIGH LIGHT-OUTPUT

5"—HIGH-VOLTAGE, HIGH-SENSITIVITY



3"—FLAT-FACE, SHORT, GENERAL-PURPOSE



5"—GENERAL-PURPOSE, HIGH-SENSITIVITY



5"—GENERAL-PURPOSE, HIGH-VOLTAGE

WRITE FOR COMPLETE DETAILS

DU MONT *for Oscillography*

Instrument Division, Allen B. Du Mont Laboratories, Inc., Clifton, N. J.

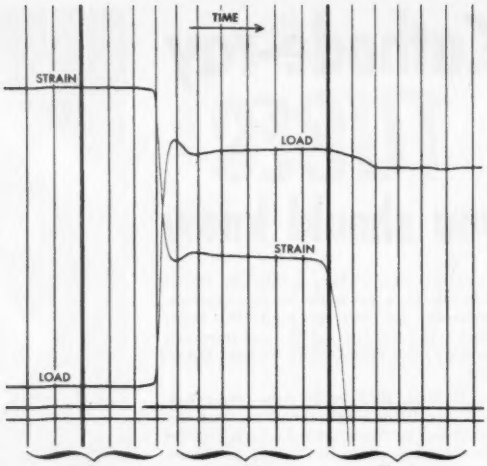

This record from a Consolidated 5-114 Recording Oscillograph gives an accurate, permanent answer to the question—

how long before metal stretches?

TO ANSWER this question, research engineers at California Institute of Technology have developed a rapid, tensile-testing machine capable of applying to a specimen any load up to 5 tons in 7 milliseconds. The problem is to measure the time delay between application of the load and the beginning of plastic deformation of metals.

Consolidated's Recording Oscillographs offer the practical solution to this problem. Recording load and deformation simultaneously, these instruments produce an accurate, high-speed picture of the time delay. Strain gages attached to the metal specimen and to the test machine yield exact signals for both deformation and load. By scaling the precise, 1/100th-second timing lines—automatically recorded by the oscillograph—against the trace deflections, the exact time delay is easily measured, although it lasts only a small fraction of a second.

Such problems of pure research, as well as the most practical field testing applications, are answered by Consolidated recording measurement instruments. The most universal of test equipment, they are as adaptable to highway bridges and box cars as to 1000 mile-per-hour aircraft.

Consolidated
RECORDING OSCILLOGRAPH



CEC's 5-114 Recording Oscillograph, recording up to 18 traces simultaneously on 7"-wide paper or film, is designed as the ultimate in precision, versatility, and operating convenience and incorporates many features available only through special accessories on many other oscillographs. Recording speeds from ½" to 115" per second, and easily removable feed-and-takeup record magazines of 125, 250, and 600-ft capacity offer an unusually wide application range. Write for Bulletin CEC 1500-X32.

CONSOLIDATED ENGINEERING
Corporation
Analytical Instruments (CEC) *for Science and Industry*
300 N. Sierra Madre Villa, Pasadena 8, California

than ten micromicrofarads per inch. The capacitor described in this paper is to be used in capacitor and dielectric-material studies. It is believed that, in providing a tool for the rapid and accurate measurement of minute capacitance-increments, a wide variety of new radio-frequency measurement techniques will be made possible.

A New Damper Diode

By MAX BAREISS

Chief Design Engineer
Tung-Sol Lamp Works, Inc.
Bloomfield, New Jersey

MOST modern television receivers use the type 6W4GT (or 25W4GT) diode as a damper in the horizontal-deflection circuit. This tube was introduced especially for this application and features a d-c current of 125 ma with a low voltage drop, a high inverse-peak-voltage rating, and a heater-cathode voltage rating of 500 volts.

Recent circuit developments brought on a simplification of the conventional horizontal-deflection circuit, the main objective being a reduction in cost. By using a higher impedance deflection yoke, the costly deflection transformer was eliminated. However, this circuit requires the damper diode to be so connected that its cathode is essentially connected to the plate of the deflection output pentode and is therefore subjected to a high surge voltage between cathode and ground. The plate of the diode in this application receives practically only the d-c plate voltage of the deflection output tube. If the 6W4GT is used in this circuit, it is necessary to use a well-insulated transformer to supply the heater, which is connected to the cathode. In addition to the cost factor, the increase in cathode to ground capacitance is very undesirable.

Therefore, there was a need for producing a tube similar to the 6W4GT but with improved heater-cathode insulation, so that its cathode could be operated with at least 3,000 volts surge above its heater, thus eliminating the need for the special heater transformer.

The highest heater-cathode rat-

Going around in circles?

UNDECIDED on what copper alloy rod to use?

. . . here's a suggestion from CHASE

Which rod is your best choice for fast production . . . for bending and forming . . . for corrosion resistance? Which should you use for hot forging . . . cold working . . . longer tool life? Which gives you strength . . . electrical or thermal conductivity?

For information like this write us today. We'll send you helpful literature on Copper Alloy Rods covering:

- Composition
- Forms and Sizes
- ASTM Specifications
- Relative Machinability
- Tensile and Yield Strengths
- Coefficients of Expansion
- Rockwell Hardness
- Elongation
- Shear Strength
- Electrical and Thermal Conductivity
- Melting Range
- Weldability

SEND FOR COMPLETE INFORMATION
Just check the literature you would like, fill in your name and address and mail coupon.

Chase Brass & Copper Co., Dept. JL 1051
Waterbury 20, Conn.

Please send me: ☐ Free-Cutting Brass, Bronze, Copper Book; ☐ Weight Chart; ☐ Decimal Equivalent Card; ☐ Chart of Free-Cutting Copper Alloys; ☐ Tellurium Copper Book; ☐ Telnic Bronze Book; ☐ Phosnic Bronze Book; ☐ Chase Phosphor Bronze Folder

Name_____

Position_____

Firm_____

Address_____

City_____ State_____

Chase BRASS & COPPER

WATERBURY 20, CONNECTICUT • SUBSIDIARY OF KENNECOTT COPPER CORPORATION

CHASE 75th ANNIVERSARY 1876 1951

• *The Nation's Headquarters for Brass & Copper*

Albany†	Cleveland	Kansas City, Mo.	New York	San Francisco
Atlanta	Dallas	Los Angeles	Philadelphia	Seattle
Baltimore	Denver†	Milwaukee	Pittsburgh	Waterbury
Boston	Detroit	Minneapolis	Providence	
Chicago	Houston†	Newark	Rochester†	(†sales office only)
Cincinnati	Indianapolis	New Orleans	St. Louis	

604B DUPLEX

Enthusiastically acclaimed by engineer and music lover alike, the ALTEC 604B Duplex is still the finest loudspeaker of its type ever produced.

Its smooth frequency response, fine musical qualities and exceptional efficiency make it the choice for professional monitoring, auditioning, and for those whose critical tastes demand the best for home music installations. On one frame, the 604B Duplex incorporates independent high and low frequency reproducing units, designed to function without distortion-producing interaction. Built-in multicellular horn properly loads high frequency unit and permits optimum dispersion of "highs." Frequency response of 30 to 16,000 cps more than spans the FM range.

ASK FOR A DEMONSTRATION
DEALERS EVERYWHERE

ALTEC
LANSING CORPORATION

9356 Santa Monica Blvd., Beverly Hills, Calif.
161 Sixth Avenue, New York 13, New York



FIG. 1—Enlarged drawing shows insulator that separates filament and cathode of new damper diode tube and permits greatly increased heater-to-cathode voltage rating

ings of any commercial tubes made up to now are 500 volts d-c, as shown for the 6W4GT and a few other diodes. These ratings are known to be quite severe. Tests were made on some of these tubes with the wave shapes of the tv receiver, that is, a pulse of 15 percent duration of a frequency of 15,600 cycles, and breakdown occurred at about 2,000 volts after a short time of testing. The possibilities of improvement seemed to be very few. The heater core was pure tungsten, which is the best material known for this purpose. The insulation material was the purest alumina obtainable. Tests to improve its purity by prefiring at even higher temperatures showed no improvement. Increasing the thickness of the insulation coating gave only a small improvement in break-down voltage. The method of applying the coating to the core wire has been optimized by all tube manufacturers during the last 15 years, so that no appreciable gain could be expected by further refinements of coating technique.

Most present heaters are made of an evenly coated core wire folded into a bundle of more or less parallel strands. The coating at the bends chips away at bending and is often replaced with a similar material. It has been found by many tests that a coating thickness of about 0.005 inch gives best results. The number of folds to be used with a given wattage and resistance rating is not as critical as it might appear. One would expect that a larger number of strands would give a lower heater temperature and higher break-down voltage. However, more strands give poorer heat transfer from the inner strands, while the outer strands have more points of contact with

PERMANENT CAREERS

FOR

ELECTRONIC DESIGN ENGINEERS

AND PHYSICISTS

IN LOS ANGELES

with GILFILLAN

- the company that developed and produced GCA, the world-famous Radar equipment for landing aircraft in bad weather
- the company that pioneered development of GCA radar equipment for the USAF, the CAA, the USN and the USMC

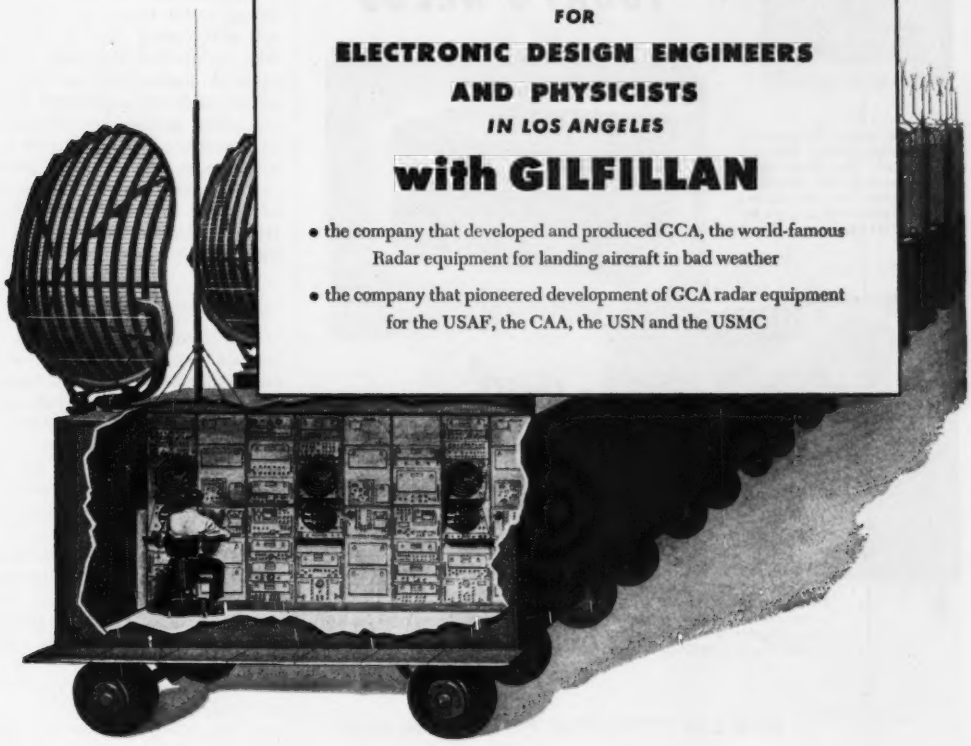

GILFILLAN OFFERS...

- excellent financial opportunity. Because Gilfillan jobs require top specialists, most jobs fall into higher pay categories.
- secure, long-term careers with a progressive 40-year-old company.
- outstanding engineering opportunity, ranging from major systems design to detailed circuit design.
- advancement in both pay and responsibility according to ability.

ELECTRONIC ENGINEERS

Having design experience in one or more of the following:

General radar and computing systems
Servo mechanisms *Indicator systems*
Radar transmitter modulators and high voltage power supply systems
Wide band IF amplifiers and receivers
General pulse circuits

MICRO-WAVE ENGINEERS...Having design experience in transmission line components, micro-wave antennas and feeds.

PHYSICISTS...Having practical experience in analysis of radar and radar control systems.

DEGREE NOT ESSENTIAL. Applicants must be capable of assuming responsibility for design engineering.

ADEQUATE MOVING ALLOWANCE...for family and furniture. Your family will enjoy living in Southern California. Wonderful climate the year around. Adequate housing, unexcelled educational facilities.

Interviews can be arranged at convenient cities

WRITE OR CONTACT MR. HOMER TASKER.

Chief Engineer, Gilfillan Brothers, Dept. E
1815 Venice Blvd., Los Angeles 6, Calif.

ALL REPLIES STRICTLY CONFIDENTIAL

GCA *Gilfillan*
LOS ANGELES, CALIFORNIA

JK CRYSTALS

Supplying TODAY'S NEEDS

Ever see a frequency monitor better than its crystal? The JKO-3 crystal used in this Doolittle monitor is the finest available — as are all JK crystals used everywhere.





. and DESIGNING TOMORROW'S

Opening the doorway to new crystal uses is the newly announced JK G-9. The glass envelope in which the crystal is hermetically sealed provides a sure vacuum for higher Q, resistance is unaffected by supersonic reflections.

EVEN A JK CRYSTAL FOR PASTEURIZING BEER!

Tomorrow's needs for crystals are constantly met today by the James Knights research laboratories. Take the case of a new JK supersonic crystal now in use with a well-known brewery for pasteurizing beer. The JK crystal was designed to kill the bacteria — without heat — simply by vibration! Another dramatic crystal application made possible by James Knights' ability to fill any specific need crystal-wise! Whether for new product design or laboratory research, consult James Knights FIRST.

Write for free catalog—listing all JK crystals, their specifications and schematics.

THE JAMES KNIGHTS COMPANY
SANDWICH 3, ILLINOIS

CRYSTALS FOR THE CRITICAL

No crystal is "outdated" with James Knights. We can furnish yesterday's crystals as well as all present-day applications — PLUS designing new crystals for still unheard of uses.

the cathode sleeve, due to the tighter fit of the heater.

Another common form of heater design is the helical or double helical wire coated after forming. It was hoped that the even spacing between heater and cathode, together with an application of the insulating coating by spraying so as to produce a rough surface with a minimum area of direct contact to the cathode, might give an improvement in break-down voltage. However, tests showed an improvement of only a few hundred volts.

New Heater Design

Therefore, in order to meet the demand for the radical improvement in insulation, it became apparent that a drastic step had to be taken in designing a new heater. A good possibility for a solution appeared to be the use of two insulators in series. A thin-walled alumina tube was tried, which fitted between cathode and heater of a 6W4GT, and a few tubes were made that stood up with 4,000 volts surge between heater and cathode. The difficulty was in a heating time of about 30 seconds which was undesirable not only for the user of the tube, but also it made the tubes very difficult to process during manufacture. Also, the alumina tube was of such wall thickness that there was no hope of producing it in quantity at a reasonable cost.

After many trials, however, a new form of ceramic insulator was designed which overcomes all the difficulties mentioned above. The cooperation of the Stupakoff Ceramics and Mfg. Co. was enlisted in



FIG. 2—Photograph shows completed diode and disassembled component parts

Hear about the revolution in Cleveland?

Rolling out of Cleveland these days is a revolution in armored warfare.

It's the T-41 "Walker Bulldog"—the first U.S. tank to be built *around a gun* instead of an engine.

But the T-41 is involved in a *production* revolution, too! Though assembled in Cleveland, its actual parts and materials come from *two thousand* factories . . . in nearly every state!

This "production team" system is producing miracles. But it produces new timing problems, too. How do you bring in two thousand units . . . at the right time?

These production experts know the answer. When they want parts and materials fast, they use the service that *gets there first.* They use Air Express!

Whatever your business, Air Express speed can make your deadlines, increase your profits. Here's why!

IT'S FASTEST — Air Express gives the fastest, most complete door-to-door pick-up and delivery service in all cities and principal towns, *at no extra cost.*

IT'S MORE CONVENIENT—One call to Air Express Division of the Railway Express Agency arranges everything.

IT'S DEPENDABLE — Air Express provides one-carrier responsibility all the way and gets a *receipt upon delivery.*

IT'S PROFITABLE—Air Express expands profit-making opportunities in distribution and merchandising.

For more facts call Air Express Division of Railway Express Agency.

AIR EXPRESS

GETS THERE FIRST

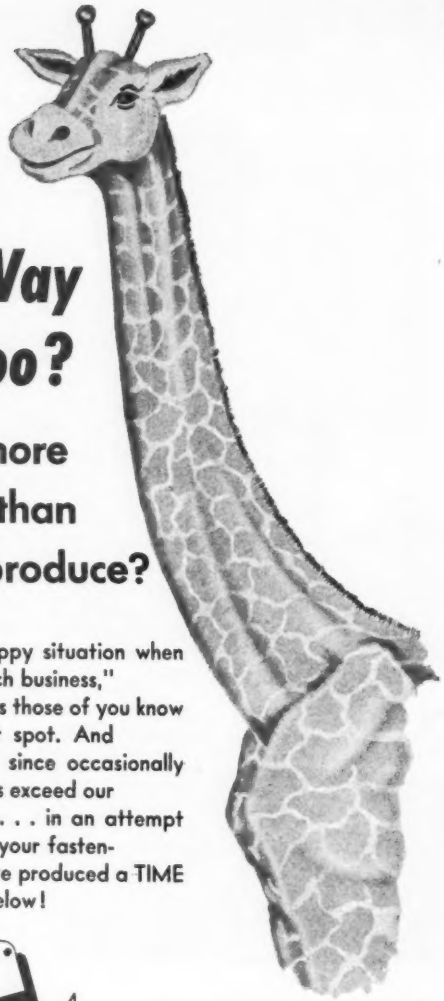

Is YOUR Neck Way Out, Too?

...with more business than you can produce?

Sounds like a happy situation when you say "too much business," but it sure isn't, as those of you know who are on that spot. And we're on it, too, since occasionally your requirements exceed our production. But . . . in an attempt to help you with your fastening problem, we've produced a TIME SAVER, shown below!



FREE—A-N Stainless Fastening Selector

This handy slide-chart instantly identifies A-N Nos. pertaining to stainless steel nuts, screws, bolts, rivets, cotter pins, washers; gives sizes and other data. Write for "Chart 51H" TODAY!

Anti-Corrosive Metal Products Co., inc.

Manufacturers of **STAINLESS STEEL FASTENINGS**

CASTLETON-ON-HUDSON, NEW YORK

this work to assure the practicability of this design. A sketch of it is shown in Fig. 1. It is made of pure alumina by extruding and machining. The outside cross section is shaped so that it fits into a lock-seam cathode sleeve. The outside wall is cut so that most of the heat from the heater can be radiated directly to the cathode sleeve, while keeping the heater from direct contact with it.

The most essential part of the insulator is the center web. Not only does it give the necessary mechanical support, but the resulting short heating time indicates that it speeds up the heating up process by reflecting heat into the cathode sleeve. The heater proper is a multi-stranded coated tungsten wire which is threaded into the two longitudinal holes of the insulator. The insulator is made a little longer than the cathode sleeve as this was found to reduce the danger of breakdown at the ends. The insulator is held in place by a ceramic cement at its lower end, tying it to the heater and heater leads. In this way, heater, insulator and cathode sleeve can expand independent of each other, as required during heating and cooling of the tube.

The heating time of the cathode assembly using this ceramic is 16 sec, which is about normal for tubes not using ceramics as insulators. Thus, its successful operation when used in series heater circuits is assured.

The cathode is designed with such an operating temperature as to give good life without undue processing difficulties. The main problem for production was found to be the control of coating texture. Only tubes with just the proper cathode coating will withstand the high inverse peak voltage tests.

Plate-Cathode Spacing

Having solved the heater insulation problem, it now became clear that the cathode-to-plate spacing of the 6W4GT was insufficient to withstand surge voltages of 4,000 volts with any degree of safety. In order to allow a rating of 4,000 volts maximum design center (RTMA system) for a production type, it was considered necessary to have some experimental tubes, made

SURE

buy SPEER
when you buy RESISTORS

. . . for consistent resistance values

Complete your circuits with R. F. coils... chokes... tubular and disc capacitors... high voltage condensers... capristors by
JEFFERS ELECTRONICS, INC.
DU BOIS, PA.
Another Speer Carbon Co. Subsidiary

SPEER *Resistor* CORP.
A SPEER CARBON COMPANY SUBSIDIARY
ST. MARYS, PENNSYLVANIA

⊕ 7570

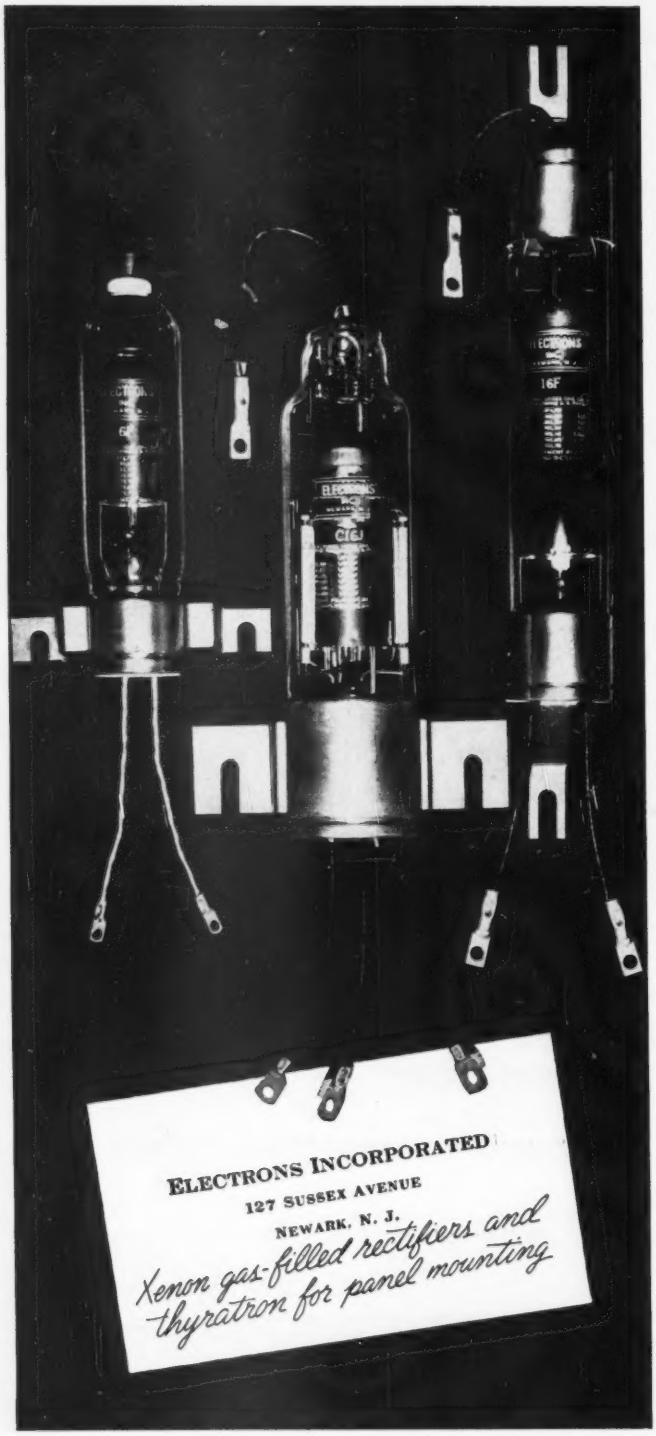

under strict laboratory control, withstand a short test of 6,000 volts.

In order to obtain sufficiently high plate-to-cathode breakdown voltage, the plate-to-cathode spacing was increased slightly over that of the 6W4GT. When this was first considered, the possibility of having to limit the plate current rating because of the increased plate dissipation was anticipated. However, extensive tests have proven that the same current rating as that of the 6W4GT is satisfactory. The plate is made from heavy stock, bright on the inside to hold in the heat of the cathode, carbon coated on the outside to permit maximum plate dissipation. Its shape is similar to that commonly used on the 6W4, except that the ends of the plate barrel are flared out in order to reduce the field strength at those points.

The electrodes are mounted on a conventional flat press stem. The lead wires are so arranged that the cathode lead is brought out on one side of the press, while heater and plate leads emerge on the other side. The base is provided with leakage barriers both inside and outside, which makes it possible to retain the single-ended basing design of the 6W4GT. It is obvious that in connecting a socket for the new type, socket clips adjacent to the cathode connection cannot be used as tie post in the receiver. A picture of a finished tube and its component parts is shown in Fig. 2.

We gratefully acknowledge the cooperation and many valuable suggestions given to us by George Fyler of Motorola, Inc.

Floating-Core Capacitor AFC System

MANY electromechanical automatic frequency systems employ motors, with associated control circuits, and elaborate gear boxes. The system described here eliminates all these, and requires but a small fraction of the driving power usually needed for old systems.

Basis of the system is a metal core which can move freely inside a tube of insulating material, filled with fluid. The core is moved electromagnetically to effect changes in

AN EAR FOR AN ANTENNA

HAROLD E. EDGERTON

The night flight of a bat is controlled by a high-frequency system not unlike radar . . . very simple . . . very effective . . . perfectly adapted to the needs of a bat.

Antennas play a highly important part in radar as well as communications. Like the bat's ear, they should be designed to fit the needs of a particular situation. We at the Workshop have been manufacturing antennas to meet the most exacting electrical and mechanical specifications. Our facilities include electronic test equipment for measuring antenna gain, pattern, and impedance, enabling us to fill nearly any antenna need.

These facilities, manned by our competent technical staff, are constantly at work for government and industry in the solution of difficult antenna problems.

The WORKSHOP ASSOCIATES

DIVISION OF THE GABRIEL COMPANY

Specialists in High-Frequency Antennas

135 CRESCENT ROAD, NEEDHAM HEIGHTS 94, MASS.

Here's why those in the know —demand

CANNON PLUGS

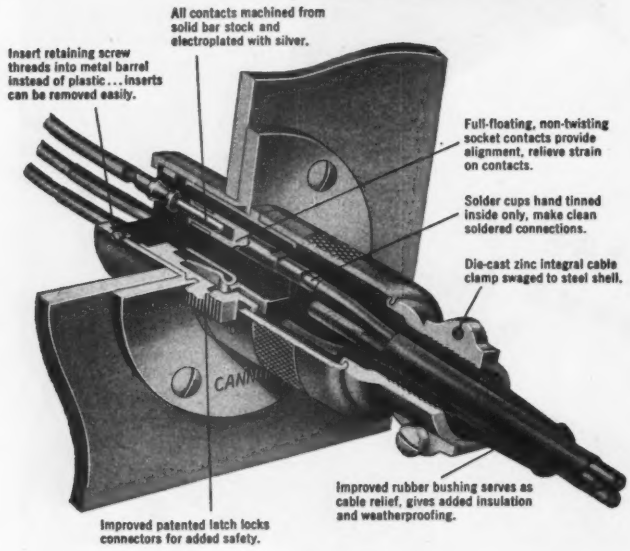
All contacts machined from solid bar stock and electroplated with silver.
Insert retaining screw threads into metal barrel instead of plastic... inserts can be removed easily.
Full-floating, non-twisting socket contacts provide alignment, relieve strain on contacts.
Solder cups hand tinned inside only, make clean soldered connections.
Die-cast zinc integral cable clamp swaged to steel shell.
Improved rubber bushing serves as cable relief, gives added insulation and weatherproofing.
Improved patented latch locks connectors for added safety.

If you talk to sound technicians anywhere you'll find Cannon Type P connectors are the accepted standard of quality... taking a beating day in day out where frequent changes in circuits are required on all kinds of jobs up to 30 amp. capacity.

The close attention to important details called out in the above illustration is typical of the care used in the design and construction of all Cannon Plugs—the world's most complete line.

The above type series is distributed through selected franchise distributors. The line is fully described in the Type P Bulletin. Engineering bulletins describing each of the many basic types of Cannon Plugs will be sent on request.

P-3

P-8

Type P insert arrangements include 2-3-4-5-6 and 8 contacts. All contacts are 30 amp. capacity except those in P-8 layout which are 15 amp. Full scale layouts, front view pin insert, engaging side, shown at right.

CANNON ELECTRIC

Since 1915

CANNON ELECTRIC COMPANY
LOS ANGELES 31, CALIFORNIA

Factories in Los Angeles, Toronto, New Haven. Representatives in principal cities. Address inquiries to Cannon Electric Company, Department J-120, P. O. Box 75, Lincoln Heights Station, Los Angeles 31, California.



FIG. 1—Circuit of control for floating-capacitor for automatic electromechanical frequency control system

capacitance. The fluid damps the movement of the core and the floating action reduces the influence of gravity and extraneous mechanical vibrations.

Figure 1 shows the circuit used in conjunction with the floating-core capacitor afc system. When there is no correction signal at A or B, V_1 and V_2 are just cut off, the coils L_1 and L_2 are not energized, and the core remains at rest. In case of a frequency deviation, and depending on the sign of the deviation, one of the tubes will draw current through the action of a discriminator. Thus one of the coils will be energized and the position of the core is varied until the two frequencies to be compared are synchronized.

According to the original article describing this development (*Communication News*, p 112, Dec. 1950) the advantages of this system are as follows: (1) Absence of initial friction results in a high sensitivity. (2) The mass of the floating body is small so that hunting will not occur. (3) The speed of control is proportional to the frequency deviations. (4) The large gear box necessary in conjunction with alternative methods is replaced by fluid damping. (5) The operation of the floating core is not influenced by mechanical vibrations. (6) Small dimensions and weight. (7) The electrical circuit required for driving the core can be kept small.

Disadvantages include: (1) Leakage or evaporation of the fluid may occur which causes the formation of air bubbles. (2) After prolonged operation the fluid may become polluted, which might result in sticking of the floating body. (3) Special care must be taken during manufacture of the floating-core device.

Experimental units have been

PROBLEM:

How to Get Higher Performance and Longer Wearing Qualities in Contact Assemblies

GENERAL PLATE:

Meets the Specified Requirements with TOP-LAY ...A Composite Metal Combination

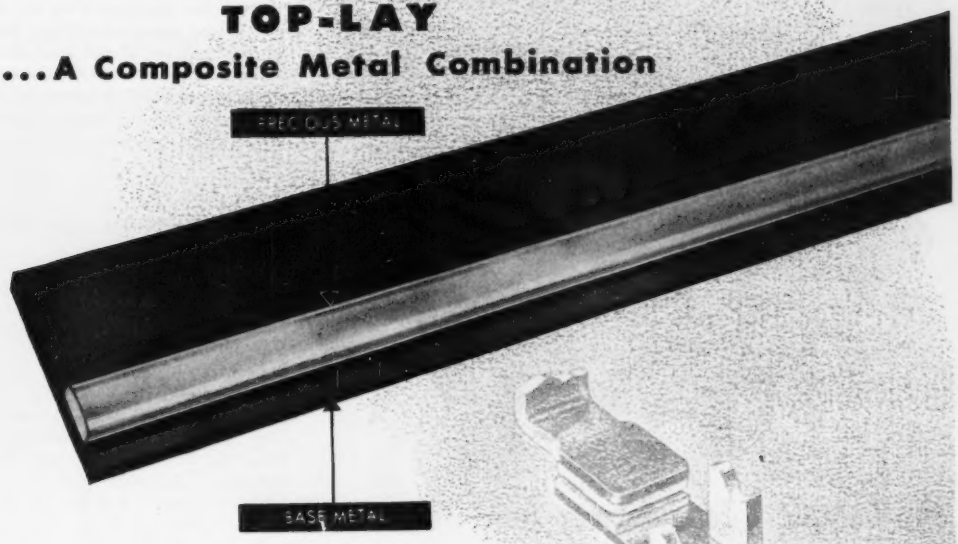

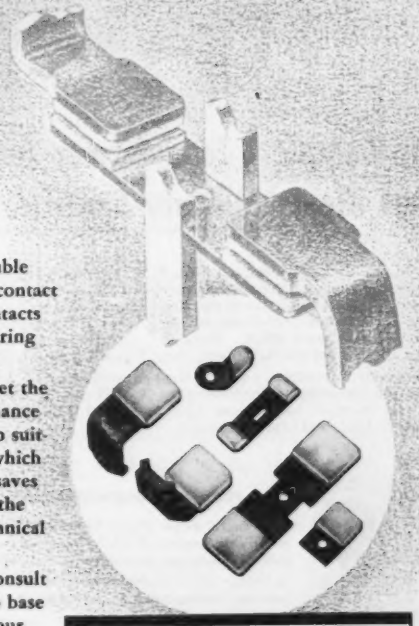

Manufacturers of electric motor starters had frequent trouble with contact assemblies which were made by brazing the contact to the base metal carrier. This method results in annealed contacts and carriers which in turn means lack of strength, poor wearing qualities and short contact life.

General Plate's Top-Lay contacts and contact material meet the engineering specifications by providing the higher performance necessary. Made by cladding silver or precious metal strip to suitable base metal, Top-Lay is cold worked by profile rolling which gives it a hard, long-wearing surface. In addition, Top-Lay saves on fabrication costs as it is easily blanked and formed to the required shape. (For information on Top-Lay write for Technical Data Bulletin #714.)

No matter what your metal problem, it will pay you to consult General Plate. Their vast experience in cladding precious to base metals, or base to base metal combinations can overcome your problems . . . often reduce costs as well.

General Plate Products include . . . Precious metals clad to base metals, Base metals clad to base metals, Silver Solders, Composite contacts, buttons and rivets, Platinum fabrication and refining, Age-hardenable #720 Manganese Alloy.

Have You a Composite Metal Problem? General Plate can solve it for you

GENERAL PLATE
Division of Metals & Controls Corporation
310 FOREST STREET, ATTLEBORO, MASS.

the Complete Transformer line that Meets Military Specifications

If you require fully approved MIL-T-27 Transformers and Filter Reactors for prototype models, pilot runs or special applications, and need them in a hurry —call your electronic parts distributor for *quick service* on CHICAGO Hermetically-Sealed units. Chances are he'll have them in stock—and you'll save valuable time and effort. There's a *complete* range of CHICAGO MIL-T-27 Transformers available: *Power, Bias, Filament, Filter, Audio.*

CHICAGO Hermetically-Sealed Transformers are the world's toughest units, preferred by engineers for those rugged applications. These stock transformers may be incorporated in your equipment with full assurance that they meet *complete* MIL-T-27 specifications.



SEND FOR "NEW EQUIPMENT" TRANSFORMER CATALOG

Have the full details at your fingertips on CHICAGO'S *New Equipment Line*—covering all MIL-T-27 units as well as famous Sealed-in-Steel transformers engineered for every application and geared to today's circuit requirements. Write for your free copy of this important catalog today, or get it from your distributor.

CHICAGO TRANSFORMER

DIVISION OF ESSEX WIRE CORPORATION

3501 ADDISON STREET • CHICAGO 18, ILLINOIS

manufactured by the Philips Telecommunication Industries laboratories, of Hilversum, Holland, and found to fulfill the characteristics expected of them. One model provides a change in capacitance per electrode of 10 to 15 μμf. Special attention has been paid to the selection of just the right fluid for the device, and experimental and theoretical analyses of the mechanical aspects of the floating core have been performed. A complete description of the development is presented in the above reference.

Barium Titanate Accelerometer

ALTHOUGH piezoelectric crystals have been used in the past as sensing elements in mechanical shock experiments, practical difficulties have prevented their wide adoption. However, recent developments in the field of ceramics have made available piezoelectric materials that are both sensitive and easily fabricated. One of these, barium titanate ($BaTiO_3$), is used in the National Bureau of Standard's piezoelectric compressive acceleration pickup.

Physical Characteristics

The pickup is composed of a ceramic disk ☆ inch thick and ⅜ inch in diameter, stacked between a suitable base and a block of metal used for mass-loading the disk. The com-

Photograph shows barium titanate accelerometer connected to magnetic vibrator

How to **PACK** a delicate product for **SHIPMENT ANYWHERE**

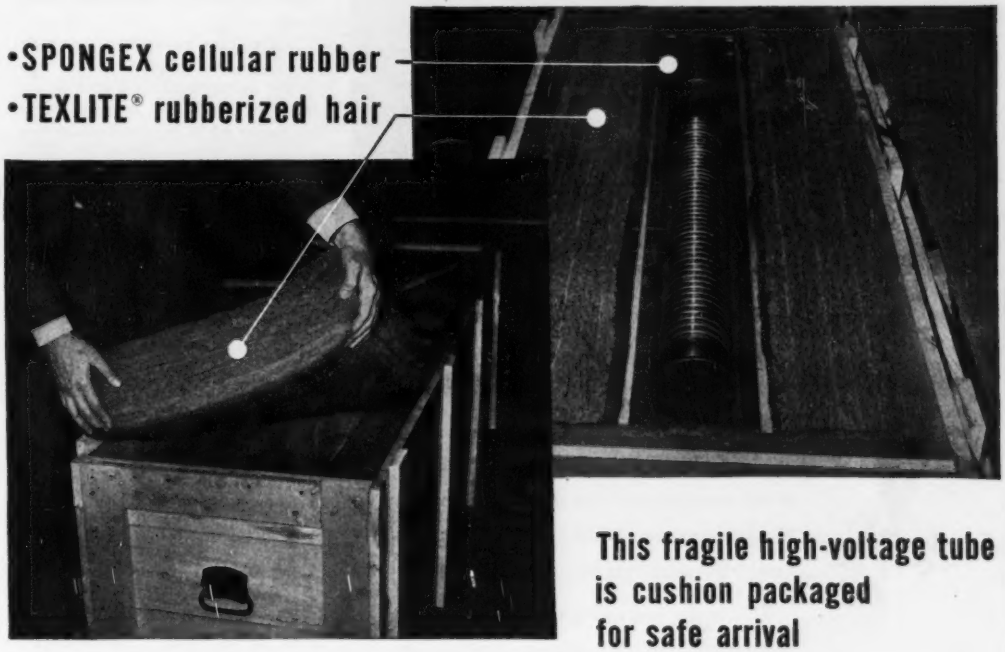

This fragile high-voltage tube is cushion packaged for safe arrival

Photographs courtesy of High Voltage Engineering Corporation.

The last nail in place and this high-voltage tube is ready for shipment anywhere. On arrival, it will do the job it was built to do. It's packaged to take the bangs.

After analyzing its needs, this fragile tube was packed in two outstanding cushioning materials—Spongex cellular rubber, and Texlite rubberized hair.

If breakage in transit is eating into profits, consult with our Packaging Division. They are equipped to analyze and prescribe the requirements of your product for safe arrival anywhere—whether shipped by land, sea or air.

For better package cushioning use

SPONGEX PRODUCTS

Spongex products available for protective packaging

- **TEXLITE** rubberized hair and/or wool
- **SPONGEX** cellular rubber
- **TEXFOAM** latex foam rubber

THE SPONGE RUBBER PRODUCTS COMPANY 449 DERBY PLACE, SHELTON, CONNECTICUT

plete unit weighs less than $\frac{1}{10}$ ounce. As a result of the stacking any acceleration imparted to the base produces a proportionate change in pressure on the piezoelectric disk tightly confined by the mass-loading block.

The voltage generated is proportional to the acceleration of the device being measured and is independent of its characteristic frequency up to the mechanical resonance of the accelerometer. This resonance has been extended to above 20,000 cps by using a small and rather monolithic structure. As a voltage source this particular pickup has an almost purely capacitive internal impedance of about 500 $\mu\mu$f and a sensitivity of approximately 2 millivolts per g.

Calibration measurements indicate that the accelerometer has a response flat within 20 percent over the range 50 to 6,000 cps, and rising to a slight peak between 10,000 and 18,000 cps. The peak appears due to calibration difficulties rather than to the property of the accelerometer.

MACHINE MAPS THYROID GLANDS

Pictures of thyroid glands may be made automatically on living patients by means of the gamma-ray sensitive instrument shown. X-ray instruments have thus far been unable to accomplish this task. The machine automatically traces the patient's thyroid on a piece of drawing paper. The instrument is shown in use on a simulated patient in a UCLA laboratory

planting trees with tractors to make fibres for industry

With this MOSINEE Tree Planter, 1500 or more seedlings can be planted per hour! It *completes* the planting operation...even tamps the seedlings into the ground.

This is the beginning of a 30 to 40-year cycle during which seedlings grow to matured trees, ready for harvesting. They then will provide the kind of fibres needed for many products of industry.

From seedlings to technically controlled industrial paper, MOSINEE safeguards every step in the process of making MOSINEE fibres that work for Industry.

MOSINEE PAPER MILLS CO., Mosinee, Wis.

MOSINEE
makes fibres work for industry

GET Sound QUALITY

with Sangamo Electrolytic Capacitors

There's a type for every application...

You give *sound* quality and long life to your audio equipment—tape recorders, amplifiers, intercoms, etc.—when you specify Sangamo Electrolytic Capacitors as standard components. Sangamo Electrolytics are manufactured under carefully controlled conditions for protection against source contamination and to assure corrosion-free elements.

There's a type to meet your exact needs—a few are shown at right. Write for full information.



Type MT

These wire lead dry electrolytics are easy to mount. Their small size makes them ideal for application in tight spots. Type MT maintains uniform capacity when subjected to heat and high ripple currents.

Type PL

These "twist-lock" electrolytics give long life and dependable performance at 85° C under conditions of extreme ripple currents and high surge voltages. Twist-prong tabs provide for washer or direct chassis mounting.

Type TS

Sangamo octal base electrolytics are the right choice for all applications where quick capacitor changes are required. Aluminum containers cannot contact mounting surface and the base pins are nickel plated to insure good contact.

Your Assurance of Dependable Performance

SANGAMO ELECTRIC COMPANY

SPRINGFIELD, ILLINOIS

IN CANADA: SANGAMO COMPANY LIMITED, LEASIDE, ONTARIO

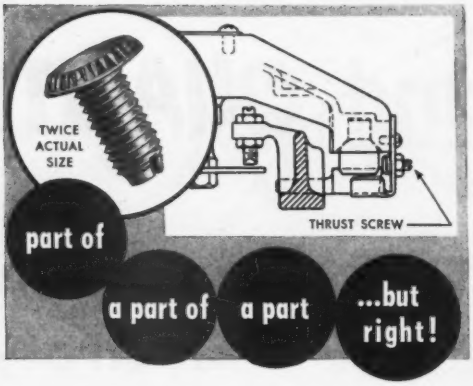

This Progressive-made fastener is one of the many precision parts in the Toledo Scale Company's Guardian Duplex scale. It is used as a thrust screw in the main lever assembly for making fine adjustments.

Hardly a major part, but still it must be right. "Honest Weight" is Toledo's business and precision is required right down to the smallest component.

Manufacturing precision fasteners is Progressive's business, as leading companies well know. If you need a special fastener manufactured in quantity to exact specifications, see Progressive.



Other typical PROGRESSIVE *"Specials"*



QUALITY PROMCO BRAND

THE PROGRESSIVE MANUFACTURING COMPANY

50 NORWOOD ST., TORRINGTON, CONN.

SALES OFFICES: SAN FRANCISCO, LOS ANGELES, PORTLAND, DETROIT, PHILADELPHIA, CLEVELAND, SEATTLE, BOSTON, SYRACUSE, ST. LOUIS, CHICAGO.

NEW PRODUCTS

(continued from p 146)

double-throw, rated at 10 amperes, 28 volts d-c. Designed to rigid MIL specifications, the units exceed many of the requirements of temperature, vibration and shock tests.



Selenium Rectifiers

INTERNATIONAL RECTIFIER CORP., 6809 S. Victoria Ave., Los Angeles 43, Calif., has developed a new line of hermetically sealed selenium rectifiers assembled in half-wave cartridges with current ratings from 300 μa up to 60 ma. The individual cartridges accommodate up to 400 cell elements with d-c voltage ratings up to 8,000 volts per cartridge. The units are capable of withstanding 100-g acceleration, and are ideally suited for airborne applications. They can be operated in ambient temperatures ranging up to 100 C.



H-V Transformer

RADIO CORP., OF AMERICA, Harrison, N. J. Type 228T1 horizontal-deflection-output and high-voltage transformer was designed for use with electrostatic-focus picture tubes having a horizontal deflection angle of approximately 66 deg, and operating at voltages as high as 16

They have a right to be proud!

These men have realized ambitions that they've carried with them since they began to build engineering careers. They're Boeing men. And that sets them a little apart. For Boeing is a renowned name in aviation. It stands for bold pioneering in aeronautical research and design . . . for leadership in the building of advanced commercial and military airplanes . . . and for trail blazing in the development of guided missiles, jet propulsion and other fields.

Today, there are many grand career opportunities at Boeing for high-caliber men who can measure up. Needed in Seattle are experienced and junior aeronautical, mechanical, electrical, electronics, civil, acoustical and weights engineers for design and research; servo-mechanism designers and analysts; and physicists and mathematicians with advanced degrees.

It's important, long-range work. The world's hottest jet bombers . . . the fascinating new field of guided missiles . . . the revolutionary new Boeing gas turbine engine—these are among the challenging assignments awaiting you. Here are outstanding research facilities and the men who have built Boeing to world eminence.

1 More housing is available in Seattle than in most other major industrial centers.

2 Salaries are good—and they grow with you.

3 The Northwest is a sportsman's paradise—great fishing, hunting, sailing, and skiing country—with temperate climate all year.

4 Moving and travel expense allowance is provided.

Or if you prefer the Midwest, *there are similar openings available at the Boeing Wichita, Kansas, Plant. Inquiries indicating a preference for Wichita assignment will be referred to the Wichita Division.*

Write today to the address below or use the convenient coupon.

JOHN C. SANDERS, Staff Engineer—Personnel
Dept. H-10
Boeing Airplane Company, Seattle 14, Wash.

Engineering opportunities at Boeing interest me. Please send me further information.

Name _____

Address _____

City and State _____

BOEING

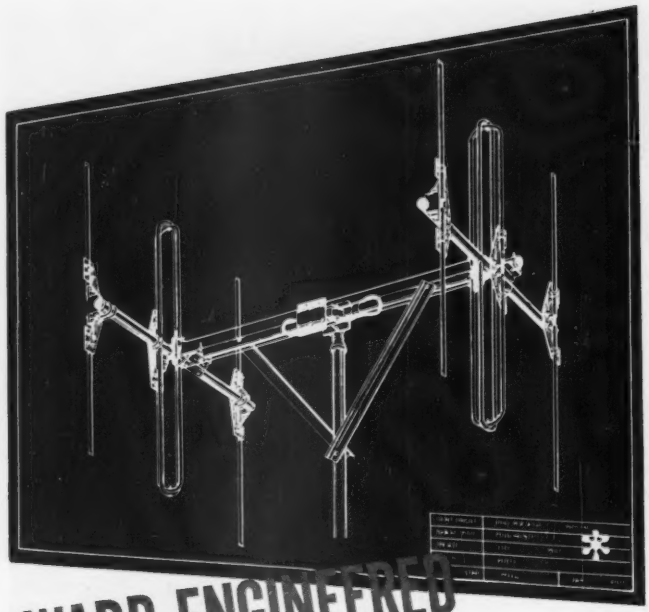

WARD ENGINEERED

means nearly a quarter century of specialized skill and know-how applied to your antenna problems

Knowledge gained through engineering and developing tens of thousands of antenna problems is your short-cut to better, more dependable mechanical and electrical designs. Ward is the oldest and largest exclusive manufacturer of antennas. Whether you require one or a hundred thousand units, Ward's complete engineering and manufacturing facilities are at your service. Write, wire or telephone.

* Illustrating Ward's SPP-127 directional transmitting and receiving antenna, designed for point to point communications, and built to go up and stay up.

THE WARD PRODUCTS CORP.
Division of The Gabriel Co.
1523 EAST 45TH ST. • CLEVELAND 3, OHIO

IN CANADA:
ATLAS RADIO CORP. LTD.,
Toronto, Ontario

only WARD OFFERS ONE SOURCE FOR SPECIAL COMMUNICATION TV-FM-AM and AUTOMOTIVE ANTENNAS

kv. The horizontal-deflection-output tube may be either a 6BQ6-GT or a 6AU5-GT. When the former is used a B-supply of 280 v is needed; for the latter, a B-supply of 300 v. Utilizing a ferrite core for high efficiency, light weight and compactness, the unit has two separate filament windings. One provides power to the filament of the rectifier tube for the h-v supply; the other, for the focusing-voltage supply.



Ultrasonic Generator

ULTRASONIC ENGINEERING CO., P. O. Box 46, Maywood, Ill. Model 800 industrial and pathological laboratory ultrasonic generator contains a v-t oscillator which, at full power, will develop in the neighborhood of 500 watts of r-f energy at 800 kc. This power is fed by means of a coax cable to the crystal transducer mounted in the aluminum vessel shown at right. Output power of the generator is continuously variable from zero to full by means of the knob at the lower left of the panel. Coils of the oscillator are of the plug-in type, thus permitting coupling to transducers of different frequencies. Crystals are available at frequencies from 450 to 2,000 kc.

Test Prod Adaptors

UNITED TECHNICAL LABORATORIES, Morristown, N. J. A new test prod adaptor is specially designed for

Do You Know?

DO YOU KNOW THAT AIRCRAFT FLIGHT RECORDERS WHICH CHART A CONTINUOUS LOG OF VARIABLE CONDITIONS DEPEND FOR THEIR ACCURATE TIMING ON **TELECHRON** SYNCHRONOUS MOTORS?

DO YOU KNOW THAT THE ROTOR SHAFTS OF MANY **TELECHRON** SYNCHRONOUS TIMING MOTORS HAVE MADE MORE THAN **30 BILLION** CONTINUOUS REVOLUTIONS AND THAT THE MOTORS ARE STILL OPERATING AS ACCURATELY AND DEPENDABLY AS WHEN THEY WERE NEW?

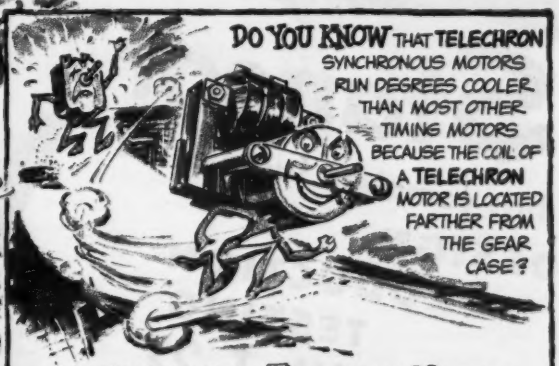

DO YOU KNOW THAT **TELECHRON** SYNCHRONOUS MOTORS RUN DEGREES COOLER THAN MOST OTHER TIMING MOTORS BECAUSE THE COIL OF A **TELECHRON** MOTOR IS LOCATED FARTHER FROM THE GEAR CASE?

NEED SKILLED HELP ON "EMERGENCY" CONTRACTS? TELECHRON INC. HAS AVAILABLE CAPACITY FOR DEFENSE ORDERS. NEW BROCHURE, "PRECISION ON THE PRODUCTION LINE," GIVES A QUICK PICTURE OF PERSONNEL CAPABILITIES AND MASS PRODUCTION FACILITIES. *WRITE FOR YOUR COPY TODAY.*

READ ALL ABOUT TELECHRON MOTORS IN THIS BULLETIN

WRITE FOR BULLETIN IS-110 WHICH CONTAINS CHARTS, TORQUE RATINGS AND COMPLETE SPECIFICATIONS ON **TELECHRON** SYNCHRONOUS MOTORS FOR USE IN TIMERS, TIME SWITCHES, RECORDING AND CONTROLLING INSTRUMENTS, COST RECORDERS, CYCLE CONTROLLERS, ETC.

TELECHRON DEPARTMENT, GENERAL ELECTRIC COMPANY, 410 UNION ST., ASHLAND, MASS.

Telechron®

ALL TELECHRON TIMING MOTORS ARE

INSTANTLY...CONSTANTLY SYNCHRONOUS

use with standard RTMA test points or the phonograph needle type so that any point in miniaturized or other compact electronic circuits may be conveniently contacted by a self-holding prod. The Klipzon type L Longie adaptor provides a slender, insulated point for reaching into crowded circuits without danger of shorts, shock or accidental disconnect. A unique self-holding point permits measurements with both hands free for circuit adjustment, soldering or other work.



Power Rectifier

SARKES TARZIAN INC., 415 North College Ave., Bloomington, Ind., has announced availability of a recently developed selenium rectifier that is capable of operating without derating in ambient temperatures of 90 C. The new power rectifier illustrated is guaranteed for a minimum of 1,000 hours of continuous operation.



Identification Tape

LABELON TAPE CO., 100 Anderson Ave., Rochester 7, N. Y. Made of two layers of acetate with a white waxy substance sandwiched in be-

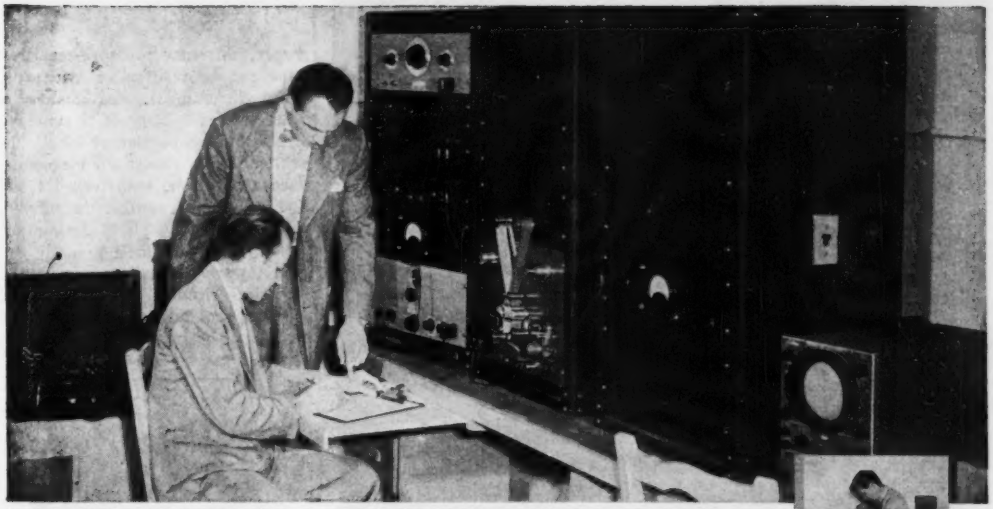

SOUND RECORDING TAPE engineers at work in the 3M Hollywood Engineering Laboratory.

Ask one of our 3M Service Engineers

FOR A "SOUND SOLUTION" TO ANY TAPE RECORDING PROBLEM

Eighty 3M engineers in the field—backed by twenty technical experts in the 3M laboratories—stand ready to help you with any tape recording problem.

This 3M Service Organization works daily with radio station engineers, electronic engineers and industries using tape recordings in process or quality control. The same electronic and engineering know-how that produced and perfected the famous "SCOTCH" Sound Recording Tape offers you technical assistance on every phase of sound recording.

If you are using sound recording equipment in your radio station, laboratory or business, call upon the 3M Service Representative in your community. He'll be glad to help you make better recordings—more easily. If you are contemplating the use of tape recordings, he'll be glad to analyze your requirements and aid in the selection of equipment.

Call him today—or, if you prefer, write directly to Minnesota Mining & Mfg. Co., Dept. AE-101, St. Paul 6, Minn. No obligation, of course.

"SCOTCH" Sound Recording Tape gives you these EXTRA construction features . . .

- **REEL TO REEL UNIFORMITY**—controlled coating assures consistent output.
- **THINNER CONSTRUCTION**—resists temperature and humidity changes.
- **NO CURLING OR CUPPING**—tape lies flat on recording head unaffected by humidity.
- **UNIFORM TAPE SURFACE**—no "dropouts" on recordings due to surface irregularities.
- **LONGER TAPE LIFE**—special lubricating process reduces friction.
- **GREATER SENSITIVITY**—more output on your present machine setting.

The term "SCOTCH" and the plaid design are registered trade-marks for Sound Recording Tape made in U.S.A. by MINNESOTA MINING & MFG. CO., St. Paul 6, Minn.—also makers of "Scotch" Brand Pressure-sensitive Tapes, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-slip Surfacing, "3M" Abrasives, "3M" Adhesives. General Export: Minn. Mining & Mfg. Co., International Division, 270 Park Avenue, New York 17, N. Y. In Canada: Minn. Mining & Mfg. of Canada, Ltd., London, Canada.

PHALO

"Current's Favorite Conductor"

Provides Versatile Quality for Mobile Communication!

Year after year, hundreds of thousands of feet of shielded connecting cables bearing the famous "Current's Favorite Conductor" trademark, find their way into the nation's best mobile radio and telephone communication systems.

Phalo builds shielded cables that are as versatile as the systems they connect . . . whatever the purpose, you couldn't find a better quality answer.

Next time specifications call for shielded communication cable, call for PHALO and be certain!

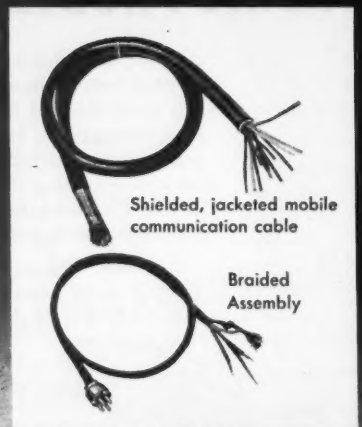

PHALO Plastics Corporation

Manufacturers of Thermoplastic Insulated Wire, Cables, Cord Sets and Tubing to Government Specifications

CORNER OF COMMERCIAL STREET, WORCESTER, MASSACHUSETTS

tween, this new pressure-sensitive tape can be written on with any blunt instrument, and makes a water-proof, oil-proof, smudge-proof and acid-resistant label. It will adhere to almost any clean surface and can be transferred from one surface to another repeatedly without leaving a sticky residue or destroying its adhesive qualities. The tape is ideal for identifying electrical circuits or wires pulled through conduits, switches, controls, spare parts, panelboards and the like.



Attenuator Switches

SHALLCROSS MFG. CO., Collingdale, Pa., has introduced a line of attenuator switches including 12 round, single-deck units in one- and two-pole types with up to 60 contact positions and with rotations ranging from 144 to 360 degrees. Average resistance of the silver alloy contacts of 0.003 ohm is maintained throughout a life of upward of a million operations. Typical conservative ratings are 1 ampere at 25 volts; ½ ampere at 50 volts; ¼ ampere at 110 volts, and 0.2 ampere at 220 volts. All are obtainable with or without detent mechanism.

Scintillation Scaler

NUCLEAR RESEARCH AND DEVELOPMENT, INC., 1094 Sutter Ave., St. Louis 5, Missouri. Model S-1001

pulse-forming Network Capacitors are dependable

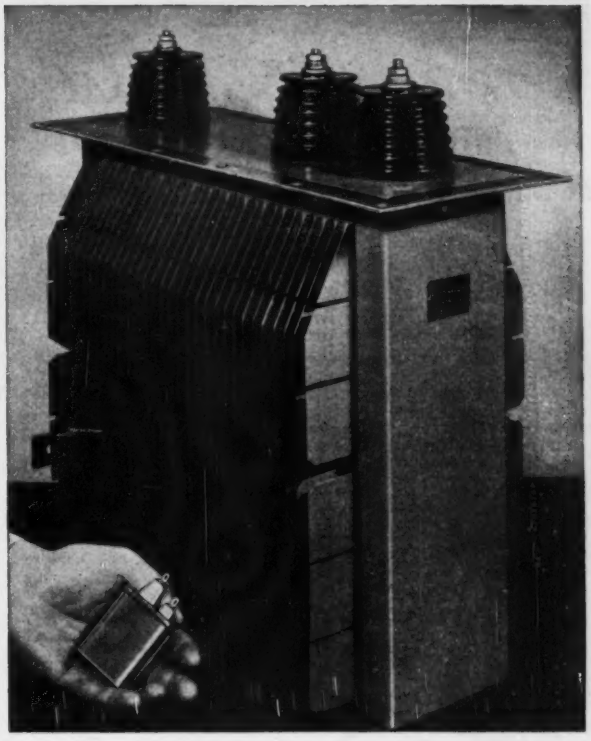

for guided missiles—aircraft—land and sea radar equipments

The keystone to good service on network capacitors is complete information. Your G-E representative has a check-list of twenty-three questions that must be answered to assure you of dependable capacitor performance. And on important propositions, to simplify your design problems, it is highly desirable that a design engineer be called into the discussions as early as possible. Arrangements for such consultations can be made through any Apparatus Sales Office of the General Electric Company.

Whether you expect a service life of 10,000 hours or just 60 seconds, G.E. networks, designed to meet exacting specifications, will give you the reliable performance you require.

Pulse networks are a highly specialized field of capacitor engineering and experience is an important part of proper design work. G.E. has built networks for every type of pulse radar equipment since the inception of radar.

Since 1944, G.E. has been running continuous life tests on many types of networks to obtain more complete research data. These tests are being used to establish life limitations under various conditions of highly critical temperatures and voltages on all types of dielectrics, bushings, materials for coil forms and treating processes. Take advantage of this wealth of information and experience. Your inquiry addressed to Capacitor Sales Division, 42-304, General Electric Company, Pittsfield, Mass. or your nearest Apparatus Sales Office, will receive prompt attention.

General Electric Company, Schenectady 5, N. Y.

You can put your confidence in—

GENERAL ELECTRIC

407-304

Look to Permoflux®
for the NEWEST...FINEST...MOST SENSATIONAL
AUDIO COMPONENTS

Newest!

MINIATURES AND SUBMINIATURES

The MRB-4 is the world's smallest dynamic receiver and microphone. Size: 1" wide x ¾" deep. Maximum power 1.75 m w. Impedance is 11 Ω ± 10%. The impedance variation is essentially constant through the range. The frequency response is from 30 - 4,000 ~. The MRB-4 has a sensitivity of 105 db (re 1,000 ~ 1 m w. The aluminum cone is absolutely moisture proof yet does not lose its sensitivity. The magnet is Alnico V. dynamic type. Uses include—Earphone, Microphone, Speaker, Mike in Transceivers, Small Speaker, Small Pick up.

T1 and T2 Transformers—and Chokes—These sub-miniature units provide power efficiency from 80-90% with high voltage breakdown characteristics and extremely low susceptibility to electrolytic deterioration. Frequency response is ± 2db from 100 to 8000 ~. Impedances up to 200,000 ohms and windings with inductive reactances up to one megohm. Ideal for use with Permoflux microphone-receiver units and headsets.

Model MRB-4

Model T1

Model T2

Finest!

STANDARD HIGH FIDELITY DYNAMIC HEADPHONES

New developments in Permoflux Dynamic Headphone design make possible use of these units in applications heretofore not covered in the electronic field. They include the military as well as broadcasting, television, recording, monitoring audio-metric work and auditory training.

Permoflux Dynamic Headphones are considered the most successful and satisfactory for all audio metric work. They are capable of taking even minute electrical impulses and converting them into sound over a wide frequency range at uniform response and high intensities. Sound reproduction is free from irritating blasts and rattles.

Flat frequency response of from 100 to 7000 ~ is assured in the Permoflux High Fidelity Dynamic Series and up to 4500 ~ in the Standard Series.

DHS-17 with Model No. 1505 Ear Cushion CAA Approved

Most Sensational!

ROYAL EIGHT" Compares with any 12" speaker

This average laboratory response curve of the Permoflux BT-8-1 proves that it compares with the finest speakers regardless of size or price


8T-8-1 Eight-Inch Speaker with the Blue Cone

PERMOFLUX®
"SOUND IN DESIGN"
PERMOFLUX CORPORATION
4910-J W. GRAND AVE., CHICAGO 39, ILL. • 236 VERDUGO RD., GLENDALE 5, CALIFORNIA
Canadian Licensee—Campbell Mfg. Company, Toronto, Canada

scintillation scaler incorporates 3 basic features that are an absolute necessity for successful scintillation counting. (1) a fast linear amplifier with a rise time of 0.25 μsec and a variable amplification from 0 up to 2,000; (2) a true electronic discriminator that accepts pulses from −100 to +50 v; and (3) a well regulated h-v supply that is variable from 500 to 2,000 v and is regulated to 0.005 percent per 1 volt change in line voltage between 95 and 130 v. The scaler portion uses the Higinbotham scale of 128, which incorporates 6SN7 tubes and has a resolving time of 2 μsec. The unit may also be used for Geiger and proportional counting.

New Tetrodes

AMPEREX ELECTRONIC CORP., 25 Washington St., Brooklyn 1, N. Y., has available three new tetrodes. Type AX-9907/6077 is a high-frequency, water-cooled tetrode especially suitable for the final stage of tv transmitters. The tube may be employed up to a maximum frequency of 220 mc, and has a maximum plate dissipation of 3 kw, maximum plate voltage of 5 kv and maximum plate current of 1.1 amperes. Tnis tube is also available in an air-cooled version, type AX9907R/6076. The type AX-9908/6079 is radiation cooled for communications applications. It operates at a maximum frequency of 75 mc and has a maximum plate dissipation of 500 w. Maximum plate voltage is 5,000 v and maximum plate current is 600 ma.



Ferrite Core Antennas

FERROXCUBE CORP. OF AMERICA, Marshall St., North Adams, Mass., are manufacturing magnetic cera-

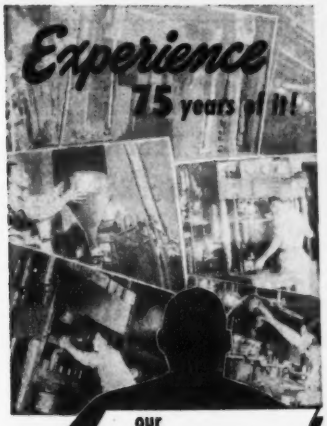

our
Priceless Ingredient
in MOLDED
PLASTICS

Webster defines EXPERIENCE as "Knowledge or special skill resulting from one's continuance in a study or work." We like that definition. It sums up the best we have to offer American Industry.

What does this experience mean to you as a buyer of molded plastics? It is your assurance that the final design is sound . . . that the mold is engineered and built by experts . . . that the molding is done by the best methods and equipment. AUBURN molds all plastic materials and is completely unbiased as to type or method. Finally, it marks AUBURN as a reliable subcontractor.

Reenforced (Fiberglas)

Transfer

Compression

Automatic Rotary

Extrusion


Injection

Sales Engineers

Auburn salesmen are Sales Engineers — not agents — available for consultation with your design engineers. Or, if your design is complete, send us prints for quotation—without obligation.

Auburn Button Works, Inc.
550 McMaster Street, Auburn, New York
Founded in 1876 Telephone 1511

3 & 5 Speed SYNCHRONOUS MOTORS

ESPECIALLY SUITED TO LABORATORY USE

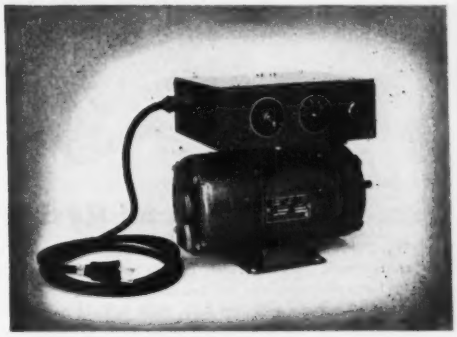

Laboratories, experimental and testing departments no longer need several motors for supplying different speeds; nor are complicated gear or other drives required.

Elinco can supply multiple-speed motors with which change of speed is practically instantaneous at the flick of a switch; instantly reversible, too, even from forward at one speed to reverse at a different speed.

Now, one unit can do the job of five . . . saving in original equipment investment and changeover time. Especially designed for experimental, servo, electronic power and audio mechanisms, as well as for general laboratory use.

115 Volt 60 Cycle Single-Phase Multiple-Speed Motors

MOTOR	SPEED	NOM. H.P. RATING	FULL LOAD POWER INPUT	START TORQUE INCH LB.	PULL-IN TORQUE INCH LB.	PULL-OUT TORQUE INCH LB.	CAP VALUE MFD.
GH-371 3 Speed	900	1/100	59	.95	.86	.90	5
	1800	1/60	77	.70	1.00	1.05	5
	3600	1/40	123	.50	.90	.90	8
GGH-492* 3 Speed	900	1/50	125	1.70	1.50	1.60	10
	1800	1/30	174	1.35	2.00	2.30	10
	3600	1/20	250	.90	1.50	1.90	16
GGH-449 5 Speed	600	1/200	64	.50	.65	.65	6
	900	1/100	59	.95	.86	.90	5
	1200	1/75	61	.70	1.25	1.35	6
	1800	1/60	77	.70	1.00	1.05	5
	3600	1/40	123	.50	.90	.90	8

*This motor must be externally cooled if used for continuous duty.
Models GH 371 and GGH 449 available with or without control box; Model GGH 492 motor only.

When ordering or requesting information on other models, a detailed description of your requirements will assist us in sending proper information promptly.

ELECTRIC INDICATOR CO.
PARKER AVENUE STAMFORD, CONN.

ELINCO
DESIGNERS AND MANUFACTURERS OF

- GOVERNOR-CONTROLLED
- SELF-SYNCHRONOUS
- DRAG-CUP
- DC & AC TACHOMETER
- SHUNT
- SERIES
- COMPOUND
- PERMANENT-MAGNET
- SPLIT-FIELD
- SEPARATELY EXCITED
- UNIVERSAL
- INDUCTION
- RELUCTANCE
- HYSTERESIS
- DC & AC SERVO
- REELMOTORS
- TOTALLY ENCLOSED
- AC DYNAMICALLY BRAKED
- STABILIZED HYSTERESIS

MOTORS AND GENERATORS

It's rpc

for

Precision Wire Wound Resistors

RPC Resistors are high quality units designed to meet the most stringent requirements. They are widely used in large quantities by laboratories, instrument manufacturers, and the Armed Forces and their suppliers. Sizes available are in accordance with JAN-R-93, RB10 to RB14 and RB51. Terminals may be wire leads if required. Resistance tolerance to 0.02% is available. All resistors are treated against humidity and fungus growth.

Write today for catalog.

Also manufacturers of High Voltage Resistors, High Megohm Resistors and High Frequency Resistors.

rpc RESISTANCE PRODUCTS CO.
714 RACE STREET • HARRISBURG 2, PA.

ZOPHAR

WAXES

COMPOUNDS

Anti-Corona high heat-resistant compounds for Fly Back Transformers.

Waxes and compounds from 100° F to 285° F Melting Points for electrical, radio, television, and electronic components of all types.

Pioneers in fungus-resistant waxes.

Our efficient and experienced laboratory staff is at your service.

105 YEARS

ZOPHAR MILLS, INC.
112-130 26th Street,
Brooklyn 32, N. Y.

PHYSICISTS
And
SENIOR RESEARCH ENGINEERS

• • •

POSITIONS NOW OPEN

• • •

Senior Engineers and Physicists having outstanding academic background and experience in the fields of:

- Microwave Techniques
- Moving Target Indication
- Servomechanisms
- Applied Physics
- Gyroscopic Equipment
- Optical Equipment
- Computers
- Pulse Techniques
- Radar
- Fire Control
- Circuit Analysis
- Autopilot Design
- Applied Mathematics
- Electronic Subminiaturization
- Instrument Design
- Automatic Production Equipment
- Test Equipment
- Electronic Design
- Flight Test Instrumentation

are offered excellent working conditions and opportunities for advancement in our Aerophysics Laboratory. Salaries are commensurate with ability, experience and background. Send information as to age, education, experience and work preference to:

NORTH AMERICAN AVIATION, INC.
Aerophysics Laboratory
Box No. K-4, 12214 S. Lakewood Blvd.
DOWNEY, CALIFORNIA

mic antenna rods in diameters from ¼ in. to 1 in. and in lengths up to 8 in. With single-layer windings of insulated wire these rod assemblies are used on portable radios in place of collapsible rod antennas or built-in loops. Because of their unusually high Q, set sensitivity is considerably increased over the usual air loop. Because of the compactness of ferrite core antennas, they may be mounted almost anywhere in set cabinets using a minimum of space.



Mobile Receiver

SONAR RADIO CORP., 59 Myrtle Ave., Brooklyn 1, N. Y. Model SR-9 mobile receiver is a 9-tube superhet unit designed for dependable 2-way operation in civil-defense and other medium-range radio communications. Power output is 3 watts; output impedance, 4 to 8 ohms; antenna input impedance, 35 to 75 ohms; overall sensitivity, better than 0.5 μv. Weight is approximately 3 pounds, and price, $72.45.



Electronic Counter

BERKELEY SCIENTIFIC CORP., 2200 Wright Ave., Richmond, Calif. Model 10 electronic counter has been developed to satisfy the need for a rugged industrial type counter

We may KNOCK YOUR HAT OFF

with our Quote on SAVINGS and DELIVERY

If you're a Big User of Tiny Parts Such as These!

Sound like exaggeration? Not when you know that the electronic tube industry looks to The Bead Chain Mfg. Co. for its millions of radio tube pins. Or, that builders of electrical apparatus turn to us for the contact pins, terminals, jacks and sleeves required in tremendous quantities.

For pin-like parts, and variations of bushings needed for *mechanical* purposes, as well, we are the money-saving supplier to scores of famous makers of products like toys, business machines, appliances, ventilators.

You save . . . if we can make it! We can almost say with certainty that if we can make that part (*up to ¼" dia. and to 1½" length*) you use in large quantities, we can show you a big saving. And, assure on-time deliveries to meet your defense work schedules! We have something unique back of that claim . . .

Nobody has What We Have! To be able to produce our famous Bead Chain to sell for pennies per yard, we had to develop *our own* equipment and method . . . our Multi-Swage Method.

Instead of turning and drilling parts from solid rod, or stamping and forming them, our Multi-Swage Method automatically swages them from flat stock into precision tubular forms, with tight seams. By increasing the production rate many times and eliminating scrap, this saves a large part of the cost by other methods.

What We Can Make. Parts may be beaded, grooved, shouldered, and of most any metal. Generally, should not exceed ¼" dia. or 1½" length. Catalog shows many *Standard Items* available in small quantity. *Special Designs* must usually be ordered in lots of a half-million or more, unless they are frequently reordered.

Get Cost Comparison. Send blueprint or sample and quantity requirements. We will return an eye-opener on economy.

Low Cost Way to Get Parts for Many Mechanical Uses

Shaft bearings—Foot or rest pins —Spacers between parts—Shoulder pins for permanent attachments.



Let **BEAD CHAIN** *make it by*

MULTI-SWAGE METHOD

I want this Catalog — Data Folder

The Bead Chain Mfg. Co.
88 Mountain Grove St., Bridgeport, Conn.

Name, title .....

Company .....

Address .....

ILLINOIS ELECTROLYTIC CAPACITORS

of "Time Tested Quality"

FOR EVERY ELECTRONIC APPLICATION

Seventeen years of production experience, making millions of quality capacitors, has created this complete, outstanding ILLINOIS CONDENSER line. There's a full Jobber line of capacitors for every TV and radio replacement purpose: capacitors for the entire electronics industry—capacitors that meet the highest standards of dependability.

This engineering and manufacturing experience enables ILLINOIS CONDENSER COMPANY to meet every demand for new capacitor types, whether for peace or defense applications.

Write for catalog or tell us your needs. There is an ILLINOIS ELECTROLYTIC CAPACITOR exactly suited for the job—a capacitor of "Time Tested Quality."

ILLINOIS CONDENSER CO.
1616 NORTH THROOP STREET • CHICAGO 22, ILL.

EXPORT DIVISION: 15 Moore St., New York 4, N. Y. U. S. A.
CABLE ADDRESS: "MINTHORNE"

NUMBERALL

CUTS THE COST OF STAMPING NUMBERS

NUMBERING and LETTERING PRESS

Model 40B

Mono Wheel—Automatic Spacer. Designed for impressing Letters and Numbers in all kinds of flat metal parts. Stamps plates up to 5" w. x 6" l. Carriage table advances one space with each impression of the dial, like a typewriter, doing rapid work, even spacing and perfect alignment. Different size dials are interchangeable. Direct sight gauge facilitates stamping in the proper space. Bulletin E40B.

NAME PLATE DETAIL PRESS

Model 48

Fully Automatic Spacer. For stamping figures and letters into all kinds of name plates, key tags, dog collar plates, and other tags. Plates up to 2 x 3½" can be stamped. The characters are carefully engraved and make clear cut impressions. Character sizes: 1/16", 3/32", 1/8", 9/64" and 5/32". Weight: 19 lbs. net. Bulletin E-48.

NUMBERING & LETTERING DETAIL PRESS



Model 141, hand operated; 142, air operated; 143, motorized. Spacing adjustments and table release located in front of press; easily accessible. Automatic spacer can be regulated up to ¼" and allows fitting characters into panels of name plates. Smooth, powerful stamping pressure is applied by eccentric action through lever to head. Depth of impression readily adjusted with knurled nut under table. Simple changing of dial for different size characters by loosening only one screw. Dials have 42 characters: sizes 1/16", 3/32, 1/8, 3/16, or ¼". Bulletin E-141.

NUMBERALL STAMP & TOOL CO.
HUGUENOT PARK STATEN ISLAND 12, N. Y.

IT'S ALLIED FOR RCA

Electron Tubes for Industry

ALL TYPES IN STOCK

- Vacuum Power
- Thyratrons
- Vacuum & Gas. Rect.
- Ignitrons
- Cold-Cathode
- Phototubes
- Oscillograph Tubes
- Camera Tubes
- Monoscopes
- Special Types

FREE Interchangeability Directory

Valuable guide to selection of proper RCA tube type replacements. Lists 1600 tuLe types. Write for FREE RCA Guide No. 37-046.

Quick, Expert Service on RCA Tubes

ALLIED maintains in stock *for quick shipment*, the world's largest distributor inventory of RCA special-purpose tubes—*of all types*. We specialize in supplying the needs of industrial, broadcast, governmental and other users. To save time, effort and money—phone, wire or write to ALLIED. Fill *all* your needs quickly from the *complete, dependable* electronic supply source.

See Your 1952 ALLIED Catalog

Refer to your ALLIED Catalog for *all* electronic supplies—parts, tubes, test instruments, tools, audio amplifiers, accessories—available from the world's largest stocks. Write today for your FREE copy of the *complete* 212-page ALLIED Catalog.

FREE! Send for it now

ALLIED RADIO
833 W. Jackson Blvd., Dept. 11-K-1, Chicago 7, Ill.

Everything in Electronics from ONE Source

that will operate reliably in the range beyond the capabilities of standard mechanical counters. Any mechanical, optical or electrical occurrences that can be converted to electrical impulses may be so counted at rates up to 6,000 per minute. However, the instrument will actually differentiate between any two occurrences as close together as 20 μsec. The unit uses selenium rectifiers in the power supply and all wiring has been moisture and fungus proofed to insure reliability and long operating life. All circuits have been developed around one tube type, the 12AU7, to facilitate replacement. All counters are factory tested to insure proper operation over a line voltage range of 105 to 130 v. Power consumption is approximately 25 w.

V-T-Electrometer

KEITHLEY INSTRUMENTS, 3868 Carnegie Ave., Cleveland 15, Ohio. Model 200 vacuum-tube voltmeter is accurate within 1 percent at full-scale reading; accuracy of low-scale readings being held to within 5 percent of the reading. The increased accuracy was achieved by recalibration of the scale to compensate for nonlinear characteristics of the vacuum tubes. The improved instrument is expected to have an enhanced value wherever a self-contained d-c voltmeter with an extremely high input impedance is required. Some of the unit's current uses include measuring voltages of charged capacitors, measuring piezoelectric potentials, in measuring d-c amplifier and f-m

* TURNS SILENCE INTO SAFETY

Silent running instruments and machines keep our submarines safe. Behind the manufacture of these fine products lie months of research with Magnecord tape recorders . . . noise analyses and vibration tests to reduce detectable sound.

Whatever your recording problem — in the laboratory or in field tests — Magnecorders offer greater flexibility, fidelity, features for subsonic to supersonic research.

Magnecord, INC.
HIGH FIDELITY TAPE RECORDERS FOR INDUSTRY

Used by more engineers than all other professional tape recorders combined



Write for NEW CATALOG

MAGNECORD, INC., DEPT. EA-10
360 N. Michigan Avenue, Chicago 1, Illinois

Send me further information on Magnecord tape recording for industrial "Sound" Research.

Name.....

Company.....

Address.....

City.....Zone.....State.....

CONSERVE VITAL MATERIALS

FOR YOUR PANEL

DIALCO

A NOVEL and UNIQUE CIRCUIT INDICATOR

DESIGNED FOR NE-51 NEON LAMP
For 110 or 220 volt circuits

The required resistor is an integral part of this assembly —"built-in."

RUGGED • DEPENDABLE LOW IN COST



PATENTED: No. 2,421,321
Cat. No. 521308-997

WILL *YOU* TRY A SAMPLE?

Write on your company letterhead. We will act at once. No charge, of course.

SEND FOR THE 192 PAGE HANDBOOK OF PILOT LIGHTS

Among our *thousands of Pilot Light Assemblies* there is one which will fit *your special conditions.* Many are especially made and approved for *military* use. We pride ourselves on prompt deliveries—*any quantity.*

ASK FOR OUR APPLICATION ENGINEERING SERVICE

Foremost Manufacturer of Pilot Lights

The DIAL LIGHT COMPANY of AMERICA

900 BROADWAY, NEW YORK 3, N. Y. SPRING 7-1300

COLOR TV

SYNC SIGNAL GENERATOR TYPE 2201

(field sequential system for CBS color)

for Broadcasting and Production Testing



- All binary dividers. No blocking tube or locked oscillators
- Camera color drive pulse provided to operate studio camera equipment—absolutely stable under all operating conditions
- Meets all RTMA and FCC specifications with margin to spare
- Gating pulse to blank out two color fields—will produce any one of three colors
- Built-in bar and dot generator for checking sweep linearity

Price $2150.00 FOB Plant. Cabinet extra

Write for further technical details on 2201 Sync Generator and 2301 Color Monoscope.

Manufacturers of a complete line of TV and Radar Test Equipment

TIC Tel-Instrument Co. Inc.

50 PATERSON AVENUE • EAST RUTHERFORD, N. J.

REXOLITE 1422

(FORMERLY G. E. TEXTOLITE 1422)

THE *Better* PLASTIC U. H. F. INSULATION

BECAUSE OF:—

- outstanding electrical properties
- superior machinability
- high heat resistance
- dimensional stability
- and extremely low initial cost



Rexolite 1422 has been specifically designed and developed to meet the growing need for a lightweight — low cost U. H. F. insulating material.

Rexolite 1422 is available for immediate delivery as centerless ground rod in any diameter up to 1". Also cast in larger diameter rods and sheets.

Meets JAN-P-77 and MIL-P-77A specifications.

The unusual chemical inertness and physical properties of Rexolite 1422 allow its use where other materials fail.

For use in: connectors, coaxial connectors, waveguide, antennas, leads and spacers, spreaders and air wound coil supports, coil forms.



Write today for technical bulletins and samples. Our engineering staff is always at your disposal.

Manufacturers of Non-strip wire, High Temperature Electrical Tubing and other extruded plastic products.

THE REX CORPORATION

60 LANSDOWNE STREET
CAMBRIDGE 39, MASS.

discriminator potentials, and in conjunction with a known resistance to measure currents as low as 10^{-14} ampere in photocells and dielectric leakages.

Three-Speed Tape Recorder

BELL SOUND SYSTEMS, INC., 555 Marion Road, Columbus 7, Ohio, has introduced model RT-65-B portable three-speed RE-CORD-O-fone tape recorder. It records for immediate playback on 1½-in., 3¾-in. and 7½-in. speeds. The amplifier in the unit is designed for high-quality frequency response of 70 to 8,000 cycles ±3 db. Output is 3.5 watts. Telephone jacks are provided for direct connections to any amplifier or p-a system. There is also an output of 3.2 ohms and high impedance for headphone monitoring. Power supply is 80 watts, 117 volts, 60 cycles a-c.



Rotary Switch Actuating Mechanisms

GENERAL PRECISION LABORATORY, INC., Pleasantville, N. Y., has developed a series of light, compact, rotary switch actuating mechanisms that provide intermittent pulsed reciprocating rotational motion of up to 330 deg, with torques tailored to suit individual require-

MAXIMUM PERFORMANCE
at MINIMUM COST with the
Browning OSCILLOSYNCHROSCOPES ON-5A ON-5X
SYNCHROSCOPE P4-EX

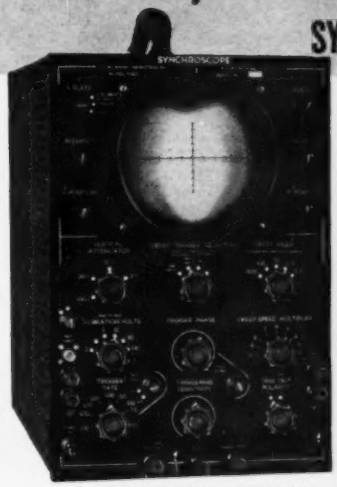

Models ON-5A and ON-5X are designed as basic, highly flexible laboratory instruments for general pulse work. Their specifications include:

- High-gain vertical amplifiers.
- Triggered sweeps, if an external trigger is available.
- Recurrent sweeps, at a repetition rate of 10 to 100,000 per second.
- Vertical input delay of 0.45 microsecond (ON-5X).

Model P4-EX is designed for applications requiring a triggered sweep, and where the signal levels met do not demand extremely high-gain amplification. Its many outstanding features include:

- Internal trigger, at a repetition rate of 50 to 5000 per second, easily synchronized with an external trigger if desired.
- Output trigger, with the same range of repetition rates, which can be continuously phased to lead or lag the sweep start by a maximum of 500 microseconds

Detailed specifications and performance data available promptly on your request.

These new instruments represent a high level of precision design and versatility of application at remarkably low cost. Major features that are common to all three instruments include:

- Type 5UP cathode-ray tube, operating at an accelerating potential of 2600 volts. P1, P7 and P11 screens are available.
- Sweep writing rate continuously variable from 1.0 to 25,000 microseconds per inch.
- Sweep calibration in microseconds per horizontal scale division, accurate to plus or minus 10%.
- Vertical amplifier flat within 3 db from 5 cycles to 5 megacycles.
- Vertical calibration voltages, at accuracy of plus or minus 5% for Model P4-EX, and plus or minus 10% for Models ON-5A and ON-5X.
- Vertical amplifier input step attenuator.
- CRT cathode connection externally available, for application of blanking or marker pulses.

NET PRICES, F.O.B. Winchester, Massachusetts:
P4-EX . . . $465.00 ON-5A . . . $485.00 ON-5X . . . $535.00

Write today for **FREE BULLETINS** giving detailed specifications and performance data.

BROWNING
Laboratories, Inc.
Winchester, Mass.
ENGINEERED FOR ENGINEERS

Electra
carbon-coat
PRECISION RESISTORS

They're NEW
PRECISION...
1% Tolerance

deposited carbon resistors

The right choice for ACCURACY ... ECONOMY ... and STABILITY in circuits where wire wound resistors are often times too expensive and the characteristics of carbon composition resistors are not suitable. Deposited carbon resistors are especially adapted to high frequency applications that require high stability and close tolerance of resistance values. Manufactured to customer's specifications. For complete data mail coupon.

ELECTRA MFG. COMPANY
RESISTOR DIVISION
2537 Madison Ave. • Kansas City 8, Mo.

FOR 25 YEARS A MANUFACTURER OF PRECISION ELECTRICAL EQUIPMENT

ELECTRA MFG. COMPANY
2537 Madison Ave. • Kansas City 8, Mo.

Please send Bulletin E-1—Complete Data on Deposited Carbon Resistors.

NAME _____

COMPANY _____

ADDRESS _____

CITY _____

STATE _____

PRECISION POTENTIOMETERS

SINUSOIDAL TYPE



RL-11C

CONDENSED SPECIFICATIONS

	RL 11-C	RL 14-MS
Total resistance	16,000 ± 10%	35,400 ± 1%
Percent resistance within brush circle	Approx. 85%	99 ± 1%
Angle of rotation	360°	360°
Weight	4.75 oz.	1.8 lbs.
Torque (Approximate)	¾ oz. in.	2 oz. in.
Wire	80 Ni 20 Cr	80 Ni 20 Cr
Resolution	.4°	.2°
Angular accuracy	±.6°	±.5°
Amplitude accuracy	±.8%	±.6%
Maximum volts across winding	150	350
Maximum speed	60 rpm	60 rpm
Expected Life	350,000 cycles	200,000 cycles

Illustration shows RL-11C unit, RL-14MS unit is approximately twice as large. Minor variations of these standard designs, available on special order, permit operation at high rotational speeds with some loss of accuracy but, with a substantial increase in expected life. Sine and cosine voltages are produced simultaneously. Resistances other than those shown above are available within certain limits.

FOR COMPLETE DETAILS SEND FOR BULLETIN F-68-A

THE GAMEWELL COMPANY
NEWTON UPPER FALLS 64, MASSACHUSETTS

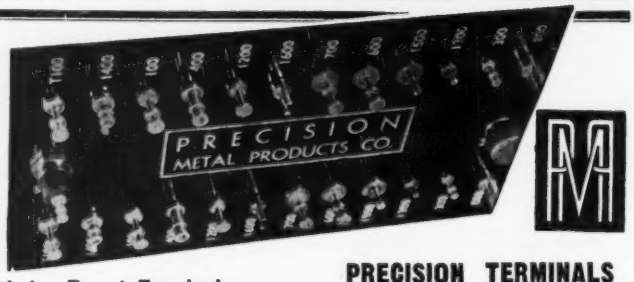

PRECISION TERMINALS

Tubular Turret Terminals:

Permit mounting of components on both sides of a terminal board. Where compactness is necessary these tubulars have found wide use in electronic circuitry.

Insulated Stand-off Terminals:

Engineered and manufactured to the highest specifications. The insulating material is Grade XXX phenolic. Bases are nickel plated brass and are furnished in 2 types: Threaded or riveting. Terminals are silver plated.



PMP designs and fabricates terminals for every conceivable electronic requirement. Their unusual production methods and engineering skill provides products of far better quality—yet at costs below competition. Base material is brass with an approved silver plated finish. Centrifugal tin dipped finish available at no extra cost. Their standard line is available immediately and specially designed terminals can be produced within any reasonable requirement. Before you buy consult PMP.

For Complete Data & Prices

on all PMP products send for Catalog No. 20. Requests on company letterhead promptly answered.

PRECISION METAL PRODUCTS CO. of Malden
41 Elm St. • Stoneham 80, Massachusetts

ments. The drive consists of a miniature motor in a special circuit permitting rapid reciprocal switching up to 10 complete cps. The device has applications in the field of microwave switches and phase shifters whose material elements require low torque rotary drive mechanisms, in high or low voltage switching, and in similar fields where a rapid rotary action with no lateral thrust is needed. The unit requires no holding current and can be operated from all commonly available power supplies with negligible power drain.



F-M Tuner Chassis

COLLINS AUDIO PRODUCTS CO., P. O. Box 368, Westfield, N. J. The type RD-1C f-m tuner chassis has high-permeability tuning cores run through electro-plated glass coils made especially for h-f operation. The whole tuner may be held in the palm of a hand and no separate i-f amplifier is needed. Antenna input is 300 ohms; sensitivity averages 20 μv; i-f is standard 10.7 mc; and audio output is approximately 1 volt. Voltage requirements are: filament—6.3 v a-c at 1.4 amperes; B voltage—100 v d-c at 35 ma. Price is $29.95.



Scintillation Detector

NUCLEAR RESEARCH AND DEVELOPMENT, INC., 1094 Sutter Ave., St. Louis 5, Mo. Model SC-2 scintillation detector incorporates a 5819

MEETS BIG NEED
IN INDUSTRY, RESEARCH
And DEFENSE PROGRAM



FOR TESTING and SERVICING

Aircraft, tank, marine radios and electronic equipment
Relays and solenoids.
Telephone circuits.
Laboratory instruments, research.
Low voltage devices.
For plating operations.

CONTINUOUSLY VARIABLE
0–28 VOLTS • AT 15 AMPERES

Electro
ELECTRONIC EQUIPMENT

NEW MODEL "N" UNIVERSAL
DC POWER SUPPLY

Never before has a DC power supply with this output range and dependability been available at this moderate price. The new Model "N" utilizes the "Electro" application of selenium rectifiers and conduction cooling. This exclusive feature increases the rectifier power rating and provides lower cost per ampere output. A single control provides continuous voltage adjustments for different load conditions over the specified range. Highest quality components and special design withstand high overloads.

NET $175

Specifications

Up to 36 volts at 6 amperes.
5% ripple at 10 amps., facilities provided for extra filtering.
Special D'Arsenval type voltmeter, ammeter accurate to 2%.
Superior Powerstat provides incremental voltage adjustments.
Bridge type selenium rectifiers.
Heavy duty transformer and choke.
115 volt 50/60 cycle input.

Mail Coupon For Complete Literature

OTHER MODELS

MODEL "B"
DC POWER SUPPLY
6 VOLTS 1-20 AMPS.

MODEL "BJ"
DC POWER SUPPLY
6 VOLTS 1-12.5 AMPS.

ELECTRO PRODUCTS LABORATORIES
4501—EL RAVENSWOOD AVE., CHICAGO 40, ILL.

Name _____
Firm _____
Address _____
City _____ Zone _____ State _____



320 kc modulated 400 cps; audio on second beam.



24 kc modulated 60% 1 kc.

100% MODULATION . . . .



. . . A.M. WITHOUT F.M.

Excellent amplitude modulation is a feature of the Standard Signal Generator TF 867 — a.m. accompanied by minimum spurious f.m. — less than 100 cps below 5 mc, 1,000 cps above. Other features are: Wide range — 15 kc (or less) to 30 mc in 11 bands on full vision scale. **Crystal accuracy** — 0.01% 1 mc harmonic source built-in. **Easy tuning** — discrimination 1 part in 10,000 on total 15 ft. scale length. **High output** — 4 volts down to 0.04 microvolts. **Flexible modulation** — internal 400 and 1,000 cps, 0-100%, external 50-10,0 0 c ss 2db.

MARCONI INSTRUMENTS 23-25 Beaver Street, New York

CANADA: CANADIAN MARCONI CO., MARCONI BUILDING, 2442 TRENTON AVENUE, MONTREAL
ENGLAND: MARCONI INSTRUMENTS LIMITED ST, ALBANS, HERTS.

See our exhibit at The 1951 National Electronics Conference—Booths 61-62, October 22-24

ELECTRAN TRANSFORMERS

★ TRANSFORMERS
★ SATURABLE REACTORS
★ ELECTRONIC DEVICES

Specialists in SMALL quantities of custom built transformers from milliwatts to 50 KVA, single or polyphase— designed and manufactured to best meet your exact requirements.

Each Electron Transformer is built to the highest standards of quality and precision. There is no "second" grade at Electron.

ELECTRAN MFG. CO.
1901 CLYBOURN AVENUE • CHICAGO 14, ILLINOIS

PRECISION-BUILT
CHOPPERS
YOU CAN DEPEND ON!

made by AIRPAX . . . pioneers in the field!

A589 . . . 6 volt, 400 cycle drive, used widely by the industry. Highly reliable, field-proven, tested and approved by many major electronic and aircraft firms.

A580 . . . 120 volt, 400 cycle drive, supplied to 0 phase angle or with 90° to 90° lag. Most versatile . . . repeated tests show life in excess of 1000 hours.

A587 . . . 26 volt, 400 cycle drive . . . the phase of closure and break is held to close limits for interchangeable use as either modulator or demodulator.

A586 . . . 6 volt, 60 cycle drive, 45 phase lag. Here's a chopper so reliable that you can put it into service and forget it for thousands of hours!

AIRPAX PRODUCTS COMPANY
DESIGNERS ENGINEERS
MIDDLE RIVER, BALTIMORE 20, MD.

photomultiplier tube. The necessary dropping resistors are mounted on the base of the tube socket, and a cathode-follower preamp circuit may be installed if desired. The SC-2 uses a NaI-Thallium activated crystal especially mounted in a polystyrene holder to provide maximum optical transmission, and is an extremely efficient end-window gamma counter. It gets from 25 to 100 times the efficiency of a normal Geiger counter. The unit comes complete with cable, ready to be used in conjunction with any commercial scaler or count-rate-meter employing a pulse amplifier, discriminator and well-regulated high-voltage supply.

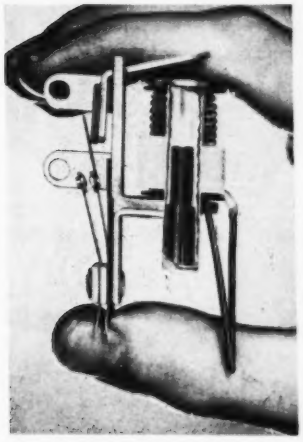

Small Time-Delay Relay

HEINEMANN ELECTRIC CO., 307 Plum St., Trenton 2, N. J. Overall dimensions of the Silic-O-Netic time-delay relay are only 1¾ in. × 2½ in. × ⅞ in. yet it has a rated capacity of 10 amperes at 120 volts a-c. It uses a hydraulic-magnetic operating principle. Instead of the fixed solid core of conventional relays, it has a sealed tube which extends through and below the relay coil. The tube, in turn, is filled with a viscosity-stable silicone liquid, and holds a movable iron core. When the coil is energized the movable core is drawn up into the magnetic field, but the rate of rise is controlled by the silicone liquid, introducing a precise time

SAVE TIME
cut costs

PRINT YOUR CIRCUITS WITH
DU PONT CONDUCTIVE COATINGS

HERE ARE SOME TYPICAL USES OF DU PONT CONDUCTIVE COATINGS

FOR PRINTED CIRCUITS IN:
Television receivers
Radar equipment
Aircraft communication equipment
Audio frequency amplifiers
Hearing aids
Switchboards and panels
Industrial electronic controls
Recording equipment
Radios
Meters

ALSO FOR USE IN high- and low-voltage ceramic and mica capacitors (on TV receivers), static shieldings, resistors, and solder seals (for hermetically sealed coils, transformers, etc.)

Use them in place of conventional wiring and solder connections. These highly conductive, low-resistance coatings are easily and rapidly applied by spray, brush, dip or stencil to metals and nonconductive surfaces.

Look at these advantages:

1. **High conductivity (low resistance).**
2. **Flexible application — composition may be formulated in suitable vehicles for desired methods.**
3. **Fired-on types unaffected by contaminating atmospheres.**
4. **Foolproof connections.**
5. **Easy application with simple, economical equipment.**
6. **High-speed production.**
7. **Economy — one troy ounce covers about three sq. ft.**

Two types of Du Pont Conductive Coatings are available:
Type "F," fired-on, specifically designed for use on ceramic bases.
Type "A," air-dried, for use on plastic, paper, and wood bases.

For additional information
call our nearest office of Electrochemicals Department,
E. I. du Pont de Nemours & Co. (Inc.)

DISTRICT OFFICES

Baltimore 2	321 Fallsway	PLaza 2862
Boston 10	140 Federal Street	HAncock 6-1714
Charlotte 2, N.C.	427 W. 4th Street	CHarlotte 5-5561
Chicago 3	7 S. Dearborn Street	ANdover 3-7000
Cincinnati 2	2412 Carew Tower	PArkway 5253
Cleveland 14	1226 National City Bank Bldg.	CHerry 1-0078
Detroit 26	966 Penobscot Bldg.	WOodward 2-7360
Kansas City 1*	Gulnotte & Mich. Aves.	Victor 8246
Los Angeles	P. O. Box 70, El Monte, Calif.	COmberland 3-2761
New York 1	350 Fifth Avenue	LOngacre 3-6440
Philadelphia 3	1616 Walnut Street	Kingsley 5-1900
Pittsburgh 22	517 Park Bldg.	GRant 1-2960
San Francisco 6	111 Sutter Street	EXbrook 7-8230

*Barada & Page, Inc.

Clip coupon for your free bulletin on Du Pont Conductive Coatings

E. I. du Pont de Nemours & Co. (Inc.)
Electrochemicals Dept., Wilmington 98, Del.
Please send me Conductive Coatings Bulletin CP 2-150

*Name*_____
*Address*_____
*City*_____ *State*_____

DU PONT
REG. U.S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*

No Lugs! No Looping of Wire!
No Screws to Remove!

CURTIS TYPE "E"
TERMINAL BLOCKS
For #18 Stranded or #16 Solid Wire or Smaller

Curtis Type "E" Terminal Blocks save labor — save money — cost less. One simple operation makes connections of small control wiring to blocks. Merely loosen one screw, insert stripped wire between clamping members and tighten screw. Wire is held so firm that it will break before pulling out. Solid base construction eliminates possibility of grounding. Available in any number of terminals from 1 to 22.

Write for Bulletin No. 123—or consult our condensed catalog in the McGraw-Hill Electrical Catalog for Product Engineers.

CURTIS DEVELOPMENT & MFG. CO.

Terminal Block Sales — 4522 West Madison St., Chicago 24, Illinois,
Factory — Milwaukee 16, Wisconsin

VULCAN
ELECTRIC HEATING UNITS

On Airplanes

in high altitudes and sub-zero temperatures, Vulcan Electric Heating Units hold lubricants in a liquid state.

They're used also as anticipators in thermostatic control: in guided missiles and in speed indicators.

Vulcan electric heat is helping out in many new inventions for both war and peace. To assist in the further development of your ideas, Vulcan heating designers will be glad to join their know-how to yours.

VULCAN
ELECTRIC COMPANY
DANVERS 10 MASS.
VULCAN

FOR POSITIVE AND INEXPENSIVE SHIELDING
—use Metex "Electronic Weather Strips"

Because they combine exceptional *resiliency* with good *conductivity*, Metex Electronic Products made of knitted wire mesh offer an unusually effective means of sealing and shielding a wide variety of types of electronic equipment.

As closures for sheet metal cabinets, for instance, the resiliency of "Metex" assures positive conductive contact *at every point* between cover and cabinet —eliminating costly machining for close tolerances. Metex Gaskets also assure resilient metal-to-metal contact between flanges, and can be combined with rubber compounds to function both as a shield and as a seal.

Applications in which "Electronic Weather Strips" have already proved their effectiveness include pulse modulator shields, wave-guide choke-flange gaskets, replacement of beryllium-copper fingers and springs on TR and ATR tubes.

We will be glad to put our experience at your disposal. A letter to Mr. R. L. Hartwell, outlining your problem, will receive immediate study. For preliminary information, write for bulletin "Metex 'Electronic Weather Strips.'"

METEX

METAL TEXTILE CORPORATION

641 EAST FIRST AVENUE, ROSELLE, N. J.

ELECTRONICALLY REGULATED
LABORATORY
POWER SUPPLIES

BENCH
MODEL 25

• STABLE
• DEPENDABLE
• MODERATELY PRICED
•

- **INPUT:** 105 to 125 VAC, 50-60 cy
- **OUTPUT #1:** 200 to 325 Volts DC at 100 ma regulated
- **OUTPUT #2:** 6.3 Volts AC CT at 3A unregulated
- **RIPPLE OUTPUT:** Less than 10 millivolts rms

WIDTH 14"
DEPTH 6"
HEIGHT 8"
WT: 17 LBS.

For complete information write for Bulletin E

LAMBDA ELECTRONICS
CORPORATION
CORONA NEW YORK

delay. The relay operates on the increased magnetic flux caused as the core reaches the pole piece at the top of the tube.



Symbol Stamps

JOHN GRIFFIN CO., 2157 James Ave., St. Paul 5, Minn., has available a kit of 20 rubber stamps that eliminate the repetitious drawing of symbols that appear many times on each circuit diagram. They are precision made so that when they are first touched to an ink pad and then to tracing paper they leave a perfect impression of an electronic symbol. They are not mounted on wood but on ¼ in. thick Plexiglas so the user can see exactly where the impression is going to appear on the drawing. There are two crosslines scribed on the Plexiglas for aligning symbol to construction lines on the drawing. Price per set is $25.



Interlocking Electrical Connectors

HARVEY HUBBELL, INC., Bridgeport 2, Conn., has introduced a new line of Interlock connectors featuring novel locking and outstanding contact characteristics. The special electrical feature of these self-locking connectors is known as

Edin instruments



OSCILLOGRAPH GALVANOMETER

No's. 8001, 8002, 8003 and 8004 ink-writing galvanometers have sensitivities from 3.5 to 40 volts per cm., resonant frequencies from 15 to 120 cps., resistances from 1000 to 2000 ohms, frequency response up to 350 cps., and a single-jewel pivot construction. Units are designed for multiple operation up to 10 channels in a total width of 12 inches.

DIRECT-COUPLED AMPLIFIER

No. 8100 direct coupled amplifier has a voltage amplification of 13,000 with a maximum output of 70 volts. Frequency response from d.c. to 10,000 cps. is flat within 10%. Input impedance is 2 megohms; output impedance is 150 ohms. Input may range from 0.1 mv. to 100 volts. Stability is better than 0.1 mv. per thirty minutes, or 0.5 mv. per day. Attenuator is stepped for factors from 1 to 1000.

OSCILLOGRAPHS

Recorders can be supplied with 1, 3 or 9 chart speeds ranging from 0.1 mm. sec. to 250 mm. sec. See specifications of OSCILLOGRAPH GALVANOMETER for frequency range.

OSCILLOGRAPH AMPLIFIER

No. 8121 special amplifier has a time constant of 1 second, an exponential response to a square wave at high gain, input impedance of 1 megohm, and input form 0.1 mv. to 1000 volts. At low gain, No. 8121 becomes a DC amplifier with a voltage gain of 100 and an input of 10 mv./mm.

HIGH-GAIN AMPLIFIER

No. 8130 amplifier has a voltage gain of 1,000,000 and includes a built-in pre-amplifier. Frequency response is from 1 to 200 cps. Input may range from 10 microvolts to 100 millivolts. This amplifier is particularly suited for Biological studies.

Many other types of recording and amplifier circuits are available and special equipment can be assembled to meet particular specifications.

EDIN COMPANY, INC.
207 Main Street
Worcester 8, Mass.

Please send complete information on:

☐ RECORDERS
☐ NO. 8121 AMPLIFIER
☐ GALVANOMETERS
☐ No. 8100 AMPLIFIER
☐ No. 8130 AMPLIFIER
☐ ..... SPECIAL (Enclose details)

(NAME)

(NO.) (STREET)

(CITY) (STATE)

COMPANY POSITION



PEERLESS S-240-Q

If you "talk test"... you talk Peerless



Square Wave

all tests demonstrate **PEERLESS** superiority



Competitor No. 1

Competitor No. 2

Competitor No. 3



Competitor No. 4

Comparative square wave tests on transformers shown all over the country have demonstrated Peerless superiority . . . Now Peerless emphasizes another very important property of transformers as shown by the "exciting current test." An output transformer's ability to deliver plenty of clean, low-frequency power (the goal of every music lover) is inversely proportional to the amplitude and distortion of its exciting current.

PEERLESS superior low-frequency power handling capacity is illustrated in these comparative oscillograms.

Write for complete data.

PEERLESS
Electrical Products

Division **ALTEC** LANSING CORPORATION

9356 Santa Monica Blvd.
Beverly Hills, Calif.

161 Sixth Avenue
New York 13, N.Y.

Runzel WIRE, CORD and CABLE

SOLVE YOUR WIRING PROBLEMS

In almost endless variety of colors, sizes and specifications to your order, Runzel products will assist you in your wiring problems.

Shielded wire and cords . . . popular hook-up and lead-in wire . . . speaker cords and all types of insulated wire products.

Geared for fast production . . . Centrally located . . . our facilities for service are unexcelled.

Write for samples.

RUNZEL CORD & WIRE CO.
4723 Montrose Avenue
Chicago 41, Illinois

Emergency ELECTRIC POWER
For A.M., F.M., and Television Stations

ONAN STANDBY ELECTRIC PLANTS

Model 10 EL
10,000 watts



PORTABLE A.C. ELECTRIC PLANTS FOR FIELD AND MOBILE RADIO

Supply power for transmission at scene of events. Can be carried by hand or in trunk of car. Take up only a few square inches of space in mobile unit. Weigh as little as 80 pounds. Lightweight models: 350 to 3,000 watts. Other models to 35,000 watts.

Stay on the air during power failures. When storms, floods, or breakdowns interrupt electric service to your station and force you off the air, you lose listeners, you lose income. Protect yourself against loss . . . make sure of your ability to give vital service to your community during disaster periods by installing a dependable Onan Emergency Electric Plant.

An Onan plant will take over the job of supplying electricity for studios and transmission automatically when power is interrupted. Plant stops itself when power is restored. Upkeep costs are negligible.

Write for Folder or Engineering Service

Onan PRODUCTS

D. W. ONAN & SONS INC.
7025 Royalston Avenue, Minneapolis 5, Minnesota

Linde
Trade-Mark

M. S. C.
(Mass Spectrometer Checked)
RARE GASES
HELIUM • NEON
ARGON • KRYPTON • XENON

LINDE Rare Gases are mass spectrometer checked to assure you gases of known purity and uniformly high quality. Available in commercial-size cylinders and glass bulbs.

LINDE, the world's largest producer of gases derived from the atmosphere, can meet your individual needs of purity...volume...mixture...containers...

LINDE AIR PRODUCTS COMPANY
A DIVISION OF UNION CARBIDE AND CARBON CORPORATION
30 East 42nd Street UCC New York 17, N. Y.
In Canada:
Dominion Oxygen Company, Limited, Toronto

The term "Linde" is a registered trade-mark of Union Carbide and Carbon Corporation

"double contact". There is frictional contact as in any other type of connector, and there is knife-edge contact effected by the locking contacts in plug and outlet, and held under constant coil spring pressure. The plugs and outlet illustrated are suitable for all wiring connections and terminal strips. Fast automatic locking action represents a saving in wiring and assembly time. The connector is rated at 10 amperes, 110 volts. Data sheets, test reports and samples are available on request.

Replacement Transformer

RAM ELECTRONICS, INC., South Buckhout St., Irvington-on-Hudson, New York, have announced the type X045 flyback transformer for replacement and conversion purposes. It is specifically designed as a replacement transformer for all tv receivers orginally using 1B3 or 6BG6 tubes. For 16 and 20-in. round and rectangular tubes, it generates 12.5 to 14 kv and 13.5 kv respectively, with horizontal sweep more than ample for 20-in. picture tubes.

Literature

Induction Heater. General Electric Co., Schenectady, N. Y. Bulletin GEA-5594 deals with the type HM20L 20-kw induction heater designed for annealing, brazing, soldering and hardening. The unit described is available either with or without variable power adjustment. Chief features, dimensional diagrams and complete technical specifications are included.

Tape Recording Equipment. Magnecord Inc., 360 North Michigan Ave., Chicago, Ill., has issued an illustrated catalog to describe the versatility of its line of magnetic tape recording equipment for professional use, and to make known to a wider field its facilities for building special equipment to individual requirements. The catalog makes explicit mention of the company's conversion and adaptation equipment. All equipment is

TRANSICOIL

"tailored" production means servo control motors that are fitted to your needs *exactly!*

Write for Bulletin M

CONTROL MOTORS · PRECISION GEAR TRAINS
INDUCTION GENERATORS · SERVO AMPLIFIERS

TRANSICOIL CORPORATION
107 GRAND STREET, NEW YORK 13, N.Y.

PUT OUT A STRONGER SIGNAL... INCREASE YOUR SERVICE AREA



with ANDREW Low Loss, High Economy Coaxial Cable

- *1/3 to 1/2 Less Loss* than same diameter plastic type cables because 96% of insulation is air—the most effective insulation.
- No maintenance or operational costs. This advantage far offsets slightly greater original cost. Seamless cable and fittings remain completely gas tight and weatherproof indefinitely.
- Maintains original characteristics indefinitely. Lasts practically forever.
- TO INSTALL—JUST UNCOIL INTO PLACE. Each coil contains up to 2,000 feet of seamless semi-flexible tubing. No soldering. No splicing. Bends easily around corners or obstructions. Shipped under gas pressure at no extra cost when pressure-tight end fittings are ordered.

Low loss and economical operation will add *extra* miles to your service radius as well as give you a stronger signal in your present area. There's no waste. You get the greatest possible range and strength from your available power.

Whether you need transmission line for your Communications, AM or FM transmitter, Directional Antenna System, or Rhombic Receiving Array, the solution to your problem is ANDREW low loss, high economy, semi-flexible transmission line. Write for further information on Types 737 and S-450 TODAY.

Andrew CORPORATION
363 EAST 75th STREET · CHICAGO 19
ANDREW

WORLD'S LARGEST ANTENNA EQUIPMENT SPECIALISTS

TRANSMISSION LINES FOR AM-FM-TV · ANTENNAS · DIRECTIONAL ANTENNA EQUIPMENT

ANTENNA TUNING UNITS · TOWER LIGHTING EQUIPMENT

coded, and a special page lists and describes such accessories as special switches, spooling mechanisms and adapter panels.

Nuclear Instruments. Nuclear Research Corp. 2707 Federal St., Philadelphia 46, Pa. Bulletin DU-201 fully describes two new demonstration units, known as DU-1A and DU-2A, which are inexpensive, lightweight, modern instruments to be used in demonstrating nuclear radiation processes. The instruments dealt with can be used in the detection of cosmic rays, alpha, beta and gamma particles, the inverse square law of a point source of radiation, the properties of absorbers in the presence of various types of nuclear radiation, the properties of G-M tubes and the statistical nature of nuclear radiation and its indication on a rate meter.

Tube Manual. Sylvania Electric Products Inc., Emporium, Pa., has published a revised and enlarged eighth edition of its Technical Manual in a new snap-open looseleaf format. It contains comprehensive technical data on more than 500 receiving tube types, standard tv picture tubes, as well as 84 pages of general information on vacuum-tube operation. Data on 60 new receiving tube types are included. Price is $2.00 per copy. New data sheet pages on future receiving tube types will be issued free to manual holders.

Teflon Shapes. John L. Dore', Inc., 5406 Schuler St., Houston 6, Texas. A line of Teflon sheets, rods, tubes, packing sets, gaskets, special molded shapes and tapes are technically described in catalog No. 711. The material described is finding a variety of uses in the electrical industry including spacers for coax cables, inserts for coax connectors, and insulation for high-frequency, high-temperature and high-voltage wires and cables.

Static Magnetic Memory. Alden Products Co., 117 North Main St., Brockton, Mass. Available upon request are three booklets that

THE
HI-GAIN Industrial
POCKETSCOPE
BY WATERMAN



MODEL
S-14-A

Wt. 12¾ lbs.
12" x 5¾" x 7"

Another Waterman POCKETSCOPE providing the optimum in oscilloscope flexibility for analyses of low-level electrical impulses. Identified by its hi-sensitivity and incredible portability, S-14-A POCKETSCOPE now permits "on-the-spot" control, calibration and investigation of industrial electronic, medical and communications equipment. Direct coupling without peaking, used in the identical vertical and horizontal amplifiers, eliminates undesirable phase shifting. Designed for the engineer and constructed for rough handling, the HI-GAIN POCKETSCOPE serves as an invaluable precision tool for its owner.

Vertical and horizontal channels: 10mv rms/inch, with response within —2DB from DC to 200KC and pulse rise of 1.8μs. Non-frequency discriminating attenuators and gain controls with internal calibration of trace amplitude. Repetitive or trigger time base, with linearization from ½cps to 50KC with ± sync. or trigger. Trace expansion. Filter graph screen. Mu metal shield. And a host of other features.

WATERMAN PRODUCTS CO., INC.
PHILADELPHIA 23, PA.
CABLE ADDRESS: POKETSCOPE

WATERMAN PRODUCTS INCLUDE:

S-10-B GENERAL POCKETSCOPE
S-11-A INDUSTRIAL POCKETSCOPE
S-14-B WIDE-BAND POCKETSCOPE
S-15-A TWIN TUBE POCKETSCOPE
S-21-A LINEAR TIME BASE

Also RAKSCOPES, LINEAR AMPLIFIERS, RAYONIC® TUBES and other equipment

WATERMAN PRODUCTS

Now Terminals Can Be
ATTACHED & SOLDERED
in ONE Automatic Operation!



The greatest innovation in attaching terminals to wires is now available to the industry . . . "Pre-soldered" TANDEM TERMINALS! Made in various sizes and types, these remarkable, production-proved terminals (supplied on reels) can be applied at rates up to 1200 per hour by a new Terminal Attaching Machine that cuts off, clinches and solders terminals in one instantaneous operation. Handling of loose terminals, solder and flux are eliminated to reduce costs and boost production on long runs. Standard types available. Send for detailed information, enclose sample of wire and terminal now used. Address Dept. E.

For ordinary runs in moderate quantity we continue to produce

SEPARATE TERMINALS for ELECTRIC WIRES

We also make SMALL METAL STAMPINGS Exact to Customer's Prints. Modern Plant and Equipment. Moderate Die Charges. Precision Work. Prompt Service.

PATTON-MacGUYER COMPANY
17 Virginia Avenue, Providence, R.I.

LARGE OR SMALL
SQUARE, ROUND OR RECTANGULAR
Coil-Proved

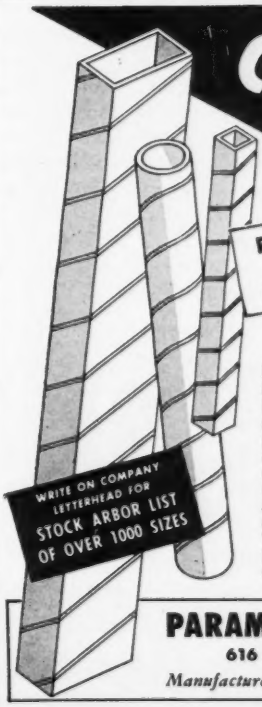

PARAMOUNT
Spiral-Wound
PAPER TUBES

Lengths from ½" to 30"
Inside Perimeters, .450" to 25"

WRITE ON COMPANY LETTERHEAD FOR STOCK ARBOR LIST OF OVER 1000 SIZES

PARAMOUNT Paper Tubes facilitate coil winding—insure coil accuracy and stability. Proved by use, they have become standard with leading manufacturers of electrical, radio and electronic products. Here you are sure to obtain the exact size and shape you need for coil forms and other uses . . . from stock arbors, or specially engineered to your specifications. *Hi-Dielectric. Hi-Strength.* Kraft, Fish Paper, Red Rope, or any combination, wound on automatic machines. Tolerances plus or minus .002" • *Also* Shellac Bonded Kraft Paper Tubes for absolute moisture resistance.

PARAMOUNT PAPER TUBE CORP.
616 LAFAYETTE ST., FORT WAYNE, IND.
Manufacturers of Paper Tubing for the Electrical Industry

FULL RANGE OF MIL-T-27 TRANSFORMERS

HERMETICALLY SEALED UNITS

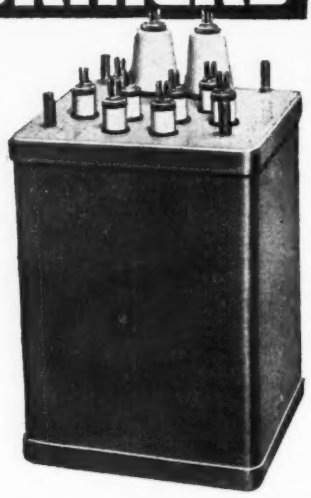

NYT hermetically sealed transformers are available in all standard sizes to meet MIL-T-27 specifications, and especially designed constructions for a wide variety of military as well as civilian applications. Designed and built to meet the most exacting specifications. Production facilities for quantity production of all sizes.

the HORNET



HORNET transformers, pioneered by NYT, are of open type construction, utilizing Class H insulating materials. Approximately one-fourth the size and weight of comparable Class A units. Filament and plate supply transformers and chokes. Units can be designed for ambients up to 190 deg. C., altitudes up to 60,000 feet; power ratings from 2VA to 5KVA.

POWER, AUDIO, FILAMENT and PLATE TRANSFORMERS
REACTORS • FILTERS • CHOKES
TV • RADIO • ELECTRONICS

NYT

Engineering and development facilities

NEW YORK TRANSFORMER CO., INC.
ALPHA, NEW JERSEY

describe the potential use, operating characteristics and some application techniques of the static magnetic memory, a storage device that requires no mechanical movement in recording, no power to maintain storage information, and that has a variable information handling rate ranging from 0 to 30,000 pulses per second.

Manufacturing Facilities. Polarad Electronics Corp., 100 Metropolitan Ave., Brooklyn 11, N. Y., is now distributing an eight-page illustrated booklet dealing with its development and production capabilities for measuring instruments and communication and tv broadcast equipment. Plant equipment and manufacturing accomplishments, together with engineering know-how are described.

Mercury Switches. Micro-Switch, Division of Minneapolis-Honeywell Regulator Co., Freeport, Ill., announces a new condensed catalog Hg-1 on a line of mercury switches. The publication covers the five most popular designs of Honeywell mercury switches, with selection and application aids, and complete electrical ratings and data for the use of these switches in both a-c and d-c applications.

Bridging Amplifier. Keithley Instruments, 3868 Carnegie Ave., Cleveland 15, Ohio, has issued a 4-page bulletin describing the model 102 Phantom Repeater, a bridging amplifier for test instruments with an unusually high-impedance input. Complete specifications are listed, plus hook-up diagrams of several typical applications, including simultaneous measurement of voltage and wave-shape inspection, connecting an oscillograph to high-impedance circuits with negligible voltage loss, and increasing the sensitivity of almost any voltmeter or cro.

Picture Tubes. Allen B. DuMont Laboratories, Inc., 750 Bloomfield Ave., Clifton, N. J., has released a 12-page publication listing the latest-type picture tubes, including the type 30BP4 30-in. Teletron. Comprehensive technical information is given for the various Tele-

EXTRA!

ATR

"A" BATTERY ELIMINATORS

Makes it easy to DEMONSTRATE AND TEST D.C. APPARATUS FROM A.C. LINES

for DEMONSTRATING AND TESTING AUTO RADIOS

New Models . . . Designed for testing D. C. Electrical Apparatus on Regular A. C. Lines. Equipped with Full-Wave Dry Disc Type Rectifier, Assuring Noise-less, Interference-Free Operation and Extreme Long Life and Reliability.

✓NEW MODELS ✓NEW DESIGNS ✓NEW LITERATURE

"A" Battery Eliminator, DC-AC Inverters
Auto Radio Vibrators

ATR *See your jobber or write factory*

AMERICAN TELEVISION & RADIO CO.
Quality Products Since 1931
SAINT PAUL 1, MINNESOTA—U. S. A.

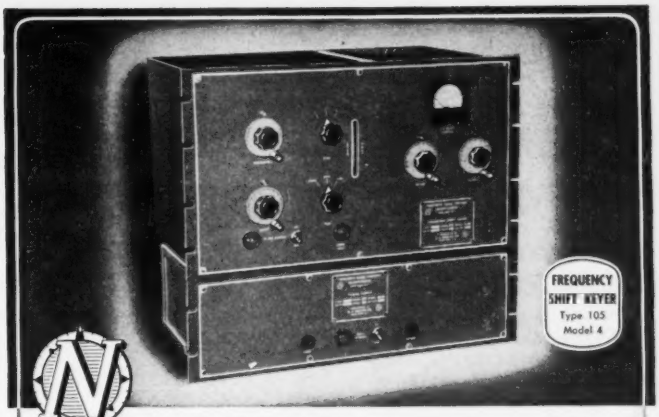

FREQUENCY SHIFT KEYER
Type 105
Model 4

HIGHEST STABILITY in Quality Communications

In today's high-speed telegraph, teleprinter and multi-channel radio communication systems—more than ever before—utmost stability is a vital need. Northern Radio's *exclusive* answer is the Type 105 Model 4 FREQUENCY SHIFT KEYER. Its highly stable oven has a temperature control of ± 0.1° C at 60°, with heaters on 4 sides of the inner oven—giving this unit frequency stability unmatched in the industry. And, greatest ease of operation is assured by its completely direct-reading dials.

See the specifications on this outstanding model in the 1951 Electronics Buyers Guide. For complete data on the precision-built Northern Radio line, write today for your free latest Catalog E-10.

NORTHERN RADIO COMPANY, inc. 143-145 West 22nd Street New York 11, N. Y.

Pace-Setters in Quality Communication Equipment

distributors for 30 years
of radio and electronic
components for all your needs

RADIO WIRE TELEVISION
INCORPORATED

NEW YORK 13, N.Y.
100 Sixth Avenue
WAlker 5-8883

NEWARK 2, N. J.
24 Central Avenue
MArket 2-1661

BOSTON 10, MASS.
110 Federal Street
HUbbard 2-7850

Lafayette 100 SIXTH AVE.
DIV. RADIO WIRE TELEVISION, INC.
FOR CUSTOM RADIO AND TV COMPONENTS

Custom assemble your own high fidelity phono - radio - television ensemble. All famous name components at lowest prices. Send for *Free* hi-fi catalog to Dept. E.

FOR MILITARY APPLICATIONS

RAYTHEON

CUSTOM-BUILT TRANSFORMERS

Since 1927, Raytheon has been a leading producer of custom-built magnetic components for military and commercial applications. Typical units include: single or polyphase power transformers, pulse transformers, blocking oscillators, servo transformers, chokes, audio components, filters, saturable magnetic components, etc. Cased or open types to meet the most exacting MIL specifications as well as Underwriters' Laboratories and R.M.A. requirements.



NEW, ULTRA COMPACT, Raytheon miniature audio type transformers with new patented, compression terminals. Designed for minimum space requirement and assembly ease in communications equipment.

FOR POSITIVE VOLTAGE CONTROL



Designs available in ratings from 5 to 10,000 watts. A wide range of catalog types, or custom-engineered to meet special needs.

RAYTHEON

VOLTAGE STABILIZERS

The first choice of manufacturers of electrical equipment for more than two decades. Compact, rugged, light weight and with no moving parts, they can be built into equipment or used as an accessory. Compensates for widely varying input (±15%) within 1/20 second; maintains voltage within ±½% of rated output. Insures peak performance of any AC operated electrical equipment.

WRITE FOR COMPLETE INFORMATION

Address Magnetic Components Division, Dept. 6460-A

RAYTHEON MANUFACTURING COMPANY
Waltham 54, Massachusetts

tron types with complete data on the 17FP4 and 20GP4 electrostatic-focus types. The booklet also provides complete ion-trap-adjustment directions for all Tetrons, and basing details for both electrostatic-focus and magnetic-focus types.

Photoflash Capacitors. Cornell-Dubilier Electric Corp., South Plainfield, N. J. A single-page bulletin covers a line of low-voltage photoflash electrolytic capacitors that will maintain their original capacitance value after several hundred thousand discharges. The units described are rated from 25 to 150 volts, with nominal capacitances from 40 to 250 μf, and have dimensions of from ⅜ × 1 13/16 in. to 1 × 2½ in.

Distribution Transformers. Acme Electric Corp., Cuba, N. Y. Bulletin AC-186 gives details on a completely enclosed line of dry-type, air-cooled transformers. The class B insulation used in the line of 3-phase 60-cycle transformers described gives ample protection for operation at a temperature rise of 80 C.

Carrier Dialing. Lenkurt Electric Co., Inc., 1105 County Road, San Carlos, Calif. Auxiliary equipment designed to add dial-signaling channels to existing H-1 carrier systems is described in a new folder, form H1D-P10. Besides giving a detailed description of the 8¾ in. high units—which provide full-duplex carrier-frequency dial signaling at 10 to 14 pulses per second—this publication includes an allocation chart showing how the dial operation utilizes frequencies not essential to H-1 voice channels. Further data is provided to show circuit arrangements, typical transmission characteristics, and various options available to accommodate particular installations.

Tape Recording. Radio Corp. of America, Camden, N. J. Form 2J8024 is a 16-page illustrated brochure describing new magnetic tape recording equipment for professional broadcast use. It fully describes the basic type RT-11A

ELECTRO TEC

MINIATURE

SLIP RING

ASSEMBLIES & COMMUTATORS

— for Gyros, Computors, Resolvers, Instruments, Selsyns, Motors

ACTUAL SIZE

- DIAMETERS FROM .05 TO 24.0 INCHES
- ABSOLUTE MINIMUM TORQUE FRICTION
- MINIMUM 1000 V.A.C. HI-POT BETWEEN CIRCUITS
- PALLADIUM AND RHODIUM FINISH TO PREVENT TARNISH, MINIMIZE FRICTION

ELECTRO TEC supplies virtually any type of Precision Miniature Slip Ring Assembly or Commutator to rigid mechanical and electrical specification. An exclusive manufacturing technique —hard silver plated to a precision machined plastic base and wire— forms a rigid assembly that easily withstands up to 12,000 rpm. Concentricity and dielectric strength are superior to any other method of construction. Although Electro Tec products provide improved performance and extra dependability, prices are strictly competitive. Write today for details.

Patents Pending

ELECTRO TEC CORPORATION

SO. HACKENSACK, NEW JERSEY

THE GRAYHILL SERIES 5000 MINIATURE TAP SWITCH IS DESIGNED TO MEET SPACE FACTORS INVOLVED IN THE MINIATURIZATION TREND. THE POSSIBLE CONTACT ARRANGEMENTS RUN FROM A SINGLE DECK UP TO 10, WITH FROM 2 TO 10 TAPS PER DECK. EITHER SHORTING OR NON-SHORTING CONTACTS. RATED TO BREAK 1 AMP., 115 V.A.C., NON-INDUCTIVE.

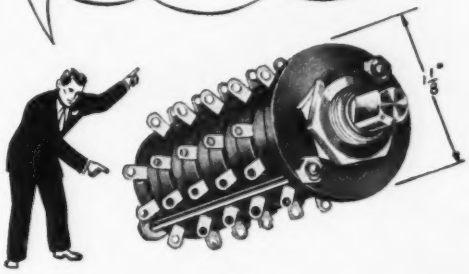

Grayhill

GET DETAILS—Write for the Grayhill Catalog now

4522 West Madison Street, Chicago 24, Illinois

ASTRON

Type MQ

Type MR

Type ML

STARTLINGLY SMALL
AMAZINGLY LIGHT WEIGHT
UTMOST RELIABILITY

"METALITE"

METALLIZED PAPER CAPACITORS

QUALITY MINIATURES— the space-saving solution to size reduction problems — save 50% to 75% in capacitor space—self-healing properties eliminate capacitor service problems — excellent RF characteristics — the "last word" in ultra-compact, miniature capacitor design—available in standard, JAN and special case styles.



ASTRON RF Interference filters with "METALITE"— is the answer to your RF Interference suppression problems

ASTRON CORPORATION

255 Grant Avenue East Newark, New Jersey

Manufacturers

HIGH QUALITY FIXED CAPACITORS AND FILTERS

WRITE FOR CATALOG AC-2

8 TRACK
SHOCK PROOF
MOBILE RECORDER!
for
INDUSTRY AND SCIENCE
PLAYBACK ANALYZER
INDUSTRIAL RESEARCH
SHOCK & VIBRATION MEASUREMENTS
TELEMETERING APPLICATIONS
GEOPHYSICAL EXPLORATIONS
Ampex specializes in designing and producing custom-built equipment to meet your requirements. A few of the proven applications are illustrated.
AMPEX RECORDERS are available in 1 to 14 tracks using ¼" to 1" tape
PRECISION PERFORMANCE
AMPEX
Performance Includes . . .
• STANDARD MODELS to 80,000 cps
• CUSTOM-BUILT MODELS to 100,000 cps
• LOW FLUTTER MODELS less than 0.1% PEAK-TO-PEAK!
• LOW FREQUENCY MODELS 0 to 5,000 cps (FM System)
AMPEX
Magnetic Tape RECORDERS
AMPEX ELECTRIC CORPORATION
REDWOOD CITY . . . CALIFORNIA
AX-48
UNRIVALED for AUDIO and INSTRUMENTATION Recording

magnetic tape recorder, as well as the console type RT-12A equipment and custom-built recording and editing equipment available in either rack or console combinations. Features, uses, specifications and test and performance data are given. Copies are available to broadcast station engineers requesting it on their letterhead.

Recording Potentiometer. Minneapolis-Honeywell Regulator Co., Wayne and Windrim Aves., Philadelphia 44, Pa. Instrumentation data sheet 10.0-7 describes a new high-speed ElectroniK recorder that features a one-second pen speed specially designed to measure the rapid change variables encountered in many laboratory and test applications. The sheet describes the applicability, operating characteristics and method of operation of the instrument and contains four illustrations.

Multirange Meter. The Automatic Coil Winder & Electrical Equipment Co. Ltd., Winder House, Douglas St., London, S. W. 1, England. A four-page folder discusses the model 8 universal Avo-Meter that features a wide range of resistance measurements, ability to measure high voltages and a-c current, and provides external accessories to further extend its range. Complete technical data given include resistance, sensitivity, scaling and accuracy. Information on terminals, operation, leads and prods and accessories is included.

Electrical Resistance Testers. James G. Biddle Co., 1316 Arch St., Philadelphia 7, Pa., has available bulletin 21-85 describing three low-cost Megger electrical resistance testers: the 705-CL midget insulation tester, the CVM-type insulation tester and the 760-S and 760-B midget circuit-testing ohmmeters. Illustrations, facsimile scales, specifications and prices are shown.

Measuring Device. Institute of Inventive Research, 8500 Culebra Road, San Antonio 6, Texas, has prepared a booklet dealing with its development program on the



Model 59

MEGACYCLE METER

2.2 mc. to 400 mc.

Frequency Accuracy ±2%

The MULTI-PURPOSE INSTRUMENT

- For determining the resonant frequency of tuned circuits, antennas, transmission lines, by-pass condensers, chokes, coils.
- For measuring capacitance, inductance, Q, mutual inductance.
- For preliminary tracking and alignment of receivers.
- As an auxiliary signal generator; modulated or unmodulated.
- For antenna tuning and transmitter neutralizing, power off.
- For locating parasitic circuits and spurious resonances.
- As a low sensitivity receiver for signal tracing.

And Many Other Applications

FREQUENCY: 2.2 mc. to 400 mc.; seven plug-in coils.

MODULATION: CW or 120 cycles; or external.

POWER SUPPLY: 110-120 volts, 50-60 cycles, 20 watts.

DIMENSIONS: Power Unit: 5⅛" wide, 6⅛" high; 7½" deep. Oscillator Unit: 3¾ diameter, 2" deep.

Write for Literature

MEASUREMENTS CORPORATION

BOONTON NEW JERSEY

di-acro PUNCH

NEW DOUBLE PURPOSE PRESS

Available in two sizes, 6" and 12" throat depth

Now you can punch holes of various shapes as large as 4" diameter in 16 gauge steel—also blank, draw, emboss, form—all with the new DI-ACRO Punch. It is ideal for both experimental and production work.

The precision ground triangular ram of this double purpose press prevents punch head from turning, assuring perfect alignment at all times for accuracy in duplicated parts.

A Turret Stripper of exclusive DI-ACRO design automatically strips material from punches of all shapes. Roller Bearing cam action develops 4-ton pressure with minimum effort. Adjustable gauges assure exact location of holes.

Send for "DIE-LESS DUPLICATING" *Catalog*

Gives the full story of the DI-ACRO Punch, and also DI-ACRO Benders, Brakes, Shears, Rod Parters, Notchers, as well as the new DI-ACRO Vari-O-Speed Powershear and Hydra-Power Bender.

DI-ACRO is pronounced "DIE-ACK-RO"

DI-ACRO PRECISION MACHINES FOR DIE-LESS DUPLICATING

O'NEIL-IRWIN MFG. CO.

321 EIGHTH AVENUE • LAKE CITY, MINN.

IN-RES-CO TYPES SM-15 & SM-30 WIRE WOUND RESISTORS

SUB-MINIATURE weather-tested midgets

Type SM-15 and SM-30 Resistors offer three vital advantages—sub-miniature size, weather resistant construction and high resistance. The elimination of center hole mounting and the inclusion of axial leads increases winding area and results in 25% greater resistance value than resistors of standard design. Special coating is moisture and fungus proof and designed to meet JAN-R-93 specifications. Sealed in Bakelite construction affords additional climatic protection. As ratings are conservative, types SM-15 and SM-30 can be specified with confidence for service under rigorous conditions.

TYPE SM-15
5/16" DIA. x ⅜" LG.

TYPE SM-30
5/16" DIA. x ¾" LG.

ASK FOR THE NEW RESISTOR HANDBOOK—
Contains complete data on resistors for every purpose and their recommended applications. Please make request on company letterhead.

INSTRUMENT RESISTORS CO.

COMMERCE AVENUE (IN RES CO) UNION NEW JERSEY

APPLICATION-DESIGNED RESISTORS FOR ELECTRONICS AND INSTRUMENTATION

HOUSINGS for the ELECTRONICS INDUSTRY

Your choice of height in more than 44 panel sizes, designed to afford greatest utilization of space and weight . . Streamlined appearance . . . Sturdy . . . Economical . . . Olympic "S" series, "A" series and MIL-T-27 series, with or without snap locks, shipped from stock.

more than 44 panel sizes

for relays vibrators amplifiers capacitors instruments transformers

Case bodies fabricated to any length required. Hot tin dipped to your specifications. Covers and cases modified with hole patterns, cut-outs, mounting brackets or other special requirements.

Facilities available for fabrication of sub-assemblies.

OLYMPIC METAL PRODUCTS COMPANY INC.

P. O. Box 71 A Phillipsburg, N. J.

NEW PRODUCTS (continued)

Vibrotron, a rugged new measuring device of high precision, designed for fields of industrial instrumentation. The Vibrotron, the booklet relates, is a fine wire vibrating in a magnetic field and generating a-c of the same frequency as the natural frequency of the wire; vibration being sustained by a feedback circuit. The many possible applications of the device are described.

Magnetic Relays. The North Electric Mfg. Co., Galion, Ohio. Temporary bulletin 1R511 gives an illustrated description of a line of magnetic relays for industrial controls. Specifications, operating characteristics, dimensional drawings, general applications and a table of available contact forms are included.

Multimeasurement Device. Mogens Bang & Co., Old Saybrook, Conn., has available pamphlet No. 525/E describing the D1SA Universal Indicator, an electronic device for measurements of both static and rapidly alternating forces, pressures, distances and vibrations. Examples of measurements are shown photographically and the device's principle of operation is completely covered.

Cartridge Directory. The Astatic Corp., Conneaut, Ohio, has published a new phonograph cartridge directory and replacement guide. It includes illustrations of all the company's cartridges and needles, together with complete performance data on each. Cartridges made by competitors are listed alphabetically and numerically, and the recommended Astatic replacement for each is indicated.

Tachometer Indicators. Metron Instrument Co., 432 Lincoln St., Denver 9, Colorado. Technical data sheet No. 42 R describes the new multiple-head, single-range, fixed installation tachometer indicators for monitoring speeds of many remotely located machines from one convenient location. Chief features, applications, installation information, servicing and ordering instructions are given.

Kahle

SPECIALISTS IN HIGH-SPEED

electron tube machinery

Kahle's 20 years of experience eliminate trial orders and experimental set-ups. Standard toolings for all tube manufacturing eventualities already have been tested and approved. This means that Kahle can assemble machines for everything from sub-miniature to largest TV picture tubes to your exact specifications . . . at lower costs!



#1902 AUTOMATIC BULB MAKING MACHINE for producing SUB-MINIATURE round bulbs with molded shoulder, constriction and tabulation. 12 index positions, 24 heads. Capacity: approximately 2400 per hour.

Machinery for all types of electron tubes and related glass products.

Consultations invited. Write today for our new catalog with complete details.

Kahle ENGINEERING CO.

1309 Seventh St., North Bergen, N. J.

VACUUM TIGHT GLASS-TO-METAL

HERMETIC SEALS

SPECIAL DESIGNS

AND ALL STANDARD TYPES

write or call for full information

SCIENTIFIC ELECTRONIC LABORATORIES, INC.

866 Bergen St. Newark 8, N. J.

Tel: Bigelow 8-6553



Every DANO coil a V.I.C.*

*Very important coil

- Form Wound
- Paper Section
- Acetate Bobbin
- Bakelite Bobbin
- Cotton Interweave
- Coils for High Temperature Applications

ALSO, ***TRANSFORMERS MADE TO ORDER***

Every Dano Coil gets special treatment, careful inspection and testing in all vital stages of production because every Dano Coil is a *Very Important Coil*—to you for performance, to us for reputation.

DANO

THE DANO ELECTRIC CO.

MAIN ST., WINSTED, CONN.

HUMIDITY TESTS



Bowser Relative Humidity Testing Units provide and automatically maintain humidity conditions from 20% to 95% at temperatures from +35°F. to +170°F. (Dry Bulb). These units are ruggedly built for extended service, yet feature the close tolerance control required for the testing of aircraft and electronic parts and equipment. The Bowser Humidity Unit is ***stainless steel throughout.*** Special accessories can be provided to meet specific requirements.

Bowser's complete line of testing, processing and storage equipment meets all MIL, JAN, USAF, AN and other Government test specs. Our Engineering staff is always available, and invites you to take advantage of Bowser's long continuous experience, the most versatile in its field.

✓ CHECK AND MAIL TODAY

BOWSER TECH. REFRIG., Terryville, Conn.

Send information on test equipment checked:

☐ High Temperature	☐ Fungus Resistance
☐ Low Temperature	☐ Rain and Sunshine
☐ Temperature Shock	☐ Sand and Dust
☐ Humidity	☐ Immersion
☐ Altitude	☐ Explosion Proof
☐ Walk-In Rooms	☐ Vapor Tight

Name_____ Pos._____

Company_____

Street_____

City_____ Zone____ State_____ 10

BOWSER

TECHNICAL REFRIGERATION

DIVISION BOWSER INC.

TERRYVILLE • CONN

OVER 30 YEARS OF PRECISION ELECTRICAL EXPERIENCE

DeJUR

PRECISION *Potentiometers*

SERIES L-400



DeJUR MODEL L-402

DeJUR MODEL L-400 with switch



FEATURES:
- 1⅛" diameter
- 3 watts fully enclosed
- 5 to 125,000 ohms
- accuracy up to 0.5%
- linearity up to 0.1%
- 300° rotation mechanical and electrical
- on-off switch
- ganging up to 10 units
- double and shafts available

To meet the increasing demand for small compact precision potentiometers for military airborne instrumentation and similar applications, DeJUR is now producing the L-400 series potentiometers, built to rigid mechanical and electrical requirements of JAN-R-19 specifications.

RA-40 DeJUR MODEL 275

RA-50 DeJUR MODEL 280

DeJUR MODEL 281

DeJUR MODEL 292

Built to JAN-R-19 specifications. Other models from 1-3/16" to 5" diameter.



DeJUR MODEL 112

1½" *Panel* INSTRUMENTS

Also available • 2½" • 3½" • 4" panel meters in all standard ranges. JAN-1-6 and A. S. A.

DeJUR MODEL 120

FEATURES:
Precision built DeJUR 1½" instruments for applications where space must be conserved • DeJUR rugged construction • Both models in all ranges and sensitivities • External shunts and multipliers available for various ranges • Complete magnetic shielding and methods of lighting scale • Approved source for government services meets JAN specifications.

- DC VOLTMETERS
- AMMETERS
- MILLIVOLT METERS
- MILLIAMMETERS
- AC RECTIFIER TYPES (self-contained).

Aluminum Case • One Hole Ring Mounting

Power RHEOSTATS

Built to JAN-R-22 specifications, DeJUR Rheostats are available in 25 or 50 watt sizes, single or dual ganged. Resistances up to 50,000 ohms in the 25 watt size and 75,000 in the 50 watt size.

DeJUR MODEL 241

All Metal Construction

DeJUR MODEL 245

For Further Information Write Dept. E-101



DeJUR MODEL 245-D

REQUEST CATALOG

DeJUR USA

DeJUR AMSCO CORPORATION

45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y.

MANUFACTURERS OF SCIENTIFIC PRECISION EQUIPMENT FOR OVER A QUARTER OF A CENTURY

• CAMERAS • PROJECTORS • ENLARGERS • EXPOSURE METERS •

NEWS OF THE INDUSTRY

(continued from page 150)

not have range voice channels on l-f, m-f or vhf. Eventually all INSACS will transmit on 122.2 mc. Owing to equipment shortages, only about ten percent are now so equipped.

New RTMA Standards Published

FOUR new recommended standards were recently issued by the RTMA engineering department for inclusion in the standards handbook. They should be filed in the section indicated by the number prefixes. The new standards are as follows:

GEN-104—Color Marking of Thermoplastic Insulated Hook-up Wire. (Price 25 cents)

TR-113-A—Metal Encased Fixed Paper Dielectric Capacitors For D-C Application. (Price 65 cents)

TR-115—Symbols and Designations for Single Line Diagrams for Audio Facilities. (Price 60 cents)

REC-115-A—Molded Mica Capacitors. (Price 50 cents)

All are available from the Radio-Television Manufacturers Association, 1317 F St., NW, Washington 4, DC.

BUSINESS NEWS

AMPEREX ELECTRONIC CORP., Brooklyn, N. Y., is building a new 100,000-sq-ft plant in Hicksville, L. I., N. Y., for the manufacture of advanced design electron tubes.

RAYTHEON MFG. CO., Newton, Mass., has begun construction of a new plant at Quincy, Mass., as a further expansion of its receiving tube division.

INDUSTRIAL DEVELOPMENT ENGINEERING ASSOCIATES, manufacturer of the Regency booster, recently built a new factory in Lawrence, Indiana.

GENERAL CONTROLS CO., manufacturer of automatic controls, is constructing a 24,000-sq-ft addition to its engineering building in Glendale, Calif.

BATTELLE INSTITUTE, Columbus, Ohio, has begun construction of an 80,000-sq-ft building for research

TAKE A GOOD LOOK!

VICTOREEN POCKET DOSIMETERS FOR EVERY PURPOSE

LOOK at the Victoreen dosimeters that have served the medical profession for over twenty-five years.

LOOK at the Victoreen dosimeters that serve Government and Atomic Energy Industrial Laboratories.

LOOK at the Victoreen dosimeters in "Olive Drab" and in "Navy Gray."

A dosimeter is an instrument which measures the total accumulated quantity (dosage) of X or gamma radiation. The reading is in roentgens regardless of exposure time. Pocket dosimeters, sometimes called pocket chambers, are either direct reading or indirect reading. Direct reading pocket chambers have a built-in optical system and electrometer, which permits the wearer to periodically observe the dosage which has accumulated since the chamber was last charged, thus enabling him to retreat from a hazardous area when the dosage approaches the average daily tolerance. Indirect reading dosimeters require a Minometer (charger-reader) to observe the reading. This reading is usually checked at the end of the working day by a competent technician.

Model	Type	Full Scale Sensitivity	Conditions
362	Indirect	0.2 r	AC or below daily Tolerance Rate
541	Direct	0.2 r	AC or above daily Tolerance Rate
547	Direct	5. r	Emergency
548	Direct	50. r	Trained personnel —Emergency
534	Direct	5. and 50. r	Civil defense, etc.
506	Indirect	100. r	Untrained personnel —Emergency
507	Indirect	200. r	Untrained personnel —Emergency

Write for Bulletin **3012 B**

Victoreen Instrument
5806 HOUGH AVE. CLEVELAND 3, OHIO

WINCHESTER ELECTRONICS, INCORPORATED



Patent Pending

HIGH VOLTAGE · MINIATURE · CONNECTOR

Radio • Communication • Instruments • Photo Flash

MONOBLOC* CONSTRUCTION—MELAMINE MOLDED BODY — TELESCOPING BARRIERS to reduce creepage, provide maximum strength, assure high dielectric and arc resistance

MELAMINE HOOD and NYLON NUT for cable and chassis mounting. (may be applied to either plug or receptacle).

LOCK RING and LOCK SPRING prevent accidental disconnection due to vibration. (may be interchanged on plug and receptacle—or omitted).

Telephone or write for additional information on the above or other connectors or for consultation on your special connector problems.

*Trade Mark

Type	No. of Contacts	A.W.G. Wire Size	Maximum Current	Maximum O.D.	VOLTAGE BREAKDOWN • At Sea Level	VOLTAGE BREAKDOWN • At 50,000
PM1	1	#20	5a	¾"	7000 V. D.C.	1600 V. D.C.
PM6▼	6	#20	5a	1-7/32"	7000 V. D.C.	1600 V. D.C.

▼ illustrated

• CONNECTOR ENGAGED

Winchester Electronics
INCORPORATED
GLENBROOK, CONNECTICUT, U.S.A.

NOW! BECOME EXPERT AT
Radio-Television
IN 4 EASY STEPS!

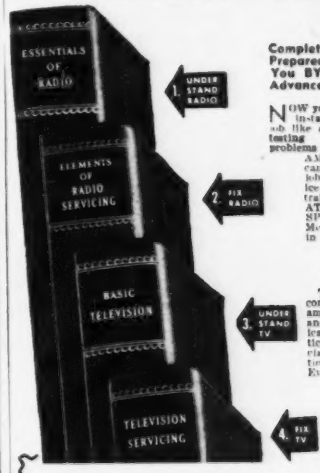

Complete Self-Training Course in RADIO and TELEVISION Prepared by Famous Experts—Starts From Scratch. Takes You BY SIMPLE LOGICAL STEPS From Basic Theory to Advanced Problems of Repair, Installation, Color TV, etc.

NOW you can do ANY Radio-TV installation, service, or repair job like an expert; operate field-testing equipment; understand problems of TV broadcasting, FM-AM transmission, etc. You can start into a good-paying job—or start your own service business. And you can train yourself for your career AT HOME . . . IN YOUR SPARE TIME . . . with the McGraw-Hill Basic Course in Radio and TV.

2296 Pages—1611 Illustrations

The men who wrote this complete 4-volume course are among the outstanding radio and TV instructors in America today. They are practical, shirt-sleeved technicians. They know the questions you want answered. Every detail is clearly explained in over TWO THOUSAND PAGES of step-by-step instruction and over SIXTEEN HUNDRED "how-to-do-it" illustrations, cross-section diagrams, etc. The review questions and answers "nail down" everything you learn. At-a-glance "trouble-shooting" charts show how to diagnose instantly any radio or TV breakdown . . . and how to repair it expertly and quickly.

The course will pay for itself many times over. It can qualify a beginner for FCC's 1st-Class License test; gives an experienced technician more confidence, shows him new tricks.

Send No Money

Mail coupon below to examine this complete four-volume course FREE for 10 days; then while you use it, send small monthly installments until the price of $19.95 is paid.

These 4 books can help you qualify for FCC's New FM, TV 1st Class License Test.

ESSENTIALS OF RADIO. 800 pages, 433 illus.

BASIC TELEVISION. 502 pages, 415 illus.

ELEMENTS OF RADIO SERVICING. 475 pages, 375 illus.

TELEVISION ENGINEERING. 429 pages, 380 illus.

FREE 10 DAY TRIAL COUPON

McGRAW-HILL BOOK COMPANY, Inc.,
330 W. 42nd St., New York 18

Send me McGraw-Hill's Basic Course in Radio & TV, 4 volumes, for 10 days' examination on approval. If the books prove satisfactory, I will remit $1.95 in 10 days, and $3.00 monthly until $19.95 is paid. Otherwise I will return books postpaid.

Name .....

Address .....

City ..... Zone ..... State .....

Company .....

Position L-10

This offer applies to U.S. only.

Standard
RADIO INTERFERENCE and FIELD INTENSITY Measuring Equipment

Complete Frequency Coverage - 14 kc to 1000 mc!

VLF!
NM - 10A
14kc to 250kc
Commercial Equivalent of AN/URM-6.
Very low frequencies.

HF!
NM - 20A 150kc to 25mc
Commercial Equivalent of AN/PRM-1.
Self-contained batteries. A.C. supply optional. Includes standard broadcast band, radio range, WWV, and communications frequencies.

VHF!
NMA - 5
15mc to 400mc
Commercial Equivalent of TS-587/U.
Frequency range includes FM and TV Bands.

UHF!
375mc to 1000mc NM - 50A
Commercial Equivalent of AN/URM-17.
Frequency range includes Citizens Band and UHF color TV Band.

These instruments comply with test equipment requirements of such radio interference specifications as JAN-I-225, ASA C-63.2, 16E4(SHIPS), AN-I-24a, AN-I-42, AN-I-27a, AN-I-40 and others.

STODDART AIRCRAFT RADIO CO.
6644-A SANTA MONICA BLVD., HOLLYWOOD 38, CALIFORNIA
Hillside 9294

services in behalf of the nation's defense effort.

AEROVOX CORP., New Bedford, Mass., recently acquired Wilkor Products Inc., Cleveland, Ohio, as a precision resistor subsidiary.

HARMAR CO., Cincinnati, Ohio, component manufacturers, have acquired the entire surplus inventory of electronic devices, component parts and end products from Heath Co., Benton Harbor, Mich.

RADIO CORP. OF AMERICA recently opened a new 136,000-sq-ft plant in Cincinnati, Ohio, for the manufacture of miniature and subminiature tubes.

BILL JACK SCIENTIFIC INSTRUMENT CO. will produce electronically controlled aerial cameras and electronic instruments for high-speed aircraft in initial operations at its new Anza Village plant in Riverside, Calif.

ESSEX WIRE CORP. has purchased a 200,000-sq-ft building in Birmingham, Alabama, to manufacture an entire line of bare and weatherproof ACSR strand and insulated wires.

POLARAD ELECTRONICS CORP., Brooklyn, N. Y., has added another floor at its same location, increasing its manufacturing space to 27,000 sq ft. The added space will be devoted to production of military equipment.

PERSONNEL

MARVIN HOBBS, formerly chief of the Munitions Board Office of Electronics Programs, has been named advisor to the chairman of the Munitions Board. In this capacity he will coordinate all phases of the Department of Defense planning to meet the requirements for military electronics production.

GORDON GROTH, for the past two years president of the Electra Mfg. Co., Kansas City, Mo., has been appointed executive vice-president of the Erie Resistor Corp., Erie, Pa.

K. R. PATRICK, formerly general manager of the engineering prod-

Why Micro sales have increased 1700% in 3 years

Since 1948, sales of Micro miniature bearings have multiplied more than 17 times — a tribute from hundreds of top-flight designers and engineers to America's first and only *fully ground* miniature ball bearings.

Applications involving critical weight, size and friction are best entrusted to the more than 85 types and sizes of Micro bearings. They are available in sizes as small as $\frac{1}{16}$" O.D. and with tolerances to the millionths-inch precision of ABEC-7. Yet, they actually *cost less* than comparable unground bearings.

Write for Technical Bulletin No. 50

New Hampshire **MICRO** Ball Bearings, Inc.

5 Main Street, Peterborough, N. H.

Only BETA gives you ON THE SPOT ENGINEERING SERVICE Coast to Coast

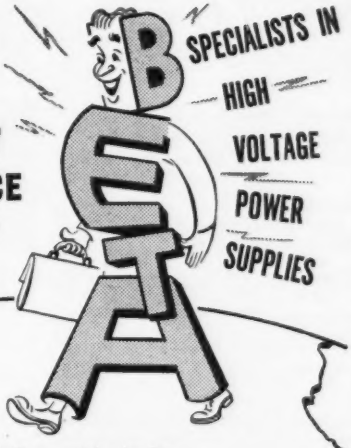

Power supplies up to 30 KV in stock . . . up to 250 KV quickly available from standard designs . . . up to 500 KV built on special order. Beta supplies the correct equipment for your job . . . designed for long, accurate, trouble-free life. Beta field engineers will be glad to consult with you on your high voltage power supply problems and will give you expert advice on proper voltage, current, regulation, metering, safety devices, control circuits, etc. for your particular application.

BETA Electric Corporation
333 East 103rd St.
New York 29, N. Y.
ENright 9-8520

NEW BRAZING ALLOY for VACUUM TUBE COMPONENTS "NICORO"

Alloy of Nickel, Copper and Gold . . . our exclusive development

- SUPERIOR FLOW CHARACTERISTICS
- MINIMUM "LEAKERS"
- GREATER STRENGTH

WRITE FOR FACTUAL DATA AND PRICES

MAIL THIS COUPON

Your name.....

Firm name.....

Address.....

City.....State.....

WESTERN GOLD & PLATINUM WORKS
Smelters • Refiners • Manufacturers
589 BRYANT STREET
SAN FRANCISCO 7, CALIF.

The First HAND-ADJUSTABLE Electrical Cam-

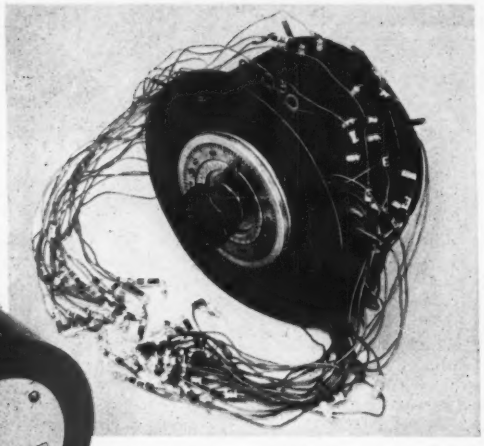

ACCURACY ± .025%

VARI-FUNCTION POTENTIOMETER MODEL J-15

±.1% TO ±.025% FUNCTIONAL CONFORMITY

30, 45, OR 60 TAPS

RESISTANCE VALUES FROM 10 OHMS TO 200,000 OHMS

± .5% OR BETTER TOTAL RESISTANCE TOLERANCE

2 TO 15 TURNS ROTATION

EXCELLENT RESOLUTION AT LOW RESISTANCE VALUES

DIAMETER 5⅞" DEPTH 2⅝" WEIGHT 2 LBS.

DIAL OPTIONAL

GANGING POSSIBLE

DOUBLE SHAFT EXTENSIONS

Ideal for Analogue Computers, Radar, Guided Missiles, Servo Controls, Industrial applications, Laboratories, etc.

The J-15 is a functionally adjustable potentiometer. It will produce a voltage output as a desired function of shaft rotation.

The exclusive features of the J-15 and all other models of the Vari-Function Potentiometer are *unequalled accuracy* and *functional adjustability*.

Complex voltage functions may be factory set or set by the user quickly and easily to an accuracy of .025%.

The J-15 is especially suited for linear applications of utmost accuracy because it can be adjusted to compensate for inherent winding non-linearity and external loading effects.

Write, wire, or phone us if you have a problem of non-linear compensation calling for adjustability or extreme accuracy. Bulletins available on J-15 and other models.

AFSCO **A. F. SMUCKLER & CO., INC.**

Electronic and Communication Engineers and Manufacturers

202-208 TILLARY ST., BROOKLYN 1, NEW YORK

ucts department, RCA Victor Co., Ltd., has been elected president and managing director of Canadian Aviation Electronics, Ltd., Montreal, Canada.

EDWARD U. CONDON, formerly director of the National Bureau of Standards, has been made director of research and development of Corning Glass Works, Corning, N. Y.

E. U. Condon

H. Pratt

HARADEN PRATT, formerly vice-president of the American Cable & Radio Corp., was recently appointed to the newly created post of telecommunications adviser to President Truman.

HENRY FOGEL, previously associated with Tele-Tone Radio Corp. as chief engineer in the advanced development section, was recently appointed chief of the product engineering division of Radio Receptor Co., Inc., Brooklyn, N. Y.

DANA W. ATCHLEY, JR., formerly director of engineering of Tracerlab, Inc., Boston, Mass., has been appointed coordinator of technical research at United Paramount Theatres, Inc., New York, N. Y.

LOUIS J. KLEINKLAUS, associated with radio station WQXR since 1940, was recently appointed chief engineer of the station. At the same time Athan Cosmas was named engineer in charge of WQXR's a-m and f-m transmitters.

SOLOMON ZIMMERMAN, until recently with the product engineering division of Teletone Radio Corp., has been appointed to the development engineering staff of JFD Mfg. Co. Inc., Brooklyn, N. Y.

RAY A. MORRIS, with Industrial Development Engineering Associates,

SPECIALISTS IN
ELECTRONIC GEARS

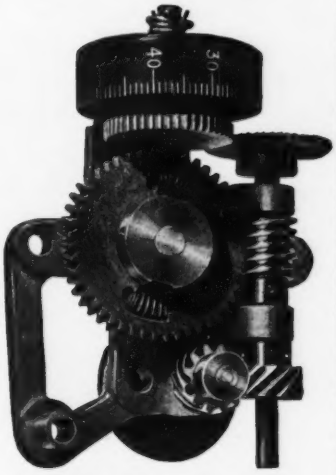

QUAKER CITY
GEAR WORKS
1910 N. FRONT ST.
PHILADELPHIA 22, PA.

SIGNAL ENGINEERING SERIES 80
MIDGET TELEPHONE TYPE
RELAYS...





Compact, multiple contact with vibration and shock-proof characteristics. Designed to meet various operating requirements typical of Armed Services applications.

Unique pile-up arrangement reduces width below the conventional relay, thereby reducing over-all space volume.

Available with octal base, sealed or unsealed, and snap-on dust covers, and also hermetically sealed containers. Also equipped with modified type AN 3106-20-27P sealed connector.

Write for Bulletin MTR-6

Sales Representatives in Principal Cities

Wheelock RELAYS
SIGNAL
ENGINEERING & MFG. CO.
154 WEST 14TH ST. NEW YORK 11, N.Y.

IMMEDIATE CAPACITY
FOR DEFENSE
SUB-CONTRACTS

STRAIGHTENING & CUTTING
Perfect straight lengths to 12 ft.
.0015 to .125 diameter

WIRE FORMS
.0015 to .080 diameter

SMALL METAL STAMPINGS
.0025 to .035 thickness
.062 to 3 inches wide

★

Specializing in Production of Parts for Electronic and Cathode Ray Tubes

Write for Illustrated Folder
Send Blueprints or Samples for Estimate

ART WIRE & STAMPING CO.
227 High Street Newark 2, N. J.

PRECISION PAPER TUBES...

. . . meet your
COIL FORM
REQUIREMENTS

YOUR SPECIFICATIONS . . .
round, oval, square, rectangular, any size, any ID or OD, any length. We will give you Precision Paper Tubes to exactly fit your coil form specifications.

YOU CHOOSE THE MATERIAL . . .
finest dielectric Kraft Fish Paper, Cellulose Acetate or combinations. We will supply whatever material or combination you prefer for your Precision Paper Tubes.

WE'LL GIVE YOU FINER COIL FORMS!
Spiral winding and die-forming under heat and pressure assure stronger, lighter coil forms. Precision Paper Tubes resist moisture better, too—provide better heat dissipation and insulation.

LET US MAKE UP A SAMPLE FOR YOU!
Write today, giving us your requirements, for a free sample. And ask for our new Mandrel List of 1,000 sizes.

PRECISION PAPER TUBE CO.
2041 W. Charleston St., Chicago 47, Ill.
Plant No. Two, 79 Chapel St., Hartford, Conn.

Electronic Engineers

are needed at world-famous

LINK AVIATION

Excellent positions are available for senior electronic engineers on long range military and civilian programs.

Challenging and interesting work—with unique advancement opportunities are offered to men with exceptional electronic abilities.

Excellent wages, liberal health and life insurance program. *Attractive homes and new apartments* within minutes of LINK plant. Bonus and vacation plan, company cafeteria. Currently on 48-hour week.

Experience in airborne radar, analogue computers, pulse systems, servomechanisms, feedback amplifiers desirable.

Write to:
JAMES F. BAYLIS
Personnel Manager

LINK AVIATION, INC.

BINGHAMTON, N. Y.

Manufacturers of LINK TRAINERS • FLIGHT SIMULATORS • GUNNERY AND NAVIGATIONAL TRAINERS • SERVO MECHANISMS • SERVO AMPLIFIERS • GRAPHIC RECORDERS • PRECISION GEAR BOXES • FRACTIONAL H.P. WIDE RANGE VARIABLE SPEED DRIVES • SPUR GEAR DIFFERENTIALS • FRICTION AND OVERDRIVE CLUTCHES • INDEX DIALS *and Special Electronic Devices*

Indianapolis, Ind., as assistant sales manager since December, 1950, was recently named chief engineer of that organization.

FRANCIS J. BURGER, associated with Emerson Radio & Phonograph Corp. for the past 18 years, has been appointed chief radio engineer of the company.

GARDINER G. GREENE has been appointed vice-president in charge of the Electronics Division of The Gabriel Co., Cleveland, Ohio. He was formerly president of Workshop Associates, Needham, Mass., one of Gabriel's divisions.

G. G. Greene C. J. Breitwieser

C. J. BREITWIESER, formerly chief of electronics and head of the engineering laboratories at Consolidated Vultee Aircraft Corp., San Diego, Calif., has been named executive assistant to F. R. Hensel, vice-president in charge of engineering at P. R. Mallory & Co., Inc., Indianapolis, Ind.

E. W. RITTER, manager of the Electronic Tube Division of Westinghouse Electric Corp., Pittsburgh, Pa., has been named a vice-president of the corporation.

OTTO C. BIXLER, previously associated with Airesearch Mfg. Co. as an electrical development engineer on aircraft and guided missile applications of special electronic equipment, has been appointed director of engineering of Magnecord Inc., Chicago, Ill.

RICHARD HODGSON, president of Chromatic Television Laboratories, Inc., and director of television development for Paramount Pictures Corp., has been named a consultant to Gen. Hoyt S. Vandenberg, Chief of Staff, U. S. Air Forces, on research and development.

RAWSON METERS



MULTIMETERS and REGULAR METERS
AC and DC types, high accuracy, multiple ranges.
2 microamperes to 1 ampere DC.
2 milliamperes to 3 amperes AC.

ELECTROSTATIC VOLTMETERS
Ranges 100-v. to 35,000-v. AC or DC
Resistance exceeds million megohms.
Can measure static electricity.

FLUXMETERS
Laboratory and production measurements on magnets and magnetic circuits. Single push button return-to-zero.

ROTATING COIL GAUSSMETER
Our most recent development for measuring magnetic field strengths. Measures from a few gausses to 120 kilogausses.

Special apparatus built to order
Write for details and estimates

RAWSON ELECTRICAL INSTRUMENT COMPANY
111 Potter St. Cambridge, Mass.
REPRESENTATIVES
CHICAGO LOS ANGELES

TEFLON MAGNET WIRE
FOR HIGHEST TEMPERATURE-APPLICATIONS

Warren Wire Company is now producing in quantity Teflon insulated Magnet Wire.

SIZES—14 through 45
Single, Heavy, Triple and Quadruple thickness, NEMA STANDARDS

We invite inquiries where requirements call for:

small SPACE FACTOR
HIGHEST ABRASION RESISTANCE
FLEXIBILITY AND ADHERENCE
DIELECTRIC STRENGTH
RESISTANCE TO CHEMICALS

and it will withstand temperatures of 250 centigrade.

WARREN WIRE COMPANY,
POWNAL VERMONT

when you need a
QUALITY OSCILLATOR
SIE
MODEL M-2 IS YOUR ANSWER

The unique SIE oscillator circuit which has no lower limit to its possible frequency of oscillation is responsible for the excellent low frequency performance of the Model M-2 and other SIE oscillators. Write today for complete specifications.

SOUTHWESTERN INDUSTRIAL ELECTRONICS CO.
2831 Post Oak Rd. Houston 19, Texas
434 Seventh Ave. East—Calgary, Alberta, Canada

Custom-Built ELECTRICAL TEST and CONTROL PANELS; DISTRIBUTION SYSTEMS

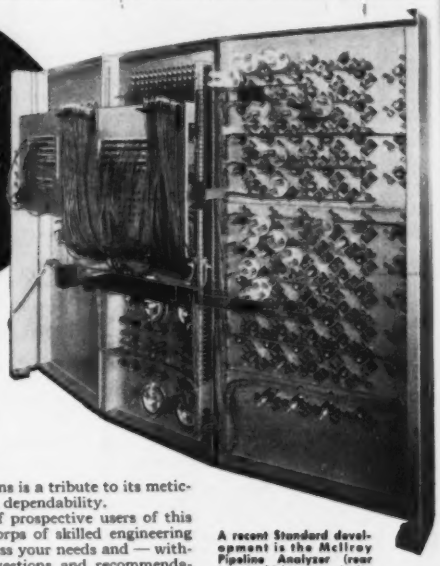

For over 25 years, Standard has specialized in engineering, designing and producing custom-built electrical test and control panels and distribution systems. The broad use of this equipment by leaders in many types of industries and in numerous armed services and other government installations is a tribute to its meticulous accuracy and inherent dependability.

We solicit the inquiries of prospective users of this type of equipment. Our corps of skilled engineering consultants is ready to discuss your needs and — without obligation — make suggestions and recommendations regarding new installations or the conversion of existing facilities.

A recent Standard development is the McIlroy Pipeline Analyzer (rear view) which electronically creates visual analogies to actual friction head losses and other data.

THE STANDARD FOUNDED 1884
Standard Electric Time Co.
97 Logan Street • Springfield 2, Massachusetts

Designed for
Application

THE NO. 37001
SAFETY TERMINAL

An old favorite in the line of exclusive Millen "Designed for Application" products. Combination high voltage terminal and thru-bushing. Tapered contact pin fits firmly into conical socket providing large area, low resistance connection. Pin is swivel mounted in cap to prevent twisting of lead wire. Easy to use. ¼" o.d. insulation high voltage cable fits into opening in cap. Bared conductor passes thru pin for easy soldering to pre-tinned tip of contact plug.

•

Standard 37001 available in either black or red bakelite. No. 37501 is low loss mica filled yellow bakelite for R.F. applications.

JAMES MILLEN
MFG. CO., INC.
MAIN OFFICE AND FACTORY
MALDEN
MASSACHUSETTS

NEW BOOKS

(Continued from page 152)

Regulating *Theory*, instead of *Design*.

It is possible that Volume II of this series would tend to round out the requirements for an actual design text. However, it would seem to this reader that an interlace of the two volumes would have made the presentation more valuable as a textbook outside of the original GE courses in which the material was originally presented. There is certainly a need for such an integrated text in our college servomechanism courses.

Due to the very comprehensive treatment of the mathematical considerations of servomechanisms, this text will find considerable more use as a more advanced reference book for the practicing engineer than it will as a classroom text. Its value as a textbook is enhanced when used in conjunction with such excellently integrated books as "Theory of Servomechanisms," which is MIT Radiation Lab Vol. 25, and "Servomechanism Fundamentals" by Lauer, Lesnick and Matson. Not one of these books is as complete in the mathematical approach as this volume, but they both are more definitely design texts.

All in all, this reader would recommend "Servomechanisms and Regulating System Design" as a worthy adjunct to any engineering reference library for the servo field. —OSCAR E. CARLSON, *Servo-Tek Products Co., Paterson, N. J.*

Propagation of Short Radio Waves

EDITED BY D. E. KERR. *Volume 13, MIT Radiation Laboratory Series. McGraw-Hill Book Co., New York, 1951, 728 pages, $10.00.*

THIS book is concerned with propagation phenomena at frequencies above 100 mc. Above this frequency, propagation is substantially independent of the ionosphere. The electrical properties of the earth or the sea and the nature of the troposphere above the surface are primarily responsible for the propagation characteristics of radiation in this frequency range.

It is known that under normal

✓ Attenuation as high as 100 db. from 0.15 to 10,000 mc. (higher attenuations with special design).

✓ Fully approved for rigid radio interference suppression and r-f shielding applications.



ACE
PRE-BUILT
SCREEN
ROOMS

✓ Pre-built, "cell-type" construction for immediate, inexpensive installation.

✓ Easy to enlarge, or to move to a new location.

✓ Special filter entry, door construction and other exclusive features.

✓ Standard sizes for practically every application.

Write, wire or 'phone for details.

ACE ENGINEERING
AND MACHINE CO., INC.
3644 N. Lawrence St., Philadelphia 40, Pa.
Telephone: REgent 9-1019

MICO

Precision Apparatus

UHF COAXIAL WAVEMETERS

2 - 75 CENTIMETER RANGE

MODEL 433. . .20 to 75 Centimeters
MODEL 501. . . 4 to 20 Centimeters
MODEL 402A. . 2 to 10 Centimeters
MODEL 402B. . 2 to 10 Centimeters
(Reaction Type)

MICO INSTRUMENT CO.
76E TROWBRIDGE ST., CAMBRIDGE, MASS.





PANORAMIC
RADIO PRODUCTS, INC.

when MAXIMUM SIGNAL RESOLUTION IS A "MUST"...SO ARE

PANORAMIC PANALYZOR SB-8 AND PANADAPTOR SA-8

These instruments enable spectrum analysis of signals so close in frequency that their corresponding indications would normally mask one another.

FEATURES—*Continuously variable resolutions • Continuously variable scanning width • Long persistence cathode-ray tube . . . 5" Screen • Intensity grid modulation for pulse analysis • Synchronous and non-synchronous scanning • Variable scanning rates • Linear and log amplitude scales.*

Let a Panoramic specialist advise you on your individual problems.

Write for fully detailed bulletin.

10 SOUTH SECOND AVENUE, MOUNT VERNON, N. Y.

The New STAVER
MINI-SPRING
TRADE MARK REG. AND PAT. PEND

Available! Special Improved Types for Military Apparatus

Gives support two ways—Keeps pressure downward and gives sideway support. The spring action is constant and resilient permanently. Send for catalog sheet.

THE Staver COMPANY
INCORPORATED

91 PEARL ST. • BROOKLYN 1, N. Y.
ULSTER 5-6303

LOW HARMONIC CONTENT PERMANENT MAGNET ALTERNATOR

MODEL N28

EAD



Originally designed and manufactured to operate into EAD synchronous motors in precision test equipment. Will meet all military specifications—high and low ambient temperature, humidity, altitude, dust, tropicalization, vibration and corrosion.

SPECIFICATIONS

Output 7 volts and 30 cycles, at 1800 RPM. Extremely low harmonic distortion, continuous duty, ball bearings.

This alternator may be modified to meet your individual requirements in 1, 2 or 3 phase for wide voltage ranges at required frequencies.

EASTERN AIR DEVICES, INC.

585 DEAN STREET • BROOKLYN 17, N. Y.

H. L. DALIS, INC.

Your Efficient and Dependable Source of Supply for all types of Electronic Components & Equipment

because...

- There is no order too large and none too small . . .
- We carry one of the largest stocks in the country.
- A staff of 20 experienced salesmen to answer your call . . . these men are fully acquainted with your needs and problems.
- All orders are shipped same day as received . . . deliveries made everywhere.
- We are as near to you as your telephone . . . just call ALgonquin 5-3000, tell us what you want, and we'll deliver.
- Our factory contacts, built up through more than a quarter-century in the industry, are at your service.

Our weekly sales staff meeting being addressed by Mr. F. E. Anderson, RAYTHEON'S Distributor Sales Manager.

The DALIS trucks lined up for daily loading at our shipping platform.

Seal of HLD Service

Do as other wise purchasers are doing—write for latest Dalis Catalog on your company letterhead.

H. L. DALIS, INC.

Wholesale Distributors Since 1925

175 Varick Street, New York 14, N. Y.

ALgonquin 5-3000

conditions, the refractive index of the atmosphere above the earth decreases in such a way as to result in a radio horizon that is somewhat greater than the optical horizon. However, under certain meteorological conditions, a temperature inversion can exist in a layer of atmosphere and cause the refractive index to vary with height in such a way as to produce ducts. Radiation of sufficiently high frequency can be trapped in these ducts and guided around the surface of the earth in a fashion analogous to that of a waveguide. Under these conditions, propagation can occur over distances that are many times as great as the distance to the radio horizon.

The first half of the volume is concerned with phenomena of this nature. After a brief introductory chapter, the theory of the horizontally stratified atmosphere is treated in great detail, using the methods of geometrical optics and of physical optics. There is an extensive theoretical discussion of the various shapes of modified index profiles. The case of propagation under conditions of standard refraction is thoroughly treated and expressions are given for computing the field strength as a function of the various parameters involved. A number of graphs to simplify the computations are included as part of the text. These graphs are supplemented by some additional graphs in an envelope at the back of the book. These graphs are large enough to be read with reasonable accuracy.

The case of nonstandard refraction is given a brief numerical discussion. Some curves have been included to orient the reader to the magnitudes involved.

The theoretical chapter is followed by one on the meteorology of refraction. This chapter is essentially a self-contained treatment of those parts of meteorology which are pertinent to the propagation of short radio waves. Many soundings are displayed to illustrate the conditions that can be encountered. Chapter 4 summarizes the experiments on transmission phenomena and their correlation with meteorological conditions. Chapter 5 con-

MEASURE ALL

3!

★ FLUTTER
★ WOW
★ DRIFT



New, Sensitive

FLUTTER METER

First Aid for the sound engineer — the ACA Flutter Meter! Accurate, sensitive instrument designed for rapid visual indication of flutter, wow, and drift content of discs (all speeds), sound film mechanisms, film recorders, and magnetic wire and tape recorders.

Three distinct and simultaneous readings may be made of flutter, wow, and drift. Large, sensitive 4" meter has three scales: 0.3%, 1.0%, and 3.0%, calibrated for flutter, wow, and drift readings. Accuracy within 2% of full scale value, independent of wave-form, amplitude variation, hum, noise, etc.

Flutter Meter complies with tentative standards set by Society of Motion Picture Engineers. Recommended for schools, labs, broadcast stations, recording equipment manufacturers, and studios.

WRITE FOR COMPLETE DESCRIPTION:

AMPLIFIER CORP. of AMERICA
398 BROADWAY • NEW YORK 13, N. Y.

GRC

ZINC ALLOY

WING NUTS

GET AROUND

you'll see them on

GENERAL ELECTRIC

EM-PM FOCUS COILS

. . . and wherever specifications call for fastenings that are rustproof • corrosion-resistant • easy to assemble and disassemble • extra easy to service • durable, dependable, attractive. Available in all popular thread sizes and commercial finishes. Also specials made to order.

Write for samples and prices today.

GRIES REPRODUCER CORP.

World's largest producer of die cast Wing Nuts
100 Willow Ave., New York 54 • MOtt Haven 9-2476

DOUBLE BARREL ADVERTISING

Advertising men agree—to do a complete advertising job you need the double effect of both Display Advertising and Direct Mail.

Display Advertising keeps your name before the public and builds prestige.

Direct Mail supplements your Display Advertising. It pin-points your message right to the executive you want to reach —the person who buys or influences the purchases.

In view of present day difficulties in maintaining your own mailing lists, our efficient personalized service is particularly important in securing the comprehensive market coverage you need and want.

Ask for more detailed information today. You'll be surprised at the low overall cost and the tested effectiveness of these hand-picked selections.

McGraw-Hill Publishing Co., Inc.
330 West 42nd St., New York 18, N. Y.

This Is Your Invitation To The Third Annual

AUDIO FAIR

Featuring Audio on the Contemporary Scene

HOTEL NEW YORKER, NEW YORK CITY, NOVEMBER 1, 2, 3

The event of utmost importance to Broadcast Engineers, Military and Government Agencies, Recordists, Sound-on-Film Men, Public Address Men, Audio Hobbyists, and Distributors and Dealers.

AES

The third presentation under one roof of an industry-wide display of audio equipment, components and accessories, REGISTRATION FREE!

Sponsored by the AUDIO ENGINEERING SOCIETY

Annual Banquet, Thursday Evening, November 1st

For Your Quartz Crystal Requirements

we can supply for immediate shipment, any frequency, any tolerance, any quantity, to your specific needs. Manufactured to meet all commercial and military specifications. Send us detailed description and quantity for prices.

MICHAEL STAHL, Inc.

215 Fulton Street New York 7, N. Y.

Simplifying **HF** *Power Measurement*

Model 67 **TERMALINE**

DIRECT-READING R-F WATTMETER

30 mc to 500 mc
(to 1000 mc if specified)

50 ohms

Triple Range 0-25 watts
0-100 "
0-500 "

Type N Input Connector
(Adaptor for PL-259 supplied)

• Model 67 is the same type absorption instrument as the well-known AN-ME-11/U (our Model 611) R-F Wattmeter. Specifically designed for fixed station transmitters to 500 watts output, it may be used nicely on low range for mobile gear. Provided with an aluminum cased, shock-mounted meter, Model 67 is as simple to use as a DC voltmeter. Now in general use throughout the industry, TERMALINE Wattmeters may be depended upon for fast, accurate and repeatable power readings.



NON-RADIATING
... Accuracy — 5%

RUGGED CONSTRUCTION
... Size — 17"x9"x6"
Wght. — 30 pounds

BIRD
ELECTRONIC CORP.
TERMALINE COAXIAL LINE INSTRUMENTS

1800 EAST 38TH ST.
CLEVELAND 14,
OHIO

West Coast:
NEELY ENTERPRISES
HOLLYWOOD 46, CAL.

THESE MOST VERSATILE HAND SWITCHES
solve complex switching problems!



LEVER SWITCHES Available in three frame sizes: small, medium and heavy-duty. Highest quality, built for unusually long life and great dependability. Various *contact* assemblies provide for relatively unlimited circuit control. Many variations possible with respect to *detent* operation, including combinations of lock, non-lock, and no-throw positions. Special *contact materials* and *ratings* to your specifications.
WRITE FOR BULLETIN LS-100E



PUSH BUTTON SWITCHES *Heavy-duty* switches for faultless performance in applications where dependability and long life are of the utmost importance. Basic unit consists of a standard frame on which is mounted any number of push button units from two to a maximum of twelve. Available in accumulative lock, no two interlock, lock release, and non-lock types. For multiple control applications, *intercoupled assemblies* with locking and non-locking positions can be supplied. Where space behind panel is limited, a standard switch with contacts mounted at right angles can be provided.
WRITE FOR BULLETIN PB-300E

SPECIAL SWITCHES Our Engineering Department will be glad to supply information on *special* Lever and Push Button Switches, and the use of various contact arrangements for other than manual actuation. **ADDRESS DEPARTMENT E**

GENERAL CONTROL COMPANY
1200 SOLDIERS FIELD ROAD BOSTON 34, MASS.

siders the effect of reflections from the earth's surface in somewhat greater detail and, among other things, discusses surface roughness and errors in radar height measurements.

The latter part of the book will prove of great interest to the radar systems engineer. Chapter 6 discusses the echoing area of ships and aircraft as well as scattering from idealized surfaces. The properties of sea return and of ground clutter are considered at length. As in the rest of the book extensive experimental data have been included along with the theory.

Chapter 7 discusses meterological echoes and will be of interest to anyone who has observed a radar scope during rain or storm. The eighth chapter treats atmospheric attenuation by oxygen, water vapor and rain.

Although the phenomena of diffraction behind hills and trees have been omitted, on the whole the book under review covers its field in a comprehensive fashion. The authoritative manner in which the problems of propagation above 100 mc are treated will make this book the standard reference on the subject for some time to come.—HENRY JASIK, *Airborne Instruments Laboratory, Mineola, New York.*

Basic Electrical Measurements

By MELVILLE B. STOUT, *Professor of Electrical Engineering, University of Michigan. Prentice-Hall, Inc., New York,* 1950, 504 *pages,* $7.75.

IN his preface to this book, the author admits that selection of material for a book on electrical measurements is a difficult task at best. It is the type of subject that can be broken down into minute segments, any one of which could easily constitute the subject for a complete book.

In general, the compromise adopted by Stout is excellent. The book is intended as a text for undergraduate courses in measurements, and as such it should serve admirably. Carefully-planned thought-provoking problems are provided at the end of each chapter.

The measurements field might be called unique in that it depends to

FOR RECORDING **strains**

- Portable
- Compact (6 3/4" x 9 13/16" x 12 3/4")
- Light weight (33 lbs.)
- Easy loading
- 2 to 12 channels
- Many other features found only in much larger recorders

Type A-500 12-channel

dependable instruments

Heiland DENVER

Oscillograph Recorder

• The Heiland 500, because of the extremely small size and light weight, is widely used in aircraft and guided missile testing and by industrial and general research laboratories. The use of highly sensitive Heiland galvanometers permits the measurement of strains without the use of amplifiers.

For further information write

HEILAND RESEARCH CORPORATION 130 East Fifth Street Denver, Colorado, USA

PIX WIRE FORMING SPECIALISTS

Precision Parts to meet your Production and Engineering needs. From .002" dia. to .125" dia. Radio tube parts—Stampings—Drawings Modern facilities, high-production equipment.

Metal Crystal Holder Parts

Send sketch or print for quotation.

PIX MANUFACTURING CO., Inc.
24 Bedford St., Newark 3, N. J.



Little thought-of facts about capacitors

The short time breakdown voltage of a well-made D.C. capacitor is not less than 5 to 8 times the actual working voltage at 20°—

E = 5 × e min
E = Breakdown voltage
e = Rated d.c. working voltage

INDUSTRIAL CAPACITORS are unvaryingly held to this formula.

Designed for maximum safety and the smallest possible volume, INDUSTRIAL CAPACITORS are the most widely used capacitor in industrial applications.

WRITE TODAY FOR DETAILED CATALOG

INDUSTRIAL CONDENSER CORP.

Watch this space for other capacitor facts that will help you

Sales Offices in All Principal Cities
3243 N. California Ave. Chicago 18, Illinois

The ONLY Soldering Tool You Need for light **or HEAVY Work!**

Switch *instantly* from light to heavy work—or vice versa—with the 250-watt Weller Soldering Gun. *Controlled* dual heat makes the Weller Gun the only soldering tool you need for *all types* of work. 5-second heating saves time and current on every job, too. Your Weller Gun pays for itself in a few months!

250-Watt WELLER SOLDERING GUN

√ Check these exclusive features

• **TRIGGER-SWITCH CONTROL**—Governs heat and saves power because no need to unplug gun between jobs. Heat goes off when you release trigger.

• **5-SECOND HEATING**—No waiting, no wasted current. Saves hours and dollars each month.

• **SOLDERLITE**—Spotlights the work. Lets you see what you're doing at all times, even in dark corners.

• **LONGER REACH**—Lets you get at any job with ease. Slides between wiring, into the tightest spots.

• **STREAMLINED**—Compact and comfortable to hold. Pistol-balanced for fast precision soldering.

• **WELLERTIP**—Rigid and chisel-shaped with more area for faster heat transfer. Over/under terminals brace tip, give greater visibility.

• **DUAL HEAT**—Single heat 200 watts; dual heat 200/250 watts; 120 volts; 60 cycles.

See the all-purpose Weller Soldering Gun today at your distributor—or write for bulletin direct.

SOLDERING GUIDE—Get your new copy of SOLDERING TIPS—revised, up-to-date and fully illustrated 20-page booklet of practical soldering suggestions. Price 10c at your distributor, or order direct.

WELLER ELECTRIC CORP.
806 Packer Street, Easton, Pa.

ENGINEERS

If You're Interested in Yourself—We're Interested in YOU!

You may think this an unusual attitude for an employer to take, but the fact is, "self-interest" is often overlooked and even considered undesirable by some employers.

But here at Honeywell, we believe self-interest is healthy for our employees and for this company. And we back up our belief not only with money, security and the usual "fringe benefits," but also by giving people satisfying, challenging work and opportunity for advancement NOW – not tomorrow or next year.

Consider the self-interested engineer. He wants always to use the latest in electronic and engineering techniques. He wants to work at his full creative capacity. He wants to show more than just a fraction of his actual potential. Because he knows that in this kind of position lies his best opportunity to further his career.

So–here at Honeywell–we take great care to put a self-interested engineer in his proper field–research, development or design. We let him loose in basic research. Or we give him meaty problems in electronics and electro-mechanical devices. We let him tear into gyro, servo-mechanism, relay, heat transfer, electrical contact phenomena or aeroelasticity. In other words–we give him the work he wants and needs to do.

Yes, Honeywell goes for self-interested engineers. We want them when we find them and we keep them when we get them.

If this kind of thinking appeals to you, the chances are you'll be mighty valuable to yourself and to us by working at Honeywell. Why not start *right now* to do something about it? Depending on the location you prefer, write to H. D. Elverum, Personnel Department EL-2, Minneapolis 8, Minn. or W. Reiterman, Personnel Department EL-2, Philadelphia 44, Pa., giving your qualifications and experience. Your letter will be held in the strictest confidence, of course.

MINNEAPOLIS **Honeywell**

First in Controls

a very great extent on commercial instruments which, because of the very nicety that makes them desirable or necessary, are quite expensive. This book reduces somewhat the need for working models by including photographs of all the standard pieces of equipment that comprise the widely-used old standbys in the measurements business.

An attempt has been made by the author to make his subject interesting—in the sense that a novel is interesting. The reviewer would hesitate to comment on the success or failure of this attempt, but the author deserves a medal for such a courageous effort. The material is presented in logical order, progressing smoothly from the development of units, through descriptions of experimental procedures and errors, to first basic measurements and thence to automatic bridges, high-frequency measurements, magnetic measurements and a discussion of electrical indicating instruments in general.—J.D.F.

THUMBNAIL REVIEWS

MUSICAL ACOUSTICS. By Charles A. Culver. The Blakiston Co., Philadelphia, Third Edition, 1951, 215 pages, $4.25. Presentation of elementary laws of acoustics applying to production and transmission of musical sounds, intended primarily as a college text for a course dealing with physical basis of music. The first nine chapters cover the physics of music: Nature and Transmission of Sound; Interference; Hearing; Resonance; Pitch; Quality; Musical Intervals and Temperament; Consonance and Dissonance; Musical Strings. Four chapters deal with the basic types of instruments: Stringed Instruments; Vibrating Air Columns; Wind Instruments; Vibrating Rods and Plates. Three final chapters cover: Acoustics of Rooms; Electronic Musical Instruments; Recording and Reproduction of Music.

GAS DISCHARGE LAMPS. By J. Funke and P. J. Oranje of the Research Laboratories of the Philips Industry. N. V. Philips' Gloeilampenfabrieken, Eindhoven, Netherlands, 1951, available from Elsevier Pub. Co., 250 Fifth Ave., New York, 270 pages, $4.50. Survey of basic types of discharge lamps, with characteristics, principles, advantages and disadvantages of each. Major types covered, each with a separate chapter, are: sodium lamps; high-pressure mercury vapor lamps with natural cooling; high-pressure mercury lamps with forced cooling; low-pressure tubular fluorescent lamps; gas discharge lamps for luminous advertising; stroboscopic lamps and flash tubes. Deals primarily with Philips products, though the text includes references to developments in other countries.

THE RADIO AMATEUR'S LICENSE MANUAL. Amateur Radio Relay League, West Hartford, Conn., 27th edition, 1951, 96 pages, $.50. Guide to preparing for FCC amateur license examinations, including details of the six classes of amateur license, scope of examinations, sample questions with answers and map of U. S. call areas.

PHASE ANGLE PROBLEMS?

Acme is producing filters with less than 5° total phase shift variation over a temperature range of −55 to +85 C. These filters solved a problem in a computer system and also effected a substantial reduction in size and weight.

They exemplify the exceedingly close phase shift tolerances Acme can hold when required. Variation between individual filters can be held to less than one degree.

Do you have a phase angle problem that may be solved with an Acme filter?

Acme ELECTRONICS, INC

300 No. Lake Ave., Pasadena 4, Calif.

Formerly Acme Metal Die, Inc.

Wave Filters • Delay Lines • Magnetic Amplifiers • Special Transformers & Chokes • Toroidal, Universal & Solenoid Wound Inductors

THIS FEATHERWEIGHT WILL

LICK SOLDERING FATIGUE!

THE NEW

HEXACON BANTAM

---MODEL 30H

Weight—5½ Ounces • Watts—40 or 60 • Tip Dia.—Both 1/8" and 1/4" Tips Furnished with Each Iron • Price— $5.50

So light its weight is hardly noticeable. Outperforms any iron of equal size. Hatchet design makes it more comfortable and practical to use than a pencil iron. No transformer required. Write for complete catalog.

HEXACON

HEXACON ELECTRIC CO.

130 WEST CLAY AVE., ROSELLE PARK, N. J.

THE KELLEX CORPORATION

ANNOUNCES its new name

VITRO CORPORATION OF AMERICA,

effective August 31, 1951.

Organization, policies and services continue as before.

RESEARCH · DEVELOPMENT · DESIGN

VITRO CORPORATION OF AMERICA

233 BROADWAY, NEW YORK 7, N.Y.

The new S.S.White 80X HIGH VOLTAGE RESISTOR

(½ Actual Size)

4 watts · 100 to 100,000,000 ohms

Developed for use as potential dividers in high voltage electrostatic generators, S.S.White 80X Resistors have many characteristics—particularly negative temperature and voltage coefficients—which make them suitable for other high voltage applications.

They are constructed of a mixture of conducting material and binder made by a process which assures adequate mechanical strength and durability. This material is non-hygroscopic and, therefore, moisture - resistant. The resistors are also coated with General Electric Dri-film which further protects them against humidity and also stabilizes the resistors.

WRITE FOR BULLETIN 4906

It gives complete information on S.S.White resistors. A free copy and price list will be sent on request.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. R, 10 East 40th St.
NEW YORK 16, N. Y.

WESTERN DISTRICT OFFICE: Times Building, Long Beach, Calif.

The Largest Selling LIGHTNING ARRESTER *At Any Price!*



JUMBO

Protects Home and TV Set Against Lightning Hazards

$2.25 LIST

U.S. Patent No. D-4664

- Installs anywhere
- No wire stripping, cutting or splicing

(Complete with strap and ground wire.)

OVER 1,000,000 IN USE TODAY!

See Your Jobber or Write for Form No. 84

JFD MANUFACTURING CO., Inc.
6145-K 16th AVENUE, BROOKLYN 4, N. Y.
Radio and Television Antennas and Accessories



Model #530

ALSO AVAILABLE

Model #520: 80 to 325 V. at 150 ma.
Model #540: 80 to 375 V. at 450 ma.
Model #550: 0 to 5 KV at 300 ma. (unregulated)

Voltage Regulated D. C. POWER SUPPLIES

Input: 105 to 125 Volts A.C.

Output: 80 to 350 volts D.C. @ 275 ma. regulated.
0 to −150 volts D.C. @ 5 ma. VR tube regulated
6.3 volts at 10 amps., C.T. unregulated

Hum: less than 5 millivolts

Regulation: Better than ½% from no load to full load

Write for fully detailed bulletin.

76 STAGE STREET

MANSON LABORATORIES

STAMFORD, CONN.

WASHERS—ALL KINDS



WASHER SPECIALISTS for nearly half-a-century. Dies in stock will produce most sizes. Big runs made with automatic presses. An economical, accurate, and highly reliable source for washers, also all kinds of metal stampings. HAVE WHITEHEAD'S CATALOG ON FILE; write for it.

BEVELED
CUP
D-HOLE
RETAINER
LOCK
SPACERS
SPRING TENSION
SQUARE HOLE
STAR LOCK
THRUST
TONGUE

EST. 1903 **WHITEHEAD STAMPING COMPANY**

1691 W. LAFAYETTE • DETROIT 16, MICH.

Try Remler for Service-Tested "Hard-to-Get" Components

Custom Components

Metal-plastic components designed and manufactured to order. Write for quotations specifying electrical and mechanical characteristics. Describe application. No obligation.

REMLER
TUBE SOCKETS

● STANDARD FOR 30 YEARS... THE BEST IN THE INDUSTRY

Heavy duty phenolic sockets with high current wiping action contacts . . . for industrial, transmitter and test applications. Rugged. Years of tube insertions and withdrawals do not impair contact effectiveness. Black phenolic is standard, low loss phenolic or alkyd on order.

Remler Company Ltd. 2101 Bryant St. San Francisco 10, Calif.

Remler
Since 1918 PIONEERS IN ELECTRONICS AND PLASTICS



FOR FREQUENCY
Stability
IN
Mobile
EQUIPMENT . . . .

make sure your crystals are made by Standard Piezo.

For years, our Crystals have been standard as original equipment with leading manufacturers and for replacement purposes by large operators of mobile equipment.

Precise, accurate, Standard Piezo Crystals are available for *ALL* types of mobile communication equipment.

Request catalog E for complete details.

Standard Piezo
COMPANY
CARLISLE, PENNSYLVANIA

BACKTALK

(continued from page 154)

agreed with the observed variation of frequency with temperature. The problem has since been solved by using stable capacitors of another type and balancing their small temperature dependence with that of the associated resistors. The loss in materials cost was negligible, but the loss in man-hours was certainly not.

Nowhere in the manufacturer's brochure or in similar catalog descriptions is frequency dependence mentioned nor is there any hint that their behavior should be so different from that of other capacitors at an entirely reasonable frequency. Our attention has since been called to an article entitled "Ceramic Dielectrics" in the August 1948 issue of ELECTRONICS where frequency dependence is mentioned. Figure 4 of that article indicates that zero-temperature-coefficient capacitors are within specified tolerance only at radio frequencies. The omission of such basic information from brochure and catalog specifications is not understandable.

WILLIAM A. BAUM
Mount Wilson and Palomar Observatories
Pasadena, California

Distributed Amplifiers

DEAR SIRS:

IN THEIR ARTICLE entitled "Millimicrosecond Oscillography" (July, p 106), Messrs. Yu Kallmann, and Christaldi make the statement "It is important to point out that uniform amplification with respect to frequency variation cannot be obtained in a stage of distributed amplification when the receiving end of the plate line is open." I have built several distributed amplifiers in the past few years, always leaving plate lines open at the receiving end when driving a capacitive load. The only difference in performance observable between a terminated and unterminated output is an increase by a factor of two in gain and maximum voltage swing in the latter case.

The two reasons given in the article for the statement quoted above appear to be two aspects of the same reason. It is true that the steady-state impedance seen by the plates in a line terminated only at

For all your needs in
RADIO • ELECTRONIC • TELEVISION
Accessories
Wire • Components

See Birnbach!

Govt. Specification
- **HOOK-UP WIRE** SRIR Jan-C-76 Thermoplastic WL-Glass Braid 90° to 105° C. UL Approved
- **JACKS—PLUGS**
- **INSULATORS** Steatite-Ceramic
- **WIRE—CABLE**
- **HARDWARE**
- **TERMINAL LUG STRIPS**
- **ACCESSORIES**
- **TEST LEADS**
- **SWITCHES**

Yes, BIRNBACH is your DEPENDABLE SOURCE of SUPPLY! Cut production costs, speed operations, by specifying BIRNBACH—
Manufacturers of Quality Products for the Electronics Industries.
WRITE FOR COMPLETE CATALOG

AN OLD RELIABLE NAME IN RADIO — SERVING SINCE 1923

BIRNBACH RADIO CO. Inc.
145 HUDSON STREET
NEW YORK 13, N. Y.

Engrave
. . . PANELS UP TO 25" WIDE IN YOUR OWN SHOP WITH THE *NEW* ENGRAVOGRAPH
Portable Model 1-S

Send for Booklets
I-S 29—portable model
H-29—heavy duty model

NEW HERMES, Inc. • 13-19 University Place, New York 3, N. Y.
CANADA: 359 St. James St., Montreal

Built Right! Priced Right!

BECO UNIVERSAL IMPEDANCE BRIDGE

Model 250-C **$295.00** F.O.B. Portland

Write today for further information
BROWN ELECTRO-MEASUREMENT CORP.
Instrument BECO *Specialists*
4435-37 S. E. HAWTHORNE BLVD. PORTLAND 15, OREGON

new hermes
Engravo graph

- The only portable machine which reproduces 15 sizes from one master alphabet.
- The only one with adjustable copy holding slides for multiline engraving in one set-up.
- Self-centering holding vise for nameplates and dials.

NEW HERMES, Inc. • 13-19 University Place, New York 3, N. Y.
World's Largest Manufacturer of Portable Engraving Machines

ELECTRONICS AND RELIGION

Does the electronic specialist know more about religion than the Saints of old? The booklet "*In Search of Truth*," discloses that knowledge about the unseen forces reveals the Intelligence of structure in the universe. Radio, Television, and hydro-atomic science tell much that is fundamental in religion. You will find this subject of paramount importance and are invited to mail this clipping and one dollar for the 36 page booklet.

Address:
THE RELIGIOUS GENERATIONS FOUNDATION
5008 Oliver Avenue So. Minneapolis 19, Minn.
A-12-3

MICROPOT

PRECISION TEN-TURN POTENTIOMETER

1. You get permanent accuracy because the resistance wire is locked in place. It is precision positioned and moulded integrally with the housing.
2. You get permanently accurate settings, smooth action and low uniform torque provided by the stainless steel, precision ground, double thread lead screw guiding the moving contact.
3. You get precise positioning of the moving contact because of the two bearings supporting the rotor assembly.
4. You get good rigid terminals because they are moulded integrally with the housing.
5. Terminals soldered to ends of resistance element before moulding. Entire resistance circuit is an integral part of the housing.
6. You get accurate setting and resetting due to anti-backlash spring in contact guide.
7. You get a fine resolution because of the 43½" length of resistance wire in the spiral element.
8. You get a resistance output directly proportional to shaft rotation within ±0.1% of the total resistance. Every potentiometer is automatically machine tested for linearity at 101 points.



LINEARITY ACCURACY ± 0.1%

Units for immediate shipment:
1,000 to 30,000 ohm range.
Special resistance values made to order.

WRITE TODAY FOR ENGINEERING INFORMATION

BORG EQUIPMENT DIVISION
THE GEORGE W. BORG CORPORATION
JANESVILLE • WISCONSIN

Immediate Delivery ! ! !

HIGH POWER WAVEGUIDE DUMMY LOADS

Non-Standard Types (*shorter flange body than Standard*)

Specifications	DA-21/U	DA-22/U
Waveguide Size (O.D.)	⅝" x 1½"	½" x 1"
Coupling Flange	UG-51/U (plain)	UG-39/U (plain)
Frequency Range (mcs.)	7,050-10,000	8,500-12,400
V S W R	Less than 1.15 over band	
Power Rating:	280 watts ave.	175 watts ave.
(Forced Air Cooling)	500 watts ave.	300 watts ave.
(on 1 ms., pulses)	0.8 megawatt peak	0.2 megawatt peak
Life Rating	100 Hours operation under continuous maximum power rating	
Dimensions	11½" x 2¾" x 3¾"	9½" x 2⅜" x 3¾"
Weight	12 lbs.	9 lbs.
Unit Price	$99.50	$89.50



DA-21/U

Over 50% Savings—Units usually sell at net price of $200.00 or more

F.O.B., Columbus, Ohio—10% Quantity Discount in Lots of 10 or More

ARL THE ANTENNA RESEARCH LABORATORY

Design - Development - Production
Antennas for Aircraft - Missiles - Radar
Electronic Equipment
Polar Recorder
Consulting Service

The Antenna Research Laboratory, Inc.
797 Thomas Lane Columbus 14, Ohio

one end varies from tube to tube and is a function of frequency. It does so because of the reflected wave adding to the wave being generated. This reflected wave has no effect, however, on the output since it is traveling toward the sending end where it will be absorbed in the termination. The wave propagated toward the receiving end, with each tube making its contribution in phase, depends only on the plate current variations and the characteristic impedance of the line. It is independent of the reflected wave so long as the plate resistance of the tubes is high compared to the line impedance. Voltage doubling occurs with reflection from the open end.

Another approach to the problem is a consideration of the current wave. One-half of the plate current of each successive tube is added in phase as a wave progresses toward the output. The termination sees only this current. It knows nothing of the steady-state impedance at the various plates.

G. G. KELLY

Physics Division
Oak Ridge National Laboratory
Oak Ridge, Tenn.

Dipole Formulas

DEAR SIRS:

IN AN ARTICLE entitled "Detecting Tramp Metal in Logs and Iron Ore", by C. W. Clapp in the March 1951 issue of ELECTRONICS it is stated that a formula for the dipole moment of a metal sphere in an alternating magnetic field has been recently found by H. Poritsky.

The solution of this problem has been given by W. R. Smythe in his book "Static and Dynamic Electricity", N. Y., 1939, and also by M. Divilkovsky in *J. Physics USSR* Vol. 1, 1939. The solution of the more general problem of the ellipsoid has been published by M. Jouguet in *Comptes Rendus*, Paris, April 12, 1943.

In *Wireless Engineer* for December 1946, I showed that the dipole moment can be replaced by an equivalent circuit consisting of a single ring of the same diameter as the sphere. The resistance and

STATHAM DYNAMICALLY BALANCED TRANSDUCER

MODEL P69



The Model P69 pressure transducer is designed for long life and excellent performance under conditions of vibration and acceleration such as are encountered in flight test and guided missile applications. This dynamically balanced, temperature compensated transducer is offered for the measurement of gage, differential, or absolute pressure. The full bridge of the transducer will operate successfully with a wide variety of controlling, indicating, recording and telemetering circuits.

Please Request Bulletin No. 3.3

We invite correspondence with our engineering staff when you are considering instrumentation for the measurement of acceleration, pressure, force or displacement.

STATHAM LABORATORIES — SCIENTIFIC INSTRUMENTS

12401 WEST OLYMPIC BLVD.
LOS ANGELES 64, CALIFORNIA

MICRODIAL

TEN TURN-COUNTING DIAL

Microdial is composed of two concentrically mounted dials . . . one for counting increments of each turn and the other for counting turns. The incremental dial has 100 equal divisions and is attached rigidly to the shaft so there is no backlash. Thus the contact position is indicated to an indexed accuracy of 1 part in 1000. Rotation is continuous in either direction. There are no stops on the Microdial assembly.

COMPACT . . . Microdial has same O.D. as Micropot . . . requires no more panel space.

CLEAR READING . . . Forced fast-reading tests showed only 1/20th as many errors with Microdial open window as with next most legible dial. Turn counter distinguishes between 0 and 10 turn readings, and accelerates to avoid confusion on readings near integral turns. Precise readings are made from larger dial with maximum separation of graduations and wide angle visibility.

CONVENIENT . . . delivered completely assembled with dials synchronized. Easily mounted in a few seconds. All dials may be locked.

ACTUAL SIZE



REAR VIEW

Microdial . . . turn-counting dial, primarily designed for use on Micropot ten turn linear potentiometers . . . use it on any multiturn device having ten turns or less.

BORG EQUIPMENT DIVISION
THE GEORGE W. BORG CORPORATION
JANESVILLE • WISCONSIN

For HEAVY DUTY WORK! Severest Electrical Services!

JONES PLUGS & SOCKETS 500 SERIES *Proven Quality*

P-506-CE Plug with Cap



S-506-DB Socket with deep Bracket

For 5,000 Volts, 25 Amperes per Contact Alterable by circuit Characteristics.

Socket contacts phosphor bronze, knife-switch type, cadmium plated. Plug contacts hard brass, cadmium plated. 2, 4, 6, 8, 10, and 12 contacts. Plugs and sockets polarized. Long leakage path from terminal, and terminal to ground. Caps and brackets, steel parkerized (*rust-proofed*). Plug and socket blocks interchangeable in caps and brackets. Terminal connections most accessible. Cap insulated with canvas bakelite.

Write for Jones BULLETIN 500 for full details on line.

Jones — HOWARD B. JONES DIVISION, CINCH MANUFACTURING CORPORATION

EISLER Television Tube MACHINERY

- ECONOMICAL
- MODERN DESIGN
- PRODUCTION ENGINEERING

TV Sealing Machine



Machines for Manufacturing Incandescent Lamps, Radio and Electronic Tubes

From 5" to huge 24" Television Tube

RESISTANCE WELDERS ½ to 300 KVA

EISLER'S Electronic Equipment is especially Designed and Built to your exact requirements.

EISLER TRANSFORMERS STANDARD • SPECIAL

Sizes From ½ to 500 KVA

WE INVITE YOUR INQUIRIES

EISLER ENGINEERING CO., Inc.
751 So. 13th St. Newark 3, N. J.

DID YOU GET IT? IF NOT

SEND NOW FOR B-A's 136 BIG PAGE FREE CATALOG

INCLUDING 21 PAGES OF DOLLAR-SAVING BARGAINS!

BURSTEIN-APPLEBEE CO.
1012-14 McGee St.
Kansas City 6, Mo.

FREE

Send your 1952 catalog to:

Name .....

Address .....

City ..... State .....

BURSTEIN-APPLEBEE CO.

Dynamic Strain Recording in the Field

The TYPE MRC-12 6-ELEMENT SELF-POWERED STRAIN GAGE CONTROL UNIT, and the TYPE S15-A 6-ELEMENT SELF-POWERED RECORDING OSCILLOGRAPH together make up a complete dynamic strain measuring laboratory which you can carry with you for field use ANYWHERE where electrical power is not available.

With standard SR-4 resistance strain gages, a frequency response from static to 500 cycles per second can be obtained. Magnifications are adequate for all practical needs for static-dynamic strain recording on structural members and machine parts.

Small in Size • Light in Weight • Simple to Use • Insensitive to Vibration • Finest Instrument Craftsmanship • Unconditionally Guaranteed

Write for Technical Bulletin SP-177G and SP-193G

Hathaway INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO

NWL

Nothelfer

SPECIALISTS IN TRANSFORMERS

NOTHELFER
WINDING LABORATORIES
9 ALBERMARLE AVE. TRENTON 3, N. J.

reactance of the ring are such that the magnetic moment of the induced ring current is the same as that of the dipole. This equivalent circuit has obvious advantages in practical problems such as the design of eddy-current metal detectors.

T. S. E. THOMAS
Eastbourne
Wellington, New Zealand

Loose-Leaf Electronics?

DEAR SIRS:

THE color coding proposed by R. S. Roberts is a bad idea for those 13 percent of our little world's population who are color blind! So I would rather have you print your articles in such a way that it would be easier to take them apart without having to slit the paper edgewise. Make a loose-leaf system of it.

A SWEDISH READER

Loran

MR. DONALD G. FINK,
EDITOR
DEAR DON:

BACK in the electronic circle—Department of Defense Production—after a seven year "sabbatical leave" in the Labour Department—I am speedily catching up with developments via the contents of your fact-full magazine.

Your name at the mast head brings back memories of our trip to Labrador in the Sikorsky with Commander MacMillan. There is a point connected with that trip—or was it a subsequent one?—I would like to clear up.

I believe we coined the word LORAN together on that trip. Up to that time—July or August 1942—it was just LRN.

As I remember the situation, Commander MacMillan, Lt. Commander Harding, Joe Waldschmitt, you and I were sitting on the rocks at the site we eventually selected for number three station near Battle Harbour.

Someone observed that the point was unnamed so I suggested LORAINE from LRN. Harding said it was a bit feminine for such

a barren rocky spot and put forward LORAN, the masculine form of LORAINE.

To name the system and the point, I chiselled the word LORAN on a well-positioned rock. We adopted it unanimously and decided to refer to the system by that name. Harding said he would arrange this at Washington.

All I know is that LORAN was quickly adopted to name the system. I don't know if the point of land became identified on the maps by that name.

JACK ARGYLE
(*Marconi Oldtimer and ex Lt. Cmdr. RCNVR*)
Ottawa, Canada

(Editor's Note: The story told by Jack Argyle is exactly correct. The official decision to adopt the word LORAN was actually taken at a meeting of Division 11 at the Radiation Laboratory sometime after the Labrador trip. Larry Harding brought forth the proposal at that time, and I think he is generally given credit for originating the term.—D.G.F.)

Electronics Quiz

LAST MONTH'S problem was submitted by J. E. Eckert of the RCA Laboratories Division at Princeton, New Jersey. It involved a plurality of 1-ohm resistors connected in square fashion, as shown in Fig. 1. The problem was to find the impedance seen across any one of the resistors. The solution, as furnished by Eckert, is as follows:

Imagine a current of 1 ampere injected into a point and flowing out of infinity, as illustrated in Fig. 2A. Remove this current and then



FIG. 1—Original quiz problem printed in September issue

This Audio Oscillator Was Designed With A Thermometer in Mind

El-Tronics "Temperature Design" minimizes thermal drift, while an electronically regulated power supply assures stable operation. No electrolytic capacitors are used. Clean lines make this superb instrument "fit in" for any laboratory—by mounting in a relay rack or table cabinet.



SPECIFICATIONS

- **FREQUENCY COVERAGE:** 20 to 200,000 cycles in four ranges.
- **FREQUENCY DIAL:** 6" diameter, direct reading, vernier drive.
- **OUTPUT VOLTAGE:** 0 to 10 volts continuously variable.
- **CALIBRATION ACCURACY:** 1% Rack panel construction. No zero set necessary.
- **HUM LEVEL:** Minus 50 Db or better. Standard load: 1000 ohm resistive.
- **FREQUENCY RESPONSE:** ± 1Db from 20 to 200,000 cycles.
- **DRIFT:** ± 2% or better.
- **POWER SUPPLY:** Nominal 115 volts 50/60 cycles, 60 watts. Electronically regulated internal supply permits operation on line voltage between 105—125v.

El-Tronics INC.

Write For Free Catalog
2649 N. HOWARD STREET
Philadelphia 33, Pa.

SPECIALTY OFFERS



LAB-BILT DRY BATTERIES
Standard or Custom-made

INDUSTRY

LABORATORY

RADIO AND IGNITION

Write for **FREE CATALOG**
This catalog gives complete specifications of 78 Lab-Bilt Batteries of industrial and hard-to-get types.

CUSTOM-MADE BATTERIES
Battery Specification Sheet illustrated in catalog enables you to get any type dry battery designed and made to your individual specifications — even in small quantities!

SUPER SERVICE
Specialty Battery Company is specially equipped to make all Lab-Bilt Batteries FRESH for each order and ship immediately. Give your customers this valuable service. Write for a new catalog today.

SPECIALTY BATTERY COMPANY
A Subsidiary of the RAY-O-VAC Ray-O-Vac Company
MADISON 10, WISCONSIN

PRINTED CIRCUITS

CHASSIS ASSEMBLIES --- SWITCHING PLATES --- SUB-ASSEMBLIES --- COMMUTATORS --- REGISTER BOARDS --- TERMINAL BOARDS

SWITCH PLATE CONTACTS
Raised or Flush

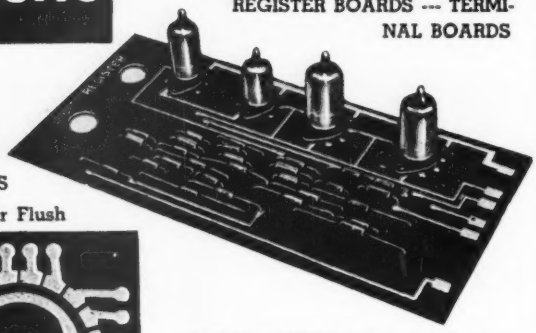



CONDUCTIVE MATERIALS: Copper, Silver, Steel, Bronze, Brass, Nickel, Aluminum.
PLATING: Copper, Silver, Nickel, Aluminum, Gold, Silver, Chrome.
INSULATING BASES: Phenolic, Melamine, Silicone, Polyester, Polystyrene, Polyethylene, Lucite, etc.; Ceramics.
OPERATIONS PERFORMED: Die Stamping, Intricate Piercing, Plating, Injection Molding, Machining, Soldering, Assembly, Research.

For additional information, write to PRINTED CIRCUIT DEPT

Emeloid

Supplier of PLASTIC PRODUCTS to The Radio and Electronic fields since 1919

1239 Central Ave., Hillside 5, N. J.
ELIZABETH 2-1944 - 1945 - 1946
N. Y. C., RECTOR 2-8554 - 8555

Cut Your Costs, Too, With
POWRARM
WORK POSITIONERS



HERE'S HOW OTHERS DO IT



POWRARM cuts costs by increasing every worker's productivity. It gives the worker a powerful *third hand* to hold work while two hands produce. That's why POWRARM works on the most efficient assembly lines in America today, and *belongs on yours.* Write us about your production "headache" . . . we'll show you how POWRARM can cure it.

Holds work at any angle in Horizontal, Vertical or Co-axial Plane.

Three sizes of Powrarm—24 to 150 lbs. capacity.

Write For Catalog 101E
32 informative pages, FREE

WILTON TOOL MFG. CO.
Precision Built Bench Vises, "C" Clamps and Work Positioners
925-T Wrightwood Avenue • Chicago 14, Illinois

take a current of 1 ampere out of point B and flowing in at infinity as shown in Fig. 2B. According to the superposition theorem we may add these two currents algebraically, and we find that we have a total of $+\frac{1}{4}a + \frac{1}{4}a$ or $\frac{1}{2}a$ total flowing through the 1-ohm resistor between terminals, which gives a voltage drop of $\frac{1}{2}$ volt across the 1-ohm resistor. This means that the impedance is

$$Z = \frac{V}{I} = \frac{0.5}{1.0} = \tfrac{1}{2} \text{ ohm}$$

An alternative solution is illustrated in Fig. 2C. Voltage V is impressed across A and B. It can be



FIG. 2—Two solutions for Electronics Quiz problem shown in Fig. 1

seen that the potential at point X is equal to potential at X', and the potential at Y equals the potential at Y'. Consequently, the circuit can be folded back on itself and points X and X' can be connected together, while points Y and Y' can be similarly connected together. All symmetrical junctions can be connected so that the circuit of Fig. 2D holds true. The resistance seen looking into terminals A and B (for only a very few terms) is

$$R_{AB} = \frac{1 \cdot \left[2\left(\frac{\frac{1}{2} \cdot 2}{2+\frac{1}{2}}\right) + \left(\frac{\frac{1}{2} \cdot 1 + \frac{1}{2}}{\frac{1}{2}+1+\frac{1}{2}}\right)\right]}{1 + \left[2\left(\frac{\frac{1}{2} \cdot 2}{2+\frac{1}{2}}\right) + \left(\frac{\frac{1}{2} \cdot 1 + \frac{1}{2}}{\frac{1}{2}+1+\frac{1}{2}}\right)\right]}$$

$$= 0.54 \text{ ohms}$$

So it can be seen that if more terms were added in the series, it would reduce the impedance looking in, until the value of 0.5 ohm is obtained with an infinite number of resistors.

PROFESSIONAL SERVICES

CROSBY LABORATORIES, INC.
Murray G. Crosby & Staff
Radio - Electronic Engineering
Research & Development
FM, Communications, TV
Test Equipment
Offices, Laboratory & Model Shop at:
126 Herricks Rd., Mineola, N. Y.
Garden City 7-0284

DUBROW DEVELOPMENT CO.
Design — Development — Mfr.
Quality Electronic Equipment
347 High St. Burlington, N. J.
Burlington 3-0446

EDGERTON, GERMESHAUSEN & GRIER, INC.
Consulting Engineers
Research, Development and Manufacture of Electronic and Stroboscopic Equipment
Specialists in High-Speed Photography
160 Brookline Avenue, Boston 15, Mass.

ELECTRONIC ENGINEERING CO. of CALIFORNIA
Radio and Electronic Consulting and Designing.
180 S. Alvarado Los Angeles
DUnkirk 2-7355 California

ERCO RADIO LABORATORIES, INC.
Radio Communications Equipment
Engineering - Design - Development - Production
Pioneers in Frequency Shift Telegraph
Garden City • Long Island • New York

GEORGE H. FATHAUER
Development and Design
of FM, TV, VHF Communications Equipment
Complete Laboratory and Model Shop Facilities
4005 E. Michigan St. Telephone
Indianapolis 1, Indiana HIlackstone 1330

HERMAN LEWIS GORDON
Registered Patent Attorney
Patent Investigations and Opinions
Warner Building, Washington 4, D. C.
NAtional 2497

HANSON-GORRILL-BRIAN INC.
Products & Mfg. Development
ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL
One Continental Hill Glen Cove, N. Y.
Glen Cove 4-1922

R. W. HODGSON
RESEARCH & DEVELOPMENT ENGINEER SPECIALIZING IN ELECTRONICS, NUCLEONICS, INSTRUMENTATION, SERVOMECHANISMS & CYBERNETICS
Office—6600 Lexington Ave., Hollywood 38, Calif.
All Mail to Box 874, Sherman Oaks, Calif.
GLadstone 9680

WHEN TIME IS SHORT . . . .

put the solution of your problems up to a specialized Consultant whose professional card appears on this page. His broad experience may save you months of costly experimentation.

ELECTRONICS
330 West 42nd St., New York 18, N. Y.

R. W. HODGSON
PATENT AGENT SPECIALIZING IN ELECTRONICS
Registered to Practice Before the U. S. & Foreign Patent Offices
Office—6600 Lexington Ave., Hollywood 38, Calif.
All Mail to Box 874, Sherman Oaks, Calif.
GLadstone 9680

HOGAN LABORATORIES, INC.
John V. L. Hogan, Pres.
Applied Research, Development, Engineering
Est. 1929. Exceptionally competent staff. Electronics, Optics, Mechanisms, Facsimile Communication, Electro-sensitive recording media, Instrumentation.
155 Perry Street, New York 14 CHelsea 2-7855

MEASUREMENTS CORPORATION
Research & Manufacturing Engineers
Harry W. Houck Jerry B. Minter
John M. van Beuren
Specialists in the Design and Development of Electronic Test Instruments
Boonton, N. J.

Eugene Mittelmann, E.E., Ph.D.
Consulting Engineer & Physicist
High Frequency Heating—Industrial Electronics
Applied Physics and Mathematics
549 W. Washington Blvd. Chicago 6, Ill.
State 2-8021

NIAGARA ELECTRON LABORATORIES
CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY
Specializing in solution of problems of electronic and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.
Andover, New York Cable Address: NIATRONLAB

PHYSICAL RESEARCH ASSOCIATES
Consulting Physicists & Engineers
Arthur M. Vigilante, Director
Research, Development, Design and Manufacture of Detection and Recording Systems. Industrial and Analytical electro-physical instrumentation. Dynamic Condenser Electrometers.
#1 Azuretee Drive Malibu, Calif.
Malibu 8444

PICKARD AND BURNS, INC.
Consulting Electronic Engineers
Analysis and Evaluation of Radio Systems
Research, Development & Design of Special Electronic Equipment
240 Highland Ave., Needham 94, Mass.

ALBERT PREISMAN
Consulting Engineer
Television, Pulse Techniques, Video Amplifiers, Phasing Networks, Industrial Appliances
Affiliated with
MANAGEMENT-TRAINING ASSOCIATES
3308-14th St., N.W. Washington 10, D. C.

JOSEPH RACKER COMPANY
Radar Consultants & Editors
Technical Manuals
Research and Development
67 West 44th Street, New York
Murray Hill 7-3139

SKINNER, HARLAN AND IRELAND, INC.
Consulting Engineers
Specializing in Magnetic Materials and Their Application
Office and Laboratory Indianapolis 7, Indiana

ALFRED W. SUTTER
Consulting Engineer
CONTRACT NEGOTIATION & RE-NEGOTIATION
RECLAMATION • TERMINATION
PROCUREMENT ADMINISTRATION
141 E. 44th St., N. Y. 17, N. Y. Murray Hill 2-2655

THE TECHNICAL MATERIEL CORPORATION
Communications Consultants
Systems Engineering
General Offices and Laboratory
121 Spencer Place, Mamaroneck, N. Y.

TELECHROME, INC.
Electronic Design Specialists
COLOR TELEVISION EQUIPMENT
Flying Spot Scanners, Color Synthesizers, Keyers, Monitors, Oscilloscopes and Related Apparatus
J. R. Popkin-Clurman, *Pres. & Ch. Engr.*
88 Merrick Rd. Amityville, L. I., N. Y.

FREDERICK P. WARRICK
Engineering Consultant
Development & Manufacture of High Speed Moving Film Cameras for Oscillography & Stroboscopic Photography.
1960 Graefield Road Birmingham, Michigan

WHEELER LABORATORIES, INC.
Radio and Electronics
Consulting—Research—Development
R-F Circuits—Lines—Antennas
Microwave Components—Test Equipment
Harold A. Wheeler and Engineering Staff
Great Neck, N. Y. Great Neck 2-7806

YARDNEY LABORATORIES, INC.
Research - Design - Development
Electro-Chemical Generators of Energy
105 Chambers Street WOrth 2-3534, 35, 36
New York 7, N. Y.

CONTACTS
FOR THE FIELD OF ELECTRONICS

RECEIVING MICAS
SILVER AND REGULAR
CM TYPES
All Capacities
Tolerances 1% and up
Immediate Delivery
Write for Price and Discount Schedule
Mica Condensers Corp.
71 MURRAY STREET • NEW YORK 7, N.Y.
TEL—DIGBY 9-0512

FINE RIBBONS
OF
TUNGSTEN and Molybdenum
Quality and accuracy in our fabrication of Tungsten & Molybdenum Ribbons have characterized our service to the Electronic industry.
A development of
H. CROSS Co.
15 Bookman St., New York 7, N.Y.

EL-TRONICS, INC.
Research, development, and manufacture of electronic equipment—a single model to large quantities.
Write Today for Free Resume of Our Plant Facilities
Specialists in Geiger-Muller equipment
2647-67 N. Howard St.-Phila. 33, Pa.-GArfield 5-2026

EISLER Manufactures Complete Equipment for:
SPOT WELDERS, Electric, for ¼ to 250 KVA.
TELEVISION TUBE GLASS WORKING EQUIPMENT.
TRANSFORMERS, Special and Standard Types.
INCANDESCENT LAMP Manufacturing Equipment.
FLUORESCENT TUBE Manufacturing Equipment.
NEON SIGN MAKERS EQUIPMENT.
ELECTRONIC EQUIPMENT, Vacuum Pumps, etc.
WET GLASS SLICING and Cutting machines for Laboratory use.
EISLER ENGINEERING CO. Inc. 751 So. 13th St. Newark 3, N.J.

ELECTRICAL
COILS
TO MEET YOUR EXACT REQUIREMENTS
D. O. & MILITARY SPECIFICATIONS
Any type construction, materials, leads, taps, wire, or finish. For ignition, solenoid, relay, voice, choke, transformer, clock, motor, switch, television, or communications.
Send your specifications for quotations.
THE FIVE STAR CO.
110 MIXVILLE ROAD
WEST CHESHIRE, CONN.

FOR MAINTENANCE OF MOBILE COMMUNICATIONS SYSTEMS
MICROMETER FREQUENCY METER
FM MODULATION METER
LAMPKIN LABORATORIES, INC.
Bradenton, Florida

Shorted Turn Indicator
MODEL 101C BULLETIN 42
HUNTINGTON BEACH, CALIF.
KARTRON

ALLEN **FLUXES**
SODERING
BRAZING & WELDING
L. B. ALLEN CO. INC. Chicago 31, Ill.
6731 Bryn Mawr Ave.

SUB-CONTRACTING
MILITARY and COMMERCIAL
receivers — test equipment
transmitters — controls
sub-assemblies
TELETRONICS LABORATORY, INC
Westbury, L. I., N. Y., Westbury 7-1028

use this
CONTACTS SECTION
to
- PROMOTE NEW USES
- PROMOTE NEW USERS
- GET NEW SALES OUTLETS
- REACH ALL BUYING INFLUENCES
- EFFECTIVELY ** ECONOMICALLY

NOW AVAILABLE ON EASY TERMS
Save trouble, time, and money with the aid of this practical RADIO ENGINEERING help . . .

Presents RADIO PRINCIPLES, STANDARDS, and PRACTICES for the designer, engineer, and radio technician

HERE is a handy volume embracing a great deal of constants needed reference material covering all fields and aspects of radio engineering — concise, dependable, arranged in easy-to-get-at form.
What the Standard Handbook, Marks' Handbook, and others are in their respective fields, Henney's Handbook is in the radio field . . .
And now this new Fourth Edition is available:
with new data on the physical, mathematical, psychological, and acoustical bases on which all electrical communication exists . . .
on the means of transmitting and utilizing energy in the very high frequency portions of the radio spectrum.
with completely rewritten sections on radio communication, inductance, radio-frequency amplifiers, modulation and detection, electron tubes, receiving systems, radio aids to aviation, and many other subjects.
with revision throughout to make the book as useful as possible in modern practice.

New 4th Edition
RADIO ENGINEERING HANDBOOK
Keith Henney, Editor-in-Chief
Consulting Editor of Electronics
1197 pages, 6 x 9, 1038 illustrations, $10

IN scope, this book ranges from fundamentals to discussion of newest circuits, amplifiers, power supply systems, short-wave systems, etc. Frequency modulation, developments in television and aircraft radio, and other applications are covered. The book abounds in circuit diagrams, tables, charts, formulas, design equations and data. The circuits described quantitatively are those in use today, or soon to be widely used.

In RADIO ENGINEERING HANDBOOK you get—

1. 1197 pages of carefully selected, accurate data—charts, tables, circuits, diagrams, formulas.
2. 23 sections covering all the most needed subjects for engineers and radio technicians, from fundamentals to specialized applications.
3. Every section prepared by one or more specialists, to assure you dependable, expert answers to your problems in design and practice.

Not only the radio technician, but every man interested in the design or manufacture of radio or television transmitters and receivers, and apparatus utilizing vacuum tubes and photocells, will find this improved handbook a helpful, day-to-day guide.

SPECIAL OFFER
When you receive a copy of Henney's RADIO ENGINEERING HANDBOOK you can look over the book for 10 days before deciding whether or not to buy it. Then, if you decide to keep the book, you can pay for it in easy monthly terms—$4.00 at the end of 10 days, and $5.00 per month until balance is paid.

SEE THIS BOOK 10 DAYS FREE

McGRAW-HILL Book Co., Inc.
330 W. 42nd St., New York 18
Send me Henney's RADIO ENGINEERING HANDBOOK for 10 days' examination on approval.
If I find the book satisfactory, I will send you $4.00 in 10 days, plus a few cents for delivery, and $5.00 a month until $10.00 has been paid. Otherwise I will return the book postpaid.
Name .....
Address .....
City .....Zone.....State.....
Company .....
Position L-10
This offer applies to U. S. only.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

CIVIL SERVICE

HOLLOMAN AIR Force Base, New Mexico, near Alamogordo, New Mexico has openings for positions in electronic engineering and physics. Openings also include numerous positions as electronic scientists, physicists, mathematicians, electronic laboratory technicians, radar technicians, telemetering technicians, and others. Applicants with education and experience in these fields are urged to submit application for Federal Employment, Standard Form 57, to the Civilian Personnel Office, Holloman Air Force Base, New Mexico. Application Form 57 can be obtained from most first or second-class Post Offices or from U. S. Civil Service Commission. Any additional information desired will be supplied upon written request.

POSITIONS VACANT

ENGINEER, THOROUGHLY experienced in mechanization and elimination of hand operations. Also with production experience in mass produced, low cost electronic assemblies, preferably with direct experience in the manufacture of radio rotary switches or volume controls. P-1254, Electronics.

ENGINEER—Thoroughly experienced in development and production of Current Regulator Tubes as used in GRC Series of military sets. Able to organize, supervise complete dept. Send resume. P-1876, Electronics.

EMPLOYMENT SERVICE

SALARIED PERSONNEL, $3,000-$25,000. This confidential service established 1920, is geared to needs of high grade men who seek a change of connection under conditions assuring, if employed, full protection to present position. Send name and address only for details. Personal consultation invited. Jira Thayer Jennings, Dept. L, 241 Orange St., New Haven.

POSITIONS WANTED

ELECTRONICS ENGINEER, 34, with extensive research and development experience and record of achievement in radar, pulse techniques and digital computers is considering change to position of responsibility with smaller company doing research and development. Will only consider positions at group leader or section head level within 250 mile radius of New York City. PW-1777, Electronics.

EXPERIMENTAL PHYSICIST. AB physics. 4 years experience in solid state, materials testing and electrical measurements. PW-1817, Electronics.

SELLING OPPORTUNITY WANTED

MANUFACTURERS: FINANCIALLY responsible party wants exclusive distributorship in Los Angeles for your electronics products used in industrial plants or may consider only representation if product is favorable. Complete details, please. RA-1889, Electronics.

PATENTS

Consult: Z. H. Polachek,
Reg. Pat. Attorney, 1234 Broadway, New York 1, N. Y.

WANTED

ANYTHING within reason that is wanted in the field served by Electronics can be quickly located through bringing it to the attention of thousands of men whose interest is assured because this is the business paper they read.

NEW ENGLAND
Effective technical sales presentation to industries, universities, institutions, and distributors in the electronic field.
AMES & DAY INC.
Hotel Touraine Boston, Mass.

Watch—
the *Searchlight Section*
for
Equipment Opportunities

DEVELOPMENT ENGINEER
PROJECT ENGINEER

We require the services of the following engineers to design and develop precision test instruments.

- SENIOR DEVELOPMENT ENGINEER preferably with a master's degree or equivalent training and five to eight years of industrial experience.
- SENIOR PROJECT ENGINEER with five to eight years of industrial experience.

These are permanent positions with a progressive organization offering stimulating work, congenial associates, pleasant surroundings, and advanced personnel policies.

Submit resume of education and experience.

BOONTON RADIO CORPORATION
BOONTON, NEW JERSEY

WANTED
(Additional Wanted Ads on page 378)

WANTED *We Need Your Surplus Electronic Equipment*
WE PAY TOP $$$ FOR:

RADIO RECEIVERS	AN CONNECTORS
TRANSMITTERS	CLAMPS
ARC-1	PLUGS
ARC-3	CORDS
ART-13	RELAYS
CONTROL BOXES	TELEPHONE
INDICATORS	MATERIALS

WE BUY ANYTHING
WRITE, WIRE TODAY!
TELL US WHAT YOU HAVE
TALLEN COMPANY, INC.
Dept. E, 562 Atlantic Ave., Brooklyn 17, N. Y.

$52,000.00 AVAILABLE
TO BUY NEEDED SURPLUS ELECTRONIC EQUIPMENT
Top $ paid. Send description, condition and asking price. Prompt replies!
URGENT! NEEDED AT ONCE: BC-611 or BC-721 Handie-Talkies. Complete units or parts.
WEST REGION ELECTRONICS
1437 S. Norton Ave. Los Angeles 19, Calif.

WANT TO BUY
MARINE and AIRCRAFT
Receivers, Transmitters, Radar, Direction Finders, Echo Sounders, etc., e.g. RCH, RAL, RBO, DAK, DAG, TCS, ARC-1, ART-13, ARN-7, APN-9, APS-4, APS-13
HANDIE-TALKIES—SCR-536, BC-611
SYNCHROS: 5F or 5G
SPECIAL PURPOSE TUBES
Give full details. Cash waiting.
AMBER COMPANY
393 Greenwich St., N. Y. 13, N. Y.
BEekman 3-6310

ENGINEERS
Design and Development

Experienced in any of the following fields

GYROSCOPES
COMPUTERS
SERVOMECHANISMS
INSTRUMENTATION
FIRE CONTROL
RADAR
CONTROL CIRCUITS
ELECTRICAL COMPONENTS

Excellent Working Conditions
Permanent Positions
Good Starting Salaries
Opportunity for Professional Growth and Advancement

APPLY by sending complete resume to

Technical Personnel Office
ARMA CORP.
254 36th St., Bklyn. 32, N. Y.

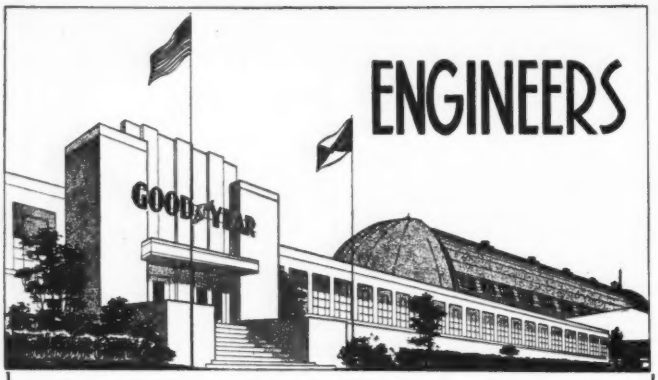

ENGINEERING WITH A FUTURE

RESEARCH • DEVELOPMENT • DESIGN

The continued and steady growth of established research and development projects has opened a number of unusual opportunities for outstanding and experienced men.

ENGINEERS • SCIENTISTS • PHYSICISTS

Positions are available in our organization for qualified personnel in the following fields:

Circuit Analysis	Aerodynamics
Microwaves	Applied Mathematics
Analog Computers	Physics
Servomechanisms	Flight Test
Dynamics	Design

Openings exist at several levels, and inquiries from recent graduates are also invited. Salaries are based on education, ability, and experience. Liberal salary, vacation, insurance, and retirement plans are yours if you qualify.

If you are interested in a secure future in these experimental fields, write and give full details to Mr. C. G. Jones, Salary Personnel Department.

GOODYEAR AIRCRAFT

GOODYEAR Aircraft CORPORATION

Akron 15, Ohio

BENDIX RADIO DIVISION

Bendix AVIATION CORPORATION

TV RECEIVER DESIGN ENGINEERS —Progressive TV Design Section has excellent opportunity for highly experienced men with proven ability. Desirable openings also available for promising young engineers. We will be pleased to discuss salaries at all levels.

ELECTRONICS ENGINEERS — At all salary and experience levels.

RESEARCH ON: Antennae, Servomechanisms, Microwave ccts. and other phases of communications and navigation equipment.

PRODUCTION DESIGN OF: Military and commercial communications and navigation equipment.

FIELD ENGINEERS — Supervise installation and maintenance of radio and radar equipment. Factory training will be given. Base salaries from $4200 to $6900 per year. 25% bonus for time spent overseas. Traveling and living expenses paid by Bendix. Insurance plan.

TEST AND INSPECTION ENGINEERS — Practical knowledge of radio, radar, or TV manufacturing processes. Good knowledge of radio fundamentals essential. Base salaries from $3900 to $5880.

TECHNICAL WRITERS — Knowledge of radar fundamentals or radio required. Work closely with engineers to gather material for instruction and maintenance manuals. Base salaries from $3400 to $4300.

LABORATORY TECHNICIANS — Require knowledge of radio fundamentals and skill in use of measuring instruments and laboratory equipment. Previous industrial experience essential. Salaries from $262 to $321 per month.

BASE SALARIES FOR ALL POSITIONS LISTED ABOVE ARE SUPPLEMENTED BY UP TO 30% FOR REGULARLY SCHEDULED 48-HOUR WEEK.

Housing is no problem in Baltimore.

Excellent group insurance and family hospitalization plan.

Attractive retirement plan for professional personnel.

Write for application:

Engineering Personnel Supervisor
Department E
BENDIX RADIO DIVISION of
Bendix Aviation Corporation
Baltimore 4, Maryland
TOwson 2200

ELECTRONIC ENGINEERS

SENIOR ENGINEERS or PHYSICISTS Degree and experience in Radar, Pulse Circuits, Digital or Analogue Computers, or Servomechanisms
JUNIOR ENGINEERS and recent graduate in EE or Physics.

ELECTRONIC ENGINEERING COMPANY
OF CALIFORNIA
180 S. Alvarado St. Los Angeles 4, Calif.

ELECTRONIC ENGINEERS
ALL GRADES

Small electronic research and development laboratory, located 8 miles outside of Washington, D. C., has several openings for junior and senior electronic engineers. Degree essential. Varied projects include analog computers, servo mechanisms, special test equipment, etc. All Defense work. Liberal salaries dependent upon experience.

THE DAVIES LABORATORIES
Incorporated
4705 Queensbury Road, Riverdale, Maryland

Capehart

needs outstanding

RESEARCH PHYSICISTS
SR. ELECTRONIC ENGINEERS
SR. MECHANICAL ENGINEERS
ENGINEERING PHYSICISTS
CIRCUIT ENGINEERS
MICROWAVE ENGINEERS
TELEVISION ENGINEERS
VACUUM TUBE ENGINEERS
TEST EQUIPMENT ENGINEERS
FIELD ENGINEERS
ELECTRONIC TECHNICIANS

with advanced academic training and several years' experience for

RESEARCH AND DEVELOPMENT

in Radar, Servos, Computers, Receivers, Solid State Physics, Image Converters, Pulse and Timing Techniques, Special Purpose Tubes, Networks and Systems Design, Light and Electron Optics, Storage-Type Tubes, Photo-Electric Pickup Tubes, and Related Test Equipment.

Our Long Range Programs and Steady Growth Assure Permanent Employment at Excellent Salaries for Competent and Qualified Personnel.

Interested Persons are Invited to Submit Detailed Resumes of Experience and Education with Salary Requirements and Availability Date to:

The Employment Department

CAPEHART-FARNSWORTH CORPORATION

FORT WAYNE, INDIANA

ENGINEERS

Special opportunities for YOU in

SAN DIEGO

that sunshiny, smog-free city on the coast of CALIFORNIA

Convair (Consolidated Vultee Aircraft Corporation) is now accepting applications for these following positions in its modern, progressive Engineering Department.

Microwave Engineers
Servomechanism Engineers
Electronics System Engineers
Electronic Circuit Designers

Unusual opportunities for those experienced in the design and analysis of Radar and Missile Guidance Systems.

WORKING FACTS: You get two holidays a week at Convair — overtime accomplished in 5-day week. Attractive salary ranges. An "engineers" engineering department . . . with stimulating, competent associates . . . and interesting, challenging, essential, long-range projects of a wide variety including — commercial aircraft, military aircraft, missiles, engineering research and electronic development. Excellent patent royalty arrangements. Top-notch retirement plan — better than-average life and health insurance. Complete progress-salary review for each person twice yearly. Opportunity for continuing engineering education.

LIVING FACTS: San Diego, with its wonderful residential areas, offers you and your family incomparable living. Ideal climate — cool, clean, dry. Mountains, desert, Mexico, Hollywood, Los Angeles, Pacific Ocean, beaches and bay — only hours or minutes away. It offers you a new way of Life . . . pleasant, refreshing, happy.

If you qualify, you will receive generous travel allowances.
***SEND COUPON* for free booklets and complete information.**

THANK YOU
Mr. H. T. Brooks, *Engineering Department*
Convair, 3302 Pacific Hiway, San Diego, California
Please send me ***FREE*** booklets describing the Convair Opportunity for me and my Convair Application Form.

My name _____
Occupation _____
Address _____
City _____ State _____

EXPERIENCED
electronic
and
mechanical
engineers

Organization established in 1942. Electronic research, development, and production must expand to meet long-term, pre-Korea commitments. Openings in all branches of electronics, including

RECEIVERS TRANSMITTERS
ANTENNAS RADARS
RELATED EQUIPMENT

Positions available for men with at least 5 yrs experience

Write or telephone Howard J. Gresens at

Airborne Instruments Laboratory
INCORPORATED
160 Old Country Road, Mineola Long Island, N. Y.
Garden City 3-0600

A CHALLENGE
to Outstanding
ENGINEERS
PHYSICISTS
DESIGNERS

POSITIONS with SCOPE and IMAGINATION NOW OPEN

Minimum Requirements for ENGINEERS and PHYSICISTS

Four years experience in advanced research and development on Radar Systems, Computers, Wave Guide and Antennas Fire Control, Moving Target Indication, Servomechanisms, Pulse Techniques, Gyroscopic Equipment and Related Fields.

Minimum Requirements for DESIGN ENGINEERS

Background-experience in design of Light Machinery, Radar Systems, Computers, Moving Target Indicators, Servomechanisms, Gyroscopic Equipment and related fields.

Please send resume and salary requirements to:

The **W. L. MAXSON**
CORPORATION
460 W. 34th St., NEW YORK 1, N. Y.

Admiral

Electronic Engineers

Needed Immediately for

Long Range Research Program

Admiral Corporation, one of America's largest electronic and appliance manufacturers, needs electronic engineers for long range research program covering both consumer as well as governmental projects. Project and senior project engineers with minimum of two to five years' experience needed immediately. Top pay with excellent opportunities for advancement. Send resume of experience and education to Engineering Personnel Manager . . .

ADMIRAL CORPORATION
Dept. E, Chicago 47.

AC SPARK PLUG DIVISION
of
GENERAL MOTORS CORPORATION

PRECISION INSTRUMENT PLANT

Positions now available for highest caliber personnel in the field of airborne automatic electro-mechanical control equipment.

MECHANICAL DESIGN ENGINEERS
ELECTRONIC ENGINEERS
SERVO ENGINEERS
JUNIOR ENGINEERS

New and expanding division of an established firm with 20 years of successful experience in the instrument field. Work involved deals with the manufacture and development of highly complex equipment of the most advanced type.

Write or Apply

AC Spark Plug Division
GENERAL MOTORS CORPORATION
1925 E. Kenilworth Place
Milwaukee 2, Wisconsin

Engineers...
Physicists....
Chemists.....
Metallurgists....

A Reminder
from
GENERAL ELECTRIC

Tremendous material resources ... the stimulation of highly creative work ... long-range security and professional recognition ... these are but a few of the assets General Electric offers you in unusual positions now available in:

Advanced Development, Design, Field Service and Technical Writing.

If you have a Bachelor's or Advanced Degree in Electrical or Mechanical Engineering, Physics, Metallurgy or Physical Chemistry and experience in the Electronics industry, you can expand your training and experience to the fullest in openings in connection with:

- .. MILITARY RADIO & RADAR
- .. MOBILE COMMUNICATION
- .. MULTIPLEX MICROWAVE COMMUNICATIONS
- .. ELECTRONIC COMPONENTS
- .. TELEVISION, TUBES and ANTENNAS.

Please send resume to:
TECHNICAL PERSONNEL
ELECTRONICS PARK

GENERAL ELECTRIC
Syracuse, New York

ATOMIC ENERGY INSTALLATION
NEEDS
ELECTRONICS ENGINEERS

Two to ten years' experience in research, design, development or test. Patent history desirable but not necessary. A variety of positions open for men, with Bachelor's or advanced degree, qualified in one or more of the following fields:

- RELAYS
- PULSE CIRCUITS
- SERVO-MECHANISMS
- LOW POWER APPLICATION
- TELEMETERING
- UHF TECHNICIANS
- INSTRUMENTATION
- QUALITY CONTROL

TEST EQUIPMENT RELATING TO THE ABOVE

●

STANDARDS ENGINEERS

Experienced in writing specifications, in liaison work, and in correlating design information to accepted standards. Aircraft industry experience desirable.

These are PERMANENT POSITIONS with Sandia Corporation in Albuquerque, New Mexico. Sandia Laboratory is operated by Sandia Corporation, a subsidiary of Western Electric Company, under contract with the ATOMIC ENERGY COMMISSION. This laboratory offers good working conditions and liberal employee benefits, including paid vacations, sick leave, and a retirement plan.

Albuquerque, center of a metropolitan area of 150,000, is located in the Rio Grande Valley, one mile above sea level. The "Heart of the Land of Enchantment." Albuquerque lies at the foot of the Sandia Mountains, which rise to 11,000 feet. Climate is sunny, mild and dry the year 'round.

Make Application to:

PROFESSIONAL EMPLOYMENT DIVISION
SANDIA CORPORATION
SANDIA BASE — ALBUQUERQUE, NEW MEXICO

OPPORTUNITY

FOR TOP EXECUTIVE RESPONSIBILITY, EXPERIENCE, AND REWARDS FOR A CAPABLE, AMBITIOUS YOUNG MECHANICAL OR ELECTRICAL ENGINEER

As Assistant to the President of a nationally-known smaller firm in the electronics field. Starting salary $10,000 plus opportunities for bonus and stock participation. Unusual opportunity for broad experience in a million dollar manufacturing firm in all phases of production and management, plus a chance for top executive rating within five years.

QUALIFICATIONS: Graduate mechanical, electrical, or industrial engineer. Age 30 to 45. Must have background of production experience in electro-mechanical or electronic field for at least ten years. Clean record, outstanding intelligence, management ability. Candidate selected must stand investigation and general tests.

All replies treated in strict confidence, and personal interviews arranged in New York, Chicago, or certain other centers.

P-1903, Electronics
520 N. Michigan Ave., Chicago 1, Ill.

A Company to Consider

If you are a capable engineer or physicist, have considered looking into opportunities for a greater professional growth on a challenging program, and prefer a smaller company geared administratively and attitude-wise for technical results, we would like to hear from you.

AIRCRAFT ARMAMENTS INC.
4415 Reisterstown Rd.
Baltimore 15, Maryland

Announcing

Unusual opportunities in

SOUTHERN CALIFORNIA

Senior men with degrees and several years of proven accomplishment may achieve further personal growth by working with some of the nation's outstanding scientists in the West's largest laboratories.

CHALLENGE AND OPPORTUNITY

for physicists and engineers in the fields of electron tubes, computers, precision electronics, solid state, system analysis, servo-mechanisms, intricate mechanisms, radar, guided missiles, microwaves.

HUGHES LABORATORIES OFFER

NEW AIR-CONDITIONED BUILDINGS WITH THE FINEST MODERN LABORATORY FACILITIES AND EQUIPMENT.

SOLID LONG RANGE PLANS FOR A CONTINUING FUTURE.

INTRIGUING — VITAL DEFENSE PROJECTS PLUS A STRONG PROGRAM FOR ADVANCED DEVELOPMENT OF NEW PEACETIME PRODUCTS

EXCELLENT EMPLOYEE BENEFITS

FREQUENT SALARY REVIEWS

COMPANY SPONSORED PROGRAM FOR ADVANCED EDUCATION

AMPLE GOOD HOUSING AVAILABLE

Send resume to

HUGHES
RESEARCH AND DEVELOPMENT LABORATORIES
CULVER CITY, CALIF.

Wanted

ENGINEERS

AND

SCIENTISTS

Unusual opportunities for outstanding and experienced men.

These top positions involve preliminary and production design in advanced military aircraft and special weapons, including guided missiles.

Immediate positions include:

Electronic project engineers
Electronic instrumentation engineers
Radar engineers
Flight test engineers
Stress engineers
Aero- and thermodynamicists
Servo-mechanists
Power plant installation designers
Structural designers
Electro-mechanical designers
Electrical installation designers

Excellent location in Southern California, Generous allowance for travel expenses.

Write today for complete information on these essential, long-term positions. Please include resume of your experience & training. Address inquiry to Director of Engineering,

NORTHROP AIRCRAFT, INC.
1009 E. Broadway
Hawthorne (Los Angeles County) California

WANTED

Engineers and Physicists with educational background in mechanical, electrical, or electronic engineering, physics or engineering physics for research and advanced development in plant and laboratory instrumentation, geophysics, physical measurements and industrial electronics. Prefer men with five to fifteen years' experience in experimental research, design and development of instruments, intricate mechanisms, electronic apparatus, optical equipment, servomechanisms and allied fields. Positions are of immediate and permanent importance to our operations. Southwestern location in medium-sized community; excellent employee benefits. Please give age, experience, and other qualifications in reply.

Personnel Director,
Research and Development Dept.
PHILLIPS PETROLEUM COMPANY
Bartlesville, Oklahoma

WANTED

Sales Engineer to cover Long Island on protected basis for manufacturer's representative having outstanding line of nationally advertised electronic instruments covering range from DC to micro waves. Salary—Commission—Expenses. State education, experience, past earnings.

SW-1877, Electronics
330 W. 42 St., New York 18, N. Y.

ELECTRONICS ENGINEERS
ENGINEERING PHYSICISTS

Several engineers required for development of electronic circuitry, electro-mechanical devices, analog and digital computing equipment.

Positions offer security in a laboratory located in desirable residential area. Apply in writing and furnish information as to education and experience.

JET PROPULSION LABORATORY
California Institute of Tech.
4800 Oak Grove Drive
Pasadena 3, Calif.

GENERAL PRECISION LABORATORY

NEEDS

SENIOR ENGINEERS

IN THE FIELDS OF

MICROWAVE SYSTEMS RESEARCH
COMPUTER AND SERVO DEVELOPMENT
MOTION PICTURE PROJECTOR DESIGN AND RELATED WORK
AND
ELECTRONIC FLIGHT TEST AND TV FIELD ENGINEERS

The Laboratory is located in the heart of Westchester County—a stimulating and pleasant rural area—convenient to New York.

For a position with a progressive and expanding organization submit resume to:

Personnel Director, General Precision Laboratory
63 Bedford Road, Pleasantville, New York

SCIENTISTS
AND
ENGINEERS
for

challenging research and advanced development in fields of

RADAR
GYROSCOPES
SERVOMECHANISMS
MECHANICAL SYSTEMS
ELECTRONICS CIRCUITS
APPLIED PHYSICS AND MATH
PRECISION MECHANICAL DEVICES
ELECTRICAL SYSTEM DESIGN
GENERAL ELECTRONICS
INSTRUMENTATION
MICROWAVES
COMPUTERS
AUTOPILOTS

Scientific or engineering degree, and extensive technical experience required.

Write:
Manager, Engineering Personnel
BELL AIRCRAFT CORPORATION
P.O. Box 1, Buffalo 5, N. Y.

Development Engineers for Electronic Aircraft Armament

ELECTRONIC INSTRUMENTATION • ELECTRONIC COMPONENTS • SERVOMECHANISMS • RADAR • ELECTRONIC PACKAGING • CALIBRATION AND TESTING ENGINEERS FOR PRODUCTION

Job openings range from recent graduates to Engineers with years of experience. Attractive employee benefits include group insurance and pension plans; paid holidays and vacations.

Send complete resume, listing salary requirements and availability, to:

Technical Employment Supervisor, Station 483-Q

THE EMERSON ELECTRIC MFG. CO.
8100 Florissant • St. Louis 21, Missouri

LEADERS IN THE ELECTRICAL INDUSTRY SINCE 1890

ELECTRONIC ENGINEERS
AND
PHYSICISTS

FOR RESEARCH IN TELEVISION AND ALLIED FIELDS

EXCELLENT OPPORTUNITIES FOR SPECIALISTS IN

- UHF CIRCUITS
- CATHODE RAY TUBE DESIGN
- ELECTRONIC CIRCUITS
- VACUUM TUBE TECHNIQUES

QUALIFIED APPLICANTS ARE INVITED TO WRITE:

MANAGER, TECHNICAL EMPLOYMENT
WESTINGHOUSE ELECTRIC CORP.
306 4TH AVE., PITTSBURGH, PA.

ENGINEERS

PERMANENT POSITIONS

ELECTRONIC - MECHANICAL

Development and Design

EQUIPMENT ENGINEERS— Electronic—analyze failure reports from maintenance and operation standpoints; specification analysis for serviceability. Experience in installation design for Military Electronic Equipment. Field experience necessary. Requires judgment and initiative.

JOB ENGINEERS— evaluate serviceability of guided missiles by test procedures operation; analyze operations. Frequent contact with field and service personnel. East and West Coast assignments.

SERVO ENGINEERS—prepare engineering design studies and production specifications; review design proposals; establish test criteria. Several years' experience in design and production of servo-mechanisms.

Electrical Engineers— design of complex electronic circuits for various applications. Analysis and design of servo-mechanisms. Several years' experience in underwater ordnance, with emphasis on design and development of servo-control systems.

All Replies Confidential

Please forward detailed resume.

SILVER SPRING LABORATORY
VITRO CORP. OF AMERICA (*Formerly* THE KELLEX CORP.)
PERSONNEL DEPT.
962 Wayne Avenue — Silver Spring, Maryland

CORNELL AERONAUTICAL LABORATORY, INC.

an affiliate of Cornell University

employs about 700 people on vital research work in all branches of aeronautical science. We are gradually expanding our scientific staff, and have several permanent positions open for:

ELECTRONICS ENGINEERS
PHYSICISTS
MECHANICAL ENGINEERS
AERODYNAMICISTS
AERONAUTICAL ENGINEERS
CHEMICAL ENGINEERS

in such fields as:

GUIDED MISSILES
RADAR RESEARCH
BASIC AND APPLIED PHYSICS
ELECTRONIC COMPUTERS
SYSTEMS ANALYSIS
AIRCRAFT PRECISION INSTRUMENTATION
WIND TUNNEL RESEARCH
FLIGHT RESEARCH
DEVELOPMENT ENGINEERING
HEAT TRANSFER
THERMODYNAMICS

Minimum requirement is a B.S. Advanced degrees are even better, but experience to back up the degree is really best. We pay industrial wages. Other tangible advantages here (for example, our self-sponsored internal research policy) should be of particular interest to men with intelligence, ingenuity, and initiative. Send us your resume; all inquiries are strictly confidential. Promising candidates will be invited to Buffalo for interviews at Laboratory expense.

CORNELL AERONAUTICAL LABORATORY, INC.

P. O. Box 235, Buffalo 21, New York

PHYSICISTS, MATHEMATICIANS ELECTRONIC ENGINEERS

Looking for opportunity? We have a new laboratory in Natick, Massachusetts, devoted to development and design of high frequency antennas. Television, mobile communications, radar, aircraft, and many other fields need more and better antennas. Your ability, complemented by ideal conditions in our laboratory, will assure your future.

You have
- ....New facilities, specifically designed for your work
- ....New England living, close to America's vacationland, and work in a small New England community near to Boston
- ....The security of permanent expansion

If you have
- ....Experience with microwave and servomechanisms
- ....A degree in physics, mathematics, or electronics
- ....Development experience in electronics, particularly antennas

WRITE TODAY TO: *Personnel Manager*

THE WORKSHOP ASSOCIATES

Division of The Gabriel Company *Specialists in High Frequency Antennas*

135 Crescent Road — Needham Heights, Massachusetts

ELECTRONIC and ELECTRICAL ENGINEERS

One electronics instrumentation engineer with degree in EE or Physics, preferably some graduate study, and 5 years minimum experience, for permanent position in charge of electronics lab. associated with our aero. engineering laboratories. Also some openings for electrical engineers with less experience. Sal. commensurate with experience. Liberal employee benefits. Housing not a pressing problem. Submit details of educ. and experience to

UNIVERSITY OF MINNESOTA

Department of Aeronautical Engineering Laboratory

Rosemount, Minnesota

WANTED
ELECTRONIC ENGINEERS ELECTRONIC TECHNICIANS

Southeastern concern has need of several good men for work in Jacksonville and other Florida areas. 1—Designer, 1—Production Engineer, 5—Licensed Marine Radio Technicians. Apply giving full details of training and experience. Enclose photo.

P-1687, Electronics
330 W. 42 St., New York 18, N. Y.

PHYSICISTS and ELECTRONIC ENGINEERS

Both junior and senior engineers as well as administrative personnel with technical background are needed for employment with expanding research and development organization specializing in Instrumentation, Radio Telemetering, Missile Guidance, Telemetering Data Treatment and special electro-mechanical devices. New laboratory facilities located in research center. Corporation has five year history and is operating on pre-Korean contracts.

Replies held in strictest confidence.

Please send complete resumes to:

APPLIED SCIENCE CORPORATION OF PRINCETON

Post Office Box 44
Princeton, New Jersey

sales engineer

Excellent opportunity for Sales Engineer to act in capacity of commercial engineer and regional sales engineer on electronic measuring equipment.

Engineering degree or equivalent required. Electronic engineering background and sales experience essential. Must be responsible business man capable of growth in management capacity. Good choice of territories available.

Please Send Resume To:

P-1886, Electronics,
330 W. 42nd St.
New York 18, N. Y.

OPPORTUNITIES

Engineers • Physicists • Chemists

Research and Development Work
On the University of Chicago Campus

Work will include research, design, and construction of various electronic devices, navigation aids, communications, infrared, light sources, etc.

To complete a staff necessary to carry out this kind of work, the best available men in the fields of mechanical and electrical engineering, physics (particularly the branches of solid state, spectroscopic, and microwave physics), chemistry (particularly physical chemistry and explosives), and experimental meteorology are needed.

A large part of the staff will also be made up of young, recently graduated men. The salary scale is that generally prevailing in industry for the various professional experiences. Since the laboratory is being established at the request of the military, this interesting and essential work necessarily carries a high priority.

Superb machine shops and laboratories are being set up on the basis of an anticipated long range research program.

Applicants must be American citizens able to pass security investigation.

Send complete resume of education, background, and experience to:

CHICAGO MIDWAY LABORATORIES

The University of Chicago
WATTS S. HUMPHREY
Director of Scientific Personnel
5650 South Ellis Avenue
Chicago 37, Illinois
Telephone: Midway 3-0800, extension 2588

DIVERSITY RECEIVING EQUIPMENT

Brand New!

- Designed to operate from a 103-260 volt, 25-60 cycle Single Phase Power Source
- Power consumption approximately 70 to 80 watts
- Front panel finished in baked black wrinkle lacquer
- Tube line up: 3-6A6; 1-77; 1-1V; 1 neon; 1-80; 1-6F8G; 2-6SJ7; 1-VR 150/30
- Overall dimensions: 19" wide x 14" deep x 21" high—Export packed 21" wide x 20" deep x 36" high
- Equipment weight: 111 lbs. Export packed 211 lbs.
- Complete instruction book supplied with each unit

Mfg. by
SCHUTTIG & CO.
Washington, D. C.

Export Packed!

EXTRA PARTS

2 extra sets of tubes
Weinbridge oscillator
Power transformer
Condensers and resistors
Meters, switches and plenty of extra parts

LIMITED QUANTITY

Special

$299.50

Write for Free descriptive circular

OTHER ELECTRONIC EQUIPMENT

STROMBERG-CARLSON SCOPE TRANSFORMER Oil-filled 400 cycle T-101 A, B, & C. Special **$24.75**

VULCAN 12 Volt Soldering Irons 100 watt only **$4.95**

ELECTRO PNEUMATIC RAMS Model FQ. Maximum Air Pressure 350 lbs/IN2 24 volts. Special **$24.75**

TUBES—4AP10—$4.95. 5AP4 Scope Tubes 9LP7 $4.95 GL-481 $1.49

LIFE-BOAT TRANSMITTER 500 KC 5 Watts, T-500 PRA Special **$14.95**

U. S. NAVY 24 hr. SELF-REGULATING CLOCK Model 581-2CG, Mfd. by I.B.M. 24 volt DC, 6 watts. **$11.95**

INVERTERS—US Army Air Corps Vibrator Inverter Mfg. Type No. S-667 Input voltage 28V DC Capacity 6 lamps 10 Amps at 3 volts Special **$12.95**
Mfg. by Electronic Labs.

US Army Air Corps Vibrator Inverter Type A-4 Input voltage 12 DC Capacity 2 lamps 15 Amps at 3 volts Mfg. Type No. S659 Only **$6.95**
Mfg. by Electronic Labs.

ATR Inverter Input voltage 12 DC Output voltage 110 AC 125 Watt Special **$24.95**

MC131 Ringers **$1.25**

C-158 coils ..... $.35 each
10 feet 3 Wire Tinsel Cords CC343A..... $.35
Army Blinker Lights Less Batteries $1.00 each
Brand New BC-223AX the latest of BC-223 series in cases with 3 Tuning Units BC906 FREQUENCY METER..... SPECIAL

Crystal Duplicators Used For testing crystals. Special **$49.50**
Mfg. by North American-Phillips

Throat Microphones Brand New —Western Electric each $.98

Lip Microphones (used) each $.98

DYNAMIC CHEST MICROPHONES D-97644 Mfg. by Western Electric Special **$12.95**

VARIABLE CONDENSERS for type ARC-5 Receivers Glass Bead insulation. Packed ball bearing gears. Worm-geared drive—30-1 gear ratio. Capacity—17MMFD-90MMFD only **$2.95**

Dual-Condenser connected with flexible shaft #7321 connected to #5302 Transmitting condenser—glass bead insulation flexible shaft coupling worm-geared drive—50-1 gear ratio double space plates provision for tuning dial. Capacity—28MMFD-150 MMFD. Only **$4.95**

Dial Scales for ARC-5 Equipment 6-9-1MC, 5.3-7MC, 1.6-9MC Large Quantity each 9¢

2 Gang Broadcast Condenser with drum and 5 push-buttons Capacity .00036SMMFD. each **$1.19**

Butterfly Condensers—(used) about 35MMFD Each 49¢

RECONDITIONED RECORD PLAYERS Gov. Surplus 33 1/3 RPM with built-in amplifier AC Special **$19.95**

RECORD PLAYERS AC-DC RECONDITIONED Government Surplus 78-33 1/3 RPM Special **$24.95**

VOLTAGE REGULATOR Type A Coil Current .110 Amp. Regulated Voltage 80 Mfg. by Alliance Mfg. Co. **$1.98**

Oil Filled Dual .4MFD7500 Volt Condenser only **$5.49**

RADAR ANTENNAS Poly Styrene Insulation SC417A only **$1.49**

DEHUMIDIFIER UNIT Part #45VA100 Mfg. by Varelty Aircraft Corp. **$1.49**

GLIDE PATH RECEIVER Type ZA-1 Complete with tubes Only **$9.95**
Mfg. by Air-Tract Mfg. Co.

KLIXON SWITCH PLM-80 TYPE K-602 Mfg. by Spencer Thermostat Co. Only **$1.49**

OXYGEN PRESSURE GAGE (Aircraft Low Pressure System) Type K-1 Range 0-500 Mfg. by General Electric Co. Only **$2.49**

RADIOSONDE AN/AMQ-1C only **$4.95**

CORD CD-318-A Mfg. by Western Electric 49¢

PL-540 PLUGS
JK-26 JACKS SPECIAL

HS-30 HEADSETS **$2.49**

PLATE CIRCUIT RELAYS Plug-in type 2 Mils 2500 Ohms Single Pole Double Throw Dust Sealed only **$1.95**

COAX CABLE RG57U-95 Ohms RG34U-70 Ohms

COAX TRANSMISSION LINE SC107A Stamp #794 Operates at 32.66 MC. Ceramic Beads Designed for high voltage
Mfg. by Link Radio

I.F.'s for I.F.F. Units only **$1.00**

JK-48 EXTENSION CORD **$1.00**

McMurdo Silver Model 911 Sweep Signal Generator with 1 and 5 mc. crystal markers. Brand new Special **$49.95** Less Case

REFLECTOR SHADES 8½" 14" 15½" diameters Baked enamel finish
Mfg. by Wheeler Reflector Co.

J-51 HAND KEY each 98¢

WHAT HAVE YOU? WE WANT TO BUY WHAT DO YOU NEED?

Wire — Write — Phone — BArclay 7-3588 — Mr. Marino — Mr. Tanza — Mr. Hewitt — Mr. Bender

MARINO RADIO CO.

Television, Radio and Electronic M·R *Supplies*

203 GREENWICH STREET (Near Fulton St.) NEW YORK 7, N. Y.

BArclay 7-3588

WANTED! WANTED!

ATTENTION colleges, schools, hams, industrials!! Highest prices paid for surplus equipment, parts, and tubes. We are especially looking for test equipment TS-12, 13, 35, 14/AP, 15/AP, 146/UP, 173, 174, 175, 239, 259, 263. Any types with TS prefix. Write, wire or call.

R·H·S
SPECIALS OF THE MONTH

WANTED! WANTED!

APR-4, 5, 7 and tuning units. ARC-1, 3, ART-13, ATC. APS-10, microwave equipment in S. K. X-band. APS-15, APQ-13, APS-32, SCR-300, 284, 694, etc. BC-221, 342, 348. BC-1016 tape recorders. Write wire or call.

RADAR—COMMUNICATIONS AND TEST EQUIPMENT

TS-35/AP X-band Signal Generator. Pulsed and C.W. freq. range, 8400-9600 mcs. This unit will measure power and frequency. 115v 50-2600 cyc.

TS-3/AP S-band Frequency and Power Meter. Portable. Battery operated. Complete with all cables.

TS-33/AP X-band Frequency Meter. 8500-9600 mcs. Contains crystal detector and indicating meter. Output to scope will indicate pulse wave shape.

TS-62/AP X-band Echo Box. 8400-9600 mcs. tuned and untuned input. Will indicate resonance on meter. Complete with pick up antenna and cable.

TS 268/UP Crystal Diode Test Set. Used to check 1N21, 1N22, 1N23, etc. Battery operated. Portable. Complete with spares.

TS-89/AP Voltage Divider. 1:10 and 1:100 ratios. Wide band for true pulse shape. Output to scope.

TS-10/APN Altimeter Test Set. Good condition. Complete with cables and dummy antenna..... $35.00

TS-12/AP V.S.W.R. Test Set for X-band. Complete with amplifier, slotted line, termination, adaptors, etc. In 2 carrying cases. Excellent.

TS-45/APM-3 X-band signal generator. 8400-9600 mcs pulsed & CW output. Used to check AP84 and similar sets.

TS-36/AP X-band Power Meter. Consists of power measuring circuit. Horn antenna, co-ax to wave guide adaptor, connecting cable and probe. Will measure either absolute or relative power. Nominal band of usefulness is approx. 8.5-9.7 KMC. Excellent condition.

TS 125/AP S-band power meter, sensitivity 2 M.W. full scale, accuracy ±0.5 DB from 9-11 CM. powered by 1½v flashlight batteries. excellent.

TS-174/U Freq. Meter. Freq. range is 50-250 mcs. High freq. version of BC-221. Excellent condition.. $385.00

TS-16 Altimeter Test Set. Used to check various altimeters or as an accurate wavemeter. New..... 29.95

TS-61/AP S-band Echo Box. Using meter provided it is possible to maximize the XMTR adjustment and determine relative power output. Complete with probe and cable. Very good condition..... $140.00

TS-13/AP Xa band signal generator, wave meter, wattmeter. Precision lab microwave. Test set. Will provide either pulsed or CW output in Xa band. Input 115v 60-800 cyc.

TS-226/AP used to measure peak power output of any xmitter in the range of 200-1000 mcs. Has provision for oscilloscope signal observation and built in calibration. Part of AN/APM-29. Excellent.

TS-69/AP freq meter covering range of 400-1000 mcs. complete with calibration charts, antenna & crank. In metal carrying case. excellent..... $72.50

TS-170/ARN-5 XTAL controlled test set, with the following freq. ranges: 332.6, 333.8, 335.0 depending on XTAL in use. This set is used to align glide path receivers. Batteries and antenna are self-contained. Excellent condition.

OTHER TEST SETS

TS-278/AP	TS-189/U	TS-92/AP
TS-102/AP	TS-110/AP	TS-36
TS-47/APR	TS-184/AR	TS-59/APN
TS-184/AP	TS-19/APQ-5	TS-23/APN

AN/APS-3 Airborne X-band Search and Homing radar. Complete. Contains RF head, modulator, synchronizer, control boxes, plugs, antenna, etc. 115v 400 cyc. Excellent condition $875.00

SQ 10 CM PORTABLE RADAR. this set is a very compact search radar. complete installation available. brand new in carrying cases with complete maintenance spares including extra trans. rec. Ind. Unit. data as follows:

power input: 90-130v 60 cyc	I.F.F. synch output available
pulse rate: 800 cyc	accuracy ±2°
range: 3, 15, 45 miles	power output 1 KW
pulse width: 1 microsec.	beam width: 8° horiz.
300 yds. min. range, all ranges	15° vert. presentation: A,B,P.P.I.

AN/APS-15 R.F. Head and Modulator. X-band. Complete with all tubes. Good condition..... $99.50

SCR-584 lightweight portable direction finder covering the range of 100 Kc to 65MC. Built into a leather suitcase & was used to track down illegal transmitters. New & complete with spares.

DYNAMOTORS AND POWER UNITS

Type	Input Volts	Output Volts	Amps	Price
DM-19	12	500	.200	$6.95
PE-125	12v/24v	475	.200	14.50
DM-32	28	250	.060	3.75
DM-33	28	570	.160	2.95
DY-12	12	275	.110	
		500	.50	
PE-73	28	1000	.350	10.00
PE-94	28	300	.260	
		150	.010	
		14.5	.5	2.25
PE-97	Vibrator Power Supply			8.95
PE-98	12v	300v		35.00
800-1	Inverter 28v	110v	800 cyc	40.00
PE-103	6 & 12	500	.160	15.00
PP-18-AR	Vibrapack			15.95
RA-42	(for BC-639 Receiver)			29.95
ATR	Inverter 12v	110v AC	125 watts	14.95

AN/ART-3 Victory Girl. Dual frequency emergency lifeboat xmitter. Complete with xmitter, kite hydrogen generator, etc. New in knapsack. C.A.A. approved $69.50

AN/APR-5 Radar Search Receiver. Freq. range 1000-3100 mcs. Will detect signals up to 10,000 mcs. with reduced sensitivity. Contains oscillator and mixer cavity, IF strip, power supply. Input 60-2600 cyc. 115v. Excellent condition $375.00

T-50 Radiotelegraph Transmitter complete with power supply and all accessories with spares. Portable. New in cases $275.00

AN/APT-5 300-1500 mcs. xmitter cavity oscillator using 3C22 lighthouse tube. Power output 30 watts. Noise modulated. Excellent condition. Complete with all tubes $149.50

SK-1M Radar Receiver Indicators. Freq. 195 mcs. 2 R.F. stages, 3 IF stages, 1 video, etc. New condition $125.00

AN/TPS-1 SEARCH RADAR. This is a pack portable ground search radar for the detection of aircraft up to 100 miles. Range and azimuth data is displayed on a 7" P.P.I. and a 5" "A" scope. This set was called the G.I.'s radar because of its ruggedness, dependability and ease of servicing. Complete tech data is as follows:

Range Max. 100 Mi. Min. .25 Mi.	P.R.R. 200 Per Sec.
Azimuth Mech. 360° Automatic 360° Accuracy ±3°	Pulse Width 2 Micro Sec.
Scanning Manual Automatic	Beam Width 3° Horiz. 13° Vert.
Presentation 7" P.P.I. 5" A Scope	
I.F.F. not provided but has provision for. Frequency 1074-1086 Mcs.	Power Input 1100 W at 115V 400 Cyc. and 180 W at 27V D.C.
Power output 150 K.W.	Weight: 1,518 Lbs.

AN/PPN-1 EUREKA! Ground portable, beacon responder. Unit will work into the AN/APN-3 transponder for purposes of homing. C.W. communication can also be carried on between plane and ground. Unit comes complete with xmitter, receiver, power pack, phones, etc. Brand new in knapsack. AN/APN-2 EQUIPMENT CAN BE SUPPLIED ON ORDER.

SCR-269/G Automatic Radio Compass. Freq. range 200-1750KC. Complete with BC-433-G receiver, BC-434, LP 21, 1-81, 1-82, BK22, etc. Very good condition $129.95

SCR-300 Frequency Modulated Transceiver. Freq. range 40-48 mcs. complete with 18 tubes, handset and antenna. Powered from self contained battery pack. Excellent condition. Weight approx. 35 lbs. with battery, each $275.00

TPS Marine Radio Telephone and Telegraph Xmitting and Receiving Equipment. Freq. range 1500-12000KC. Consists of xmitter, receiver, antenna loading coil, remote control box, power unit, cables, etc. Power input 12 or 32v DC. We can supply an 110v AC power supply for stationary use at additional cost. Excellent condition.

SCR-536 Xmitter-Receiver (handy talkie). Freq. range 3885-5500KC. Complete with coils, tubes, crystals. Very good condition $89.95

AN/APA-10 Panoramic Adaptor for use with any receiver with following I.F's: 455KC, 5 mcs, 30 mcs. Unit will give panoramic presentation (1 mc wide for 455KC input) (100KC for 5MC input) (2MC for 30 mcs input). Power input 115v 400 cyc. but can be changed with the addition of a proper power transformer. Excellent condition $175.00

10 CM R.F. package. 2700 mcs. Consists of BC-1007 modulator & BC-1091 RF head. Power output approx. 40 KW. Complete with tubes $195.00

RT-39/APG-5 10 CM LHTR R.F. head & modulator. Low power approx. 2 KW. Lighthouse tube rec & trans w/T.R. tunable. New $135.00

SCR-510 Freq. Modulated Portable Transceiver. Covering range of 20.0-27.9 mcs in 80 channels 100KC apart. Complete equipment consisting of BC-620 transceiver, power supply PE-97A, T-17 mike, handset, AN-45 antenna, battery operated or 6 or 12v input. Excellent condition $69.95

SCR-610 similar to SCR-510 except for freq. range which is 27.0-38.9 mcs. Excellent condition.. $79.95

AN/APA-11 Pulse Analyzer to work with Search Receiver for analysis of received pulsed signals. PPS pulse width, wave shape, can be displayed on an CR tube. Unit can also be used as a standard oscilloscope for general servicing work. Input is 115v-400-2600 cyc. but can be changed with the addition of a 60 cyc. transformer. Very good condition.

SCR-694 Field Radio. Light weight version of SCR-284 Freq. range is 2.8-6.5 mcs. Power output is A1-20, A3-5; comes with transceiver BC-1306, GN-45 or 58 hand generator antenna system, microphone, headset, etc. In excellent condition.

CY-50/TRC-1 antennas. Freq. range 70-100 mcs. Complete with antenna, poles, wires, etc., in carrying case.

COMMAND EQUIPMENT

ARC-5 | 274N | OTHERS

RECEIVERS

ARA 500-1500KC. Good..... $24.95
R-28/ARC-5 ..... 29.95
433 200-1750KC. Good..... 29.95
ARR-2 234-258 mcs. Good..... 19.95
455R 6-9 mcs. Good..... 19.95
BC-454 3-6 mcs w tubes. new..... 16.95

TRANSMITTERS

T-23/ARC-5 ..... $49.95
696-A 3-4 mcs. Good..... 29.95
TYPE O 5.3-7 mcs. New..... 9.95
AVT-23 3000-13,000KC complete w/control box, manual, etc. C.W. or phone. 14 or 28v input. Brand new. Original cases..... 79.50
BC-950A 100-156 mcs. New..... 59.95

ACCESSORIES

BC-456 Modulator. Good..... $2.25
BC-450 Control Box (3 rec). Used..... 1.25
BC-451 Control Box (xmitter). Used..... .89
BC-442 Relay Unit (ANT.). Used..... 1.95
Flexible Shafting Available

MISCELLANEOUS SPECIALS!

Sound Powered Chest and Headsets MI-2454-B type O, mfg. RCA. Brand new in original boxes. Pair ..... $ 29.95
Trailing WAP Antenna Feed Tube. New..... 5.95
Goniometer for SCR-277 Direction Finder. Excellent..... 39.95
HS-30 headsets, good..... 3.95
FT-154 BC-348 Shock Mounts..... 2.98
AN/CRW Receiver for Remote Control..... 5.95
BC-1206 Beacon Receiver 200-400KC, 28v in. Excellent 4.95
MN/26-Y Compass Receiver. Very good..... 24.95
BC-433G Compass Receiver, 200-1750KC in 3 bands. Excellent 39.95
HS-33 headsets, good..... 4.95
BC-1016 Tape Recorder. Complete. New..... 439.50
CFI Unit with 200KC Xtal. New..... 14.95
BC-733D receiver with tubes..... 29.95
BC-329 Transmitter. Excellent..... 89.95
QBG-1 Sonar complete with Hydrophone. Excellent 125.00
BC-608 automatic keyer for SCR22..... 5.95
AN/104A Antenna for SCR-522, ax handle. New 3.95
BC-1284 Lighthouse Tube Preamplifier. Excel.. 69.95
ASB 500 mcs. YAGI Antenna Dual 6 Element.. 14.95
Single 5 Element..... 8.95
AN/APA-17 Radar Direction Finding Antenna, back to back parabola, freq. range 300-1000 mcs. Horizontally and vertically polarized. Excellent 59.00
BC-306 Interphone Amplifier. Good..... 9.95
ART-13 Loading Condenser. Excel..... 4.95
CW-3 less coil & crystals. New..... 29.50
CU-25 Loading Box for ART-13..... 49.95
AS-27/ARN5 Antennas. Very good..... 4.95
SA-1/ARN-1 Part of ARN-1. Very good..... 2.95
ID-80/APA-17 Indicator. Excel..... 129.95
AT-4 Antenna, new 4.95
BC-639 receivers, new 285.00
RM-29 remote control, new..... 17.95
AVR-15 Aircraft Receiver. Very good..... 19.95
BC-923 Receiver. Very good..... 39.95
BC-800 Xmitter/Receiver. Very good..... 39.95
RA-300 FM Exciter (Mfg. Tempo). New..... 32.50
A-55 Dummy Antenna. Very good..... 2.25
BC-1365 Control Box. Good..... 3.95
FL-8 Filter 3.95
FL-6 Filter. Less cables. Fair..... 2.65
3C-16-D GSAP Gun Camera Computers with all access. In carrying case. Excel..... 19.95
AT-2A/APN-2 Antenna. Fair cond..... 4.95
Spares for ARC-5 and 274 N, APX-1, ASG-10. We have a large stock of TS-34A/AP Spares.

CORDS AND PLUGS

CG-(172/173) CPN-8 CM Coax Patch Cable New $4.95
CX-548/CRD-3 Cable. New..... 1.25
CX-546/CRD-3 Cable. New..... 1.25
CD-509A w/SW-14 U & J Cord Attachments with JK-48 Jack & PL-68 Plug. New..... .75
CD-307A with PL-55 and JK. New..... 1.29
PL-55 Plug. New..... .49
83-168 Adapter. New..... .17
83-18P Connector. New..... .69
83-1R Coax Connector. New..... .69
PL-68 plugs ..... .39
83-1J Feed Thru. New..... 1.10
83-1F Feed Thru. New..... 1.35

SCR-522 VHF Airborne Command Equipment. Freq. range 100-156 mcs. in 4 channels receiver and transmitter. Crystal controlled. Complete equipment. Consists of trans/rec, control box BC-602, dynamotor PE-94, AN104A antenna, plugs, etc. Power input with PE-94 is 28v. Excellent condition. We can supply PE-98 dynamotors for 12v input at additional cost.

PHONE DIGBY 9-0347
WRITE FOR QUANTITY PRICES

Prices subject to change without notice. F.O.B., NYC minimum order $10.00. 20% deposit required. All merchandise guaranteed.

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y.

Coaxial relay K-101—SPDT—24v DC.....$ 8.50
Set of 83-1SP coax-connectors for above..... 1.35
RG59U coaxial cable—75 ohm
150' roll.....$11.95 300' roll..... 22.50
300 ohm twin lead. 500' minimum—per ft..... .03
Sigma plate relay 500 ohm—SPDT..... 2.75

R·H·S
SPECIALS OF THE MONTH

1000KC crystal BT cut.....$3.95
3" scope shield..... 1.29
2 speed dial drive for ¼" shaft ratios 5:1 1 to 1.. .39
ATC 100 mmfd air trimmer screwdriver shaft.... .29
Centralab 850 S 50MMF 5KV button cond..... .39
VS-2 vac switch..... 6.95

TUBES!! BRAND NEW! STANDARD BRANDS! NO SECONDS! COMPARE! TUBES!!

0A3/VR75. $1.09	3C23	99.95	211	$ .69	808	$7.25	2050	$1.25	WL578	$1.29	5X4G	$ .89	6SJ7	$ .89	12SK7	$ .98
OB3/VR90. 1.29	3C24	2.25	212E	49.50	809	2.45	2051	1.45	WL616	37.50	5Y3GT	.83	6SK7	.89	12SL7	1.05
OC3/VR105 1.49	3C31/C1B.	3.49	215A	.19	810	9.95	8005	5.95	WL619	18.95	5Y4G	.73	6SL7GT	.98	12SN7	.98
OD3/VR150 1.29	3C45	8.95	217C	8.95	811	1.75	8011	1.75	WL657	34.50	5Z3	.89	6SN7GT	.98	12SQ7	.85
1B22	3.45	3CP1	2.25	227A/5C27	8.95	812	2.98	8012	3.95	WL681	22.50	6AB4	.89	6SQ7	.75	12SR7	.85
1B23	12.50	3CP1S1	2.95	249C	3.95	812H	6.95	8013	6.95	0A2	1.95	6A3	1.25	6SR7GT	.98	12Z3	.85
1B24	3.95	3DP1	4.95	250R	12.95	813	20.95	8014	29.95	0A4G	1.20	6A4LA	1.35	6SS7	.98	14A4	.98
1B26	3.95	3DP1A	6.95	250TH	22.50	814	3.95	8020	1.29	0B2	1.65	6A6	.92	6ST7	1.10	14A7	.95
1B27	24.50	3DP1-82A.	9.95	257TL	21.50	815	2.95	8025	9.95	0C4	.75	6A7	.99	6SV7GTY	2.10	14B6	.95
1B29	2.75	3D21A	1.98	274A	5.50	816	1.30	9001	2.25	0C5	.73	6A8	1.05	6SV7	1.25	14F7	.95
1B32	8.98	3E29	14.95	274B	2.69	826	.98	9002	2.25	0D3	.73	6AB7	1.05	6T7G	1.20	14F8	.95
1B36	24.95	3FP7	3.95	276A	9.95	828	13.75	9003	2.25	1A3	.73	6AC7GT	1.20	6T8	1.20	14H7	.95
1B38	32.50	3GP1	4.95	293A	2.98	829	12.95	9004	.75	1A5GT	.78	6AC7	1.15	6U5G	.95	14J7	.95
1N21 Xtal	1.29	3HP7	5.75	295A	5.75	829B	14.25	9005	2.95	1A7GT	.85	6AD7GT	1.35	6U7G	.89	14N7	.95
1N21A "	2.25	4-65A	14.21	300B	9.95	830B	3.95	9006	.49	1A7GT	.93	6AE6G	.89	6U7G	.89	54Q7	.95
1N21B "	4.25	4-125A	29.95	304TH	27.50	832	12.95	CIJA	9.95	1AB5	.80	6AF6G	.95	6V6	1.55	14R7	.95
1N22 "	1.35	4-250A	29.95	304TL	29.95	832A	25.95	C5B	1.49	1B3/8016.	1.25	6AG5	.89	6V6GT	.89	15	.95
1N23 "	3.25	4AP10	4.95	305A	34.95	833A	39.50	C6A	7.95	1B4	1.15	6AG7	1.35	6W4	.85	24A	.75
1N23A "	3.25	4B32/EL8B	9.95	307A/RK75	5.95	836A	2.95	C6J	6.95	1B5/25S	.95	6AH6	1.40	6W7G	1.05	25L6GT	.85
1N23B "	6.95	4B24/EL3C	7.95	310A	5.95	837	1.69	C100D	1.49	1B7GT	1.25	6AJ5	1.15	6X4	.73	25Z5	.79
1N27 "	1.40	4B25/6CP	3.95	316A	.69	838	2.99	CK502AX	2.95	1C5GT	.89	6AK5	1.50	6X5GT	.79	25Z6GT	1.05
1N34 "	1.40	4B26/2000	8.95	323A/B	24.50	841	.49	CK503AX	2.25	1C6	.73	6AK6	1.10	6Y6G	.98	26	.75
1N34A "	1.40	4B28	4.95	327A/5C27	4.95	843	.39	CK505AX	2.25	1C7G	.73	6AL5	.83	6Y7G	1.25	27	.69
1P23	3.89	4B32	9.95	328A	4.95	845	4.95	CK506AX	2.25	1D5GP	.73	6AQ5	.89	6ZY3G	.89	28D7	.98
1P24	1.79	4C27	12.95	331A	12.95	849	29.50	CK507AX	2.25	1D7G	.73	6AQ6	.87	7A4/XXL	.79	30	
1P26	2.98	CV92	49.50	350A	8.95	851	89.50	CK512AX	2.25	1D8GT	.73	6AR5	.79	7A5	.89	31	.85
1B31	6.95	4C35	34.50	350B	29.95	852	29.95	CK517AX	2.45	1E5GT	.73	6AT6	.73	7A6	.88	32L7GT	.89
2AP1	11.95	4E27	34.50	368AB	7.95	860	.995	CK1005	.89	1E7G	1.19	6AU5	1.25	7A7	.85	32L7GT	.89
2AP5	6.95	257B.	17.95	371A	.98	861	29.95	CK1006	2.25	1F4	.73	6AU6	.83	7A8	.79	33	.95
2C21/RK33	.69	5AP1	3.69	371B	.98	864	.39	E1148	.38	1F5G	.73	6AV6	.72	7AG7	1.05	34	.85
2C22/7193	.69	5AP4	2.75	388A	2.75	865	1.49	EF50	.79	1G4	.73	6B6G	.98	7B4	.85	35/51	.83
2C26A	.49	5BP1	5.95	393A	4.95	866A	1.39	F123A	2.95	1G6GT	.73	6B7	.98	7B5	.85	35A5	.89
2C34/RK34	.89	5BP4	5.95	394A	4.95	866JR	1.20	F127A	22.50	1H4G	.89	6B8G	.85	7B6	.85	35B5	.89
2C39 24.50	5CP1	24.50	417A	12.95	869B	49.50	F128A	89.50	1H5GT	.78	6BA6	.83	7B7	.79	35C5	.98
2C40	8.95	5CP7	4.95	434A	4.95	872A	2.95	F606	37.60	1H6GT	1.05	6BC5	.98	7C5	.85	35L6GT	.85
2C43 14.50	5C22	95.00	446A	4.95	874	1.49	F660	79.50	1J6	.78	6BD6	.98	7C6	.85	35W4	.69
2C44 1.49	5D21	24.50	446B	4.95	878	1.49	F667	3.95	1L4	.73	6BE6	.79	7D7	.85	35Y4	.75
2C46 7.50	5FP7	1.98	450TH	47.50	878	2.28	FG27A	9.75	1LA4	.89	6BG6G	1.10	7E5	.79	35Z3	.85
2C51 6.95	5GP1	4.95	450TL	47.50	879	2.28	FG32	79.50	1LA6	1.15	6BH6	.97	7E6	.79	35Z4	.75
2D21 1.79	5JP1	24.45	527	12.75	885	1.49	FG57	14.95	1LB4	1.06	6BJ6	.97	7E7	.89	35Z5	.89
2E22 1.95	5JP2	5.50	528	1.39	902	11.95	FG81A	3.95	1LC5	.89	6BQ6	1.19	7E8	.85	37	.79
2E24 4.89	5JP4	24.45	562	97.50	903	2.95	FG105	22.95	1LC6	.98	6C4	.79	7F7	.79	38	.79
2E26 2.89	5JP8	12.95	575A	13.95	908	12.95	FG172	34.50	1LD5	.98	6C5	.79	7K7	1.20	38	.60
2E30 7.50	5JP9	12.95	701A	.89	918	2.79	FG180	4.95	1LE3	.85	6C6	.79	7N5	.98	39/44	.60
2J21A .95	5J30	49.50	702A	3.95	919	2.79	FG434A	4.95	1LG5	.85	6C8G	.98	7N7	.98	41	.75
2J22 6.45	5J31	99.50	703A	3.95	922	.98	FG451	9.95	1LH4	.98	6CB6	.98	7P7	.98	42	.75
2J26 29.50	5LP1	19.95	704A	1.05	923	1.05	FG502A	1.85	1LN5	.98	6D6	.85	7R7	.85	43	.75
2J27 29.50	5NP1	5.95	705A	2.95	927	1.89	FG582	97.50	1N5GT	.89	6D8	.89	7S7	.98	45	.89
2J30 49.50	6A86	39.50	706BBY	39.50	930	1.49	FG591	97.50	1P5GT	.79	6F5	.79	7V7	.98	45Z3	.85
2J31 39.50	6C21	24.50	706CY	39.50	931A	4.95	HF125	14.95	1Q5GT	.73	6F6	.95	7W7	1.05	45Z5	.80
2J32 39.50	6F4	4.95	706FY	42.50	934	.39	HF300	19.95	1R5	.73	6F7	.95	7X7	1.10	46	.82
2J33 39.50	6J4	8.98	706GY	42.50	935	.45	HY114B	.79	1S5	.98	6F8G	.95	7Y4	.75	47	
2J34 39.50	7BP7	8.98	707B	17.95	936	.45	HY115	.79	1S4	.73	6G6G	1.15	7Z4	.85	48	.98
2J36 17.95	8GP7	14.95	708A	3.95	957	.45	HY615	.29	1S5	.85	6H6	.85	8	.89	49	
2J37 12.75	9JP1	14.95	709A	3.95	958	.45	KC4	37.50	1T4	.85	6H6GT	.79	12A6	.73	50A5	.95
2J38 12.75	9LP1	14.95	710A/8011	1.75	958	.39	KU610	24.50	1T5GT	.73	6J5	.79	12A7	1.05	50B5	.95
2J39 39.50	9LP7	14.95	715	.45	961/NE16	.39	ML100	69.50	1U4	.89	6J5GT	.69	12AH7GT	.79	50C5	.95
2J40 39.50	10BP4	22.50	714AY	9.95	1608	9.25	RELZ1	3.95	1V	.72	6J6	1.20	12AH7GT	1.27	50L6GT	.85
2J46 39.50	17P4	17.95	715A	9.95	1613	2.25	RK34	.89	1X2	1.19	6J7	.82	12AL5	.79	50Y6	.85
2J48 29.50	10	.49	715B	9.75	1614	2.28	RK25	4.49	2A3	.95	6K5GT	.89	12AT6	.73	53	.98
2J50 39.50	12DP7	16.95	715C	29.95	1616	.98	RK33	4.49	2A5	1.25	6K6GT	.79	12AT7	1.25	55	.98
2J50 22.50	12GP7	16.95	717A	1.89	1619	.98	RK34	.89	2A5	.73	6K7	.73	12AU6	.98	57	.80
2J54B 39.50	12HP7	16.95	721A	2.89	1622	3.25	RK48A	4.49	2A6	.73	6K8	.73	12AU7	1.15	58	.98
2J55 39.50	12P4	22.50	723A	3.95	1624	2.28	RK60	2.95	2A7	.78	6L5G	.89	12AV6	.73	59	.95
2J61 49.50	15E	1.19	723A	9.95	1625	.48	RK60/1641	1.69	2B7	.78	6L6	3.00	12BA6	.85	70L7	.95
2J62	15R	1.19	723A/B	14.95	1626	.48	RK61	24.50	2C26A	.75	6L6G	1.75	12BE6	.87	71A	.75
2K25/	16AP4	42.50	724B	3.95	1629	.45	RK72	.59	2X2	.85	6L6GA	1.75	12C8	.79	75	1.25
723AB.	16CP4	42.50	725A	7.95	1630	.98	RK73	.59	2X2A	1.60	6L7	.98	12F5GT	.79	76	.95
2K35 36.25	17GP4	42.50	726A	4.95	1631	1.29	RK74	2.95	3A4	.65	6L7G	.95	12J5GT	.79	77	.79
2K39 24.50	23D4	.45	726B	29.50	1632	.79	RX120	1.95	3A5	.90	6N7	.89	12J5GT	.85	78	.79
2AP1 115.0	23DP7	19.95	726C	49.50	1633	.79	RX121	1.95	3B3/1201.	.89	6P5	.89	12J7GT	.79	80	.79
3B22/Eitc. 2.98	30 Specia.	.59	730A	12.95	1634	.75	VR78	.89	3D6/1299.	.59	6R7	.85	12K7GT	.79	82	.89
3B22/RK38 4.89	35TG	4.95	750TL	79.50	1636	3.25	VR91	1.49	3LF4	.98	6S7G	.98	12K8	.89	83	1.15
3B24 7.95	45 Special.	4.95	800	.79	1638	.65	VR92	1.29	3Q4	.79	6S8GT	1.05	12SA7	.89	84/6Z4	.85
3B24W 7.95	53A	9.95	801A	.49	1641	.98	VT127A	3.95	3Q5GT	.85	6SA7	.85	12SA7GT	.93	85	.85
3B28 6.95	75TL	4.95	802	.49	1644	.98	VT137A	14.95	3S4	.85	6SC7	1.30	12SF5	.89	89Z	.85
3B28 3.95	100R	.89	803	4.49	1654	2.39	VU29	2.95	3V4	.90	6SD7GT	.98	12SF5	.89	89Y	.45
3B27 3.98	100TH	9.95	804	9.95	1665	1.45	VU111	1.49	3R4GY	3.75	6SF5	.89	12SF7	.89	117L7/M7.	1.35
3B28 6.95	181A	4.95	805	4.49	1851	1.89	WL530	12.75	5U4G	.73	6SF5GT	.89	12SF7	.89	117N7	1.35
3BP1 8.95	203A	8.95	806	29.95	1860	.98	WL531	12.75	5V4G	1.12	6SF7	.98	12SG7	.79	117Z3	.95
3C22 64.50	204A	69.50	807	1.98	1961	4.99	WL532	2.95	5W4	.81	6SH7	.73	12SJ7	.79	117Z6	.90

FULL-WAVE SELENIUM RECTIFIER STACKS

Max. RMS Input Volts	A.C. Volts	Max. D.C. Output Volts	Cell Size in Inches	Max. D.C. Output Amps. Continuous	Order by This Number	Price
SINGLE PHASE BRIDGE						
0-18	0-14.5	18v	x18v	1.3	18B4D1S1	$ 3.95
"	"	36v	2-3/16"x2-3/16"	2.4	18B4E1S1	4.95
"	"	36v	x3¾v	3.2	18B4F1S1	5.75
"	"	72v	x5"	13.0	18B4K1S1	13.95
"	"	72v	x6"	17.5	18B4J1S1	16.95
"	"	72v	x5"	26.0	18B4K1S2	22.50
"	"	72v	x5"	39.0	18B4K1S3	37.50
"	"	72v	x5"	52.0	18B4J1S3	47.50
"	"	72v	x6"	70.0	18B4J1S4	64.50
0-40	0-34	72v	x18v	0.60	40B4D1S1	4.95
"	"	72v	2-3/16"x2-3/16"	1.2	40B4EW1S1	6.95
"	"	72v	x3¾v	3.2	40B4FW1S1	9.75
"	"	72v	x5"	6.0	40B4K1S1	14.95
"	"	72v	x6"	9.0	40B4JW1S1	17.50
"	"	72v	x5"	12.0	40B4K1S2	28.75
"	"	72v	x6"	18.0	40B4JW1S2	34.50
"	"	72v	x5"	25.0	40B4J1S3	42.50
"	"	72v	x5"	34.0	40B4J1S4	64.25
"	"	72v	x6"	36.0	40B4JW1S4	62.25
0-120	0-100	144v	x18v	0.60	40B4D1S1	12.45
"	"	144v	2-3/16"x2-3/16"	1.2	40B4EW3S1	14.95
"	"	144v	x3¾v	3.2	40B4FW3S1	19.95
"	"	144v	x5"	6.0	40B4K3S1	32.50
"	"	144v	x6"	9.0	40B4JW3S1	42.50
CENTER-TAP						
10-0-10	0-8	18v	x18v	1.2	20C2D1S1	2.35
"	"	36v	2-3/16"x2-3/16"	2.4	20C2EW1S1	3.10
"	"	36v	x3¾v	6.4	20C2FW1S1	4.25
"	"	36v	x5"	12.0	20C2K1S1	6.95
"	"	36v	x6"	16.0	20C2J1S1	9.95
"	"	72v	x5"	24.0	20C2K1S2	14.75
"	"	72v	x5"	36.0	20C2K1S3	19.65
"	"	72v	x5"	48.0	20C2J1S3	28.75
"	"	72v	x5"	64.0	20C2J1S4	34.50
"	"	72v	x6"	80.0	20C2J1S5	42.50
"	"	72v	x5"	84.0	20C2KW1S7	49.50
"	"	72v	x6"	96.0	20C2J1S6	58.90
"	"	72v	x5"	126.0	20C2J1S8	67.90
3 PHASE BRIDGE						
0-120	0-150	18v	x18v	0.90	40B6D3S1	24.50
"	"	36v	2-3/16"x2-3/16"	1.8	40B6EW3S1	29.50
"	"	36v	x3¾v	4.75	40B6FW3S1	42.50
"	"	72v	x5"	9.0	40B6K3S1	79.50
"	"	72v	x6"	12.5	40B6J3S1	95.75

SPECIAL RECTIFIERS ON REQUEST

TRANSFORMERS—115V 60 CY HI-VOLTAGE INSULATION

2700 @ 2 MA; 6.3v @ .6A; 2.5v @ 1.75A..$ 4.45
2500v @ 15 MA..... 4.49
2000-0-2000v @ 800 MA..... 24.95
1540v @ 5 MA; 340-0-340v @ 300 MA..... 4.35
925v @ 10 MA; 525-0-525v @ 80 MA; 2x5v @ 3A; 6.3v @ 3.6A; 6.3v @ 2A; 6.3v @ 1A 4.85
415-0-415v @ 60 MA; 5v @ 2A; 115/230 Dual Pri..... 4.25
400-315-0-100-315v @ 200 MA; 2x6.3v @ 9A; 5v @ 3A; 2.5v @ 2A..... 5.35
325-0-325v @ 12 MA; 255-0-255v @ 240 MA; 300-0-300v @ 65 MA; 6.3v @ 2.5A; 6.3v @ 1A; 2x5v @ 2A..... 4.25
0-17-21.6-25.8v @ 400 MA; 6.4v @ 8A; 2.5v CT @ 2.5A Pri 115/230..... 3.25
12.6v CT @ 10A; 11v CT @ 6.5A..... 3.85
5x10v @ 7A..... 6.35
6.3v @ 12A; 6.3v @ 2A; 115v @ 1A..... 3.50
6.3v @ 8A; 6.3v @ 6A; 2.5v @ 1.75A..... 3.17
6.3v @ 1A; 2.5v @ 2A. $2.29 4-0-4v @ 1A .87
6.3v CT @ 1A..... 1.39
5v CT @ 20A; 10 KV INS..... 3.95
.6v @ 15A RMS..... 1.47

TRANSFORMERS—220v 60 Cyc

512.5-0-512.5 @ 427 MA..... $ 9.35
3x5v @ 6A; 4v @ 22A..... 3.95
3x6.3v CT @ 3A; 6.3v CT @ 1.6A..... 2.98
10v CT @ 5.5A; 6.3v CT @ 2.5A; 6.3v CT @ 1.8A 220/440 Pri..... 3.95
Step Up/Down 110/220, 500 watt..... 10.95

FILTER CHOKES HI V INS

.025 HY @ 1.36A..$1.98
3 HY @ 50 MA.... .39
5 HY @ 70 MA/.2 HY @ 350 MA. Dual..... 2.39
10 HY @ 55 MA.... .89
10 HY @ 250 MA.. 3.95
10 HY @ 100 MA.. 1.29
13 HY @ 120 MA.. 1.89
15 HY @ 70 MA... 1.39
10/20 HY @ 85 MA $1.49
15 HY @ 100 MA.. 1.69
15 hy @ 800 ma.... 6.95
5.3 HY @ 225 MA. 2.79
6.6 HY @ 175 MA. 2.10
8 HY @ 150 MA... 1.79
200 HY @ 10 MA.. 2.95
325 HY @ 2 MA... 2.95
600 HY @ 1 MA .. 2.95
9/60 HY @ 50/400 MA..... 9.95

OIL CONDENSERS—DC RATINGS

3x.1	MFD	600v	$ .59	.1	MFD	2500v	$1.15
.25	"	"	.35	.25	"	"	1.25
.5	"	"	.45	.5	"	"	1.35
1	"	"	.69	2	"	"	3.45
2	"	"	.85	.01	"	3000v	1.25
2x2	"	"	1.15	.05	"	"	1.39
4	"	"	1.29	.1	"	"	1.35
6	"	"	1.95	.25	"	"	2.75
8	"	"	2.49	.5	"	"	2.85
10	"	"	2.75	1	"	"	2.95
3x.1	"	1000v	.85	2	"	"	4.25
.5	"	"	.89	4	"	"	6.25
1	"	"	.67	1	"	3600v	1.98
2	"	"	1.75	.25	"	4000v	1.49
4	"	"	1.85	.5	"	"	2.75
8	"	"	3.55	1	"	"	3.85
14	"	"	3.85	2	"	"	5.75
20	"	"	4.25	3	"	"	5.89
.5	"	1500v	1.02	1	"	5000v	2.75
1	"	"	1.19	.1	"	"	2.95
2	"	"	1.69	.25	"	"	1.19
4	"	"	2.69	1	"	"	1.39
.1	"	2000v	1.75	.1	"	7000v	2.75
.25	"	"	1.92	.02	"	7500v	2.25
.5	"	"	1.98	.03	"	"	2.35
1	"	"	2.99	.05	"	"	2.35
2	"	"	2.85	.1	"	"	2.85
4	"	"	4.95	2x.1	"	"	7.95
8	"	"	4.95	.02	"	12000v	12.95

HIGH CAPACITY CONDENSERS

2x3500	MFD	25v	$3.47	2000	MFD	35v	$ .57
2500	"	3v	.35	100	"	50v	.45
2000	"	25v	2.45	4000	"	30v	1.35
650	"	80v	1.29	2350	"	24v	2.25
2000	"	15v	1.69	10000	"	25v	4.57

PHONE DIGBY 9-0247

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y.

WRITE FOR QUANTITY PRICES

Prices subject to change without notice. F.O.B. NYC, minimum order $10.00. 20% deposit required. All merchandise guaranteed.

BRAND NEW U. S. GOV'T. SURPLUS GUARANTEED

HIGH POWER TR. MICA

G-1 TYPE		G-2 TYPE		G-3 TYPE	
.0001	6KV	.0001	10KV	.0001	20KV
.00015	8KV	.00015	10KV	.0003	20KV
.0002	6KV	.0002	10KV	.0004	20KV
.0008	6KV	.000247	12KV	.00045	15KV
.0047	6KV	.0003	10KV	.0005	20KV
.005	8KV	.000375	10KV	.001	20KV
.01	4KV	.0004	8KV	.0011	20KV
.032	2KV	.0005	10KV	.0024	15KV
.04	1KV	.00065	10KV	.004	12KV
.051	1.5KV	.001	6KV	.25	1.6KV
.08	1.5KV	.003	6KV	.25	6KV
.09	1.5KV	.003	8KV	.001	20KV

G-4 TYPE	
.0002	30KV
.0025	25KV
.004	15KV
.005	8KV
.01	15KV
TYPE #56	
.000155	30KV
.000533	30KV
.0004	30KV
.001	30KV
.00047	20KV
.015	3KV
.0012	20KV

OTHER H.V. MICAS

.0001	12.5KV	.01	7KV
.007	15KV Type 75A	.02	8.5KV
.01	5KV		

Type "F" and "NIF" GLASS FERRULE RESISTORS

Ohms	Watts	Ohms	Watts	Ohms	Watts
1	15	1000	50	6300	40
2	20	1000	90	6500	120
2.2	15	1250	20	7500	15
4	90	1500	20	8000	90
5	15	1500	50	8200	40
6.2	15	1500	120	10,000	15
10	15	1500	40	10,000	40
10	50	1800	15	10,000	90
20	15	2000	15	12,000	15
20	90	2000	20	12,500	15
25	20	2000	50	12,500	90
32	20	2000	90	12,500	120
40	90	2000	120	13,000	20
40	12	2500	15	15,000	120
50	15	2500	20	16,000	M-O-M
60	20	2500	50	16,000	50
100	15	2675	35	16,000	90
100	50	3000	20	20,000	50
125	90	3000	50	20,000	120
150	50	3100	40	25,000	90
160	20	3100	90	25,000	120
200	50	3150	15	35,000	120
270	20	3150	90	40,000	90
400	20	3300	20	50,000	MFC
600	40	3500	20	1000,000	120
630	50	4000	50	300,000	MFC
800	50	4500	20	500,000	M-O-M
1000	15	5000	40	600K	MFC
1000	15	5000	50	4.0 Meg.	MFB
1000	201	6000	50	40.0 Meg.	M-O-M
1000	40	6000	120	100. Meg.	MVP

NOISE FILTERS

MALLORY NF.1-1	SOLAR EA-125L
MALLORY NF13-6 EQ	SOLAR ER 102
MALLORY NF13-7	SOLAR ED-101
SPRAGUE JX-51	SOLAR EP-100
SPRAGUE JX-51A	SOLAR EP-103
SPRAGUE JX-51B	SOLAR EP-104
SPRAGUE JX-55D	SOLAR EL-109
SOLAR EA-107	SOLAR EL-111
SOLAR EA-109	SOLAR EL-113
SOLAR EA-121	SOLAR FL 14, EV106
SOLAR EA-142	SOLAR FL16, EV-125

LEVER SWITCHES

Over 100 Varieties in Stock of Mossman #4101 Series

1% PRECISION RESISTORS

Standard Brand

Ohms	Ohms	Ohms	Ohms
6.	500	5910	72K
24.	536	6000	75K
28.	680	6550	76100
34.9	733	6800	83700
35.7	743	7000	90K
38.6	750	7300	100K
40.	946	15K	110K
47.7	1000	17K	115K
75.	1250	18380	120K
78.8	1260	19500	125K
80.	1280	20K	130K
88.	1477	20500	135K
100	1485	21K	140K
107.85	2000	22K	145K
110	2142	23500	220K
125	2170	30K	235K
200	2500	32K	260K
215	2800	33800	347K
225	3460	37500	390K
248	3500	38140	500K
280	3700	39K	750K
290	4250	40500	800K
298	4500	47710	1.0 Meg.
300	5000	60K	4.0 Meg.
370	5294	61K	10.0 Meg.
400	5470	64130	
450	5500	70K	

POWER RHEOSTATS

Ohms	watt	ea.	Ohms	watt	ea.
.5	25	1.98	225	50	2.53
.5	50	2.81	250	25	2.23
.5	150	5.93	250	50	2.53
1	50	2.81	300	50	2.53
2	50	2.81	300	100	4.27
2	100	4.66	350	25	1.98
2	225	6.59	350	100	4.26
3	300	8.42	379	25	1.98
3	100	4.67	378	150	6.59
3	225	6.58	400	25	1.98
3x3	300	19.95	400	75	3.98
4	225	6.60	400	75	3.98
5	25	1.97	500	75	3.95
5	100	4.66	500	50	2.53
6	25	2.23	500	100	4.39
6	75	3.98	500	150	6.59
7	25	1.98	585	150	6.60
8	50	2.53	750	25	2.23
10	25	2.23	750	150	8.95
10	100	4.27	1000	25	1.98
12	25	2.23	1000	150	8.93
12	50	2.53	1200	225	7.20
15	25	1.98	1250	50	2.53
15	75	3.98	1250	150	6.59
15	100	4.38	1500	25	2.53
20	50	2.53	1500	50	2.65
25	25	2.23	1500	150	6.24
50	25	1.98	2000	25	2.23
50	50	2.53	2000	150	6.24
60	25	1.98	2250	150	6.24
75	25	1.98	2500	150	6.24
75	75	3.98	2500	25	2.23
75	100	4.38	2500	50	2.53
80	50	2.53	2500	100	4.68
80	500	12.46	3000	25	2.39
100	25	1.98	3000	100	4.68
100	50	2.53	5000	25	2.53
100	100	4.39	5000	50	2.85
125	25	2.53	7500	50	2.85
150	50	2.53	7500	100	5.31
175	25	2.53	10000	50	3.12
185	25	1.98	10000	100	5.51
200	25	1.98	15000	25	2.29
200	100	4.27	20000	150	8.43

Specify whether shaft required is for knob or screwdriver adjust.

SELECTOR SWITCHES

Pole	Pos	Deck	Type	Each
1	11	1	Bak-n.shtg	.60
1	21	3	Bak-n.shtg	.89
2	2	1	Cer-shtg	.80
2	6	2	Bak-n shtg	.60
2	11	2	Bak-n shtg	.75
3	4	2	Bak-shtg	.88
5	3	2	Cer-n shtg	.98
6	11	6	Bak-n shtg	1.95
10	5	6	Cer-n shtg	2.25
16	2	4	Bak-n shtg	1.35

Many other types in stock

"AN" CONNECTORS

Large Variety Available At Great Savings

Send your specs and let us quote

BIRTCHER TUBE CLAMPS

FROM 35c.

#926-A	#926-B22
#926-A1	#926-C
#926-A14	#926-C1
#926-B	#926-C5
#926-B1	#926-C10
#926-B7	#926-C24

MICROSWITCHES

CR-1070-C103-B3	"R-R12T"
CR-1070-C103-E5	"YZ"-7RST-1"
CR-1070-D103-A3	"WZ-7RST-1"
CR-1070-C123-C3	"YZ-2YST"
CR-1070-D123-D3	"B-RS36"
CR-1070-D102-N3	"B-RS10"
TYPE "Q"	"WZ-2RQTC1"
"4MC3-1B"	"BZ-3RQTC"
"YP-5 "A"	"YZ-AZRP45"
"AZBPB"	"YZ-RS13"
"HRD7-1ATB"	"BZ-2RQ91"
"BZ-R37"	"BZV-2RQ9
TYPE "D"	TN3"
B-17	"AHB-201"
"WZ-2RT"	"TAAZGPD"
"YZ-2RT"	"TAAZG
"2-AZG"	PWDA"
"WZ-RLP"	YZ-2RSTC
"WZ-RRLT"	YZ-2RS
"R-RL2T"	

OIL CONDENSERS

Mfd.	Voltages Avail.
.1	2-3-20K
.25	2-3-3½-4-5K
.5	600-1-3K
1	600-1-1½-2-3-6
2	400-600-1-1½-2 3-4K
4	600-700-1-1½K
6	400-600-1½-2K
8	600
10	600-21K
15	600-1K
30	90-vac. 3-ph
100	230-vac. 3-ph
3x4	600
3x5	600
4x3	600
4x8	600
3x10	90-vac

Special Prices on Request

BATHTUBS

Mfd.	Voltages Avail.
.033	400
.05	2-4-600
.1	2-3-1K
.15	600
.25	2-4-600
.35	600
.5	4-6-1K
.75	600
1	1-2-4-6-1K
2	4-600
4	50-100
8	500
25	25-50-75
40	25
50	25
100	15
200	13
300	8
2x.01	3-400
2x.02	6-1500
2x.045	600
.044x.055	600
2x.05	5-1500
1x.05	200
1x.5	400x250
2x.1	4-600
2x.16	600
2x.2	600
2x.25	4-600
3x.5	600
2x 5	4-600
1x.05	600
1x.1	300
1x.5	200
2x1	600
2x10	25
2x200	9
3x.001	600
3x.05	600
3x.1	4-600
3x.25	4-600
3x.5	100-600

.01fx.02x.045x.06x.12/600

Also available CHANNEL Types. Special Prices on request.

SHOCKMOUNTS

100P-1	1 lb.	.15
100P-2	2 lb.	.15
100PR-2	2 lb.	.15
100P-3	3 lb.	.15
100P-4	6 lb.	.20
150P-4	4 lb.	.20
150PH-4	8 lb.	.25
200PL-1	1 lb.	.15
150P-7	7 lb.	.25
150P-8	8 lb.	.35
200PD-15	15 lb.	.39
200PHN-35	35 lb.	.79
204P-112	112 lb.	.98

TERMINAL BOARDS

5 terminal	.90
8 terminal	1.67
12 terminal	2.49

TYPE "J" POTENTIOMETERS

TYPE "J" $1.50 | TYPE "JJ" $2.95 | TYPE "JJJ" $4.95

ohms	ohms	ohms	ohms
50*	2500*	100 K*	500-500*†
65*†	4000*†	100 K†	600-600†
200*	5000*†	125 K*	1500-1500*†
300*†	10 K*†	200 K*	2000-2000*†
400*†	15 K*†	250 K*	2000-500*
500*†	20 K*†	250 K†	2200-24K†
600*†	25 K*†	500K*†	20K-2000*†
750*†	30 K*†	1meg*	25K-10K†
1000*†	50K*†	1meg†	35K-5000*†
1500*†	80K†	2meg*	50K-50K *
2000*†		2meg†	100K-100K*

ohms	ohms
130 K-15K*	350K-75K*
150 K-15K*†	350K-350K*
250 K-250K*†	500K-75K*
250K-5K†	1meg-1meg†
300K-300K*†	2meg-2meg†
350K-350K*	4meg-4meg†

* 1 ⅝" screwdriver adjustment shaft.
† Knob type shaft.

TRANSMITTING MICAS

mfd.	wv	type	ea.
.0001	600	4	.36
.0003	600	4	.36
.00005	600	4	.29
.00005	2500	9	.57
.0001	600	4	.29
.0001	2500	9	.57
.00015	600	4	.36
.0002	600	4	.36
.00025	600	4	.29
.0005	600	4	.29
.0005	2500	4	.75
.0005	2500	9	.85
.0006	2500	9	.85
.0007	600	4	.36
.00075	600	4	.36
.0008	600	4	.36
.0009	600	4	.36
.001	600	4	.36
.001	1200	4	.543
.001	1200	9	.57

mfd.	wv	type	ea.
.0015	600	4	.36
.00162	600	4	.42
.002	600	4	.39
.002	1200	4	.72
.0025	600	4	.39
.003	600	4	.43
.004	600	4	.43
.005	1200	4	.99
.0047	600	4	.47
.005	2500	9	1.56
.006	600	4	.54
.006	2500	4	.65
.01	1200	9	1.41
.01	600	4	.92
.01	1250	9	2.11
.025	600	4	1.04
.03	300	4	.99
.03	600	4	1.34
.043	1200	4	1.79
.05	300	4	1.19

(Many other sizes in stock)

"UG" and "UHF" CONNECTORS



UG-9/U	UG-25/U	83-1F
UG-10/U	UG-27/U	83-1J
UG-12/U	UG-27/AU	83-1AP
UG-14/U	UG-57/U	83-1RFTY
UG-16/U	UG-58/U	83-1SP
UG-17/U	UG-87/U	83-1R
UG-18/U	UG-88/U	83-1U
UG-19/U	UG-123/U	83-1SPN
UG-20/U	UG-185/U	83-22R
UG-21/U	UG-294/U	CN 49128
UG-21B/U	UG-260/U	CN 49121A
UG-22/U	UG-290/U	CN 49151
UG-24/U	83-1AC PRICE	

Jones Connectors

P-101-½	.25
P-101-¾	.25
S-101-D-MOD	.33
S-302-AB	.13
S-304-CCT	.38
P-306-AB	.24
P-306-CCT-L	.33
S-306-FHT	.24
S-308-AB	.24
P-312-AB	.24
P-312-CCT-L	.42
P-315-FHT	.30
P-315-EB	.30
P-315-CCE	.46
S-315-AB	.36
S-318-AB	.41
P-324-FHT	.74
P-324-EB	.59
S-338-AB	.44
S-404-AB	.33
P-406-AB	.33
S-406-CCT	.86
S-408-CCT	.83
S-2408-SB	.83
P-2412-SB	.81
S-2412-CCE	.97
S-302-DB	.74
P-508-CE	2.55
P-510-CE	3.82
P-512-CE	3.82

Jones BARRIER STRIPS

2-140-Y	.13
6-140-Y	.53
18-140-¾W	.83
18-240	.38
18-240	.88
4-141-W	.30
4-141-¾W	.30
7-141-Y	.43
12-141-Y	.82
12-141-Y	.82
15-141-Y	1.02
2-142-Y	.20
4-142-Y	.36
8-142	.48
4-151	.83
4-150-Y	.83
4-151	1.30
5-151	1.80
4-152	1.80
2002	.04
2008	.07
8-54	.22
8-6	.18
4-140-Y	.23
17-240 on 21	.83
29-181-R/L	.52
29-181-R/L	.52

Many other types in stock

MALLORY PUSH SWITCH

#2001	S.P. make cont., non-L	.52
#2003	S.P.D.T., non-lock	.66
#2003L	S.P.D.T., lock	.55
#2004	D.P., make 2 non-L	.64
#2004L	D.P., make 2 lock	.64
#2006	D.P.D.T., non-lock	.76

HUNDREDS OF OTHER ITEMS AVAILABLE

Open a/c to Rated Concerns. Prices net FOB our store NYC and subject to change without notice

ALEXANDER MOGULL CO., INC.

161 Washington St., N. Y. 6, N. Y. WOrth 4-0865

A LEADING SUPPLIER OF ELECTRONIC & AIRCRAFT EQUIPMENT

IMMEDIATE DELIVERY -- FULLY GUARANTEED

A C MOTORS

TELECHRON SYNCHRONOUS MOTOR, Type B3, 110 V., 60 Cy., 4 W., 2 RPM. PRICE $5.00 EA.

TELECHRON SYNCHRONOUS MOTOR, Type BC, 110 V., 60 Cy., 6 W., 60 RPM. PRICE $4.00 EA.

EASTERN AIR DEVICES, Type J33, Synchronous, 115 V., 400 Cy., 3 ϕ, 8000 RPM. PRICE $15.00 EA.

HAYDON TIMING MOTORS 110 V., 60 CY.

Type 1600, 2.2 W., 4/5 RPM. PRICE $3.00 EA.
TYPE 1600, 2.2 W., 1/240 RPM. PRICE $3.00 EA.

TYPE 1600, 2.3 W., 1 RPM. PRICE $3.00 EA.
TYPE 1600, 2.2 W., 1-1/5 RPM. PRICE $3.00 EA.

TYPE 1600, 3.5 W., 1 RPM. With shift unit automatic engaging and disengaging shaft. PRICE $3.75 EA.

TYPE 1600, 2.2 W., 1/60 RPM. PRICE $3.00 EA.

SERVO MOTORS

CK1, PIONEER, 2 ϕ, 400 Cy. PRICE $10.00 EA.
CK2, PIONEER, 2 ϕ, 400 Cy. PRICE $14.00 EA.
CK2, PIONEER, 2 ϕ, 400 Cy., with 40:1 reduction gear. PRICE $15.50 EA.
10047-2-A, PIONEER, 2 ϕ, 400 Cy., with 40:1 reduction gear. PRICE $10.00 EA.
MINNEAPOLIS HONEYWELL Type B, Part No. G303AY, 115 V., 400 Cy., 2 ϕ, built-in reduction gear, 50 lbs. in torque. PRICE $10.00 EA.
MINNEAPOLIS HONEYWELL Amplifier Type G403, 115 V., 400 Cy., Used with above motor. PRICE $10.00 EA. WITH TUBES

REMOTE INDICATING COMPASSES 26 V., 400 CY.

PIONEER TYPE AN5730-2 Indicator and AN5730-3 Transmitter. PRICE $40.00 PER SET
KOLLSMAN TYPE 680K-03 Indicator and 679-01 Transmitter. PRICE $15.00 PER SET

D C MOTORS

JAEGER WATCH CO. TYPE 44K-2 Contactor Motor, 3 to 4.5 V. Makes one contact per second. PRICE $2.50 EA.
GENERAL ELECTRIC TYPE 5BA10AJ52C, 27 V., 0.65 Amp., 14 oz. in torque, 145 RPM. PRICE $6.50 EA.
GENERAL ELECTRIC TYPE 5BA10AJ37, 27 V., 0.5 amps., 8 oz. in torque, 250 RPM. PRICE $6.50 EA.
BARBER-COLMAN CONTROL MOTOR, Type AYLC 5091, 27 V., 0.7 Amps., 1 RPM. Contains 2 adj. limit switches. 500 in. lbs. torque. PRICE $6.50 EA.
WHITE RODGERS ELECTRIC CO., Type 6905 No. 3, 12 V., 1.3 Amps., 1½ RPM, torque 75 in. lbs. PRICE $10.50 EA.

RECTIFIER POWER SUPPLY

GENERAL ELECTRIC TYPE 6RC146. Input 230 V., 60 Cy., 3 ϕ, adjustable input taps. Output 130 Amps., at 28 V. D.C. Continuous duty. Size 46" high, 28" wide and 17.5" deep. PRICE $225.00 EA.

INVERTERS

WINCHARGER CORP. PU-16/AP, MG750. Input 24 V. D.C., 60 Amps. Output 115 V., 400 Cy., 1 ϕ, 6.5 Amps. PRICE $100.00 EA.

HOLTZER CABOT TYPE 149F, Input 24 V. D.C. at 36 Amps., Output 26 V. at 250 V.A., 400 Cy., and 115 V., 400 Cy., at 300 V.A., 1ϕ. PRICE $75.00 EA.

PIONEER TYPE 12117. Input 12 V. D.C., Output 26 V., 400 Cy. at 6 V.A. PRICE $30.00 EA.

PIONEER TYPE 12117. Input 24 V. D.C., Output 26 V., 400 Cy. at 6 V.A. PRICE $30.00 EA.

PIONEER TYPE 12116-2-A. Input 24 V. D.C. at 5 Amps. Output 115 V., 400 Cy., 1 ϕ at 45 watts. PRICE $100.00 EA.

GENERAL ELECTRIC TYPE 5D21NJ3A. Input 24 V. D.C. at 35 Amps. Output 115 V., 400 Cy., 485 V.A., 1 ϕ. PRICE $35.00 EA.

LELAND PE 218. Input 24 V. D.C. at 90 Amps. Output 115 V., 400 Cy., 1ϕ at 1.5 K.V.A. PRICE $47.50 EA.

PIONEER AUTOSYNS

TYPE AY1, 26 V., 400 Cy. PRICE $8.50 EA.
TYPE AY3, 26 V., 400 Cy. PRICE $8.50 EA.
TYPE AY14G, 26 V., 400 Cy. PRICE $15.00 EA.
TYPE AY14D, 26 V., 400 Cy. PRICE $15.00 EA.
TYPE AY54D, 26 V., 400 Cy., PRICE $10.00 EA.
TYPE AY131D Precision Autosyn. PRICE $35.00 EA.

PIONEER AUTOSYN POSITION INDICATORS & TRANSMITTERS

TYPE 5907-17. Dial graduated 0 to 360°, 26 V., 400 Cy. PRICE $30.00 EA.

TYPE 6007-39. Dual Dial graduated 0 to 360°, 26 V., 400 Cy. PRICE $50.00 EA.

TYPE 4550-2-A Transmitter, 26 V., 400 Cy., 2:1 gear ratio. PRICE $20.00 EA.

VOLTAGE REGULATORS

LELAND ELECTRIC CO. TYPE B, Carbon Pile type. Input 21 to 30 V. D.C. Regulated output 18.25 at 3 Amps. PRIC $6.50 EA.

WESTERN ELECTRIC TRANSTAT VOLTAGE REGULATOR Spec. No. V-122855, Load K.V.A. 0.5. Input 115 V., 400 Cy. Output adjustable from 92 to 115 V. PRICE $10.50 EA.

RATE OR TACHOMETER GENERATORS

EASTERN AIR DEVICES J36A, .02 V. D.C. per RPM. Max. speed 5000 RPM. PRICE $17.50 EA.

ELECTRIC INDICATOR CO. TYPE B68 Rotation Indicator, 110 V., 60 Cy., 1 ϕ. PRICE $14.00 EA.

GENERAL ELECTRIC TACHOMETER GENERATOR TYPE AN5531-1. Variable frequency, 3 ϕ output. PRICE $20.00 EA.

GENERAL ELECTRIC TACHOMETER GENERATOR TYPE AN5531-2. Variable frequency, 3 ϕ output. PRICE $25.00 EA.

SYNCHROS

1F SPECIAL REPEATER, 115 V., 400 Cy. PRICE $20.00 EA.

2J1F3 GENERATOR, 115 V., 400 Cy. PRICE $10.00 EA.

2J1G1 CONTROL TRANSFORMER, 57.5/57.5 V., 400 Cy. PRICE $10.00 EA.

2J1F1 GENERATOR, 115 V., 400 Cy. PRICE $10.00 EA.

2J1H1 DIFFERENTIAL GENERATOR 57.5/57.5 V., 400 Cy. PRICE $10.00 EA.

5SDG DIFFERENTIAL GENERATOR, 90/90 V., 400 Cy. PRICE $20.00 EA.

5G GENERATOR, 115 V., 60 Cy. PRICE $50.00 EA.

W. E. KS-5950-L2 Size 5G, 115 V., 400 Cy. PRICE $10.00 EA.

D C ALNICO FIELD MOTORS

DIEHL TYPE S.S. FD6-23, 27 V, 10,000 RPM. PRICE $6.50 EA.

DELCO TYPE 5069466, 27 V., 10,000 RPM. PRICE $15.00 EA.

DELCO TYPE 5069370, 27 V., 10,000 RPM. PRICE $15.00 EA.

DELCO TYPE 5072400, 27 V., 10,000 RPM. PRICE $10.00 EA.

BLOWER ASSEMBLIES

JOHN OSTER TYPE MX215/APG, 28 V. D.C., 7,000 RPM, 1/100 H.P. PRICE $8.50 EA.

WESTINGHOUSE TYPE FL, 115 V., 400 Cy., 6,700 RPM, Airflow 17 C.F.M. PRICE $7.50 EA.

DELCO TYPE 5068571 Motor and Blower Assembly, P.M. Motor, 27 V., 10,000 RPM. PRICE $15.00 EA.

GENERAL ELECTRIC D C SELSYNS

8TJ9-PAB, TRANSMITTER, 24 V. PRICE $4.00 EA.

8DJ11-PCY, INDICATOR, 24 V. Dial marked −10° to +65°. PRICE $6.00 EA.

8DJ11-PCY, INDICATOR, 24 V. Dial marked 0 to 360°. PRICE $7.50 EA.

MISCELLANEOUS

SPERRY A5 CONTROL UNIT, Part No. 644836. PRICE $7.50 EA.
SPERRY A5 AZIMUTH FOLLOW-UP AMPLIFIER, Part No. 656030, with tubes. PRICE $5.50 EA.
SPERRY A5 DIRECTIONAL GYRO, Part No. 656029, 115 V., 400 Cy., 3 ϕ. PRICE $25.00 EA.
PIONEER TYPE 12800-1 GYRO SERVO UNIT. 115 V., 400 Cy., 3 ϕ. PRICE $20.00 EA.
ALLEN CALCULATOR TYPE C1 TURN & BANK INDICATOR, Part No. 21500, 28 V. D.C. PRICE $15.00 EA.
TYPE C1 AUTO-PILOT FORMATION STICK, Part No. G1080A3. PRICE $15.00 EA.
PIONEER GYRO FLUX GATE AMPLIFIER Type 12076-1-A, 115 V., 400 Cy. PRICE $40.00 EA.

ALL PRICES F. O. B. GREAT NECK N. Y.

INSTRUMENT ASSOCIATES

363 GREAT NECK ROAD, GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

U. S. Export License-2140

Western Union address: WUX Great Neck, N. Y.

NEW YORK'S RADIO TUBE EXCHANGE

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
OA2	$2.00	2J38	17.95	5CP7A	15.00	328A	9.95	725A	9.95	884	1.95
OA3	1.50	2J39		5D21	27.50	350A	7.95	726A	6.95	885	1.75
OB2	3.00	2J42	150.00	5JP1	27.50	350B	5.95	726B	56.00	889R	199.50
OC3	1.75	2J49	109.00	5JP2	19.50	357A	20.00	726C	69.00	913	12.95
OD3	1.50	2J50	69.50	5JP4	27.50	368AS	6.95	728AY	27.00	914	75.00
C1A	4.95	2J61	75.00	5LP1	18.95	371B	1.95	730A	28.95	931A	6.95
C1B	6.95	2J62	75.00	5LP1A	19.50	385A	4.95	801A	1.00	954	.35
1B21A	2.75	2K25	47.50	6C21	29.50	388A	2.95	802	4.25	955	.55
1B22	3.95	2K28	37.50	C6A	3.95	393A	8.95	803	5.95	956	.69
1B23	9.95	2K29	27.50	C6J	9.95	394A	8.95	804	13.50	957	.29
1B24	17.95	2K41	99.00	7BP7	7.95	MX408U	.75	805	5.95	958A	.69
1B26	2.95	2K45	199.50	7DP4	10.00	417A	17.95	806	25.00	959	.69
1B27	19.50	2V3G	2.10	12AP4	55.00	434A	17.95	807	1.69	975A	17.95
1B32	4.10	3B24	5.50	15E	2.95	446A	1.95	808	3.50	991	.45
1B38	33.00	EL3C	5.95	15R	.95	450TH	45.00	809	2.45	E1148	.29
1B42	19.95	3C24	1.95	NE16	.45	450TL	45.00	810	11.00	1280	1.95
1B56	49.95	3C31	5.95	FG17	6.95	464A	9.95	811	3.15	1611	1.95
1B60	69.95	3C45	13.95	RX21	3.95	471A	2.75	813	8.95	1613	1.38
1N21	1.35	3DP1A	10.95	35T	4.95	527	15.00	814	3.95	1616	2.95
1N21A	1.75	3E29	15.50	45 Special	.35	WL530	22.50	815	3.50	1619	.89
1N21B	4.25	SN4	5.50	RK39	2.95	WL531	12.50	816	1.45	1620	5.95
1N22	1.75	4A1	1.75	VT52	.35	700A/D	25.00	829	9.95	1622	2.75
1N23	2.00	4B26	10.95	RK72	1.95	701A	7.50	829A	11.95	1624	2.00
1N23A	3.75	4C27	25.00	RK73	1.95	703A	6.95	829B	15.95	1625	.45
1N23B	6.75	4C28	35.00	100TH	9.00	705A	3.95	830B	11.50	1851	1.85
1N27	5.00	4E27	17.50	FG105	19.00	706AY	48.50	832	6.95	2050	1.85
1N48	1.00	4J25	199.00	F123A	8.95	706CY	48.50	832A	9.95	2051	1.80
1S21	6.95	4J26	199.00	203A	8.95	707A	17.95	833A	49.95	8012	4.25
2B22	4.95	4J27	199.00	211	.75	707B	27.00	834	7.95	8013	2.95
2B26	3.75	4J30	395.00	217C	18.00	714AY	7.95	836	4.95	8013A	5.95
2C34	.35	4J31	99.00	242C	10.00	715A	7.95	837	2.95	8014A	29.95
2C40	20.00	4J32	99.00	249C	4.95	715B	15.00	838	6.95	8020	3.50
2C43	27.00	4J33	99.00	250TL	19.95	715C	25.00	845	5.59	8025	6.95
2C44	.90	4J37	99.00	274B	3.00	717A	1.75	849	52.50	9001	1.75
2D21	1.75	4J38	89.00	304TH	15.00	718AY/EY	48.50	851	80.50	9002	1.50
2E22	3.75	4J39	99.00	304TL	14.50	719A	29.50	860	4.95	9003	1.75
2E30	2.75	4J41	99.00	307A	4.95	721A	3.95	861	39.50	9004	1.75
2J26	27.75	4J52	350.00	310A	7.95	722A	3.95	866A	1.79	9005	1.90
2J27	29.95	C5B	2.95	311A	7.95	723A B	14.95	869B	37.50	9006	.35
2J31	29.95	5BP1	6.95	312A	3.95	724A	4.95	872A	3.95		
2J32	69.95	5BP4	6.95	323A	25.00	724B	6.95	878	1.95		

This Month's Special 4C28 . . . . . $35.00 OTHERS

ATTENTION PURCHASING AGENTS AND BUSINESS MANAGERS

**WE PURCHASE COMPLETE INVENTORIES AND ELECTRONIC PARTS AND TUBES FOR CASH.
CAN WE HELP YOU TO OBTAIN URGENTLY NEEDED ELECTRONIC MATERIALS?
OUR ORGANIZATION IS DEDICATED TO SERVE THE ELECTRONIC FIELD.**

YOU CAN REACH US ON TWX NY1—3235

TEST EQUIPMENT

ATTENTION PURCHASING AGENTS AND BUSINESS MANAGERS

WE BUY—WE SELL—WE EXCHANGE—WILL PAY CASH FOR YOUR INVENTORY NO MATTER HOW SMALL OR LARGE. —TURN YOUR OVERSTOCKED ITEMS INTO CIRCULATION

Test Equipment

Microwave K Band 24,000 MC

TSKI-SE Spectrum Analyzer

X Band 10,000 MC

TS 12 Unit 1 USWR Measuring Amplifier, 2 channel
TS 12 Unit 2 Plumbing for above
TS 33 X Band Power and Frequency Meter
TS 35 X Band Pulsed Signal Generator
TS 36 X Band Power Meter
TS 45 Band Signal Generator
TS 146 X Band Signal Generator
TS 62, TS 102, TS 168
X Band Magic T Plumbing
X Band Tunable Crystal Mounts
TVN #3EV Bridge Cy 94

S Band 3000 MC

TS 102, TS 270
TS 125, TS 155, TS 127
RF 4 Electrically Tuned S Band Echo Box
BC 1277/60ABQ S Band Pulsed Signal Generator
PE 102 High Power S Band Signal Generator

L Band

Hazeltine 1030 Signal Generator 145 to 235 Megacycles
Measurements Corp. type 84 Standard Signal Generator
TS 47, 40 to 400 MC Signal Generator
TS 226

Audio Frequencies

RCA Audio Chanalyst

Broadcast Wave Bands

162C Rider Chanalyst
Short Wave Adapter for 162C
TS 174 Signal Generator

Oscilloscopes

BC 1287A used in LZ sets
Supreme 564
APA10, APA28
TS 34 Oscilloscopes WE TS 126

Other Test Equipment and Meters

TS 15/A Magnet Flux Meter
General Radio V T Voltmeter 728A
Calibrator WE 1-147
General Radio 1000 cycles type 213
Limit Bridges
Boonton Standard instructions
Model 40 Pyrometer
Rawson, meters 0-10 Microampere 0-2 Millivolt

RADAR Sets & Parts

APS 3—APS 4—R-111/APR5A

Minimum Order $25.00

Prices Subject to Change

LIBERTY ELECTRONICS, INC.

PHONE WORTH 4-8262 — 135 LIBERTY ST., NEW YORK 6, N.Y.

UNITS • TORQUE UNITS • AMPLIDYNES • INVERTERS • ELECTRONIC SERVO SYSTEMS • TACHOMETER GENERATORS

SYNCHROS • AMPLIFIERS • ALNICO MOTORS • SHUNT MOTORS • BLOWERS • RATE GENERATORS • SUB-FRACTIONAL HORSEPOWER AC MOTORS • SELSYN

AUTOMATIC PILOT COMPONENTS • DC MOTORS • SINE-COSINE GENERATORS • U. S. NAVY SYNCHROS • AUTOSYNS • SERVO MOTORS • DYNAMOTORS

IMMEDIATE DELIVERY — Servo-Tek — FULLY GUARANTEED

SYNCHRONOUS MOTOR

W. E. S-1283228. For 2 phase 240 cycle operation. 55 volts.

Stock #SA-317. **Price $9.75 each.**

JOHN OSTER MOTORS

Types B-9-1 & B-9-2 27.5 V DC & 12 V DC. 5600 rpm. Built-in noise filter. Large qty.

PRICES ON REQUEST

C-1 Autopilot Amplifier



Three channel servo amplifier for use in C-1 Autopilot. 7 tubes. Stock #SA-172.

PRICES ON REQUEST

Aircraft Generator Eclipse NEA-3

Output 115 VAC; 10.4 amps 800 cycles at 2400 rpm. Also 30 VDC at 6 amps. Stock #SA-306. **Price $39.50 each.**

PM MOTOR

Sampsel 27 V DC PM motor. Type S—151272. One in./oz. torque at 7000 rpm. 1⅛" x 1⅛" x 2¾" Lg. Stock #SA-283. **Price $12.75 each. Quantity available.**

REVERE CAMERA MOTOR



27 v. D-C Split field series. Approx. 2¼" sq. x 2⅛" lg. Stock #SA-316.

Price $6.75 each.

Gyro and Housing Mirror Assembly. For K-14A sighting head. Gyro stabilized mirror assembly. Stock #SA-294. **Price $6.75 each.**



AC Motor Special Eastern Air Devices J-33 115 V. 400 cy. 3 phase synchronous. 8000 RPM. Stock #SA-59.

Price $19.50 each

DC SERVO MOTORS

Elinco B-64 DC Servo Unit — armature voltage, 80 v d-c max. 27.5 v. field 1/165 hp 3100 rpm. Field current 200 ma. Armature current 200 ma. at normal torque.

Stock #SA-211. **Price $16.50 each.**

John Oster A-21E-12R — Split field series reversible motor. W.E. KS-5996-LO-4, 28 v. d-c at 0.4 amps. 2 watts output. 1½" diam. x 2½" lg. Ideal for relay or thyratron servos. Stock #SA-282. **Price $8.75 each.**

INVERTERS

Wincharger FU-7/AP Input 28 VDC at 160 amps. Output 115 v. 400 cy. 1 ϕ at 2500 VA. Voltage and frequency regulated. Cont. duty. Stock #SA-164. **Price $99.50 each.**

G.E. 5AS131NJ3 (PE-118) Input 26 VDC at 100 amps. Output 115 v. 400 cy. 1 ϕ at 1500 VA. PF 0.8 W.E. Spec. KS-5601L1. Stock #SA-286. **Price $29.50 ea.**

PE-218EInverters Russel Electric and Leland. Input 28 VDC at 92 amp. Output 115 v. 400 cycles at 1500 VA. PF 0.9. Stock #SA-112A. **Price $49.50 each.**

Pioneer 12130-4-B (3 ϕ) Input 28 VDC at 14 amps. Output 115 v. 400 cy. 3 ϕ at 100 VA. Voltage and frequency regulated. Made 1949. Stock #SA-304. **Price $89.50 each.**

400 Cycles

Three Phase

Holtzer Cabot MG-153—

—Input 28 volts DC at 52 amps. Output three phase 115 volts 400 cycles at 750 va. 0.90 P.F. Also second output of 26 volts 400 cycles at 250 V.A. Voltage and frequency regulated. **New—Perfect** ..... **$99.50 ea.**

Also MG-153F **$119.50**

800 CYCLE INVERTER

Navy Type CRV-21AAR. GE. 5AS121LJ2. 27 v. DC input @ 45 amps. 120 v. 400 cy. output @ 750 V. A. P.F. 0.90. Wt. 52.5 lbs. Stock #SA-192. **Price $59.50 each.**

BLOWER ASSEMBLY

WESTINGHOUSE FL BLOWER

115 v. 400 cy. 17 c.f.m. Includes capacitor. Stock #SA-144. **Price $14.50 ea.**

ALSO IN STOCK

C-1 AUTOPILOT COMPONENTS
A-5 AUTOPILOT GYROS
GENERAL ELECTRIC D-C SELSYNS
AC and DC RATE GENERATORS

AC-SERVO MOTORS

Pioneer Type CK-2. 26 v. 400 cycles fixed phase, var. phase 49 v. max. 1.05 in/oz. Stall torque. Rotor moment of inertia 7 gm/cm: With 40: 1 gear reduction. Large Qty.

Prices on Request

PIONEER CK-17

400 cycle 2 phase, 26 v. fixed phase, 45 v. max. variable phase. Built in gear reduction. Output shaft speed approx. 4 rpm. Stock #SA-287. **Price $16.50 each.**

FORD SERVO MOTOR

115 volt 60 cycle two phase low inertia motor. 15 watts output. BuOrd. 207927. Stock #SA-291. **Price $49.50 each.**

Pioneer Servo Motor

Type 10047-2A. 2 ϕ 400 cycle low inertia. 26 v fixed phase. 45 v. max. variable phase. Stock #SA-90. **Price $12.50 each.**

MICROWAVE ANTENNA

AS-217/APG 15B. 12 Cm dipole and 12 inch Parabola housed in weatherproof Radome 16" dia. 24 v. DC spinner motor for conic scan. Stock #SA-95. Shipping wt. 70 lbs. Original boxes.

Price $14.50 ea.

ANTENNA TILT INDICATOR

D-C Selsyn type tilt indicator. G.E. 8DJ29AAK. 24 volt. Stock #SA-296. **Price $3.75 each.**

Compass Indicator

I-82F. Compass Indicator. 0-360°-5 in. dial. 26 v. 400 cy. 8-12 v. 60 cy. Ideal position indicator. Stock #SA-284.

Price $6.50 each

400 CYCLE AIRCRAFT ACTUATORS

Manufactured by AirResearch. 115 volt 400 cycle operation. 2½" linear travel. Stat. load 200 lbs. Ten. 75-100 lbs. Comp. 75-100 lbs. Stock #SA-326. **Price $24.50 each**

SYNCHROS-SELSYNS

1SF, 1G, 5G, 5F, 5CT, 5HCT, 5SDG, 5DG, 58G, 58F, 5HSF, 6G, 6DG, 7G, 2J1F1, 2J1G1, 2J1H1, 2J5FB1, 2J5R1, 2J1F3, XX1, X, XV, VII, II, IV, etc.

WRITE FOR LISTING

Prices F.O.B. Paterson

Phone ARmory 4-3366

Servo-Tek products co.

4 Godwin Ave. Paterson, N. J.

SPECIALISTS IN FRACTIONAL HORSE POWER MOTOR SPEED CONTROL

Reliance Specials

TIMING MOTOR
8 RPM 115V 60 cyc
E. Ingraham Co.

$1.95

GEAR ASSORTMENT
100 small assorted gears. Most are stainless steel or brass. Experimenters dream!.....Only $6.50

VERNIER DIAL or DRUM (From BC-221)
DIAL—2⅝" dia. 0-100 in 360°. Black with silver marks. Has thumblock. DRUM—0 50 in 180°. Black with silver marks.....either 85¢

SOUND POWER HANDSET
Brand New!
Includes 6 ft. cord. No batteries or external power source used.
$17.60 pr.

Sound Powered Chest Set RCA—With 24 Ft. Cord
$17.60 per pair

Variac—General Radio
100W removed from equipment **$10.00**

400 CYCLE INVERTERS
Leeland Electric Co.

#10800 In: 20-28 V.D.C., 92 A. 8000 R.P.M. Out: 115V. 400 Cyc. 1 phase, 1500 V.A. .90 PF.....$12.95

3AG FUSES

AMP	PER 100	AMP	Per 100	AMP	Per 100
⅛	$4.00	1	$3.00	6	$3.00
¼	4.00	1½	3.00	10	3.00
¾	4.00	5	3.00	20	3.00

DELAY NETWORK—ALL 1400Ω
T 113—Approx. 1.2 micro sec. delay.....
T 114—Approx. 2.3 micro sec. delay..... } 95¢ each
T 118 Similar to T 114 with tap brought out.....

BEARINGS

Mfg. No.	ID	OD	Thickness	Price
MRC5028-1	5 1/2	6 1/2"	½"	$3.50
MRC7026-1	5 5/64	6 15/64	9/16	3.50
Timken 37625	4 5/16	6 1/4	29/32	4.25
MRC-7021-200	4 1/8	5 9/32	23/64	2.95
Norma A 545	2 1/16	2 5/8	1/4"	1.00
MRC 106 M2	1 17/64	2 7/16	25/64	1.75
MRC 106 M1	1 13/64	2 7/16	25/64	1.60
Federal LS 11	1 1/8	2 1/2	5/8	1.75
Norma S 11 R	1 1/8	2 1/8	3/8	1.25
Fafnir B 541	1 1/16	1 1/2	9/32	.55
Hoover 7283	5/8	1 9/16	7/16	.90
Norma 203 S	5/8	1 9/16	7/16	.90
SCHATZ	3/4	1 3/4	9/16	1.00
N5 5202-C13M	1/2	1 3/8	1 3/8	1.00
ND 3200	25/64	1 5/32	11/32	.55
Norma S 3R	3/8	7/8	7/32	.45
MRC 39 R1	11/32	1 1/32	5/16	.45
ND CW 8008	5/16	5/16	13/32	.45
MRC 38 R3	5/16	55/64	9/32	.45
Fafnir 33K5	3/16	1/2	5/32	.25

NEEDLE BEARINGS
TORRINGTON B108 ½" wide ⅝" 13/16" 30¢

Brand New METERS—Guaranteed
0-1 Amp. R.F. 2½"...$3.29 | 0-80 Amp. D.C. 2½"...$2.25
0-10 ma. D.C. 3½"... 3.95 | 0-7.5 V. A. C. 3½"... 3.46

SELENIUM RECTIFIERS
Full Wave 200 MA 115V.....$1.79
Half Wave 100 MA 115V.....,91

SPAGHETTI SLEEVING—assortment—99 feet.....$1.00

TYPE "J" POTENTIOMETERS

60	SD	1000	SD*	5000	SD*	30K	SD*
100	SD	1500	SD	5000	3/8"	50K	SD*
150	SD	2000	SD	10K	3/8"	70K	SD
200	SD	2000	1/2"	10K	SD*	80K	SD
300	SD	2000	SD*	15K	1/4"	100K	3/8
300	3/8	2500	1/2"	15K	SD*	200K	SD*
400	3/8	2500	SD	25K	3/8"	250K	SD
500	3/8	3000	3/8	25K	SD*	1 Meg	SD
1000	7/8	4000	3/8				

*Split locking bushing $1.50 each

JONES BARRIER STRIPS

Type	Price	Type	Price	Type	Price
2-140Y	$0.13	4-141W	$0.30	9-141Y	$0.64
3-143¾W	.19	5-141	.26	10-141	.50
6-140	.25	5-141¾W	.37	17-141Y	1.17
10-140¾W	.53	7-141	.36	3-142	.21
3-141¾W	.24	7-141¾W	.49	8-142	.69
3-141W	.24	9-141	.64	2-150	.39
				3-150	.54

TIME DELAY RELAY

Raytheon CFX 24166 KS 10193-60 Sec.
• 115 V., 60 cycle • Adj. 50-70 Seconds • 2½ second recycling time—spring return • Micro-switch contact, 10A • Holds ON as long as power is applied • Fully Cased •
ONLY $6.50

AN CONNECTORS
IMMEDIATE SERVICE
PHONE! WIRE! WRITE! YOUR NEEDS

NEW COAXIAL CABLES

	Ohms	Price per 1,000 Ft.		Ohms	Price per 1,000 Ft.
RG-6/U	76	$150	RG-35/U	71	$450
RG-7/U*	97.5	65	RG-37/U	55	40
RG-8/U*	52	150	RG-39/U	72.5	180
RG-11*	75	150	RG-54/U	67.5	295
RG-15/U	76	160	RG-54/U	58	65
RG-22/U*	95	150	RG-55/U	53.5	65
RG-24/U	125	240	RG-57/U*	95	100
RG-25/U	48	575	RG-58/U*	53.5	60
RG-26/U	48	75	RG-59/U*	73	70
RG-27/U	48	290	RG-77/U*	48	100
RG-29/U*	53.5	50	RG-78/U	48	80
RG-34/U	71	175			

Add 25% for orders less than 1,000 feet.
*No minimum order—others 250' minimum.

COAXIAL CABLE CONNECTORS

	15¢ UG 175/U	$1.30 83-1F	30¢ ANGLE	80¢ 83-1J	40¢ 83-4R	9¢ HOOD
83-1AC	$0.42	83-2R	$1.30	UG 57/U		$2.30
83-1AP	.30	83-2185P	2.10	UG 58/U		.63
83-1F	1.30	83-22AP	1.10	UG 60/U		2.40
83-1H	.10	83-22R	.68	UG 85/U		1.75
83-1J	.80	83-228P	1.15	UG 87/U		1.60
83-1R	.40	UG 13/U	1.75	UG 88/U		1.60
83-1SP	.50	UG 21/U	.95	UG 167/U		2.05
83-1SPN	.50	UG 21B/U	1.45	UG 175/U		.15
83-168	.15	UG 22/U	1.30	UG 176/U		.15
83-185	.15	UG 23/U	1.25	UG 206/U		1.60
83-2AP	2.00	UG 27/U	1.30	UG 260/U		1.60
83-2H	.25	UG 27A/U	2.95	UG 281/U		.77
83-2J	1.65	UG 30/U	2.50	UG 290/U		1.60
				UG 409/U		1.25

DIFFERENTIAL
115 V., 60 Cyc. **$3.95 ea.**
#C78249
3⅝" dia. x 5⅝" long

Used between two #C78248's as dampener. Can be converted to 3600 RPM Motor in 10 minutes. Conversion sheet supplied. (Converted).....$4.50
Mounting Brackets — Bakelite for selsyns, and differentials shown above.....35¢ pair

2J1G1 SELSYNS $2.95
BRAND NEW 400 CYCLE
Can be used on 60 cycle

POSTAGE STAMP MICAS

mmf	mmf	mmf	mmf	mmf	mmf	mfd	mfd	mfd
4	22	47	82	180	470	800	.002	.0044
5	23	50	90	220	500	820	.0022	.005
7	24	51	100	240	510	910	.0026	.0056
7.5	25	56	110	250	560	.001	.0027	.005
8	28	60	120	270	580	.0011	.003	.0065
8.2	30	62	125	300	600	.0012	.0033	.0068
10	33	68	130	350	620	.0013	.0035	.01
15	39	70	150	370	650	.00136	.0036	
18	40	75	154	390	680	.0015	.0039	
20	43	80	175	400	750	.001625	.004	

Price Schedule

8.2 mmf to .001 mfd.....5¢
.0011 mfd to .001625 mfd.....7¢
.002 mfd to .0082 mfd.....12¢
.01 mfd.....32¢

SILVER MICAS

mmf	mmf	mmf	mmf	mmf	mmf	mfd	mfd
10	40	82	155	300	466	700	.0026	.005
18	47	100	170	325	470	800	.0027	.0051
20	50	110	180	350	488	875	.00282	.0056
22	51	115	208	360	500	900	.002826	.006
23	60	120	225	370	510	.0011	.003	.0082
24	62	125	240	390	525	.0016	.0033	
27	66	130	250	400	560	.001625	.0039	
30	68	135	270	410	570	.0022	.004	
39	75	150	275	430	680	.0023	.0047	

Price Schedule

10 mmf to .001 mfd.....10c
.001625 mfd to .0024 mfd.....20c
.00282 mfd to .0082 mfd.....50c

FILAMENT TRANSFORMER
Pri., 115V., 60 Cyc.—Sec. 6 V. @ 35 A. or 12 V. @ 18 A. or 24 V. @ 9 A. **$6.50**

PULSE TRANSFORMERS
UTAH—9262 9278 9340
WESTERN ELECTRIC—D166173 D161310
KS8896, KS9565, KS9565, KS9800, KS9862, KS13161
GENERAL ELECTRIC—K2731; 80-G-5
JEFFERSON ELECTRIC—C-12-A-1318
CROSLEY—W-226262-4
DINION COIL—TR1048. TR1049
Also 352-7250-2A; 352-7251-2A; T-1-229621-60

PRECISION RESISTORS—½ WATT—30¢

2	10.48	12.32	14.98	62.54	125	414.3
2.5	10.84	13.02	15.8	79.81	147.5	705
3.5	11	13.52	16.37	105.8	220.4	2,193
5	11.25	13.89	32	123.8	301.8	3,500
6.68	11.74				366.6	59,148

PRECISION RESISTORS—¼ WATT—30¢

1.	11.1	71	389	3,407	13,333	37,000
.2	13.15	75	397	3,427	14,825	39,000
.25	13.3	80	400	3,500	15,000	40,000
.334	13.52	87	600	3,995	15,750	41,700
.444	15	90	607	4,000	15,755	43,766
.502	18.75	97.8	705	4,101	15,810	45,000
.557	20	123.8	723.1	4,285	16,000	47,000
.627	21.5	125	785	4,300	16,700	50,000
.76	25	147.5	855	4,451	17,000	56,000
1	30	148.7	900	4,750	19,880	59,000
1.01	34.75	150	970	5,000	20,000	59,905
1.02	40	178	1,100	5,714	20,150	68,000
2	44.73	179.5	1,150	5,900	21,300	70,000
2.04	45	180	1,264	6,000	22,500	75,000
3.07	48	210	1,375	6,500	23,300	79,012
3.27	49	220	1,400	7,000	25,000	80,000
3.7	52	230	1,490	7,300	26,667	90,000
3.87	55.1	235	1,500	7,500	30,000	92,000
5.24	60	240	1,573	8,000	31,500	100,000
5.26	61	250	1,876	8,500	32,700	120,000
5.89	65	260	2,230	8,800	32,888	140,000
7	66	270	2,250	8,909	33,000	180,000
7.6	66.6	288	2,500	9,000	33,300	
8	69	290	2,850	10,000	35,888	
10.58	70	298.3	3,330	12,000	36,000	

PRECISION RESISTORS—1 WATT—35¢

1	2.5	18	179.5	1,500	7,800	50,000
11	2.55	25	206	1,800	8,000	55,000
147	2.58	27.4	215	1,900	8,250	56,000
.2	2.6	28	250	2,200	9,000	60,000
.25	2.66	30	270	2,215	10,000	65,000
.31	3	35	300	2,250	12,000	68,000
4	3.1	38	312	2,413	12,420	70,000
.861	3.39	43.6	321.7	2,500	12,500	80,000
1	4.29	45.5	400	3,300	15,000	84,000
1.01	4.3	49.75	420	3,800	18,000	95,000
1.106	4.7	54.25	425	5,000	20,000	
1.17	5.21	60	565	5,221	35,000	
1.21	10.5	71	800	5,400	37,000	
1.25	12.8	80	1,000	6,000	40,000	
2	15	112.8	1,200	7,000	45,000	

PRECISION RESISTORS—1 WATT—45¢

100,000	200,000	320,000	590,000
105,000	220,000	340,000	413,000	600,000
120,000	250,000	348,000	423,400	645,000
132,000	260,000	350,000	430,000	650,000
145,000	270,000	375,000	500,000	700,000
149,000	296,000	376,000	522,000	750,000
166,100	300,000	390,000	550,000	876,457
175,000	310,000	399,000	560,000	

1 MEGOHM 1 WATT 1%—65¢; 5%—45¢

PRECISION RESISTORS—2 WATT—60¢

4.385	5,000	6,000	10,000	23,000

UNIVERSAL JOINTS
3/16" hole x ⅜ O.D.
1-½" long—
steel or aluminum 50¢
1/4" hole x 1/2 O.D.
1-½" long—
aluminum only 75¢

OIL FILLED

MFD	V.D.C.	Price	MFD	V.D.C.	Price
.125	35,000	$35.95	.5	2,000	$1.95
.125	27,000	28.95	.3	2,000	1.75
.1	25,000	25.95	.1-.1	2,000	1.65
.25	20,000	19.95	.02	1-1,500	.79
.1	12,000	2.95	2	1,500	1.79
.15-.15	8,000	2.75	1	1,500	1.50
.02	8,000	1.89	6	1,000	2.25
.1	7,500	1.95	3	1,000	1.50
.05	7,500	1.75	2	1,000	.90
.03	7,500	1.69	1.02	1,000	.65
.1-.1	7,000	1.98	1	1,000	.45
.1	7,000	1.85	7	800	1.98
.02-.03	7,000	1.48	1	800	.55
1	6,000	5.95	8-8	600	1.59
.1	6,000	2.75	8	600	2.05
.03-.03	6,000	1.35	7	600	1.75
.01-.03	6,000	1.35	4	600	1.43
2	5,000	5.95	4 x 3	600	1.95
.25	5,000	2.95	2	600	.69
2	4,000	4.95	2 x 2	600	1.40
.3 x .2	4,000	2.50	1	600	.49
.1	4,000	2.25	8	500	1.55
.06	4,000	1.45	4	500	.98
.1	3,500	1.95	4	200	.39
.25	3,000	2.25			
.1	3,000	1.75			
8	2,000	4.95			
4	2,000	3.45			
4	2,000	4.25			
2	2,000	3.75			
2	2,000	2.95			
.5-.1	2,000	1.95			

2 mfd 4,000 V.D.C. G.E.
$4.95

OIL FILLED A. C. CONDENSORS

MFD	V.A.C.	Price	MFD	V.A.C.	Price
.2	750	$.69	30	330	$6.50
.8	660	4.95	25	330	5.95
6	660	4.95	20	330	5.50
5	660	4.50	15	330	4.50
4	660	4.25	10	330	3.95
2	660	3.25	6	330	2.95
1	660	2.35	4	330	1.95
28	440	6.95	3	330	1.25
15	440	4.95	2.5	330	.98
6	440	3.50	2	330	.65
5-3	440	3.95	10	220	2.95
4.4	375	2.15			

IN34 Crystal Diode.....79¢
Neon Glow Lamp NE 16.....30 ea. $25 per 100
300 Twin Lead.....03 per ft. $18.95 per M
Dynamotor DM 32A.....$3.75 ea.
Chokes: 30 Hy. 8MA @... $1.29; 6 Hy. 8MA @...78¢
Minimum Orders $5.....All orders f.o.b. PHILA, PA.

RELIANCE MERCHANDIZING CO.

Arch St. Cor. Croskey Phila. 3, Pa. ***Telephone Rittenhouse 6-4927***









THIS EQUIPMENT IS THE FINEST AVAILABLE, BUILT BY LEADING MANUFACTURERS AND UNCONDITIONALLY GUARANTEED BY WELLS. MANY TYPES NOT LISTED ARE IN STOCK. SEND US YOUR REQUIREMENTS FOR IMMEDIATE QUOTATION.

MANUFACTURER	TYPE OR NO.	VOLTAGE	RPM	DIMENSIONS	SPECIAL INFORMATION
Stewart Warner		6VDC		2¼"x2¾"	¼"x½" Lg. shaft
John Oster	B-9-2	12VDC 1.4A	5600	2¼"x3¼"	¼"x⅛" Lg. shaft. Shunt Wd.
General Ind.	62800	13VDC 9A	6800	2½"x4"	¼"x⅛" Lg. shaft. 1/12 HP
Emerson	D-26-BT	24VDC 24A	100	2¼"x5½"	160 Ft.-Oz. torque
Redmond	7-N	24VDC .96A	6000	2¾"x3¼"	Complete blower assembly
F. A. Smith	40H	115VAC 60 Cy		6"x5½"x5"	100 CFM blower ($12.95)
Western Elect.	FL	115VAC 400 Cy	6700	3¼"x4"x4½"	25 CFM blower
Signal Elect.	D-4272	24VDC .66A	2100	2¼"x2⅞"	¼"x1" shaft. 1/190 HP
General Elect.	5 BA50MJ64	24VDC 13A		3⅛"x7½"	Shunt wound
Stromberg	D-4496	24VDC .45A		2½"x3½"	¼"x⅜" shaft. .003 HP
Amglo		24VDC		1½"x2½"	Telephone ringing circuit motor
John Oster	A-16B-26R	26VDC		1½"x2½"	1/16"x⅛" shaft. Series Rev.
John Oster	DEST-8-1R	27VDC 1.4A	3800	2¼"x4⅜"	⅛"x⅜" shaft. 1/40 HP
Delco	5069267	27.5VDC .25A	6000	1⅝"x2½"	¼"x1⅛" shaft. 1½ Oz-In Tq.
Western Elect.	KS5996-L04	28VDC		2"x2⅛"	1/16"x1/16" shaft. Series Rev.
Bendix	MO5B	28VDC 1.75A	3200	1½"x2½"	¼"x1⅛" shaft. Series Rev.
Bendix	E-11500-1	28VDC 1A	9000	1½"x2½"	¼"x1⅛" shaft. Series Rev.
Fractional Mtrs.	SH-280	28VDC 3.1A	3900	3¼"x5½"	¼"x⅜" shaft. Used in ART 13
Electrolux	20100	28VDC .1A		2"x2 11/16"	1/16"x⅛" shaft. 20 Deg. rotation
John Oster	A-21-E-12R	28VDC .4A		1½"x2⅛"	1/16"x⅛" shaft. Series Rev.
Emerson	D-26-BV	28VDC 3.1A	3900	2½"x3½"	⅛"x⅜" shaft. 1/20 HP
Electrolux	16876	28.5VDC 1.8A	2200	3¼"x5"	⅛"x1⅛" shaft. 1/35 HP
Western Elect.	KS 9303	50-60VAC 175 Cy		2½"x3½"	
General Elect.	2J1H1	57.5VAC 400 Cy		2¼"x3¼"	Selsyn differential
General Elect.	2J1G1	57.5VAC 400 Cy		2¼"x3½"	Selsyn transmitter
General Elect.	5BN38HA10	80VDC .25A	3000	2⅞"x5¼"	⅛"x⅜" lg. shaft
General Elect.	2J1F1	115VAC 400 Cy		2¼"x3"	Selsyn generator
Diehl	11-1	110VAC 60 Cy		4"x5¼"	Synchro repeater selsyn
Bendix		110VAC 60 Cy		3¼"x5½"	Synchro differential selsyn
Bendix		110VAC 60 Cy		3¼"x5½"	Synchro transmitter selsyn

MANUFACTURER	TYPE OR NO.	INPUT	OUTPUT	DIA.	LGTH.	SPECIAL INFORMATION
Eicor	ML3415-254	27.5VDC 1.5A	250VDC .060A	4"	8⅛"	With bracket mounting
Eicor	ML3412-42	13.8VDC 2.45A	220VDC .070A	3½"	5¼"	No mounting
Western Elect.	DM53AZ	14VDC 2.8A	220VDC .080A	2¼"	4½"	With base plate
Westinghouse	1171187A	27VDC 1.4A	285VDC .060A	2½"	4½"	No mounting
General Elect.	5DY82AB52	27VDC 1.5A	285VDC .060A	2¼"	4½"	No mounting
Western Elect.	1171091B	27VDC 1.6A	285VDC .075A	2¼"	4½"	No mou. ting
Redmond	5047	27VDC 1.75A	285VDC .075A	2¼"	4½"	No mounting
Eicor	ML3415-254	27.5VDC 1.5A	100VDC .150A	3½"	5½"	With base plate
Eicor	ML3420-194	27.5VDC 4.0A	325VDC .200A	3½"	6½"	With base plate
C.Q.R.	355D2BA	27.9VDC 1.25A	220VDC .070A	3⅛"	5⅛"	No mounting
Continental	DM310A	28VDC .5A	100VDC .01A	2¼"	4½"	No mounting
C.A.Y.	DM32A	28VDC 1.1A	250VDC .060A	2¼"	4½"	With base plate
Pioneer	PE86M	28VDC 1.25A	250VDC .060A	2¼"	4½"	With base and filter
Bendix	DA-1A	28VDC 1.6A	230VDC .100A	3½"	5½"	No mounting
Redmond	DM5 3A	28VDC 1.4A	220VDC .080A	2¼"	4½"	With base plate
Redmond	5056	28VDC 1.4A	250VDC .060A	2¼"	4½"	With base plate
Eicor	ML-3420-90	28VDC 3.3A	400VDC .125 A	3½"	6½"	With base plate
Continental	DM33A	28VDC 5A	575VDC .160A	3½"	7½"	Cont. duty. No mounting
Winco	41S6	13VDC 13A 13VDC	250VDC .060A 300VDC .225A	4"x	8⅛"	With base plate Intermittent
Continental	DMX310A	12VDC 2.8A	150VDC .100A	2¼"	4½"	Cont. Duty. No mounting
Airs	VA 137	115VAC 60 Cy	90-135VAC 7.6A	3¼"	5¾"	⅛"x1" Shaft. Ind. Volt Reg.
				DIMENSIONS		
Pioneer	PE 55	12VDC .16A	500VDC 0.2A Cont.	7¼"x12⅛"x13½"		Pwr. Unit W/DM 19G DYN, Filter and Mounting
Westinghouse	PE 94C	28VDC 10.5A	300VDC .260A 150VDC .010A 14.5VDC 10A	8¼"x6½"x12½"		Pwr. Unit W/DA3A DYN, Filter and Mounting

CHECK WELLS' HUGE STOCK FOR IMMEDIATE DELIVERY OF QUALITY COMPONENTS AT SUBSTANTIALLY LOWER COST

- Resistors • Condensers • Wire and Cable • Relays
- Co-ax Connectors • Rectifiers • Transformers • Chokes
- Micro Switches, Toggles • Antennas • Accessories
- Electronic Assemblies • Dial Light Assemblies

SEeley 8-4143

MANUFACTURERS AND DISTRIBUTORS: WRITE FOR CATALOG

ORDER DIRECT OR THROUGH YOUR LOCAL PARTS JOBBER

WELLS SALES, INC.

833 W. CHICAGO AVE., DEPT. SL, CHICAGO 22, ILL.

MICROWAVE RECEIVERS

AN/APR-1 Receivers and tuning units TN-1 (38 to 95 MC) TN-2 (76-300 MC) TN-3 (300-1000 MC).

AN/APR-4 Tuning units TN-16 (38-95 MC) TN-17 (76-300 MC) TN-18 (300-1000 MC), TN-19 (950-2200 MC).

RIIIA/APR-5A Receivers. 1000 to 6000 MC.

MODEL AN/APA-10 PANORAMIC ADAPTER

Designed for use with receiving equipment AN/ARR-7, AN/ARR-5, AN/APR-4, SCR-587 or any receiver with I.F. of 455 kc, 5.2mc, or 30 mc. With 21 tubes including 3" scope tube. Converted for operation on 115 V, 60 cycle source.

PRICE $245.00

AN/APA-10 89 Page Tech Manual $2.75

LAVOIE FREQ. METER

375 to 725 MCS

Model TS-127/U is a compact, self-contained, precision (± 1 MC) frequency meter which provides quick, accurate readings. Requires a standard 1.5V "A" and 45V "B" battery. Has 0-15 minute time switch. Contains sturdily constructed HI-"Q" resonator with average "Q" of 3000 working directly into detector tube. Uses 957, LS6 and 384 Tubes. Complete, new with inst. book. Less batteries. Write for descriptive circular..... **$69.50**

SWEEP GENERATOR CAPACITOR

High speed ball bearings. Split stator silver plated coaxial type 5/10 mmfd. Brand new..... **$2.50**

BC-348 RECEIVER PARTS

for Models C, E, H, K, L, M, P, R.

Dial Mechanism assemblies, 1st, 2nd, 3rd, 4th I.F. transformers, C. W. use, and xtal filter trans. with xtals. All R.F. coils. Front panels. Shock mounts. Large quantity misc. hardware sub assemblies, etc. Write your requirements.

MISCELLANEOUS EQUIPMENT

TS-127/U Lavoie Freq. Meter—375 to 725 MC.
TS-47 APR Test Set—40 to 500 MC.
213-A DuMont C.R. Modulation Monitor.
BC1206 APN-4 Test Set.
625SA H.P. Interpolation Osc.
TS-23/APN Test Set.
TS-487/U Peak to Peak VTVM.

G. E. SERVO AMPLIFIER

Type 2CV1C1 Aircraft Amplidyne control amplifier, 115 volts—400 cycles. Dual channel. Employes 2-5SN7GT and 4-6V6GT tubes. Supplied less tubes. **New** $22.50

LINEAR SAWTOOTH POTENTIOMETER

W.E KS-15138

Has continuous resistance winding to which 24 volts D.C. is fed to two fixed taps 180° apart. Two rotating brushes 180° apart take off linear sawtooth wave voltage at output. **Brand New**.... $5.50

8,000-VOLT TRANSFORMERS

Primary: 115 V., 60 cycles.
Secondary: 8000 V., C.T., 800 V.A.

Brand new in sealed cans.... **$27.50**

CRYSTAL DIODE

Sylvania 1N21B. Individually boxed and packed in leaded foil. Brand new..... $4.25

SYNCHRO DIFFERENTIAL GENERATOR

Ford Inst. Co. Type 5SDG. **Brand New**.... $22.50
Electrolux Torque Motor..... $16.50

MOTOR GENERATORS

2.5 KVA Diehl Elec. Co. 120V D.C. to 120V A.C. 60 cy. 1Ph., .4PF. Complete with Magnetic Controller, 2 Field Rheos and Full Set of Spare Parts including Spare Armatures for Generator and Motor. Full spec. on request. New..... **$285.00**

2 KVA O'Keefe and Merritt. 115V DC to 120V AC, 50 cy. Idles at 3 Ph. syncs motor on 208V, 50 cy. New. Export crated..... **$165.00**

1.25 KVA Allis-Chalmers. 230 DC to 120 AC, 60 cy, 1 Ph. Fully enclosed. Splashproof, Ball Bearings, centrifugal starter. New, complete with kit of Spare Parts..... **$175.00**

M.G. 164, Holtzer-Cabot Motor: 440V, 3Ph, 60 cy., .90A, 1/3HP, 1750 RPM. Generator: 70V, 3Ph, 146 Cy., .140KVA. Exciter: 115DC, 1A. New... **$67.50**

Type CG-21302. 440V AC, 60 cy, 3Ph, 1500 VA to 875 DC and 300V DC. New..... **$69.50**

INVERTERS

Onan MG-215H. Navy type PU/13. Input 115/230, 60 cy, 1 Ph. Output 115, 480 cy, 1 Ph, 1200W and 26V DC at 4 amps. New..... **$295.00**

G.E. Model 5D-21N13A. Input: 24V, DC. Output: 115V, 400 cy., 485 Va. New..... **$29.50**

Leland Elec. Co. Model PE206A. Input: 28V. DC, 38 Amps. Output, 80V., 800 cy, 485 VA. New. **$22.50**

G.E. J8169172. Input: 28V. DC, Output: 115, 400 cycles at 1.5 KVA..... **$32.50**

DYNAMOTORS

Navy-Type CAJO-211444, 105/130V DC to 13V DC at 40A or 26V DC at 20A. Radio Filtered. Complete with Line Switch. New..... **$89.50**

Elcor. 64V DC to 110V AC, 60 cy. 1 Ph. 3.04 Amps. New **$24.50**

Elcor. 32V DC to 110V AC, 60 cy, 1 Ph, 0.43 Amps. New **$22.50**

Type PE94C. For use with SCR522 Transmitter-Receiver. Brand new in export cases..... **$15.00**

Carter 6V DC to 400V DC at 375 mils. New.. **$39.50**

AMPLIDYNES

G. E. Model 5AM21JJ7. 4600 R.P.M. Motor Compound wound. 150 Watts. Input: 27V DC. Output: 60V DC. Sig. Corps. U. S. Army MG-27-B. New **$34.50**

Edison type 5AM3INJ18A. Input: 27 volts, 44 Amps., 8300 RPM. Output: 60V DC at 8.8 amps. 530 Watts. New..... **$22.50**

SMALL D.C. MOTORS

G.E. Model 5BA50LJ2A. Armature 27V D.C. at 8.3A. Field 60V DC at 2.3A. RPM 4000. H.P. 0.5. New **$27.50**

Electrolux Corp. of Canada. P/O vent fan assembly for SCR-602-T6. 1/35HP, 28.5V. 2.15 amps., 2200 RPM. Price..... **$16.50**

Oster type E-7-5, 27.5V, 1/20HP, 3650 RPM. Shunt wound. Price..... **$15.00**

Dumore Co. Type EBLG, 24V DC., 40-1 gear ratio, for use with type B-4 Intervalometer. Price. **$17.50**

RADAR ANTENNAS

Type SO-1 (10CM.) Complete assembly with reflector, waveguide nozzle, drive motor and synchros, etc. New in original cases..... **$279.50**

Type SO-3 (3 CM.) Surface Search type complete with reflector, drive motor, synchro, etc., but less plumbing. New in original cases..... **$189.50**

Type SO-13 (10 CM.) Complete assembly with 24" dish with feedback dipole. Complete with synchros, drive motor, gearing, etc. New in original cases **$149.50**

Also in stock—spare reflectors, nozzles, probes, right angle bends for SO-1 antennas.

400 CYCLE TRANSFORMERS

AUTO. 400 cy. G.E. Cat No. 80G184. KVA .945S—520P. Volts 460/345/230/115. **New. $4.95**

FILAMENT. 400/2600 cy. Input: 0/75/80/85/105/115/125V. Output: 5V3A/5V3A/5V3A/5V3A 5V6A/5V6A/6.3V6A/6.35A. New..... **$2.95**

THYRATHRON POWER. 400/1600 cy. Raytheon UX-8876. 400/1600 cy. Pri: 115. Sec: 50-0-50V at 1.5A, 6.3V at 1.2A. Test r.m.s. 1780. New.... **$2.75**

PLATE WECO K89560, 400/800 cy. Pri: 115V, Sec: 1350-0-1350 at .057A (2700 V Total). Elecstat shided. Wt. 2.3 lbs. New..... **$2.95**

Plate, Thordarson #T46S89. 1650 VA. Pri: 105-120V. 500 cy. 1 PH. Sec: 5600V. Center tapped. 1.5KV insulation. Brand new..... **$49.50**

PLATE & FIL. WECO K89555, 400 cy. Pri: 115V. Sec #1: 930-0-930. Sec #2: Three 6.3V windings **$3.95**

FILAMENT. 400/2400 cps. WECO K89553. Pri: 115V. Sec: 8.2V1.25A/6.35V1.5A Elecstat shdld. Wt. 0.5 lbs. New..... **$1.95**

PLATE & FIL. 400/2600 cy. Pri: 0/80/115V. Sec: #1=1200VDC at 1.5MA. Sec. #2=400VDC at 130MA. Fil. Secs: 6.4V4.3A/6.35VO.8A ims. 1500V/5V2A/5V2A **$4.95**

RETARD. 400 cy. WECO K89598. 4 Henry 100MA. **$1.75**

60 CYCLE TRANSFORMERS

FILAMENT. Raytheon Hypersil Core. Pri: 115V. Sec: 6.3V22A/6.3V2.4A/6.3V2.25A/6.3VO.6A ins. for 1700V **$5.95**

High Reactance Trans. G. E. type Y-3502A.—60 cy., Voltage 11200-135. Inductance H.V. Winding 135 Henries. Output: Peak Voltage 22.8KV. Cat. 83180853G1. New **$89.50**

High Voltage Trans. Westinghouse Pri: 115, 60 cy. Sec: 15,000 C.T., 60 MA. Good for Hi-Pot test set up **$29.50**

PULSE TRANSFORMERS

PULSE. WECO KS-9563. Supplies voltage peaks of 3500 from 807 tube. Tested at 2000 Pulses/sec and 5000V peak. Wdg. 1-2=18 ohms. Wdg. 1-3=f2 ohms. L of Wdg. 1-3= 073-.092H at 100 cps..**$5.00**

PULSE. WECO KS-161310, 50 KC to 4MC. 1⅜" Dia. x 1⅞" high. 120 to 2350 ohms. New..... **$1.95**

RAYTHEON VOLTAGE REGULATOR

Adj. input taps 95-130V., 60 cy. 1 Ph. Output: 115V., 60 Watts, ½ of 1% Reg. Wt. 20 lbs. 6⅛" H x 8¼" L x 4⅝" W. Overload protected. Sturdily constructed. Tropicalized. Special..... **$14.75**

HIGH VOLTAGE CAPACITORS

.25 MFD., 20KV..... **$26.50**
.25 MFD., 15KV..... **22.50**
.5 MFD., 25KV..... **34.50**
1 MFD., 15KV..... **34.50**
1 MFD., 7.5KV..... **12.50**

SOUND POWERED PHONES

Western Electric No. D173312, Type O. Combination headset and chest microphone. Brand new including 20 ft. of rubber covered cable.....**$17.50**

Automatic Elec. Co. No. GL643A0. Similar to above but including Throat microphone in addition to chest microphone. Brand new with 20 ft. rubber covered cable **$10.00**

U. S. Instrument Co. No. A-360. Complete with 20' cable and plug. **Brand new**..... **$13.50**

W. E. type TS-10M Handset. New..... **$16.50**

PARABOLOIDS

Spun Magnesium dishes 17½" dia. 4" deep. Mounting brackets for elevation and azimuth control on rear. 1½ x 1¾" opening in center for dipole. **Brand new, per pair**..... **$8.75**

SWEEP GENERATOR CAPACITOR

High speed ball bearings. Split stator silver plated coaxial type 5/10 mmfd. Brand new..... $2.50

WESTERN ELECTRIC CRYSTAL UNITS

Type CR-1A/AR. Available in quantity—following frequencies—fundamentals.

6910—6450—6370—6470—6510—6610—6670—6690—6940—7270—7350—7380—7390—7480—7580—9720—Kilocycles.

$1.25 each

All prices indicated are F O B Bronxville, New York. Shipments will be made via Railway Express unless other instructions issued.

ELECTRONICRAFT INC.

27 MILBURN ST. BRONXVILLE 8, N. Y.
PHONE: BRONXVILLE 2-0044

All merchandise guaranteed. Immediate delivery, subject to prior sale.

All Prices Subject to Change Without Notice

METERS

3MA DC 2½" R—Simpson black scale.....$3.35
500 Microamps, DC—2½" round—Sun.....4.30
1 ma. DC Fan type—4" scale (rem. from equipt) 3.95
500 ma. DC 2½" R.—General Electric.....2.85
2 amp. RF 2½" Sq.—Simpson.....3.15
5 amp. AC 4½" R.—JBT.....4.11
10 amp. RF 3½" R.—Simpson.....4.95
50 amp. AC 3½" R.—General Electric.....4.11
3 amp. RF 3½" R.—Weston.....6.00

MAGNETRONS

2J21A	2J37	5J31	706BY
2J22	2J38	4J31	706CY
2J26	2J39	4J33	706GY
2J27	2J40	5J23	714AY
2J31	2J41	5J29	718AY
2J32	2J48	700B	718BY
2J33	2J49	700C	720B/C/DY
2J34	2J56	700D	725A
2J36	2J61	706AY	730A

KLYSTRONS

2K23	2K33	417A	723A/B
2K25	2K45	707A	726A
2K26	2K54	707B	726B
2K29	2K55	723A	5611

OIL-FILLED HIGH VOLTAGE ISOLATION TRANSFORMERS

Pri. 400V 60 cy. Sec. 115V 200VA Insulated for 50KV DC—G. E. Form EIR—36"H x 13"D.....$125.00
Pri. 115V 60 cy. Sec. 115V 250VA Insulated for 35 KV DC—G. E. Form EIR—29"H x 12½" D.$125.00

VOLTAGE DIVIDER

G.E. Cat. #248886G-1 and 9001934G-1 17,246,400 ohms 35KV 70:1 ratio wire wound shielded oil-filled 40"H x 12"D.....$77.50

2φ LOW INERTIA SERVO MOTORS

KOLLSMAN Type 937-0240—85/88V 100 cy 5 watts 2650 RPM—new.....$12.95
DIEHL, Type FPE-25-11 75V 60cy 4 watts — new.....$34.50

OIL FILLED CONDENSERS

MFD	VDC		Price	MFD	VDC	Price
2	600		$ .69	.1	2500	$ .69
4	600		1.65	1-1	2500	3.85
4	600	R'd	1.65	.32	2500	15.88
6	600		1.85	.3/.2	4000	2.95
8	600	R'd	2.25	1	5000	4.85
10	600	R'd	1.95	.01-.03	6000	1.65
8-8	600		1.95	.1	7000	1.79
1	1000		.62	.045	16KV	4.79
2	1000		.89	.05	16KV	4.95
4	1000		1.85	.075	16KV	8.95
6	1000		2.45	.25	20KV	18.95
1	1500		.89	50	220VAC	4.95
4	1500		2.95	7	660VAC	4.25
.1-.5	2000		.87	8	660VAC	4.50
1	2000		1.95			

HIGH VOLTAGE TRANSFORMERS

G.E.—Pri. 115V 60 cy Sec. 6250V 80 MA—12.5 KV Ins.....$18.50
G.E.—Pri. 115V 60 cy. Sec. 6250/3850/2600V 50 MA 12.5 KV Ins.....$18.00
Raytheon—Pri. 115V 60 cy. Sec. 8500/6450V CT 43 MA Hermetically sealed.....$22.50

CRYSTAL DIODES

1N21	$1.19	1N23	$1.49	1N34	$ .79
1N21A	1.69	1N23A	2.25	1N38	1.44
1N21B	4.00	1N23B	5.25	1N45	.94
1N22	1.09	1N27	1.79	1N52	1.05

ANTENNAS

AT-38A/APT (70 to 400MC).....$13.70
AT-49/APR-4 (300 to 3300MC).....13.70
DZ-2 Loop antenna with pedestal.....22.50
AN-74B (125 to 150MC).....3.25
AN-65A (P/O SCR-521).....1.50
AN-66A (P/O SCR-521).....1.75
A1A-3CM conical scan.....125.00
ASB Yagi—5 element 450 to 560MC.....7.00
ASB Yagi—Double stacked 8 element.....12.70
ASA Yagi—Double stacked 370 to 430MC.....29.40

WESTINGHOUSE HYPERSIL TRANSFORMER

PRI-115V. 60CY ¾ KVA
SEC #1 - 240V - 1.56A
SEC #2 - 240V - 1.56A
WT. 30 LBS.

$14.50 EACH

Terms 20% cash with order, balance C. O. D. unless rated. All prices net F.O.B. our warehouse, Phila., Penna., subject to change without notice.

COAXIAL CONNECTORS

83-1AC	$ .42	83-1R	$ .40	83-22AP	$1.10
83-1AF	.36	83-1RTY	.65	83-22R	.68
83-1P	1.30	83-1SP	.50	83-22SP	1.15
83-1PH	.10	83-1SPN	.50	83-16S	.15
83-1J	.89	83-1T	1.30	83-18S	.15

FULL LINE OF JAN APPROVED COAXIAL CONNECTORS IN STOCK

UHF	N	BN	BNC	
UG-7	UG-23	UG-37	UG-102	UG-175 UG-254
UG-12	UG-24	UG-57	UG-103	UG-176 UG-255
UG-18	UG-27	UG-58	UG-104	UG-185 UG-260
UG-19	UG-27A	UG-85	UG-106	MX-195 UG-264
UG-21	UG-29	UG-86	UG-108	UG-197 UG-274
UG-21B	UG-30	UG-87	UG-109	UG-201 UG-275
UG-22	UG-34	UG-88	UG-146	UG-206 UG-276
UG-22B		UG-98	UG-166	UG-236 UG-290
			UG-167	UG-245 UG-291
			UG-171	UG-306

M-356	MC-277	PL-259A	PL-325
M-359	MC-320	PL-274	SO-239
M-359A	PL-258	PL-284	SO-264
M-360	PL-259	PL-293	TM-201
93-C	49120	D-163950	ES-685696-5
93-M	49121A	D-166132	ES-689172-1

TYPE "J" POTENTIOMETERS

Resis.	Shaft	Resis.	Shaft	Resis.	Shaft
60	SS	5K	1/4"	50K	3/8"
60	9/16"	5K	3/8"	50K	1/2"
100	SS	5K	1/2"	100K	SS
200	SS	10K	SS	150K	1/2"
250	1/8"	10K	3/8"	200K	3/8"
500	SS	10K	1/2"	250K	SS
500	5/16"	15K	SS	250K	3/4"
500	1/2"	15K	1/2"	250K	3/8"
500	5/8"	20K	SS	500K	SS
650	1/2"	25K	SS	500K	1/4"
1K	SS	25K	1/4"	500K	7/16"
2K	3/8"	30K	1 1/8"	1 Meg	SS
2500	SS	40K	SS	2.5 Meg	SS
4K	SS	50K	SS	5 Meg	SS
5K	SS	50K	1/4"		

DUAL "JJ" POTENTIOMETERS

50	SS	500	SS	1 Meg SS
100	SS	1K	SS	2.5 Meg SS
250	SS	2500	SS	5 Meg SS
330	SS	10K	SS	1K/25K 3/8"

TRIPLE JJJ POTENTIOMETERS

100K/100K/100K—⅜" 20K/150K/15K—⅜"

SOUND POWERED TELEPHONES

U. S. NAVY TYPE M HEAD AND CHEST SETS
U.S.I. A-280 W.E. D-173013
A.E. GL832BAO
ANY TYPE—$14.88 EACH

TS-10 Type Handsets.....$8.92 ea.

F. W. BRIDGE SELENIUM RECTIFIERS

AC Volts Input	—	18	AC Volts Input	—	40
DC Volts Out	—	14.5	DC Volts Out	—	34
1.3 Amps.		$3.85	0.6 Amps		$4.60
2.4 Amps.		4.95	1.2		5.95
4.6 Amps.		7.75	3.2		8.95
13.0		12.75	4.0		15.50
17.5		15.75	9.0		17.50
26		22.75	12		26.95
39		35.50	18		32.50
52		38.50	25		42.50
78		49.50	36		55.50

130 VAC ½ WAVE STACKS

75MA	$ .85	150MA	$1.30	250MA	$1.75
100MA	1.10	200MA	1.57	400MA	2.60

GENERATORS

• Eclipse-Pioneer type 716-3A (Navy Model NEA-3A) Output—AC 115V 10.4A 860 to 1400cy. 1 φ: DC 30 Volts 80 Amps. Brand New.....$38.50
• Eclipse-Pioneer type 1235-1A. Output—30 Volts DC 15 Amps. Brand New—Original Packing...$15.50

THYRATRONS & IGNITRONS

OA4G	FG-41	FG-271	722A
C1A	FG-57	393A	873
1C21	FG-67	394A	884
2A4G	FG-81A	GL-415	885
2B4	91	KU-610	1665
2D21	FG-95	KU-623	1904
3C23	FG-105	KU-628	2050
3C31	FG-166	KU-634	2051
4C35	FG-172	WL-652	5550
C5B	FG-173	WL-672	5551
5C22	RX233A	WL-677	5552
C6J	FG-235A	WL-681	5557
FG-17			5560
FG-33			

TEST EQUIPMENT

• I-222A Signal Generator.....* $79.50
• I-72K Signal Generator.....$48.50
• Vibrotest Mod. 218 Mogger.....* $45.00
• C-D Quietone Filter Type IF-16 110/220V AC/DC 20 Amps.....* $9.00
• TS-127/U Freq. Meter w/spares.....$89.50
• TS-143/CPN Oscilloscope.....* $95.00
• Dumont 175A Oscilloscope.....*$225.00
• LM-20 Frequency Meter.....* $49.50
• Gen. Radio 757-P1 Power Supply.....* $27.00
• TS-5/AP Frequency Meter.....* $42.00
• I-130A Signal Generator.....* $85.00
• A.W. Barber Labs. VM-25 VTVM.....* $86.00
• TS-10A/APN Delay Line Test Set.....$45.00
• TS-19/APQ-5 Calibrator.....* $95.00
• REL W-1158 Frequency Meter 160-220 MC $32.95
• CWI-60AAG Range Calibrator for ASB, ASE, ASV and ASVC Radars.....$39.85
• CRV-14AAS Phantom Antenna for Transmitters up to 400 MC.....$11.75
• 3 CM. Pickup Horn Antenna.....$9.95
• I-130A Signal Generator—10 cm.....*$155.00

All Items New Except Where Noted * (Exc. Used Condition)

MISCELLANEOUS EQUIPMENT

Amperex 1B99 Gamma Counter.....$ 9.87
Powerstat 1226—115/230V Input—0-270V out @ 9 amp.....37.00
ElMAC 35 TG Ionization Gauge.....5.95
ATR Inverters 6VDC to 110 VAC 60 cy 75W.....22.95
ID-6/APN-4 Indicator.....29.50
R-7/APS-2 Receiver.....49.50
R-78/APS-15 Receiver.....49.50
FL-8 1020 cycle filter.....7.95
RM-25 remote control unit.....8.95
RM-14 remote control unit.....8.95
RTA-1B 12/24 V dynamotor.....40.00
BC-1206-CM2 Receiver.....12.95
CY-230/MPG-1 Radar Console.....575.00
G.E. Type JP-1 portable current transformer..32.50
ASG-4 Radar equip. Complete.....86.75
T-9/APQ-2 less tubes.....16.50
RCA AVR-15 Beacon Recvr.....15.50
TBY Trans-Recvr.....29.95
Pioneer Type 800-1B Inverters—28VDC to 120V 800 cy 7 amp AC (used).....22.88
G.E. Inverter—28VDC to 120 VAC 800 cy 750VA (used).....39.50
Navy SD-3 Radar complete.....1200.00
Navy DP-14 Direction Finder complete.....385.00

PULSE TRANSFORMERS

UTAH		UTAH	
	9262		9318
G.E. 68G-627	9278		9340
G.E. 68G628	9280		9350
G.E. 68G929G1		Westinghouse 232-AW2	
G.E. 80G13		Westinghouse 232-BW-2	
G.E. K-2469A		AN/APN-4 Block Osc.	
G.E. K-2744B		Philco 352-7149	
AN/APN-9 (901756-501)		Philco 352-7150	
AN/APN-9 (901756-502)		Philco 352-7071	
AN/APN-9 (352-7250)		Philco 352-7178	
AN/APN-9 (352-7251)		Raytheon UX-7350	
Westinghouse 49 PH-1		W.E. D-161310	
Westinghouse 132-AW		W.E. D-163247	
Westinghouse 139DW2F		W.E. D-163325	
		W.E. D-164661	
		W.E. KS-9563	

AN/APA-23 RECORDER

Sweeps any receiver through its tuning range and permanently records frequency and time of received signals on paper chart. Power input—(motor) 27V DC 1.5A, and (recorder) 80/115V AC 60-2600 cy 135W.
Originally designed to record pulse or sine-wave modulated signals received by AN-APR-1, AN/APR-2, AN-APR-4, AN/APR-5, BC-348, S-27, SX-28.
BRAND NEW.....$147.50

SPRAGUE PULSE NETWORKS

7.5 E3-1-200-67P. 7.5 KV. "E" Circuit 1 Microsec. 200 PPS. 67 ohms imped. 3 sections.....$4.30
7.5 E3-1-200-67P. 7.5 KV. "E" Circuit 3 microsec. 200 PPS. 67 ohms imped. 3 sections.....$8.75
7.5 E4-10-60-67P. 7.5 KV. "E" Circuit 4 sections, 10 microsec. 60 PPS. 67 ohms imped.....$8.25
15 E-4-.01-400-50P. 15KV "E" circuit .01 microsec. 400 PPS. 50 ohms imped. 4 sections.....$12.00
15-A-1-.00-51P. 15KV. "A" Circuit. 1 microsec. 400 PPS. 50 ohms imped.....$37.50
15 F7 2-200-50P. 15KV "E" Circuit. 2 microsec. 200 PPS. 50 ohms imped., 7 sections.....$42.00

SYNCHROS

Size 1, 3, 5, 6, 7 and 8 generators, motors, control transformers, differential generators, and differential motors in stock.

AY-101D	5F	M	C-69486-1
AY-129D	5G	N	C-78248
AY-130D	5N	X	C-78249
1CT	6DG	2J1F1	C-78410
1F	6G	2J1G1	C-78411
5B	7DG	2J1H1	C-78415
5CT	7G	C-44968-6	C-79331
5D	A	C-56701	C-78254
5DG	B	C-69405-2	C-78670

SEND FOR COMPLETE LISTING
SYNCHRO CAPACITORS IN STOCK

LECTRONIC RESEARCH LABORATORIES
715-19 ARCH ST. PHILA. 6, PA.
Telephones - MARKET 7-6771-2-3

SUPERIOR VALUES FROM

AMERICA'S LARGEST ELECTRICAL CONVERSION HOUSE

HIGH FREQUENCY CONVERSION EQUIPMENT

ONAN 400 CYCLE MG SET. Motor: 7½ H.P. operative at 220/440 V 3ϕ, 60 cy. V belted to self-excited alternator with output of 4KVA, 115 Volts, single ph. 400 C.P.S. Alternator is self-excited with secondary output of 14 VDC 40 amp. With Voltage Regulator built-in. Price.....$592.00
With single phase Motor.....$642.00
ELECTRIC SPECIALTY FREQUENCY CHANGERS Type BF852/BFR8354 Input: 220 Volts, 3 Ph. 60 cy. 3600 RPM. Output: 250 Volts, 20 Amps, single ph. 180 Cyc. 5000 VA. 3000 Watts. Brand New. Compact ball bearing units for operation of Hi-cycle equipment. SPECIAL PRICE.....$160.00
ONAN 800 CYCLE MG UNIT. Employing 5 H.P. Motor operative at 220/440 Volts, 3ϕ, 60 Cy. V belted to self-exc. generator with output of 1.5 KVA, 115 Volts, single ph. 800 CPS, and secondary output of 500 Watts 28.5 VDC 17.5 amperes. PRICE.....$280.00
INVERTER UNIT PE206A. Input: 27.5 VDC, 28 amp. Output: 80 Volts, single ph. 800 CPS. 500 VA. Price.....$19.00
RLX DUAL GENERATORS. Flange mounted. Output: 500 Watts; 1300-2600 Cycles, also 12-14 VDC 750 Watts. Price.....$25.50
ELECTRIC SPECIALTY HIGH FREQUENCY CONVERTER UNIT. Primary: 32 VDC, 16 amperes, 3000 R.P.M. Ball Bearings. Secondary: 350 volts, 1500 cycles. .75 amps. 275 V.A. Single Ph. Built-in frequency control. Specially Priced at.....$30.00
BENDIX POWER MG SET. Consists of G.E. 2 HP Rep-Ind Motor, 115 volts, single phase, 60 cyc. directly connected to Bendix alternator with output of 120 volts, 700 cyc., 600 watts and DC output of 14.5 volts, DC, 22amp. Brand new. Price.....$225.00
CONTINENTAL DC/AC SET. Motor: 1.5 HP 230 VDC 3440 RPM. Output: 120 VAC, 6.6 amps. 1 KW 800 cyc. 1 ph., also output of 14 VDC, 4 amps., Model CG21637. Compact 2-bear. units. Completely rebuilt. Price.....$89.00
Also available with input of 440-3-60 and same output. Price.....$101.50
WINCHARGER PU-16/AP INVERTER. Type MG750. Input: 28 volts, 60 amp. Output: 115 volts, 6.5 amp., 400 cyc., 1 ph. Brand new. Price.....$69.50
HOLTZER-CABOT MG 221. Compact 2 bear. units for low current 400 cyc. Operates on 115 VAC, 1.5 amp. Output: 110 volts, 1.0 amp., 1 ph., 100 watts, 400 cyc. Brand new. Price.....$69.50
HOLTZER-CABOT MG 218. Operates at 115 VDC 2.3 amp. with same output. Price.....$79.50
LELAND INVERTER TYPE MG 4A. DC Input: 27.5 volts, 38 amp., 6000 RPM. Output: 115 volts, 1 ph., 400 cyc., 500 VA. Like new and fully guaranteed. Price.....$39.50
GENERAL ELECTRIC MODEL 5D21NJ3A. Input: 27 volts, 35 amp. Output: 115 volts, 485 VA, 1 ph., 400 cyc. Price.....$31.50
LOUIS-ALLIS 3 UNIT MG SET. Consists of 5 HP motor operative at 220/440-3-60 directly coupled to alternator with output of 115 volts, 1 ph., 400 cyc. and with exciter unit all mounted on steel base. Brand new. Price.....$565.00
HOLTZER-CABOT TYPE CAJ-211168 MG UNITS. Compact 2 bear. operative at 115 volts, 1 ph., 60 cyc., ½ HP. Output: 115 volts, 4 amp., 233 cyc., 3 ph., also 24 VDC at 5 amp. Brand new. Price.....$38.00
NORMAND ELEC. CO. (BRITISH MFR.) MG UNIT. Motor: 220 VDC, 8.8 amp., 2 HP. 4200 RPM, directly connected to H. F. alternator with output of 1400-2800 cyc. 1200 watts. Exc. 24 VDC. Price.....$70.00
MARCONI MG UNIT. 2 KW. operates at 110 VDC, 30 to deliver 110 VAC, 300 cyc., supplied with field rheostat for variable frequency output. Price.....$70.00
PIONEER MG UNIT. Input: 115 VDC, 3.4 amp. Output: 140 VAC, 1.2 amp., 350 cyc. Complete with field rheostat for variable frequency output. Price.....$60.80
ESCO MG UNIT. Operative at 120 VDC, 25 amps., 4 HP. Delivers 115 VAC, 1 ph., 1050 cyc., 2 KW. An exceptionally fine machine for laboratory use. Can be used with field rheostat for frequencies up to 2000 cycles. Price.....$175.00
ESCO INVERTER UNIT. Prim: 12 VDC, 20 amp. 1800 RPM. Sec: 140 VAC, 1 amp., 140 VA, 360 cyc. With field rheostat for frequency outputs up to 360 cyc. Price.....$69.50
HOLTZER-CABOT MG UNIT. Operates at 115 VDC, 8.2 amp. to deliver 55 VAC, 6 amp., 195 cyc., 3 ph., 1950 RPM with field rheostat for frequencies up to 400 cyc., 3 ph. Price.....$80.00
HOLTZER-CABOT MG UNIT. Motor: 120 VDC, 5 amp., 2500 RPM. Output: 75 VAC, 9 amp., 500 cyc., 675 VA, 1 ph. Price.....$49.00
GENERAL ELECTRIC HIGH FREQ. MG SET. Consists of 3 HP motor operative at 220-3-60, directly connected to alternator with output of 220 VAC, 22.7 amp., 1 ph., exciter unit rated at .5 KW, 110 VDC. 3 units are directly coupled. Price.....$295.00
G.E. MG SET MODEL 5LY56AB5A. Motor: 1.1 HP, 250 VDC 3.5 amp. Generator: 600 watts, 120 VAC, 4.8 amp., 500 cyc., 1 ph. Price.....$79.50
HOLTZER-CABOT HIGH FREQUENCY MG SETS. Compact 2 bearing units with input of 120 VDC, 7 amps. Output: 120 Volts, 3ϕ 320 Cycles. Has shaft extension permitting use as dual generator. Price.....$112.00
WESTINGHOUSE HIGH FREQUENCY UNITS. Operate with input of 115 VDC to deliver 17 VAC, 1050 to 1650 cycles. An excellent value.....$25.50
ESCO DUAL FREQUENCY UNITS. Motor operates at 120 VDC, 10 amperes. Delivers 70 Volts at 120 Cycles or 200 Volts at 720 Cycles. Price.....$95.00
GE MG UNITS. Motor: 110 Volts, D.C. 31.5 Amperes, in a single compact unit with output of 120 Volts, 20.8 Amp. single ph. 500 cycles. Like New. Price.....$95.00
WESTINGHOUSE HIGH FREQUENCY UNITS. Input: 115 Volts, D.C. 2.7 Amps. Output: 14.4 Volts, obtained with built-in controller on end of unit. 139 Amp. 450-2550 Cycles. Frequency variation in Price.....$48.50
GE DUAL OUTPUT MG SETS. Consist of Motor rated 3 H.P. 230/440 V. 3ϕ, 60 Cy. directly coupled to 2 generators. Output .5 KW, 220 Volts, 2.27 Amp. 525 Cycles. Also .5 KW. 110 Volts, D.C. 4.55 Amp. 3 separate units mounted on common bed plate. Price.....$150.00
WESTINGHOUSE 180 CYCLE ALTERNATORS. 750 V.A. Output: 110 Volts, 3 Phase, 180 C.P.S. 3000 R.P.M. Separately excited at 110 VDC Price..$44.00 Also available with built-in exciter. Price.....$78.00
GENERAL ELECTRIC HIGH FREQUENCY UNIT. Operating at 440-3-60 .75 amp. Output, 70 Volts, 3 ph. 148 cyc. 220 Watts, 1.8 amperes. An ideal unit for experimental work or for operation of equipment. SPECIAL PRICE.....$34.50
GE HIGH FREQUENCY MG SETS. Motor: 250 VDC 4 amp. Alternator: 600 watts, 125 single ph. 4.8 amp. 500 cycles. Brand new. Price.....$90.00
MARCONI MG UNITS. Operative at 110 VDC to deliver 500 VAC, 6 amp 3 K.W. 240 CYCLES. Extending shaft permits driving complete unit to obtain dual self-excited generator. Price.....$89.00
HOLTZER-CABOT 500 CYCLE MG SET. Motor: 230 VDC GENERATOR: 5 KVA 230 VAC, 1ϕ 500 Cyc. Rebuilt. Price.....$271.50
CROCKER-WHEELER 500 CYCLE MG SET. Compact 2 bearing Unit. Operative at 120 VDC, 7.3 amps. Output: 250 Volts, 3 amp. 500 cycles. Rebuilt. Price.....$88.88
ESCO HV UNITS: Operative at 11.5 VDC 28 Amp. Output: 575 VDC, .25 Amp. also 55 VAC, .91 Amp. 1ϕ, 500 Cycles. Price.....$36.75
GENERAL ELECTRIC 400 CYCLE UNITS. Operate at 26 VDC, 100 Amp. Output: 115 VAC, 1ϕ, 400 CPS. 1500 V.A. With filter system built-in. Price.....$29.50
LOUIS ALLIS FREQUENCY CHANGER SETS. Pri: 25 H.P. 220/440-3-60; Sec. 15/10.8 K.W. 3300/2200 RPM. 30/220 Volts 35/35 Amps. 2 ph. 500/360 C.P.S. Price.....$1050.00
Pri: 10 H.P. 220/440-3-60; Sec: 7.5 K.W. 440/220 V. 17/8.5 Amp. 3000/1200 RPM. 360/480 Cycles. 2 ph. Price.....$750.00
We can supply these units for 400 cycle output and with transformers to supply 3 phase, wye output. Write for further information.
BENDIX ECLIPSE 800 CYCLE AERO UNIT. Input: 24-28 VDC, 75 amps. Output: 115 V. 10.5 Amp. 800 C.P.S. Complete filter system mounted thereon. Price.....$22.50
ONAN 2 BEARING MG UNITS. Motor: 115/230 Volts, single phase, 60 cy. Generator: .6 KVA 115 Volts, 5.3 Amps. 480 cy. 1750 R.P.M. Price.....$165.00
ECLIPSE 800 CYCLE GENERATORS. Flange mounting with spline shaft. Output is 115 VAC 10.4 Amp. 90% P.F. 800 Cycles, 1200 V.A. with secondary output of 28.5 VDC. 60 Amperes. Self excited. Price.....$39.00
BRITISH MADE 500 CYCLE MG SETS. Motor: 230 Volts, 3 PH. 50 Cycles, Alternator: 5 K.W. 180 Volts, 27.8 Amp. 500 Cycles, Excitation—110 VDC. When used at 60 Cycle current. Output is 600 cycles, 220 Volts. Price.....$353.00
WINCHARGER PU-7/AP: Input: 28 VDC, 160 Amps. Output: 115 VAC, single ph. 2500 V.A. 400 C.P.S. Frequency and Voltage regulation built-in. Price.....$87.00
British Alternators. 1.5 KVA., 230 Volts, 1ϕ, 400 CPS. sep. exc. Price.....$115.00
ONAN 400 CYCLE MG SET. Motor: 5 HP, 220/3 ϕ. Generator: 2 KW, 115 volts, single phase, 400 CPS, self excited with secondary output of 26 volts DC, 200 watts. V-belt drive. Price.....$635.00

HERE IS EXCEPTIONAL VALUE

Robins and Myers Motor Generator Units. Operate at 110 Volts, AC, single phase, 60 cyc. and deliver 22/40 Volts, DC. Can be used with field rheostat to supply 24/28 VDC for the operation of aero equipment from lighting line. Rated at 40 watts but will deliver 200 watts for intermittent operation. Gear head built into one end rotates external shaft at 225 RPM. An exceptional value at $18.75 each. With field rheostat $20.00. Also available for operation at 115 VDC at $12.50 and with rheostat at $13.75 each. Both units have 1/4 HP Motor. Stock up on these sets while they are available. Special price on quantity. Rebuilt.

Esco AC Motors: built-in magnetic brake for quick reversing. Double shaft, ball bearings. Rated: 2½ HP 30 minutes, marine duty: 440-3-60. Brand new in original cases. **SPECIAL PRICE**.....$34.00
ESCO DC/AC MG SETS. Motor: 115 Volts, 1¼ HP line start; built in voltage regulator, frequency control, filtered: ideal for television, radar or any application requiring constant voltage and frequency. Output: 115 V.A.C. 1ϕ, 60 Cyc. 460 V.A. Brand New.....$120.00

WE CAN FURNISH M.G. SETS OF ANY SPECIFICATIONS. SEND US YOUR REQUIREMENTS.

GEN. ELECTRIC AMPLIDYNES

Model 5AM73AB89: Input: 115 VAC, 1ϕ, 60 cyc. 9 amp. Output: 375 K.W. 250 VDC, 1.5 amp.....$86.00
Model 5AM65FB2A: Input: 115 VAC, 3ϕ, 60 cyc. 5 amp. Output: 500 watts, 2 Volts, 2 Amp.....$144.00
Model 5AM49AB30: Input: 230 Volts, 3 phase, 60 cyc. 1 amp. output: 115 Volts, D.C. 3.25 amp. 3450 RPM. $88.00
Model 5AM3INJ18A: Input: 27 VDC, 44 amp. 8300 RPM. Output: 60 VDC, 8.8 amp. 530 watts.....$12.95
Model 5AM78AB10: Input: 32 VDC, 60 amp. 2 H.P. 2200 RPM: Output: 250 Volts, D.C. 3 amperes; 750 Watts.....$190.00
Model 5AM43DB26: Input: 440 V. 3ϕ, 60 cyc. Output: 125 V.D.C. 1.0 Amp.....$55.00
Model 5AM49AB7A: Input: 440 Volts, 2ϕ, 60 Cyc. Output: 375 Watts. 250 V.D.C. 1.5 Amp. Price.$100.00

WESTINGHOUSE AMPLIDYNE TYPE MG SETS

Motor: Type CS, Fr. 204, 208 v, 3 ph., 60 cyc., 4 amps. 1.5 HP., directly connected to 2 DC gen. (1) 125 VDC, 2.8 amp., .35 KW. Gen. (2) 250 VDC, 2 amp., sep. exc. .35 volts. The 3 units are contained in one housing. Brand new. The generators have similar characteristic of an amplidyne with a set of control fields and are completely enclosed with rubber gaskets on the enclosing covers, which can be removed for increased KW output. An exceptional value at.....$183.00

Crompton-Parkinson Alternators. 3 KVA. .7 PF. 110 VAC, 1ϕ, 60 cy. 1800 RPM. sep. exc. Price.....$170.00
DC Manual Controllers, mfg. by Marconi Co. of England. Enc. type. For starting duty of 24 VDC Motors, rated at .7 HP. A really hard-to-get unit at a give-away price. SPECIAL.....$4.60
PIONEER DYNAMOTOR. Type PS250. Input: 12 VDC, 4.9 amp. Output: 350 VDC, .100 amp., brand new. Price.....$14.00
BRITISH DC/AC MG UNITS. Operate at 100/110 VDC, 4 amps., 3000 RPM. Output: 230 VAC, .87 amp., 50 cyc. Wt: 132 lbs. Brand new. Price.....$42.50 With field rheostat for 60 cyc. output. Price.....$50.00
G.E. 3 PH. TRANSFORMERS. 3 KVA, 418/429/440 Pri. 140 volts, 3 ph. Sec. Price.....$45.50
G.E. SELSYN MOTORS. Model 2JD65FA2. 120/55 volts, 60 cyc. Price.....$18.50
BOGUE ELECTRIC AC/DC MG SET. Consists of 5 HP motor in center directly connected to 2 13 volt 160 amp. generators. Will deliver 24 volts at 16o amp. or 12 volts at 320 amp. Condition like new. Price.....$375.00
LOW FREQUENCY MOTOR GENERATOR. Burke. Variable frequency, 2-12 cycles, single phase, 300-800 amperes, 25-5 volts, ball bearings. Price.....$385.00
WINCHARGER WIND GENERATOR. 12 volts, 200 watts, complete with all fittings including propeller. Excellent for battery charging. Price.....(New) $70.00
GARDNER DRY TRANSFORMER. 3.42 KVA. 230/115 to 5.7 volts, 600 amperes. Price.....$48.75
RAYTHEON VOLTAGE STABILIZER (CONSTANT VOLTAGE TRANSFORMER). Input 190-260 volts. Output 230 volts. 250 VA. Price.....$37.75
RAYTHEON CONSTANT VOLTAGE TRANSFORMER. .5 KVA. Input 180-269 volts. Output 220-230 volts. Price.....$67.50
ACME AIR-COOLED TRANSFORMER. Primary: 500 volts. Secondary: 14.840 volts with C.T., 3 phase, 60 CPS. 18.2 KVA, brand new. Price.....$390.00
RAYTHEON VARIABLE VOLTAGE TRANSFORMER. Primary: 220 volts, 3 phase with output by selector snap switch giving voltage outputs from 140 to 220. Brand new. Price.....$35.00
WESTINGHOUSE TRANSFORMER CONTROLLER. Contains 300 watts, 120-220 volt transformer with multi-taps. The transformer with tap switch alone is worth more than the special price.....$6.25
IDEAL AC/DC M-G UNIT. 110 V. 1ϕ, 60 cy. Input: 110 VDC 2.28 amp. .25 KW output. 2 bearing unit thoroughly rebuilt and guaranteed. With rheostat. Price.....$55.00
GE DC Generators. Consists of three separate generators in one unit. 3600 RPM. Delivers 1200 V., 450 V. .25 a. and 115 V. 1.3 amp. Price.....$24.00
G.E. Motor Starting Reactors Type 11K2840G2: Rated at 440 V. 3 Ph. 60 Cy. 16.8 Amp. Only a 3 Pole Double Throw Switch is necessary with this unit to make a 15-20 HP compensator starter. Useful for any purpose requiring three phase choke. **SPECIAL PRICE**..$16.00
GE DC Generators. Type 8D, Sh. wdg. .5 KW. 18 VDC. 27.8 amp. 1725 RPM. Price.....$30.00
Watthour Meters. 110/110 Volt DC operation. Used but in A1 condition. 5 amp.....3.75 10 amp.....$4.35 15 amp.....5.00 25 amp.....$6.00
ALLIS-CHALMERS MG UNIT. .94 KVA. Input 24 VDC, 63 amperes. Output 120/60/1, 7.82 amperes, 3600 RPM. New. Price.....$149.90

IF IT'S FROM ONE FREQUENCY TO ANOTHER; FROM DC TO AC OR AC TO DC; IF IT'S ONE VOLTAGE TO ANOTHER, THEN CALL ON US.

Established in 1922
409 ATLANTIC AVE.

WILLIAM I. HORLICK COMPANY

Tel. HAncock 6-2480
BOSTON, 10, MASSACHUSETTS

Electrolytics

29¢ ea. 10 for $2.75

MFD.	VOLT
2x 8	450
2x10	450
2x15	450
2x16	450
2x20	350
2x20	450
20-20	200/25
20-20	350/25
20- 8	500
20-10	350/300
24-24	400
30-30	350
40-40	450
40-40	450
40-40	475-400
40-10	450
40-10	450/350
40-15	450
40-20	150
40-20	350/25
40-35	450/350
40-50	400 300
50-50	350
50-40	300-250

A. C. COND. NON-POLARIZED

13-15	220-1.20
20-24	110-1.00
26-30	220-1.35
43-45	110-1.25
43-48	110-1.25
50-75	110-1.25
53-60	220-1.50
61-69	220-1.60
64-72	110-1.25
72-87	110-1.25
75-84	110-1.25
88-106	110-1.50
107-129	110-1.65
130-157	110-1.75
130-156	70-1.50
130-158	110-1.65
158-191	110-1.85
161-193	110-1.75
189-218	110-1.95
200-220	110-1.95
270-300	110-2.10
324-368	110-2.40
378-420	110-2.65
432-480	110-2.75
485-548	110-2.85

MINICAPS PIGTAIL

Mfd.	Volt	Price
2	50	5.10
4	50	.10
4	100	.15
4	150	.10
4	220	.18
5	25	.10
5	50	.10
5	150	.15
8	25	.15
8	100	.18
8	150	.18
8	350	.20
10	50	.18
10	150	.20
12	450	.23
16	100	.20
16	150	.22
16	300	.30
16	450	.48
20	25	.10
20	50	.15
20	150	.20
20	80	.18
20	350	.30
24	150	.30
25	25	.10
30	300	.25
30	450	.30
40	450	.22
50	50	.25
50	150	.35
100	50	.60
250	15	.50
500	6	.60
500	25	.75
1000	6	1.20
2000	6	1.35
1250	3.5	1.10
30	300	.25
30	450	.30
40	450	.22
40	450	.30
50	150	.35
100	50	.60
250	15	.50
500	6	.60
500	25	.75
1000	6	1.20
2000	6	1.35
1250	3.5	1.10

130-158	70-1.50	8-8	450	.60
130-158	110-1.65	8-16	450	.65
158-191	110-1.85	10-10	150	.30
161-193	110-1.75	10-10	450	.35
189-218	110-1.95	16-16	450	.70
200-220	110-1.95	20-20	150	.40
270-300	110-2.10	20-20	450	.50
324-368	110-2.40	40-20	450	.55
378-420	110-2.65	50-50	150	.40
432-480	110-2.75	50-30	150	.35
485-548	110-2.85	70-70	175	.85

400 CYCLE TRANSFORMERS 115-V 400 CYCLE INPUT

Ratings	Price Each
6.3V/1.8A P/O APG2	$1.40
6.4V/2.5, 400VCT/35Ma., 6.4/150a	3.95
6.4V/7.5, 6.4/3.8, 6.4/2.5a	3.49
780V/27v/4.7, 6.3/2.9, 1.25/.2a	2.49
6.4V/8a, 6.4V/1A	1.95
6.3V, 9.1A, 6.3VCT/6.5a, 2 x 2.5/3.5a	2.49
5V/2a, 6.3V/2a, 5V/2a, 6.3/.5a	2.99
5V/15A, 5000V Ins.	3.95
6.3/2.7, 6.3/.66, 6.3VCT/21A	5.95
760V, 6.3V, 6.3V, 5V, 220V, 6.3V/20A 6.4/7.5, 6.4/3.8, 6.4/2.5	2.95
592V/118Ma, 6.3/8, 1a, 5V/2 W.E.	4.95
6.3V/9.1, 6.3VCT/.65a, 2 x 2.5V/3.5A	2.95
6VCT/.00006 KVA	.98
6.4V/8a, 6.4V/1a	1.49
526VCT/.50a, 6.3VCT/2a, 5VCT/2a	5.49
2300VCT Large Qty.	2.25
900VCT/36Ma	1.49
2.5V/1.75, 5V/3A, 6.5V/6.5, 6.5/2. For SCR728	3.96
360VCT/20Ma, 1500V/1Ma, 2.5V, 6.3/2.5, 6.3V/6a. P/o 729A	3.95
2 x 2.5V/5A, 2.5V/10A, P/O AFT 6	4.95
2 x 2.5V/2.5a, 6.3V/2.25a, 1200V, Tap 1000V—750V. P/o AN/APS-15	4.95
742.5V/50Ma, 709V, 47Ma, 671V/45Ma	2.95
640VCT/250MA, 6.3V/9, 6.3V/.6, 5V/6A	3.95
6.3V/9.1a, 2.5V/3.5a, 6.3VCT/65a, 2.5V/3.5a	3.25
9800V or 8600V/232MA	12.50
4540VCT/250MA	7.50
5V/3a, 6.3V/2a	1.75
5000V/290MA, 5V/10A	12.50
2300V/350	5.45
2.5V/5, 5300V/2MA	14.95
13.5KV/2.5MA	11.50
734VCT/.177a, 1710VCT/177a	6.95
6.3V/9A, 7.7V/.365A	2.79
2.5/20A	4.85
6.3V/12a, 6.3V/2a, 6.3V/1a, P/o AN/APQ-5	5.85
6.4VCT/7.5, 6.4VCT/3.8, 6.4VCT/2.5a	4.35
6.3V/2.7, 6.3V/.66A, 6.3VCT/21A	2.95
6.5V/12A, 250V/100MA, 5V/2a, P/o AN/APS-15	3.50
650VCT/50MA, 6.3VCT/2A, 5VCT/2A, P/o, BC8/ARQ8	2.45
2400CT/5MA, 640V/.5MA, 2.5V/1.75A	3.85
15.5KVCT/1A	1.95
6.3/9, 6.3V/.6.5V/6, 640/200MA	4.95
2 x 14CV/9001A, 12QV/9001a, P/o APQ2	1.95
3640V/400Ma, P/o APT4	7.95
23.5V Tapped 22V/47MA	1.95
600VCT/36Ma	1.95
780V, 27V/4.3, 6.3V/2.9, 1.25V/20A	3.95
6.4V/11 Amp. P/o APQ7	2.25
2 x 6.3V/1.25a, P/o APQ13	1.95

DYNAMOTORS

Type	Input Volts	Input Amps.	Output Volts	Output Amps.	Radio Set	Price
PE86	28	1.25	250	.060	RC 16	$2.95
DM416	14	6.2	330	170	RU 19	6.95
DM33A	28	7	540	250	BC 456	4.95
DM42	14	46	515	.110	SCR 506	4.95
			1030	.050		
			2/6			
PE101C	13/26	12 6	400	.135	SCR 515	5.95
		6 3	800	.020		
BD AR 93	28	3.25	375	.150		4.45
23350	27	1.75	285	.075	APN-1	3.50
ZA0515	12/24	4/2	500	.050		3.65
B-19 pack	12	9.4	275	.110	MARK II	8.75
			500	.050		
D-104	12		225	.100		12.49
			440	.200		
DA-3A	28	10	250	.060	SCR 522	
			150	.010		
			14 5	5		
5053	28	1 4	250	.060	APN-1	3.95
PE73CM	28	19	1000	.350	BC 375	
CW21AAX	13	12 6	400	.135		
	26	6 3	800	.070		
			9	1 12		9.95
BD77KM	14	48	1000	.350	BC 191	12.95
PE94	28	10	360	.200	SCR 522	
			180	.101		
			14 5	5		

INVERTERS

PE 218-E: Input: 25 28 vdc. 92 amp. Output: 115 v. 350-500 cy 1500 volt-amperes. Dim: 17"x6⅛"x10". New $49.50

PE 218-H: Same as above except size: 16⅛"x6"x10". New $49.50

PE 206: Input: 28 vdc. 38 amps. Output: 80 v 800 cy. 500 volt-amps. Dim: 12"x5⅛"x10⅛". New.... $12.50

RC 145 IFF GROUND STATION EQUIPMENT

RC 145 includes: Receiver and Transmitter BC 1267A; Power Unit RA 105A; and Indicator Panel 1-221A.

The 8 tube transmitter delivers 1 KW peak power between 157-187 mc. using PP 2C26 tubes, an 829 modulator, and several pulse forming and clipping tubes. There is plenty of room to install crystal oscillator, multipliers and modulators. The **locher line plate circuit** and antenna coupler are adjustable from the front panel. Both receiver and transmitter can be matched independently to the antenna in use by adjustments on the front panel. The dials are not calibrated in frequency.

The receiver is a **13 tube superhet**, as follows: RF stage—6AK5; RF stage 6AK5; Mixer—6AK5; H. F. Osc.—6C4; Five IF Stages—6AG5; Second Det.—6H6; Tuning Eye—6E5; Video Amp.—6AG5; Cathode Follower—6AG5.

The I.F. frequency is 11 mc. and is stagger tuned to bandwidth of 4 mc. Power is supplied to the receiver from the main power supply. There is a jack for audio output from the second detector. Receiver dials are not calibrated in frequency. Tuning range 157-187 mc.

The indicator panel has controls for turning on and off a beam antenna rotating motor and various tubes and circuits to indicate the position of the antenna. Includes 1 **selsyn motor.** (8 tubes).

The power required is approx. 450 watts at **117 volts 60 cycles.** The power supply is fused on the front panel, and circuit breakers are used in the HV and Fil. primaries. (7 tubes). The relay rack measures 39 5/16" high, 26⅜" wide and 20⅛" deep. There is a blower mounted in the top of this rack. In all, there are 36 tubes supplied with the equipment. The weight of the entire equipment is approximately 400 lbs.

These units are brand new.

Price $390 ea.

Wavemeter for above $75.00
Dipole Array for above $85.00

CRYSTALS Low Freq.

FT-241. A holder ½" Pin spacing, for ham and general use. Xtal controlled. Signal Generators, Q-5 RS, S.S.B. Exciters (Nov. QST) marked in army Mc harmonic frequencies—Directions for deriving fundamental frequencies enclosed. Listed below by fundamental frequency, fractions omitted.

370	419	445	485	512	391	447
372	420	446	486	514	392	448
374	422	455	487	514	393	449
375	423	458	488	515	394	451
376	424	459	490	516	395	453
377	426	461	491	518	396	454
379	427	462	492	519	397	455
380	429	468	493	520	398	456
381	430	469	494	522	400	457
383	431	470	495	524	401	461
384	433	472	496	525	402	465
385	434	473	497	526	403	466
386	435	474	502	527	404	480
387	436	475	503	529	405	501
388	437	476	504	530	406	513
412	438	477	505	531	407	540
413	440	479	506	533	408	
414	441	480	507	534	409	each
415	442	481	508	536	411	$1.49
416	443	483	509	537	each	
418	444	484	511	390	59c	

FULL WAVE BRIDGE SELENIUM RECTIFIERS

18 VAC IN.	14 VDC OUT.
2A	$2.95
4A	4.89
6A	6.90
8A	7.49
12A	9.79
24A	18.34
36 VAC IN.	28 VDC OUT.
1A	$3.95
2A	5.79
4A	9.89
8A	13.59
12A	19.49
24A	34.53
54 VAC IN.	42 VDC OUT.
2A	$6.95
4A	14.49
120 VAC IN.	100 VDC OUT.
2A	$14.45
8A	42.50
12A	65.15

SPECIAL RECTIFIERS ON REQUEST

Hi-Current Chokes

1 HY—12 Amp—40 Ohms $14.95

01 HY—2.5 Amp—Cased $2.25

Low-Voltage Transformers Primaries 115v, 60 Cycle

36V-40V at 3.5 amps... $3.75
24v-1.5A 1.55
8v-1.5A ..... .98

Transmitters 40-Watt Output

These Famous V.F.O. Drivers Available

4—5.3MC. $5.95
5.3—7MC. 5.95
274N (ARC5)

Used. Good Cond.

PE 157 Vibropack for BC 745

Runs on 2V DC. Obtained from small Willard Rechargeable battery contained in case which is charged from 6 Vac or DC. Also contains 5" PM Speaker. Jacks for Mike Hdsets. Used, excellent... $9.95

T.V. Transformer, 7" or 9" scope, 3000v / 8 MA. 720vet /200 MA. 6.4 / 8.7A, 6.4 / 6A, 5/3 A. 1.25/ 3A. 115V 60 cy Input. Price ... $3.95

A-62 PHANTOM ANTENNA

This antenna is a Signal Corps type, and may be used for pre-tuning rigs for either single wire, doublet, or coaxial fed antennas. Unit consists of two coils, two resistors, variable condenser and indicating lamps, completely enclosed in circular case, 3" in diameter, 6⅝" high, having bracket for wall mount, or under, 3" in rear of can. Used chiefly by Signal Corps for tuning mobile equipment.

TUBES!

01-A	7E5	6L5
1B26	7E6	704-A
2C21	10Y	785A
2C22	12A6	724B
2K2/575	12K8Y	808
3BP1	12SF7	808-A
2C24	12SR7	804
3C3B	15P	815
3D6	28D7	836
3DP1	30 (Spec.)	837
3D21-A	45 (Spec.)	843
3DP1	39/44	860
3EP1	35/51	861
3FP7	227A	874
3Q5	22S	876
5BP1	268-A	1005
5BP4	355-A	1619
5CP1	417	1624
5FP7	530	1629
5J30	531	1961
6C	532	9002
6SC7	559	9004
7C4	562	CEQ72

LARGE QUANTITIES AVAILABLE

615	EF50
704-A	F-127
785A	FC25BA
724B	
808	GL532
808-A	FC27L
804	GL562
815	GL623
836	GL697
837	WL.180
843	QK59
860	QK60
861	QK61
874	QK62
876	VR91
1005	VR130
1619	VR135
1624	VR137
1629	VU120
1961	VU134
9002	*WLS12
9004	WN150
CEQ72	WT260

PRECISION RESISTORS

1.01	128	2230	30000
3	150	4300	33000
5	200	5000	35000
5.05	250	7500	40000
10.1	300	8500	50000
18	430	10000	55000
43.5	468	12000	57000
50	800	17000	75000
75	920	17300	We ship type in stock
82	1000	20000	
120	1100	25000	
125	1450		
Above Ea. ..... 39¢		Ten For	$2.50
100000	150000		200000
120000	170000		220000
Above Ea. ..... 46¢		Ten For	$3.50
1,000,000 ohms			Each 75¢

OIL CONDENSERS

Mfd.	Volt.	Price
5	50	$0.45
650	80	2.39
15	220 AC	2.20
1	500	.40
0.5	750 AC	1.89
0.5	1000	.79
2x0.5	1000	.70
1	1000	.75
1.5	1000	.85
2	1000	.90
4	1000	1.75
3x.01	1200	1.35
1	1500	1.39
1.5	1500	1.49
2	1500	1.45
2x0.1	2000	1.39
0.15	4000	1.29
2x0.1	4800	1.29
0.1	6000	1.39
2x0.1	7000	1.75
.015	16000	8.95
.0016	15000	5.95
.25	20000	
1	25000	
.5	25000	
1	7500	

MANY OTHERS

SELSYN TESTER

Magnesyn Instrument Field Tester AAF 43G-25330 Spec. 40772 To test individual mag. Ind. & Xmitters, for isolating Faults in magnesyn systems. Brand new $125.00

COAX CABLE

RG 8/U, 52 ohm
RG 9/U, 52 ohms
RG 57/U, Twin Cond. 95 ohms
RG 23/U, twin coax, 125 ohm imp. armored
RG 28/U, 50 ohm imp. pulse cable Corona min. starting voltage 17 KV
RG 35/U, 70 ohm imp. armored

Many other Cables & Wire in stock. Write.

All merch. guar. Mail orders promptly filled. All prices F.O.B. N. Y. C. Send MO or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

Min. Order $3.00

COMMUNICATIONS EQUIPMENT CO.

Min. Order $3.00

131 Liberty St., New York, N. Y. Dept. E-10 CHAS. ROSEN Phone: Digby 9-4124

RADAR — COMMUNICATIONS

10 CM RESEARCH EQUIPMENT

Coaxial Wavemeter, W.E. Transmission Type, using type "N" fittings. Calibrated between 3400-4500 MC.....$99.50
LNTR. LIGHTHOUSE ASSEMBLY Part of RT39 APG 5 & APG 15 Receiver and Trans Cavities w/assoc. Tr. Cavity and Type N CPLG. To Recvr. Uses 2C40, 2C43, 1B27. Tunable APX 2400-2700 MCS. Silver Plated.....$49.50
BEACON LIGHTHOUSE cavity 10 cm. Mfg. Bernard Rice.....$47.50 ea.
MAGNETRON TO WAVEGUIDE Coupler with 721A Duplexer Cavity, gold plated.....$48.00
SIGNAL GENERATOR using 417A Klystron, 2700-3300 mc. Output approx. 50 mw. 115 vac power supply. With tubes, new.....$425.00
REGULATED POWER SUPPLY for GL 446 type lighthouse tubes (2C40, etc.) 115 vac. 60 cycles. Panel Mounting. Less tubes.....$32.50
COAX CRYSTAL MOUNT, type N connectors.....$17.50
RT-39/APG-5 10 cm. lighthouse RF head c/o Xmtr.-Recvr-TR cavity compl. recvr & 30 MC IF strip using 6AK5 (2C40, 2C43, 1B27 lineup) w/Tubes.....
721A TR BOX complete with tube and tuning plungers.....$12.50
McNALLY KLYSTRON CAVITIES for 707B or 2K28. Three types available.....$4.00
TS 268 CRYSTAL CHECKER.....$35.00
F 29/SPR-2 FILTERS. Type "N" input and output.....$12.50
WAVEGUIDE to ⅞" Rigid Coax "Doorknob" adapter choke flange, silver plated broad band.....$32.50
AN/APRS-4 10 cm antenna equipment consisting of two 10 cm waveguide sections, each polarized 45 degrees.....$75.00 per set
POWER SPLITTER: 726 Klystron input dual "N" output.....$5.00
MAGNETRON COUPLING FOR TYPE 720 MAG. to 1¼" x 3" Waveguide.....$35.00
AS14A/AP-10 CM Pick up Dipole with "N" Cables.....$4.50

⅞" RIGID COAX—⅜" I.C.

RIGHT ANGLE BEND, with flexible coax output pick-up look.....$8.00
SHORT RIGHT ANGLE bend, with pressurizing nipple.....$3.00
RIGID COAX to flex coax connector.....$3.50
STUB-SUPPORTED RIGID COAX, gold plated 5' lengths. Per length.$5.00
RT. ANGLES for above.....$2.50
RT. ANGLE BEND 10" L. OA.....$3.50
FLEXIBLE SECTION, 15" L Male to female.....$4.25
FLEX COAX SECT. Approx. 30 ft.....$16.50

1.25 CM RESEARCH EQUIPMENT

Complete 24,000 MC RF Head, including 2K33 Klystron, 3J31 Magnetron and Magnet, all plumbing, and associated circuitry, in standard A-N Pressurized housing. New, $1100.00.

Low Power Load.....$20.00
Shunt Tee.....$35.00
Waveguide Lengths, 2" to 6" long, gold plated with circular flanges and coupling nuts.....$2.25 per inch
APS-34 Rotating Joint.....$19.50
Right Angle Bend E or H Plane, specify combination of couplings desired.....$12.00
45° Bend E or H Plane, choke to cover.....$12.00
Mitered Elbow, cover to cover.....$4.00
TR-ATR-Section. Choke to cover.....$4.00
Flexible Section 1" choke to choke.....$5.00
"S" Curve Choke to cover.....$4.50
Adapter, round to square cover.....$5.00
Feedback to Parabola Horn with pressurized window....$27.50
90° Twist.....$10.00
"K" Band Directional Coupler.....$49.50 ea.

SUPERSONICS

QCU Magneto striction head RCA type CR 278225—New.$95.00
Stainless Steel streamlining housings for above.....$18.50
QBG Driver Amplifier, New.....$200.00
QCU Magneto striction head, coil plate assembly, new....$14.50
QCG-2/QCS Magneto striction head coil plate assembly..$14.50
QCG2 Sonar complete set—Write for details.
QC-RCA magneto striction head assy. consists of coil, plate, nickel diaphragm plate, milled steel body unassembled.$65.00
Supersonic Oscillator RCA 17-27 Kc. Rec. Driver, Osc. 115 v 60 cy. AC. Designed for use w/200 watt drive. New less tubes.....$39.50
WEA-1 Console, Consists of Rec. Ind. Osc. Remote training control 200 watt driver amp. 17-27 kc range.....$450.00
QBF Sonar mfg. WE complete console consists of 10-40 kc rec. driver osc. ind. & control unit, and driver amplifier 22-28 kc. Write
QJA Sonar QBF w/OJA adapter kits w/cathode ray tube indication. Write.

3cm Research Equipment 1" x ½" WAVEGUIDE

1" x ½" waveguide in 5' lengths, UG39 flange to UG40 cover, silver plated.....$7.50 per length
Rotating Joint supplied either with or without deck mounting.....$17.50 each
UG 40 choke flanges.....
Micrometer Head Wavemeter (Ordnance absorption type) supplied with calibration curve.....$85.00 each
2J42 Magnetron Pulse Modulator, 14Kw max. rating 7Kw min. Plate voltage pulsed 5.5kv. 6.5 Amp. 1001 duty cycle, 2.5 usec pulse length max. filament 6.3v .5 amp. Includes magnetron mtg. and blower. Requires 3C45 and 2-3B24. New.....$75.00
TS-268 Crystal Checker.....$35.00
Bulkhead Feed-Thru Assembly.....$15.00
Pressure Gauge Section 15 lb. gauge and press nipple.....$10.00
Pressure Gauge, 15 lbs.....$2.50
Dual Oscillator-Beacon Mount, P/O APS 10 Radar for mounting two 723A/B klystron with crystal mts. matching slugs, shields.....$42.50
Dual Oscillator Mount (Each is back) with crystal mount, tunable termination, attenuating slugs.....$18.50
Directional Coupler, UG-40/U Take off 20 DB.....$17.50
Directional Coupler, type "N" take off 20 DB calibrated.....$17.50
2K25/723 AB Receiver local oscillator Klystron Mount, complete with crystal mount. Iris coupling and choke coupling to TR.....$22.50
TR-ATR Duplexer section for above.....$8.50
CU 105/APS 31 Direction Coupler 25 DB.....$25.00
723AB Mixer—Beacon dual Osc. Mut. w/xtal holder.....$12.00
Waveguide Section 12" long choke to cover 45 deg. twist & 2½" radius, 90 deg. bend.....$4.50
Twist 90 deg. 5" choke to cover w/press nipple.....$6.50
Waveguide Sections 2½ ft. long silver plated with choke flange.....$5.75
3 cm. **mitred elbow** "E" plane unplated.....$12.00
UG 39 flanges.....85¢
UG 40 chokes.....$1.00
90 degree elbows E or H plane 2½" radius.....$12.50
90 degree twist 6" long—UG39 to UG40.....$8.00
45 degree twist.....$8.00
40KW X Band radar, complete as described and illustrated in July, 1951, Electronics—APS-4 under belly assembly, less tubes.....$375.00

1¼" x ⅝" WAVEGUIDE

Tunable Termination—Precision adjust.....$65.00
Low Power Termination.....$25.00
Magic Tee.....$45.00
90 Degree Elbows, E or H plane.....$12.50
Waveguide Lengths, cut to size and supplied with 1 choke, 1 cover, per length.....per ft. $2.00
Bi Dir-Coupler WG output calibrated—25 db nominal.....$17.50
Flex sections, 12" Rubber Coated.....$14.50
Mitred Elbow H Plane UG51-UG52.....$12.00
6" St. sect. choke to choke.....$3.50
APQ 13 Constant Z Rotat. Jnt......$22.50
CG 98B/APQ-13 12" Flex. Sect. 1⅛" x ⅝" OD.....$10.00
Wave Gd Run 1¼" x ⅝" Gd. consists of 4 ft. sect. w/RT angle bend on one end. 2" 45 deg. bend on other end.....$8.00
X Band Wave Gd. 1¼" x ⅝" O.D. 1/16" wall aluminum.....per ft. 75¢
Slug Tuner Attenuator W.E. guide. Gold plated.....$6.50

VARISTORS

D-167178	$.95
D-172155	$2.25
D-172307	$1.70
D-168687	$.95
D-171812	$.95
D-171528	$.95
D-162356(308A)	$1.50

THERMISTORS

D-166288	$1.50
D-167332 (tube)	$1.50
D-170396 (bead)	$1.50
D-167813 (button)	$1.50
D-164699 for MTG	
"X" band Guide	$2.50

PULSE EQUIPMENT

MIT. MOD. 3 HARD TUBE PULSER: Output Pulse Power 144 KW (12 KV at 12 Amp). Duty Ratio: .001 max. Pulse duration: 5, 1.0, 2.0 microsec. Input voltage: 115 v 400 to 2400 cps. Uses: 1-715B, 4-829-B, 3-'72's, 1-'73. New.....$110.00
APQ-13 PULSE MODULATOR. Pulse Width .5 to 1.1 Micro Sec. Rep. rate 824 to 1348 Pps. Pk. pwr. out 35 KW Energy 0.018 Joules.....$49.00
TPS-3 PULSE MODULATOR. Pk. power 50 amp, 24 KW (1200 KW pk); pulse rate 200 PPS, 1.5 microsec. pulse line impedance 50 ohms. Circuit—series charging version of DC Resonance type. Uses two 705-A's as rectifiers, 115 v, 400 cycle input. New with all tubes.....$49.50
APS-10 MODULATOR DECK. Complete, less tubes.....$75.00

PULSE NETWORKS

15A—1-400-50: 15 KV, "A" CKT. 1 microsec 400 PPS, 50 ohms imp.$42.50
G.E. #6E3-5-2000-501P2T, 6KV "E" circuit, 3 sections .5 microsecond, 2000 PPS, 50 ohms impedance.....$6.50
G. E. #3E (3-84-810) (8-2.24-405) 50P4T, 3KV "E" CKT Dual Unit; Unit 1, 3 sections, 84 Microsec. 810 PPS, 50 ohms imp.: Unit 2, 8 Sections, 2.24 microsec. 405 PPS, 50 ohms imp.....$6.50
7.5E3-1-200-67P. 7.5 KV, "E" Circuit, 1 microsec 200 PPS, 67 ohms impedance, 3 sections.....$7.50
7.5E4-16-50, 67P, 7.5 KV, "E" circuit, 4 sections 16 microsec, 50 PPS, 67 ohms impedance.....$18.00
7.5E33-200-6FT, 7.5 KV, "E" Circuit, 3 microsec 200 PPS, 67 ohms imp. 3 sections.....$12.50

PULSE TRANSFORMERS

G.E.K.-2745.....$39.50
G.E.K.-2744-A, 11.5 KV High Voltage, 3.2 KV Low Voltage @ 200 KW peak (270 KW max.) 1 microsec, or 1/microsec. @ 600 PPS.....$39.50

TEST SETS

TS 102/AP
TS 62/AP
TS 36/AP
TS 12 UNIT 2
Q. METER
TS 69/AP
TS 33/AP
CW60-ABM
LU-1
LU-3
TS 159
TS 226
TS 250/APN
TS 89
I-203-A
TS II/AP
BC 438
CS60-ABW
I-158
I-222
I-185
TS 268/U

Send For Further Info. & Price Others

MICROWAVE TUBES

MAGNETRONS

Tube	Frq. Range	Pk. Pwr. Output	
2J27	2965-2992 mc.	275 KW	$25.00
2J31	2820-2860 mc.	265 KW	38.50
2J32-A	9345-9405 mc.	50 KW	32.50
2J22	3267-3333 mc.	265 KW	25.00
2J26	2992-3019 mc.	275 KW	37.50
2J32	2780-2820 mc.	285 KW	
2J38 Pkg.	3249-3263 mc.	5 KW	39.50
2J39 Pkg.	3267-3333 mc.	87 KW	39.50
2J49	9000-9160 mc.	58 KW	75.00
2J61	3000-3100 mc.	85 KW	75.00
2J62	2914-3010 mc.	35 KW	75.00
3J31	24,000 mc.	50 KW	85.00
3J30			
718DY	2720-2890 mc.	250 KW	35.00
720BY	2800 mc.	1000 KW	75.00
725-A	9345-9405 mc.	50 KW	50.00
738-A	9345-9405 mc.	50 KW	50.00
700	A, B, C, D		35.00
706	AY, BY, DY, EY, FY, GY		35.00

KLYSTRONS

723A	723A/B—2K25	726A

"CW" MAGNETRONS

QK 62	3150-3375 mc.
QK 59	2675-2900 mc.
QK 61	2975-3200 mc.
QK 60	2800-3025 mc.

New, Guaranteed.....Each $87.50

MANY OTHER TYPES AVAILABLE. SEND YOUR REQUIREMENTS.

Mail orders promptly filled. All prices F.O.B. New York City. Send money order or check. Only shipping sent C.O.D. Rated concerns send purchase order.

131 LIBERTY ST., Dept E10

ALL MERCHANDISE NEW YORK, N. Y.

EQUIPMENT CO. — SONAR



AN/APS-6-(AIA)

RT 17/APS-6 . . . A 3 C.M. package designed for aircraft interception . . . night fighter radar work for use with a conical scan antenna, pictured and described below. Package consists of 725A magnetron and magnet, 1B24 duplexer, 724 ATR, 723 A/B local oscillator and beacon oscillator, complete transmitter-receiver, RF plumbing, IF strip using 6AK5's and 6AL5's. Miniature tubes used throughout, enclosed blower, pressurized housing. A complete 3 CM RF package of the latest design, using miniaturized components.

Less recdring type tubes..... $425.

AN/APS-6-(AIA) Test Synchroscopes—WRITE



The AN/APS-6 SPIRAL SCAN ANTENNA

The AN/APS-6 (AIA) system imposes unusual requirements on the scanner. This radar is used for airborne detection of aircraft under blind conditions, and therefore requires a search over a solid angle in the forward direction. The beamwidth is about 5°.

The scan is spiral, and one turn of the spiral is described in 1/20 sec, which causes the plane of polarization to gyrate at this speed. The beam is made to spiral outward from 0° (straight ahead) to 60° and back again in 2 sec by the nodding of the antenna in relation to the yoke which forms the forward end of the horizontal main shaft. By throwing a switch the operator can halt the nodding of the antenna, which then executes a conical scan to permit accurate homing. A single motor, rated at 600 watts mechanical output, provides power for the nod and spin motions. The data takeoffs are a 2-phase sine-wave generator for the spin angle and a potentiometer for the nod angle, both being mounted on the main gear case to obviate the need of slip rings. The gear case is unusual in airborne practice in that it is oil-filled..... **$375**

POWER EQUIPMENT

50KW Diesel Generator

Delco Generator Mod. #1-3659

50KW 120 Volt DC 500 Amperes 1500 RPM

Stab Shunt wound 60° C Rise

Navy Spec. #17-C-7

Cummins Diesel

SBMH 63 Model HGD Eng. #45751

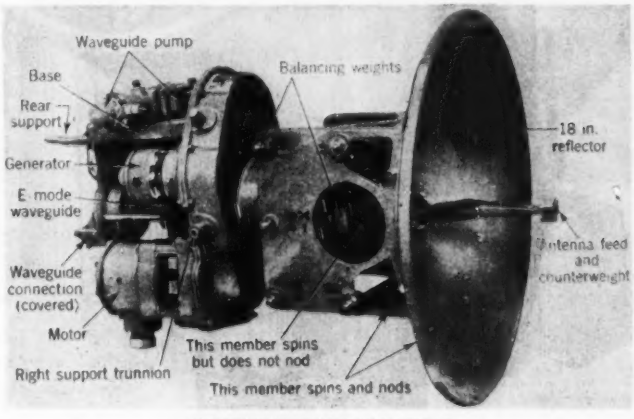

Photo reprinted by permission of Daime-Victor Co

RADAR SETS

APS-2, Airborne, 10 CM Major Units, New

APS-4, Airborne, 3 CM, Compl.

APS-15, Airborne, 3 CM, Major Units, New

SD-4, Submarine, 700 MC, Compl., New

SE, Shipboard, 10 CM, compl., New

SF-1, Shipboard, 10 MC, Compl., New

SJ-1, Submarine, 10 MC, Compl., Used

SL-1, Shipboard, 10 MC, Compl., Used

7.5 KVA Gasoline generator sets, Type PE99, 115 volts, 60 cycle, single phase AC, unused..... **$550.00**

115 Ampere circuit breaker, 1TE MODEL KJ..... **$15.00 each**

Stepdown Transformer, Pri. 440/220/110 VAC, 60 Cy. 3KVA, Sec., 115 Volts, 2500 volts insulation. Size 12" x 12" x 7". **$39.50**

Plate Transformer, Pri. 115V 60 Cy. Single phase AC Sec., 17,600 Volts @ 144 MA. Oil emmersed..... **$95.00**

VOLTAGE REGULATOR

Mfg. Raytheon: Navy CRP-301407: Pri: 92-138 v. 15 amps. 57 to 63 cy. 1 phase. Sec: 115 v. 7.15 amp. .82 KVA. .96 PF. Contains the following components:

Regulator Transformer: Raytheon UX9545. Pri: 92-138 v. 60 cy. 1 PH. Sec: 200/580 v. 5.55/5.26 amps. 400 c rms test.

Filter Reactor: 1.56 hy. 5 amps. 4000 v. Raytheon UX9547.

Transformer: Pri: 186 v. 5 amps; Sec: 115 v. 7.2 amps. Size, 12" x 20" x 29". Net wt. approx. 250 lbs. Entire unit is enclosed in grey metal cabinet. New, as shown..... **$99.50**

SN, Portable, 10 CM, Compl., Used
SQ, Portable, 10 CM, Compl., Used
SO-1, Shipboard, 10 CM, Compl., Used
SO-7, Portable, 10 CM, Assault Radar
SO-8, Shipboard, 10 CM, Compl., Used
Mark 4, Gunlaying, 800 MC, Less Ant., Used
Mark 10, Gunlaying, 10 CM, Compl., New
CPN-3, Beacon, 10 CM, Major Units, Used
CPN-8, Beacon, 10 CM, Complete New Less Ant., New
SCR-533, IFF/AIR, 500 MC, New
SCR-545, Early Warning Radar Trailer, Complete
SM Radar, 10 CM, Early Warning, Used

SCR 277 RANGE TRAILER

Trailer, consisting of a complete low frequency radio range installation, including portable tower, gasoline generator, communications equipment. This unit is standard and approved. Write for details and price.

GUARANTEED

Phone Main 4-8373-4-5-6

Mail orders promptly filled. All prices F.O.B. New York City. Send money order or check. Only shipping charges sent C.O.D. Rated concerns send purchase order.

P. J. PLISHNER

HARMAR HAS TRANSFORMERS...for a wide range of applications — civilian and military

CONTACT HARMAR, when you need transformers. From sample lots to production quantities, your order can be shipped *immediately*. And prices are reasonable.

Remember . . . when you deal with Harmar, you deal with principals — *Harmar owns every item it offers for sale.*

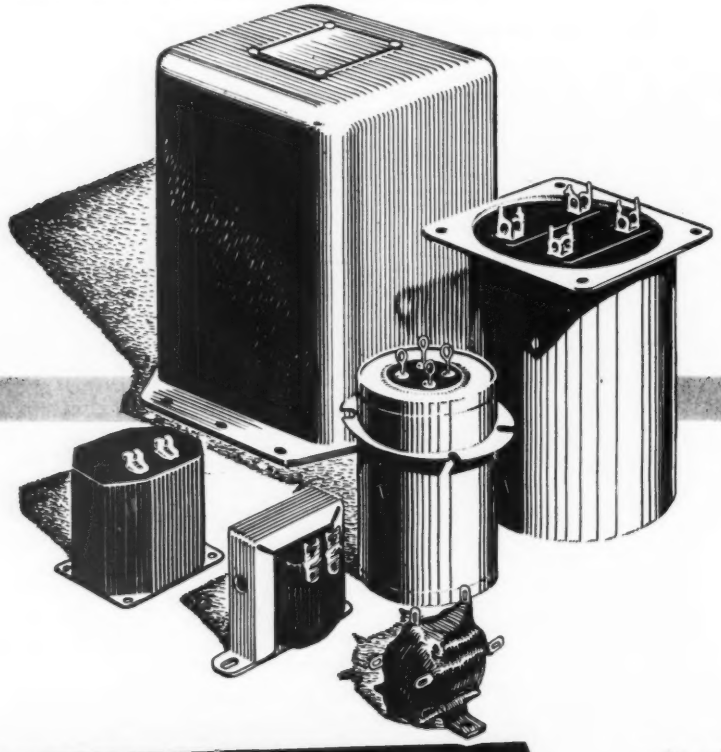

HARMAR *Company*

refer to our rating in Dun & Bradstreet

write, wire or phone:

242 Territorial Rd.
Benton Harbor, Mich.
• Phone: 5-7271

1003 Union Trust Bldg.
Cincinnati, Ohio
• Phone: Main 3155

ANTENNAS • RESISTORS • TRANSFORMERS • DYNAMOTORS • CONDENSERS • CABLES AND CORDS • SOCKETS • INSULATORS • TUBES METERS • CONTROLS • SWITCHES • JACKS • COILS • RECEIVERS • KEYS • HEADSETS • BREAKERS • RADAR • TRANSCEIVERS

RELAYS ARE OUR SPECIALTY WE HAVE OVER ~~200,000~~ 300,000

WE ALSO HAVE LARGE STOCKS OF:

APC'S	Crystals	Relays
Binding Posts	Filters	Registers
Cable	Fuses	Servo-Xfmrs.
Capacitors	Hardware	Shock-Mounts
Ceramicons	Iron Core Slugs	Sockets
Ceramics	Knobs	Spaghetti
Chokes	Potentiometers	Switches
Coils	(sine-cosine)	Transformers
Controls	Pulse Xfmrs.	Tubes
		And Others

MINIATURE RELAYS

GUARDIAN 6VDC, SPST n.o. 40 ohm, #R31 .98

23025 RBM 48VDC, SPDT, 8000 ohm, 6 ma #R428 1.50

ALLIED 24VDC, SPDT, 300 ohm, #R432 1.25

5525I TELECHRON, 24VDC, SPST n.o. (1A) 300 ohm, #R174 .90

55340 PRICE, 24VDC SPST n.o. (1A) 300 ohm #R170 .90

55342 TELECHRON, 24VDC. Makes 3 Breaks One, (2As, 1C) 300 ohm. Anti-Capacity Arms, Low Loss Bakelite Insulation #R171 1.25

55526 COOK, 24VDC. Makes 2, Breaks One, (1A, 1C) 300 ohm Ceramic Insulation, #R107 .95

55828 G.E. 12VDC, 6PST n.o. (6As), 150 ohm, #R426 1.50

55831 COOK, 12-24VDC. Makes 4, Breaks 2 (2As, 2Cs). 159 ohm #R405 1.25

55589 RBM, 24VDC, DPST n.o. (2As), 300 ohm, #R245 1.25

55836 G.E. 24VDC, SPDT, (2As), 250 ohm, #R402 ea. 1.25

55837 G.E. 24VDC. Double Make, 300 ohm, #R108G 1.00

55837 RBM. Same as #R108G, #R108B 1.25

55837 ALLIED. Same as #R108G, #R108 1.50

D163221 AMER. TOTALIZATOR, 24VDC, DPDT 300 ohms, Anti-Capacity Arms. #R134 1.25

GUARDIAN, 24VDC, SPST, n.o. 300 ohms, Anti-Capacity Arm. Ceramic Insulation, #R106 .59

23012-D RBM, 24VDC. SPDT, 250 ohms, #R172 1.25

7251 ARC 24VDC, SPDT, 300 ohm #R406 1.25

7252 ARC, 24VDC, DPST, n.o. (2As) 300 ohm, Anti-Capacity Arms, Ceramic Insulation, #R354 1.25

A13415 CLARE, 12VDC, DPST, n.o. (2As) 120 ohms, #R246 1.25

A21577 CLARE, 24VDC, DPST n.o. (2As) 250 ohms, #R352 1.25

P3 LEACH (Pair on Bakelite Strip) Each relay; 6VDC, SPDT, 125 ohms, #R353 pr. 2.25

ZM77628-I AUTOMATIC, 12VDC, Make One, Break Two (1B, 1C) 640 ohms Dual Telephone Type Contacts #R244 .85

7472679 G.E. 3VDC, SPST, n.c. (1B) 30 ohms, #R58A .59

2VDC SPDT, 125 ohms, #R173 .69

73A23 ALLIED, 24VDC. Make 3, Break 1, (2As, 1C) 300 ohms, #R403 ea. 1.25

TB 302 PRICE, 24VDC. Make 3, Break 1. (2As, 1C) 300 ohms, #R404 ea. 1.25

810059-11 CLARE, 24VDC, 4PDT, 300 ohm, #R426 1.50

RIO COOK, 12-24VDC, 3PST n.o. (3As), One contact 10A, 250 ohm, #R427 1.50

HI-VOLTAGE

GLASS TO METAL SEALS (FEED THRU)

MANY TYPES AND SIZES

Send us blueprints or samples for our Quotes

A. C. RELAYS

ALLIED B06AI15 110V 60Cyc, DPDT, 10A Contacts #R429 $ 3.40

ALLIED B04AI15 110V 60Cyc, DPST n.o. 10A Contacts #R430 2.40

LEACH 1154 50V 60Cyc, DPST n.o. 10A Contacts #R431 2.40

ABT C1070 110V 60Cyc, Coin Release Mechanism #R262 .69

GUARDIAN 24VAC, Makes, Breaks 1 (1A, 1C) 5A Contacts #R275 1.10

GUARDIAN 24VAC, SPST n.o. 5A Contacts #R274 .98

12VAC DPST, n.o. 5A Contacts #R275 ea. .98

CLARE, 110V 50-60 cyc. Makes 2 Breaks 1, Quick Acting, Octal Plug-in Base #R161 3.25

AUTOMATIC ELECTRIC CLASS F TYPE RA, 110V, 50-60 cyc. 4PDT Quick Acting #R159 4.49

AUTOMATIC ELECTRIC Similar to #R159 with KR51 Cover DPDT #R160 3.49

SOLENOIDS

B5A ALLEN BRADLEY 24VDC SPST 50A 100 ohms, #R105 $1.95

B5A HART Cat. #692R4 SPST 50 A, 150 ohms, #R105H 1.95

B5A SQUARE "D" 24VDC SPST 50A, 150 ohms, #R25 2.25

B5A CUTLER HAMMER 24VDC, SPST 50A, 100 ohms #R24 2.25

B4 AUTO LITE 24VDC, SPST 200A, 90 ohms, #R174 3.50

B4 HART M569A Cat. 692R19, 24VDC, SPST 200A, 25 ohms, #R127A 2.95

B3 CUTLER HAMMER 6041H139A, 24VDC, SPST 200A, 10 ohms, #R130 3.95

B3 AUTO LITE SPEC #32424A, 24VDC, SPST 200A, 6 ohms, #R128 2.75

D1 ECLIPSE D1EA 53528, 24VDC SPST 200A, 6 ohms, #R126 2.95

CUTLER HAMMER 6041H36A, 12VDC, SPST 200A, 17 ohms, #R121 3.95

D1 CUTLER HAMMER D1-9432181, 24VDC, SPST 200A, 50 ohms 3.95

LEACH 5030CSP, 12VDC, SPST 50A, 25 ohms, #R125 1.95

LEACH 79733, 24VDC, Dble Make & Break 50A, and SPST n.o., 65 ohms, #R131 2.50

G.E. 429896, Plastic Enclosed, 24VDC, SPST 50A, 150 ohms, #R23 2.95

G.E. CR2792D116W2 Plastic Enclosed, 12VDC, SPST 100A, 30 ohms, #R23B 5.50

EPCO S47D, 12VDC, SPST 30A, 35 ohms #R122 2.95

RBM BN5, 24VDC, SPST 50A, 200 ohms #R224 1.95

G.E. CR2800384A3, 24VDC, SPST, 200A, 50 ohms #R59B 3.95

G.E. CR9533K 100A2, 24VDC, 2 switchettes, DPST n.c. & SPST n.c. long throw #R132 9.95

GUARDIAN 34585 Dual Latching 24VDC en section: Double Make & Break & Alternate Double make, Break. 100A contacts, 24 ohms #R223 8.75

G.E. M29J682-1 (No contacts) 10-12VDC—Micalex Flipper Arm. Releases at 2VDC #R167 1.25

CUTLER-HAMMER 6041H158A, 12VDC, SPST n.o. 50A, 25 ohms #R428 1.9

12 LB TREASURE CHEST 12 LB

JUST THE THING FOR YOUR LAB!

12 lbs of miscellaneous ELECTRONIC PARTS—ALL GOOD—ALL USABLE—such AS RELAYS, CONTROLS, CAPACITORS, APORMERS, CHOKES, SWITCHES, RESISTORS, ETC. NO JUNK—NO MECHANICAL PARTS.

Worth many times the purchase price! Odd pieces left over from displays, samples, and quantity sales, closed out at fraction of value because of Ifficulty in stocking.

$2.00 $2.00

H-F TIE POST

Low-Loss Yellow Bakelite Insulation, pictured actual size (4-40 Thread) $7.50/C $60.00/M

Write Us Your Needs for Immediate Quote

Universal general corp.

324 Canal St. N. Y. 13 WA 5-9642

TELEPHONE TYPE RELAYS

107 COOK, 3-6VDC, 6 make, 1 break (5As, 1C), 12 ohm. Part of RC654. #R467 $ 2.95

5035A7 AUTOMATIC, 1300 ohm, 8MaDC, SPST n.o. (1A). #R103 1.25

AI8256 BENDIX (Cook 102) 8-12VDC, Copper Slug, Slow Release, SPDT, 200 ohm, Part of SCR 522. #R365 2.49

P32505 STROMBERG-CARLSON 12VDC, SPDT n.o. (2As), 200 ohm, Anti-vibration contacts. Part of ARK. #R92 1.49

P32504 STROMBERG-CARLSON 6VDC, SPST, n.o. (1A), 100 ohm, **Anti-vibration** contacts. #R92 1.49

R5229A1 AUTOMATIC 6VDC, 3PST n.o. (3As), 75 ohms, Slow Release, #R412 2.50

R5021A1 AUTOMATIC 1300 ohm, 20maDC, SPST n.c. (1B), #R413 2.95

SHORT TELEPHONE RELAYS

A11996 CLARE (H77519-1) 24VDC, 3PST n.o. (3As), 2000 ohm, #R94 $ 1.75

6385 ARC 12VDC, SPST n.o. (1A), 10A contact, 200 ohm, Part of **ARC5** or SCR 274N. #R13 1.50

C58180 BENDIX, 12VDC, DPDT & SPST n.c. (2C, 1B) 150 ohm. **Part of SCR522.** #R58 2.00

A22268 CLARE, 12VDC, SPST n.o. (1A), 200 ohm, #R411 1.50

5586 W.E., 12-24VDC, SPST n.o. (1A), 300 ohm, #R414 1.25

D.C. SENSITIVE PLATE RELAYS

W.E. (Whelock) KS9665-RX956 2000 ohm, 8 ma. Makes 2, Breaks 2 (1A, 1B, 1C) #R426 4.95

KURMAN 1500 ohm, 12 ma, SPDT, Small Compact #R427 .98

KURMAN 3300 ohm, 7 ma, Makes 3, Breaks 1 (3A, 1B) Long Telephone Type #R243 2.95

AUTOMATIC 5035A7 1300 ohm, 8 ma, SPST n.o. Long Telephone Type #R102 1.25

CLARE K102 3500 ohm, 6 ma, SPDT, Short Telephone Type #R30 3.49

DUMONT 5000 ohm, 5 ma, SPST n.o. #R239 .98

RBM 23025 8000 ohm, 6 ma, SPDT #R428. 1.50

SIGMA TYPE 4F 8000 ohm, SPDT (1C). Can be adjusted to operate on 0.5 ma, #R425 $3.98

ALLIED RELAYS

			Each
B06D40	77VDC, DPDT, 2380 ohm	#R356	$2.25
B013D35	24VDC, SPST, double make, 240 ohm	#R06	1.25
B09D28	6VDC, 3PDT, 14 ohm	#R225	2.25
BJ6D36	24VDC, DPDT, 255 ohm	#R420	1.85
BJX-42	12or24VDC, SP DPLE break, 240 ohm C.T.	#R226	1.25
55837	24VDC, Double make, 300 ohm	#R108	1.50
B01335	24VDC, Double make & Break 240 ohm	#R238	1.30
B01332	12VDC, 80 ohm, Coil & Frame only (no contacts)	#RC358	.40
B0YX3	1VDC, SPST, n.o. 1 1/2 ohm	#R35	1.50
B0Y13D	20VDC Double make & break 550 ohm	#R360	1.95
AR	12VDC, SPST n.o. 75 ohm	#R429	1.00
B04A115	110V 60 Cyc, DPDT, 10A Contacts	#R429	3.49
B04A115	110V 60Cyc, DPST n.o. 10A Contacts	#R430	2.49
B0Y6D42	87VDC, DPDT, 10,000 ohm, 9 ma, 10A Contacts	#R433	3.49
BN12D34	24VDC, 4PDT, 277 ohm, 10A Contacts	#434	3.49
BJU (Electrical Latching)	6VDC, 4PDT, 16 Ohm ea. Coil, Dustproof Shield, 11 Pin Plug-Base	#R435	6.95
AN13D33	24VDC, SPST n.o., 175 ohm, 50A Contacts (Electrical & Mechanical Specifications Identical to CN13D33)	#R436	1.95
SRH-CC-CC38	18-24VDC, 4PDT, 680 ohm, Hermetically Sealed	#R437	3.95

DIFFERENTIAL 803476 **DUAL** 8000 ohm 2.5 ma. coils, Armature pivoted between poles, all contacts normally open, SPDT 5A, contacts Hi-speed, Suitable for P.P., bridge or balanced circuits where differential action is required #R362 $4.95

TERMS

PRICES FOB OUR PLANT. Min. Order $5.00

So much depends on
QUALITY
IN
POTENTIOMETERS,
RESISTORS, CONDENSERS
WHY NOT BUY THE BEST?
KNOW – Most widely used
JAN approved components
Call us about it - ACademy 2-0018
LEGRI S COMPANY
158 W. 99th St., New York 25, N. Y.

DISCOUNTS AND SAVINGS OF 25 - 40 - 60 %

INSERTS AVAILABLE AT THIS TIME

8S-1P	16S-8P	18-23S	20-24P	22-23S	24-684P	28-745S	32-2S
8S-1S	16S-8S	18-24P	20-24S	22-24P	24-684S	28-840P	36-7P
10S-2P	16-15P	18-24S	20-25P	22-24S	24-691P	28-840S	36-7S
10S-2S	16-15S	18-25P	20-25S	22-27P	24-691S	28-852P	36-8P
10SL-3P	16-16P	18-25S	20-26P	22-27S	24-710P	28-852S	36-8S
10SL-3S	16-16S	18-26P	20-26S	22-30P	24-710S	32-1P	36-9P
10SL-4P	16-2P	18-26S	20-27P	22-30S	28-1P	32-1S	36-9S
10SL-4S	16-7P	18-27P	20-27S	22-32P	28-1S	32-3P	36-10P
10SL-656P	16-7S	18-27S	20-28P	22-32S	28-2P	32-3S	36-10S
10SL-656S	16-9P	18-28P	20-28S	22-36P	28-2S	32-5P	36-11P
12S-1P	16-9S	18-28S	20-29P	22-36S	28-3P	32-5S	36-11S
12S-1S	16-10P	18-29P	20-29S	24-1P	28-3S	32-6P	36-12P
12S-2P	16-10S	18-29S	20-30P	24-1S	28-4P	32-6S	36-12S
12S-2S	16-11P	18-30P	20-30S	24-2P	28-4S	32-7P	36-14P
12S-3P	16-11S	18-30S	22-1P	24-2S	28-5P	32-7S	36-14S
12S-3S	16-12P	18-31P	22-1S	24-3P	28-5S	32-8P	36-15P
12S-4P	16-12S	18-31S	22-2P	24-3S	28-7P	32-8S	36-15S
12S-4S	16-13P	20-1P	22-2S	24-4P	28-7S	32-9P	36-16P
12-5P	16-13S	20-1S	22-3S	24-4S	28-8P	32-9S	36-16S
12-5S	18-1P	20-2P	22-4P	24-5P	28-8S	32-10P	36-17P
12S-6P	18-1S	20-2S	22-4S	24-5S	28-9P	32-10S	36-17S
12S-6S	18-2P	20-3P	22-5P	24-6P	28-9S	32-13P	36-18P
14S-1P	18-2S	20-3S	22-5S	24-6S	28-10P	32-13S	36-18S
14S-1S	18-3P	20-4P	22-6P	24-7P	28-10S	32-14P	36-19S
14S-2P	18-3S	20-4S	22-6S	24-7S	28-11P	32-14S	36-20P
14S-2S	18-4P	20-5P	22-8P	24-9P	28-11S	32-16P	36-21P
14S-4P	18-4S	20-5S	22-8S	24-9S	28-12P	32-16S	36-21S
14S-4S	18-5P	20-6P	22-9P	24-10P	28-12S	32-18P	36-646P
14S-5P	18-5S	20-6S	22-9S	24-10S	28-13P	32-18S	36-697P
14S-5S	18-6P	20-7P	22-10P	24-11P	28-13S	32-19P	36-697S
14S-6P	18-6S	20-7S	22-10S	24-11S	28-14S	32-19S	36-799P
14S-6S	18-8P	20-8P	22-11P	24-12P	28-15P	32-20P	36-799S
14S-7P	18-8S	20-8S	22-11S	24-12S	28-15S	32-20S	40-1P
14S-7S	18-9P	20-9P	22-12P	24-15P	28-16P	32-101P	40-1S
14S-9P	18-9S	20-9S	22-12S	24-15S	28-16S	32-101S	40-2P
14S-9S	18-10P	20-10P	22-13P	24-16P	28-17P	32-102P	40-6P
14S-10P	18-10S	20-10S	22-13S	24-16S	28-17S	32-102S	40-9P
14S-10S	18-11P	20-11P	22-14P	24-18P	28-18P	32-722P	40-9S
14S-11P	18-11S	20-11S	22-14S	24-18S	28-18S	32-722S	40-11P
14S-11S	18-12P	20-12P	22-15P	24-19P	28-19P	32-810P	40-11S
14S-12P	18-12S	20-13P	22-15S	24-19S	28-19S	32-810S	40-13P
14S-12S	18-13P	20-13S	22-16P	24-20P	28-20P	32-811P	44-1P
14-3P	18-13S	20-14P	22-16S	24-20S	28-20S	32-811S	44-1S
14-3S	18-16P	20-14S	22-17P	24-21P	28-21P	36-1P	44-2P
16S-1P	18-16S	20-15P	22-17S	24-21S	28-21S	36-1S	44-2S
16S-1S	18-17P	20-15S	22-18P	24-24P	28-684P	36-2P	44-4P
16S-3P	18-17S	20-16P	22-18S	24-24S	28-684S	36-2S	44-4S
16S-3S	18-18P	20-16S	22-19P	24-25P	28-693P	36-3P	44-5P
16S-4P	18-18S	20-17P	22-19S	24-25S	28-693S	36-3S	44-5S
16S-4S	18-20P	20-19S	22-20P	24-26P	28-695P	36-6P	44-6P
16S-5P	18-20S	20-20P	22-20S	24-26S	28-695S	36-6S	44-6S
16S-5S	18-22P	20-20S	22-21S	24-28P	28-702P	22-3P	44-9S
16S-6P	18-22S	20-23P	22-22P	24-28S	28-702S	28-6P	48-1P
16S-6S	18-23P	20-23S	22-22S	24-28S	28-745P	32-2P	48-3S

3108-B

AN 3108-A

AN 3106

AN 3102

AN 3101

AN 3100

AN 3057

SPECIAL ATTENTION GIVEN TO "DO" ORDERS

DAVID GREENBERG

99 MURRAY ST., N. Y. C. TEL. WORTH 2-7423

BRAND NEW – GUARANTEED – SURPLUS – METERS ! !

R. F. AMMETERS

1.5 **AMP.** GENERAL ELECTRIC DW-52, 2½" round flush metal black scale..... @ $3.50
2 **AMPS.** WESTON 425, 3½" round flush bakelite case..... @ $8.50
2.5 **AMPS.** WESTON 425, 3½" round flush bakelite case..... @ $8.50
2.5 **AMP.** SIMPSON 35, 3½" round flush bakelite case..... @ $5.50
3 **AMPS.** WESTON 425, 3½" round flush bakelite case, with external thermocouple..... @ $9.50
3 **AMPS.** WESTINGHOUSE NT-35, 3½" round flush bakelite (JAN type MR35W00WRFAA) ..... @ $6.50
5 **AMPS.** GENERAL ELECTRIC DO-44, 3½" round flush bakelite case..... @ $7.50
5 **AMPS.** GENERAL ELECTRIC DO-44, 3½" round flush bakelite case with external thermocouple ..... @ $8.50
6 **AMPS.** GENERAL ELECTRIC DW-44, 3½" round flush bakelite case, black scale... @ $4.50
8 **AMPS.** GENERAL ELECTRIC DW-52, 2½" round flush bakelite case (JAN type MR25-W00SRLAA) ..... @ $3.95
10 **AMPS.** WESTON 425, 3½" round flush bakelite case, MR35W010RFAA ..... @ $9.50

D. C. VOLTMETERS

30 **VOLTS.** GRUEN 250M, 2½" round flush metal case..... @ $3.50
75 **VOLTS.** GENERAL ELECTRIC DO-40, 3" round non-flanged, ring mounted flush bakelite case, 1000 ohms per volt..... @ $4.95
5/125 **VOLTS.** DUAL RANGE, WESTON 506, 2" round flush metal, ring clamp mounted (non-flanged) approx. 125 ohms per volt, plus button for high range ..... @ $4.00
150 **VOLTS.** GENERAL ELECTRIC DO-53, 3" square flush bakelite case..... @ $7.50
150 **VOLTS.** GENERAL ELECTRIC DO-41, 3½" round flush bakelite case, 1000 ohms per volt..... @ $7.50
150 **VOLTS.** HOYT 17-L, 3½" round flush metal case, red line at 110 volts..... @ $6.00
300 **VOLTS.** SUN 2AI380, 2½" round flush bakelite case, 1000 ohms per volt, (JAN type MR25W-300DCVV) ..... @ $7.00
500 **VOLTS.** WESTON 506, 2½" round flush bakelite case, 1 MA movement complete with Weston type 8, external resistor box (JAN type MR25W500DCVV) ..... @ $9.50
750 **VOLTS. WESTINGHOUSE** NX-35, 3" round flush bakelite case, 1 MA movement complete with external resistor..... @ $8.95
2 **KILOVOLTS,** GENERAL ELECTRIC DO-53, 3" square flush bakelite case, 1 MA movement complete with 1000 ohms per volt precision ferrule-type multiplier ..... @ $10.95
4 **KILOVOLTS,** DEJUR AMSCO # 310, 3½" round flush bakelite case, 1 MA movement.... @ $4.50

D. C. MILLIAMMETERS

2 **MILLIAMPS,** WESTINGHOUSE NX-35, 3½" round flush bakelite case (JAN MR35W002DCMA) ..... @ $5.50
3 **MILLIAMPS,** GRUEN GW-587, 2½" round flush bakelite case, scale calib. 30 & 450 MA and 3000 volts..... @ $3.50
5 **MILLIAMPS,** SIMPSON, 2" square flush bakelite case, special scale with red mark at 3, caption "Volts" ..... @ $3.50
5-0-5 **MILLIAMPS,** WESTERN ELECTRIC D-165647, 2½" round flush bakelite case, concentric style movement approx. 160° deflection, scale calib. 50-0-50 ..... @ $4.00
15 **MILLIAMPS,** GENERAL ELECTRIC DO-58, 4" x 4½" rectangular flush bakelite case @ $4.95
15 **MILLIAMPS,** SIMPSON 28, 3½" round flush bakelite case (JAN type MR25W015DCMA) ..... @ $6.00
20 **MILLIAMPS,** GENERAL ELECTRIC DO-53, 3" square flush bake case ..... @ $5.50
25 **MILLIAMPS,** GENERAL ELECTRIC DO-41, 3½" round flush bake case..... @ $5.50
113 **MILLIAMPS,** BURLINGTON, 31 B, 3½" round flush bakelite case, special 3 color scale, no calibrations, caption "Power Indicator"... @ $3.00
150 **MILLIAMPS,** GENERAL ELECTRIC DO-41, 3½" round flush bake case..... @ $5.50
150 **MILLIAMPS,** THIPLETT, 3" square flush bake case, black scale ..... @ $3.95
150 **MILLIAMPS,** GRUEN 508, 2½" round flush bakelite case..... @ $3.95
150 **MILLIAMPS,** ELECTEL # 350, 3½" round flush bakelite case made by Elect. Div. of US Time Corp. ..... @ $4.00
150 **MILLIAMPS,** BEEDE, 3½" round flush bakelite case ..... @ $4.00
200 **MILLIAMPS,** MARION, 3½" round flush bakelite case, knife edge pointer..... @ $4.00
200 **MILLIAMPS,** SIMPSON 28, 3½" round flush bakelite case (Jan type MR35W200DCMA) ..... @ $5.95
300 **MILLIAMPS,** GRUEN GW-529, 3½" round flush bakelite case (JAN type MR35W300DCMA) ..... @ $4.95
500 **MILLIAMPS,** DEJUR AMSCO 312, 3" square flush bakelite case..... @ $5.00
800 **MILLIAMPS,** DEJUR AMSCO # 310, 3" round flush bakelite case S. C. # 2F980..... @ $4.50
1000 **MILLIAMPS,** WESTERN ELECTRIC D-55049, 3½" round flush bakelite case, concentric style movement with 190° scale length..... @ $4.00

D. C. AMMETERS

1 **AMP,** WESTINGHOUSE NX-35, 3½" round flush bakelite case (JAN type MR34W001DCAA) ..... @ $6.00
5 **AMP,** GENERAL ELECTRIC DO-40, 3" round, non-flanged, ring mounted flush bakelite case ..... @ $4.95
10 **AMP,** GENERAL ELECTRIC DO-40, 3"round, non-flanged, ring mounted flush bakelite case ..... @ $4.95
30 **AMPS,** GENERAL ELECTRIC DW-51, 2½" round flush bakelite case (JAN type MR24W030-DCAA) ..... @ $4.50
30-0-30 **AMPS.** GENERAL ELECTRIC DW-51, 2½" round flush metal case ..... @ $4.50
50-0-50 **AMPS,** GENERAL ELECTRIC DO-41, 3½" round flush bakelite case, black scale, with lum. markings ..... @ $5.50

A. C. AMMETERS

0-3 **AMPS,** SIMPSON 55, 3½" round flush bakelite case ..... @ $8.10
0-10 **AMPS,** SIMPSON 55, 3½" round flush bakelite case ..... @ $8.10
100 **MILLIAMPERES,** WESTON 476, 3½" round flush bakelite case, 400 cycles..... @ $7.50
150 **MILLIAMPERES,** GENERAL ELECTRIC AO-22, 3½" round flush bakelite case..... @ $5.50
250 **MILLIAMPERES,** GENERAL ELECTRIC AW-41, 2½" round flush bakelite case. Made for Daco, red blocking on scale..... @ $3.50

A. C. VOLTMETERS

8 **VOLTS,** WESTON 476, 3½" round flush bakelite case ..... @ $8.50
15 **VOLTS,** WESTINGHOUSE NA-35, 3½" round flush bakelite case, (JAN MR35W015ACVV) ..... @ $8.50
40 **VOLTS,** WESTINGHOUSE NA-33, 2½" round flush metal case, black scale lum. markings, calib. for 400 cycles..... @ $3.50
40 **VOLTS,** WESTINGHOUSE NA-35, 3½" round flush metal case, black scale lum. markings. (These were originally calib. for 400 cycle use but have been adjusted for 60 cycle)..... @ $3.95
75 **VOLTS,** WESTON 517, 2" round flush metal case, ring-clamp type mtg. non-flanged.. @ $3.50
300 **VOLTS.** BURLINGTON 23A, 2½" round flush metal case ..... @ $6.00
300 **VOLTS,** THIPLETT 232-C, 2½" round flush metal case ..... @ $6.00

We specialize in electrical instruments. Over 75,000 meters in stock. Send for our latest circular showing our complete line of Surplus-New-Guaranteed meters.

MARITIME SWITCHBOARD
338 Canal St., N. Y. 13, N. Y.
Worth 4-8217

Orders accepted from rated concerns, public institutions and agencies on open account, others please send 25% deposit, balance C.O.D. or check with order. All prices FOB our warehouse, N.Y.C.

REVERSIBLE REMOTE CONTROL DRIVE

A.C. motor driven unit designed for "lazy man" control of 1951 Zenith TV. Operates from 115 volts 60 cycle; has self incorporated transformer permits low voltage control leads. Includes attractive plastic hand grip switch with black & white control buttons, one for each direction. Motor drives worm gear which is moved against a nylon gear by solenoid. Made this way so that TV set could be tuned manually. Output to ¼ inch shaft is approximately 4½ RPM. Intermittant duty. Includes 17 feet three wire control cable with plug. Brand New. ACT NOW! Our limited supply going fast at $10.95

COAXIAL CONNECTORS

J 201	$4.50	UG85/U	$.60
M358	1.30	UG87/U	.60
M359	.35	UG88/U	1.50
PL258	.70	UG89/U	1.50
PL259A	.50	UG105/U	1.25
PL274	1.30	UG106/U	.10
SO239	.45	UG173/U	.35
UG9/U	.60	UG175/U	.18
UG12/U	.60	UG176/U	.18
UG21/U	.60	UG260/U	1.50
UG27/U	.60	UG275/U	4.50
UG28/U	2.00	UG290/U	1.50
UG58/U	.60	UG203/U	.45

HAROLD H. POWELL
2102 MARKET ST.
PHILADELPHIA 3, PA.
WITHIN FOUR BLOCKS OF B&O AND PENNSYLVANIA STATIONS
PHONE LOCUST 7-5285

EAGLE ADJUSTABLE TIME DELAY RELAY, 110 volt 60 cy with double throw Micro Switch. Can be set from 1½ to 58 minutes. Includes attractive 3¼ x 4½ x 2¾ black cover. Made to sell for $26. SALE PRICE $6.95

DELAY LINE 15-E4-91-400 Sprague #892-5245, H623, 4x5x7 inch oil filled with 3½ inch insulators, 0.91 Microsecond, 15KV..... $9.90

PULSE FORMING LINE, Millen flex ible type, 25⅛ inches long, form 2 microsecond pulses, Zo-1000 ohm, our #288 ..... $3.75

PULSE TRANSFORMERS

7P26, Westinghouse $4.50
9C1756-501, RCA, 15/16 dia. x 1⅜" high, 165 turns on primary, 330 turns secondary, core is ¾" stack of .007 inch "F" laminations. Magnetic Metals Co. Audio 58, used to form 2.5 microsecond pulses, 1744 in stock $1.50
9C1756-502, RCA, same core & can as 501, 100 to 200 turns, used to form 2.2 microsecond pulses. 870 pieces in stock $1.50
A117012, Bendix, 1 ⅝ x 1 7/16 x 1 13/16" can, nine terminals, Hypersil core $1.50
C12A-1318, Jefferson, 50 millihenry & 10 millihenry, 2¾ x 3 x 3¼ $1.95
D161310, WE frequency response 50Kc to 4 Mc. Video input, 120 to 2250 ohm. Perm. core..... $2.50

K2468B, GE Magnetron pulsing bifilar 250KVA peak power at ¾ microsecond pulse, 1000 D' duty cycle, 3.85 KV into 50 ohm pulse cable socket gives 17.3 KV to built-in Mag. socket. Only 31 in stock. Cost $223. SALE PRICE $18.00

CONVERTER, Electronic Labs Model 1485, 26 VDC input, 115 volts, 60 cy, 70 watts output, complete with NSU 1341 vibrator $9.95

CHOKE, Conservatively rated 165 MA, 5 Henries, 160 ohm dc. 2 Inch High, 3 ⅝" Mtg. Cvr. Worth $3. SALE PRICE 81 cents. #1A-158.

UTAH X124T3 TYPE PULSE TRANSFORMERS

UTAH 9287D

Windings: three
D.C. res: 4.2, 4.4, 4.8
Ω tot. pri. 3.2 mh
true pri. 1.6 mh
...kage 17 micro H
Dist. capacitance between windings: 90
To: 430 ohms
Turns: 100
Cores: 16 strips .002" hypersil wound in three turns
Optimum pulse width: 0.9 microseconds
Sharpest pulse: (B.O.) 0.25 microseconds
Write for prices, giving exact quantity required.

HIGH VOLTAGE GLASS-METAL SEAL

10¢ each. $7.50 per 100. $65 per 1000

AN CONNECTORS

Over 2500 Different Types in Stock— See June Electronics for Price Schedule, Page 311

POWER POTENTIOMETERS

Ohm	Watt	Bushing	Shaft	Cat. No.	Price
2	25	5 8S	1 8SD	O-H	$1.04
3-3	25	1 2	1 2	I	1.04
15	25	3 8	1"	C	1.04
15	25	5 8	1 1 8	D-245	1.04
15	25	1 2	1 1 4	D-1	1.04
20	25	1 2	1 2F	D-245	1.04
25	25	1 2	1 2F	C	1.04
25	25	3 8	1"	D-245	1.04
25	25	1 2	3 8S	I	1.04
30	25	3 8	1"	C	1.04
50	25	5 8	1 1 8	D-245	1.04
50	25	5 8	1 8SD	O-H	1.04
75	25	1 2	7 16	O-H	1.04
100	25	3 8	1"	D-245	1.04
100	25	1 2	1 2	H	1.04
350	25	3 8	1 1 8	O-H	1.04
500	25	3 8	11 16	D-245	1.04
500	50	3 8	7 16F	O-J	1.24
1K	25	1 2	1 2	O-H	1.17
3K	25	3 8	1 3 16	D-245	1.20
5K	25	1 2	1 8SD	I	1.24
5K	25	3 8	7 8FS	D-245	1.24
20K	25	1 2	1 8SD	D-245	1.40

10 AMPERE FILTER

60 db att. .15 to 30 Mcs. permalloy core. D170738 ..... $3.00

SERVO MOTOR

400 cy 2 phase, 40:1 gear train, low inertia 10047-2A $12.50

Buy TOP Radio-Electronic Values!

TRANSMITTING MICA CAPACITORS

Stock No.	Cap.	Test Volts	Fig.	Type No.	Price Each
5493A*	.01	1000	B	1445	35¢
5494A	.02	1000	B	1445	30¢
5495A	.006	1200	A	A 2	35¢
5496A	.0001	1500	C	BE 15	20¢
5497A	.0005	1500	C	BE 15	20¢
5498.1	.004	2500	B	4	40¢
5499A	.001	5000	A	F	40¢
5600A	.0036	5000	A	A2	60¢

*Supplied with Meter Bracket

Standard Brand. MFR. Name on Request

TRANSMITTING MICA CAPACITORS

5601A	.15	1000V	E	XS	90c
5602A	.00007	2500V	E	3	90c
5603A	.00005	3000V	E	15L	1.00
5604A	.0001	5000V	E	F2L	1.00
5605A	.0008	5000V	E	F2L	1.00
5606A	.000025	10,000	D	PL-341	1.95
5607A	.00015	10,000 D.C.W.	F	PL-315	7.95

Standard Brand. MFR. Name on Request

OIL FILLED CONDENSERS

Stock No. 5134A

1 MFD—4000 VOLT For BC-610. 2 Ceramic Insulated Screw Terminals 3⅜" x 3⅛" x 6½" High Can. ..... **$4.95 ea.**

.045 M F D.—16,000 Volt Vitamin "Q". One Ceramic Insulator Screw Terminal 1¾" x 3⅛" x 4½ High Can.
Stock No. 5199A **$4.95 ea.**

OIL FILLED BATHTUB CONDENSERS



Stock No.	Capacity & Voltage	Lug Arrangement	Type No.	Price Each
5166A	.01–600V	Side	306-91	10¢
354A	.05–600V	Top	XDMRTWG	15¢
5167A	.1–600V	Side	306-357	20¢
544A	3 x .1–400V	Side	DYR 6111	25¢
2908A	2 x .02–600V	Top	DYR 600 22	15¢
2911	2 x .1–600V	Top	DYR 6011	25¢
5172*	2 x .1–600V	Top	306-361	25¢

* Can is common ground—Other types and sizes available

Standard Brand. MFR. Name on Request

STRIP HEATERS

Stock No. 5492 A — Price each **95¢**

24 Volt—150 Watt Chromalox Strip Heaters. Manufactured by E. L. Wiegand Co., 1½" x 12" x ⅝" thick.

Standard Brand. MFR. Name on Request



ART–13 RELAYS

Circuit Control Relay K-105. Used in output of 813 Final. Micalex Insulation. 28 V.D.C. Coil. Collins Part No. 410-1800-00. Stock No. 5487 A

Each **$4.95**



Autotune Motor Control Relay K-101 3 P.D.T. Contacts. 28 Volt Coil. Collins Part No. 405 N B 201. GM Type J. Stock No. 5485 A — each **$1.75**



SOLENOID CONTACTORS

200 Amp. S.P.S.T. Normally Open Contacts

Stock No.	Mfg & No.	Voltage	Resistance	Price Each
4101 A	Leach 7220.32	32VDC	234 OHMS	$4.00
4102 A	Leach 7220.24	24VDC	139 OHMS	4.00
4103 A	Leach 7220.3.24	24VDC	139 OHMS	4.00
4104 A	Guardian 3 3804 B78	24VDC	139 OHMS	4.00

50 Amp. S.P.S.T. Normally Open Contacts

5358 A Allen Bradley X101147 D.P.S.T. N.O. D.B. 24 VDC 60 OHMS **$1.95**

5489 A Leach 7064-12C S.P.S.T. N.O. D.B. 12 VDC 40 OHMS **$1.95**



MISCELLANEOUS RELAYS

Stock No.	Manufacturer and Mfg. No.	Contacts	Voltage	Coil Resistance	Price
563A	Automatic Electric R-25	S.P.S.T. Handle 2 Amp	12 VDC	75 OHMS	$.95 ea.
4210A	Guardian TC-195	4 P.D.T.	10 VDC	5 OHMS	1.75 ea.
4213A	2 Poles N.O.; 2 Poles N.C. C.P. Clare A20545	Slow Acting-Copper Slugged—1.5 AMP Contacts S.P.S.T. N.C. 4 insulated leads with solder lugs	12 VDC	45 OHMS	95 ea.
5483A	Automatic Electric R-22	D.P.D.T. & S.P.S.T. N.O.	12 VDC	40 OHMS	1.25 ea.
5484A	G.M. Type 27 Cat. #12957-1	3 P.D.T.	28 VDC	150 OHMS	1.50 ea.
5488A	Leach 1024	D.P.S.T. N.O.	12 VDC	95 OHMS	1.50 ea.
5489A	Guardian 35935 & Automatic Electric R-30	5 P.D.T.	20-30 VDC	100 OHMS	1.50 ea.
5490A	Ward Leonard 13L21	Magnetic Relay	48 VDC	600 OHMS	2.50 ea.
5491A	Guardian G38273	D.P.S.T.	28 VDC	125 OHMS	1.50 ea.
5259A	G.E. K—275849	S.P.S.T. D.B. N.O.	12 VDC	70 OHMS	75 ea.
102248A	Automatic Electric R-45 operates continuous duty on 6 VDC	S.P.D.T. & S.P.S.T.	24 VAC Intermittent	25 OHMS	60 ea.

ECLIPSE VOLTAGE REGULATOR

5608A — Bendix, Eclipse V.R. 1365 Model 2 style A — volts set at 115 — **$4.95 ea.**

AMPHENOL & CANNON CONNECTORS & FITTINGS

Stock No.	Price Each	Stock No.	Price Each
AN-3102-12-5P	30¢	AN-3060-6	15¢
AN-3102-145-7P	40¢	AN-3050-20	10¢
AN-3102-165-1P	45¢	AN-3057-24	50¢
AN-3102-20-8P	70¢	GK-C3-328-VAR3	15¢
AN-3102-36-1P	1.25	GK-9-328*	20¢
AN-3102-36-18	1.50	GK-12-328	25¢
AN-3102-28-20S	1.20	FK-L15-23 ¾" B	45¢
AN-3102-16-6S*	40¢	FK-10-328 VAR2	50¢
97-3106-22-10P**	50¢	SK-C16-328	25¢
97-3106-195-POS 2	50¢	RWK-59A-1	25¢
AN-3108-16-10P	90¢	DP-C6-34	25¢
AN-3108-20-4P	1.15	DP-C8-34	25¢
AN-3053-8	.05¢	DP-CB-33	25¢

* Insulated Leads w/ Solder Lugs—Cap & Chain attached.
** Cable Clamp Included

6.3 VOLT FILAMENT TRANSFORMERS

Stock No. 5254 A

Three 6.3 Volt Secondaries
115 Volt—
60 Cycle Primary
1600 Volt Insulation

6.3 Volts @ 4.9 Amps.
6.3 Volts @ 4.3 Amps.
6.3 Volts @ 1.1 Amps.

Each Price **$2.65**

Horizontal Half Shell Mounting. 2¼" x 2 13/16" Mounting Centers. 2 13/16" x 3⅛" Core Size. 2½" above Chassis. Solder Lug Terminals—All Terminals Marked.

WRITE FOR SPECIAL LISTING OF SIGNAL CORPS AND NAVY TRANSFORMERS, CHOKES AND SPECIAL ITEMS. THIS INCLUDES WESTERN ELECTRIC, GENERAL ELECTRIC AND OTHER WELL KNOWN MANUFACTURERS' PART NUMBERS. COMPLETE INFORMATION AS TO SPECIFICATIONS AND CHARACTERISTICS.

Radio Surplus Corp.

732 South Sherman Street
Chicago 5, Illinois
Phone: HArrison 7-5923

COMPASS

COMMUNICATIONS COMPANY
393 GREENWICH STREET
NEW YORK 13, N. Y.

BEekman 3-6510
CABLE ADDRESS: COMPRADIO

We carry in stock six floors of:

- **RADAR** *Marine, Ground & Airborne*
- **SONAR**
- **TRANSMITTERS** *from 25 watts to 5 kilowatts*
- **RECEIVERS**
- **BEACONS**
- **LORAN**
- **RADIOTELEPHONES**
- **TELEPHONE EQUIPMENT**
- **TUBES** *New, Standard Brands Only* —*MAGNETRONS* —*KLYSTRONS* —*TRANSMITTING and other Special Purpose Tubes*
- **CONVERSION EQUIPMENT** —*MOTOR GENERATORS* —*CONVERTORS* —*DYNAMOTORS* —*INVERTORS* —*POWER SUPPLIES* —*RECTIFIERS*
- **TEST EQUIPMENT** *Portable and Stationary Switchboards and Supplies*

Special Lots of Equipment

100—Sets—mobile ground station, **model SCR-284**
100—Switchboards, portable, 12-line, **model BD-72**
125—Switchboards, portable, 6-line, **model BD-71**
100—Receiver, direction finder, complete, **model MN-26**
12—Shipboard Transmitters, 115 and 230 V dc, **model TDE**

TRANSMITTING STATIONS

1 KW—200-500 kcs, complete with 440 volt, 3 ph. 50-60c. power supply **Price $2,500.00**

800W—(400 watts phone) Western Electric, 10-channel, automatic dial selection, 2.0-200 mcs, with 220 volt, 1 ph, 50-60c, power supply. SAME TRANSMITTER AS USED ON S.S. "QUEEN MARY"—**Brand New. Price $4,000.00**

1 KW—FM Broadcast station, complete with monitor, all tubes, antenna and waveguide, Mfr. G. E. **$1,500.00**—at location, N. Y. C.

OUR EXPORT DEPARTMENT AVAILABLE FOR SPECIAL SERVICE TO OVERSEAS CUSTOMERS

WE MAINTAIN OUR OWN FULLY EQUIPPED TESTING LABORATORY IN THE SAME BUILDING AS OUR MAIN WAREHOUSE TO TEST ANY ITEM WE SELL.

WE GUARANTEE EVERYTHING WE SELL

CERTIFIED AN CONNECTORS

LATEST SPECS

3100 – 3101 – 3102 – 3106 – 3108
3057 CLAMPS – CONDUIT COUPLINGS

It is our pleasure to announce our appointment as distributors of A N Connectors, Clamps and Conduit Fittings for American Phenolic Corporation. AMPHENOL.

THE STEVENS AIRCRAFT CORP.
516 MARKET STREET,
ROCHELLE PARK, N. J. Diamond 2-3950

DESIRABLE *Select Surplus* ELECTRONIC EQUIPMENT

- TDE Navy model radio transmitters with 230 volts, D.C. power supply, complete with tubes, ready for operation. New.
- SF Ships' radar units complete with all components.
- TCS, Collins type Navy and mobile type transmitters-receivers complete with remote control, antenna coil, cables, key, microphone, for 110 volt, A.C. and 12 or 24 volt D.C. Refinished, checked out and guaranteed for operation.
- ET-8023-D1 Radiomarine Corporation telegraph transmitters.
- BC-348 — BC-312 unconverted receivers for 24 and 12 volt operation. Checked out, excellent, guaranteed.
- BC-221 A.K. Frequency meters with modulation.
- BC-221 Frequency meters without modulation.
- TS-174-U Frequency meter with modulation 20-250 mcs.
- LM-15 Frequency meters (Navy version of BC-221 A.K.) with modulation and A.C. power supply.
- I-100A Test sets for SCR-269.
- Telephone or power line insulators, glass Hemingray No. 40, heavy duty.
- W-110 B Army field telephone wire.
- RC-58-B Army Tape Facsimile transmitters-receivers.
- Link radio transmitters-receivers 1498 including remote control and antenna, reconditioned.
- Link-50 UFS transmitters, receivers including remote control and antenna. New.
- BD-72 army field telephone switchboards, twelve lines. Reconditioned, like new.
- BD-71 army field telephone switchboards, six lines. Reconditioned, like new.
- Army Field Telephones, Type EE8. Excellent.

WE HAVE OUR OWN MANUFACTURING AND LABORATORY FACILITIES AND INSPECT AND GUARANTEE ALL ITEMS BEFORE SHIPMENT.

COMPLETE TECHNICAL DETAILS, AVAILABLE QUANTITIES AND PRICES WILL BE SENT UPON REQUEST.

SPECIAL ATTENTION GIVEN TO ALL EXPORT ORDERS—LICENSE APPLICATIONS EXPERTLY HANDLED.

French-Van Breems, Inc.

375 Fairfield Avenue
Stamford, Connecticut

COLUMBIA ELECTRONICS LTD.

TELEVISION CAMERA

330 line resolution. Easily converted to present RMA standards. Circuits available with camera. Complete, like new.

TEST EQUIPMENT
Complete Line!

SIGNAL GENERATOR 804-C
DUMONT 224-A OSCILLOSCOPE
I-77 HICKOK TUBE CHECKER
I-208 FM SIGNAL GENERATOR
RPC MODEL 644 MULTIMETER
FERRIS MICROVOLTER MOD. 18-C.

IE-36 (New)	TS-111/CP
I-139 METER	TS-126
I-212	TS-128
TS-3/AP	TS-127/U
TS-5/AP	TS-170/ARN-5
TS-10B/APN	TS-182/UP
TS-15A/AP	TS-184A/AP
TS-19/APQ-5	TS-204/AP
TS-24A/ARR-2	TS-250/APN
TS-34/AP	TS-348/AP
TS-36/AP	TS-375/U
TS-61/AP	UPM-1(Complete)
SL-1 Slotted Line Test Set	WE I-193 Range Calibrator I-146
TS-100/AP	
TS-102A/AP	

COUPLING HEAD BC 1201-A

RC-184 IFF EQUIPMENT
Brand New. Complete.

COMPLETE RADAR
APS-4 MARK 16
APS6

RECEIVERS
APR-4 APR-5

SCR-720 EQUIPMENT
SCR-584 PARTS

HEADSETS
HS-33 Brand New

MK-20A/UP — New,
INDIVIDUALLY BOXED

SCR-291 DIRECTION FINDING EQUIPMENT—NEW

MODULATOR UNIT BC 1203-A — U/16 U PLUGS, MG19A—New, R5/ARN-7

VARIAC TRANSTAT AMERTRAN
Input 0-115 V., 50-60 cycles; output 115 V 100 amps. 11.5 Kva. Excellent condition.

SEE COLUMBIA ELECTRONICS AD ON PAGE 378

COLUMBIA ELECTRONICS LTD.
524 S. San Pedro St., Los Angeles 13
CALIF.
Cable Address COELECT
ALL ITEMS SUBJECT TO PRIOR SALE

TEST EQUIPMENT

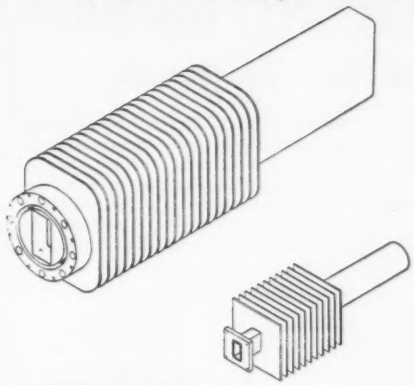

HI POWER X BAND TEST LOAD, dissipates 350 watts of average power for ⅜" x 1¼" waveguide. VSWR less than 1.15 bet. 7 and 10 KMC $150.00

S Band Test Load TPS-55P/BT, 50 ohms **$12.00**

HI POWER S BAND TEST LOAD, dissipates 1000 watts of average power, for 1½" x 3" waveguide, Range 2500 to 3700 mc.

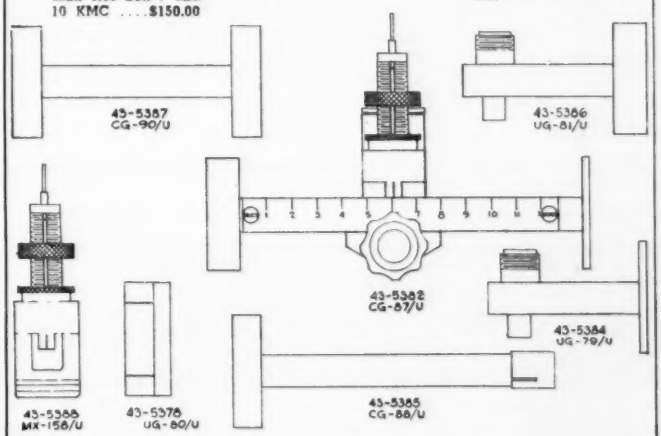

X Band VSWR Test Set TS 12 (Unit 2, Plumbing)

consisting of:

1	Waveguide-coax adapter	UG-81/U
1	RF cable	CG-92/U
1	Sync cable	CG-91/U
1	Sync cable 3'6" long, with type 49193 connectors	CG-89/U
1	Waveguide-coax adapter. Coax end terminates in type 49285 connector. Waveguide end terminates in a choke	UG-81/U
1	Waveguide-coax adapter. Coax end terminates in type 49285 connector. Waveguide end terminates in a flange	UG-79/U
1	Slotted section Gear driven probe assembly and crystal	CG-87/U
1	Probe assembly Hand operated; includes crystal	MX-158/U
1	Terminating section With four-inch (4") resistive strip. One end terminates in a choke coupling—the other end in a cap	CG-88/U
1	Adapter section ½" x 1" x .050 waveguide terminates in a choke coupling at each end	CG-90/U
2	Adapters Large to small waveguide adapters; large ends with choke couplings, small ends with flange couplings	UG-80/U
2	Support blocks	

ELECTRO IMPULSE LABORATORY

62 White Street Red Bank 6-0404 Red Bank, N. J.

YOU HAVE TO BE SATISFIED
WHEN YOU BUY TEST EQUIPMENT
from Weston Laboratories

We realize the grave responsibility of ensuring that each piece of test equipment sold complies with the original intended specifications, and to that end absolutely warrant complete satisfaction on any device sold. With 2000 pieces of equipment to draw on and with the most modern plant facilities staffed by highly skilled technicians, we believe very firmly that it is to your best interests to investigate our stocks before placing orders for any test equipment. A partial list follows:

TS-1ARR	TS-203/AP	TS-226A	BC-906/D
TS-3A/AP	TS-87/AP	TS-233/TPN-2	BC-949/A
TS-8A/U	TS-89/AP	TS-288	BC-1060/A
TS-10A/APN-1	TS-96/TPS-1	TS-270A/UP	BC-1066/A
TS-12	TS-98/AP	TS-323	BC-1201/A
TS-13	TS-100	I-56	BC-1203
TS-14	TS-101AP	I-95/A	BC-1287/A
TS-15B/AP	TS-102/AP	I-106/A	BC-1277
TS-16/APN	TS-108/AP	I-122	BE-67
TS-19	TS-110/AP	I-145	LAD
TS-27/TS	TS-118/AP	I-177	LAF
TS-32A/TRC-1	TS-125/AP	I-178	LAG
TS-33	TS-131/AP	I-208/A	LU2
TS-34	TS-153	I-212	LU3
TS-34A	TS-155A/AP	I-222/A	OAA-2
TS-35A	TS-170/ARN-5	I-225	TTS-4BR
TS-36	TS-173/UR	I-233	TTX-10RH
TS-45/APM-3	TS-174	IE-21/A	TSS4SE
TS-47/APR	TS-175	IE-36	TSK4SE
TS-51/APG-4	TS-184/AP	IF-12/C	
TS-62	TS-197/CPM-4	BC-221	
TS-69/AP	TS-204/AP	BC-376	

(We will purchase your test equipment at highest prices. Send your list for a prompt reply.)

Cable: WESLAB **Telephone: WE 5-4500**

Weston Laboratories
Weston 93, Mass.

NOW IN STOCK

WESTON SENSITROL RELAYS Model 705, KS-7996, Calibrated 13-19 V.....$12.50
RUNNING TIME METERS Sangamo Model 17, in hours and 1/10th hours to 9999.9, 440 V AC 60 Cycles.....$4.95
Variable RESET TIMERS Sangamo Model 21, opens circuit from 0 to 3 minutes, calibrated in 5 second intervals. Will handle 10 Amps or more 110/230 V AC 60 cycles.....$4.95

CALCULOGRAPHS. These units compute elapsed time to 30 minutes in minutes and seconds, and print this elapsed time as well as time of day on a card (For example a card may show "start 9:55 AM" "Elapsed time 18 minutes, 51 seconds"). Any number of jobs may be run at the same time. Originally used to log long distance telephone calls. Dial type printing. Reconditioned. With 8 day "windup" movement.....$85.00
With 20V AC 60 cycle Movement.....$70.00

PIONEER TORQUE UNITS 12604-3-A.....$70.00
PIONEER AUTOSYNS AY-30-D.....$35.00
BENDIX AMPLIFIER 12077-1-A.....$29.50
RT-21/APN-7 With all tubes, new, repacked.....$250.00

BEACHMASTER 250 Watt Audio Amplifier with bank of 9 35 watt speakers, cables, mike, tubes. Operates on 110 V AC 60 cycles. Like new.....$395.00
BEACHMASTER AMPLIFIERS are available as originally delivered to the Navy, with 1500 Watt gas engine driven generator & complete spares, all packed in 6 waterproof cases, all new.....$895.00

SN PORTABLE RADAR with all tubes, antenna rotor, cases, less antenna, scope & tripod.....$300.00
SUPERSONIC MODULATOR Mfgd by Doolittle for Navy Air Drawing # 68326-1, contains 11 tubes, 10 relays etc. for operation on 12 V Cases dirty, very clean inside.....$14.95
SUPERSONIC SELECTOR Mfgd by Doolittle for Navy air. Drawing #69245-1 Contains 11 tubes, 10 relays etc. for operation on 12 VDC. Cases dirty, very clean inside.....$14.95

Laboratory PRECISION REGULATED RECTIFIER Type CZC-20AAQ. Input 110 V AC 60 cycle, output adjustable from 250 to 500 VDC at 250 Mills. Contains 2-5U4G, 2-6BQ7, 1-VR150-30, 1-VR-105-30, 4-6L6G. A steal at.....$98.50

DYNAMOTORS

Type	Input Volts	Output Volts	Mils	Price
DM-34	12	220	80	$9.95
DM-35	12	625	225	
DM-36	28	220	80	5.95
DM-37	28	625	225	11.50
DM-64	12	275	150	11.50
DM-65	12	400	440	22.50
BD-77	12	1,000	350	25.00
TCS-Rcvr	12	225	100	11.50
TCS-Xmtr	12	440	200	22.50

TCS-Complete power supply, 110 VDC input 68.50
ET-5012-D-230 MG24

BEARING DEVIATION INDICATOR Type CBM-55105. Mfgd by Sub Signal.....$60.00
QBG-1 DRIVER RECEIVER Type CFF 43058.....$125.00
BC-348 RECEIVERS, Reconditioned.....$150.00
RBL RECEIVERS Operate on 110v AC 60 Cycles Frequency range 15 Kc to 600 Kc. Reconditioned.....$90.00
(We have spare parts for above RBL available to quantity consumers)
SF-1 RADAR Brand new with complete spares waveguide, fittings, etc. 10 boxes.....$3000.00
SO-1 or SO-8 RADAR. Fully reconditioned, overseas packed.....$2750.00

ANTENNA SLEWING MOTORS For SO-8 radar 24 VDC $15.00—12 VDC $15.00—110 VDC $42.50—110 VDC for SO-1.....$19.95

ALLEN-BRADLEY Type B-200 starting relay DPST 440V AC 60 cycle. Excellent condition $3.00
ELECTRIC CLOCKS, 24 V AC 60 Cycles, sweep second hand. Excellent condition.....$12.50
TRANSFORMER 230-460 V 60 Cy in, 7.5 V 27A out, weight 7 lbs. $3.00 ea. **Special 100 for $125.00**

TDE PRIMARY SHIP TRANSMITTERS. If band 200-1500 Kcs. H.F. band 1500-18100 Kcs. CW MCW & Phone. With Internal M.G. for 115 VDC or 230 VDC. Fully reconditioned.....$600.00

TRANSFORMER. Input 105, 110, 115, 120, 125 VAC 60 cycle output. 5V 115 Amps (filaments for 4 304th).....$12.50
SOUND POWERED CHEST & HEADSETS, used operating RCA & Automatic Electric (large Headset) per pair.....$12.50
SOUND POWERED HANDSETS. New per pair $19.95
SLOW RELEASE RELAY Mfgd by Cool Electric Co Type 102 200 ohms SPDT S.C. 2G7750.3 Part # A13258. Each $5.00 **Per 100 $2.50. Per 1000 $1.95**
REACTOR. 12 H @ 150 mills 130 ohms insulated for 1000 V fully cased Cat #7466323. **10 for $19.95**
CD-149 High voltage cable for BC-191 **10 for $27.50**
CD-152.....**10 for $17.50**

All prices FOB Oakland, Calif., subject to change without notice. Terms 20% cash with order, balance COD.

EMMONS RADIO SUPPLY CO.
405 10th St. Oakland, Calif.
Phone TWinoaks 3-9103

OIL FILLED CONDENSER
Conservative Govt. Rating

.25 MFD—18,000 V. DC W.
Length 13½"—Width 4",
Height 12"—4" H.V. Terminals
BRAND NEW **$25.00**

TELEPHONE RELAYS



CLARE, TYPES C, D & E
COOKE, AUTOMATIC—ELECTRIC
ALL TYPES of COILS and PILE-UPS
CLARE TYPE K MINIATURE TELEPHONE RELAYS.
CLARE Type G Half Tel. Relays
1) 3600 OHM COIL, SPDT.....$2.00
2) 3300 OMF COIL, SPST, N.O.....$1.50

Chase
Electronic Supply Co.
222 Fulton St.
New York 7, N. Y.
HOllis 4-5033

PRICED RIGHT
IMMEDIATE DELIVERY
100,000 RELAYS—50 TYPES

Example

ALLIED CONTROL
#B0635 D.P.D.T. 10 amp. cts. 24 V. dc 230 ohm coil..$1.49

OTHER SPECIALS

GR MEGOHM BRIDGE 2-511. B with battery supply **$159.00**

6V. STORAGE BATTERY WILLARD MINIATURE NT-6 3⅛"x2x11⅛" spillproof, dry shipped 11½ lbs.....**$2.95**

Upright Cond.-1.0 mfd. 1000 V.....**$0.69**

Bathtub DYR-0.5 mfd. 1000 V. 2 s.t.....**$0.59**

Oil Cond.-2 mfd. @ 600 V. 2-dia. with bkt.....**$0.59**

WE CARRY IN STOCK A COMPLETE LINE OF STANDARD RELAYS, SOLENOIDS & RECTIFIERS

STRUTHERS-DUNN
GENERAL ELECTRIC
RADIO RECEPTOR

POTTER & BRUMFIELD
GUARDIAN ELECTRIC
PHILLIPS CONTROL

"OUR COIL WINDING DEPARTMENT IS READY TO WIND OR REWIND YOUR SPECIAL RELAY OR SOLENOID TO ANY SPECIFICATION"

RADIO DEVELOPMENT & SALES CO.
See our ads in May, June & Sept. Electronics
323 Atlantic Ave. Brooklyn, N. Y.
ULster 5-0488

TUBES

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
*1A5GT	.75	7G7	1.20	VT62	.50	841	.45
*1LC5	1.25	7H7	.85	VT128	.65	851	75.00
1LG5	1.25	12A5	.90	VU111S	.50	861	40.00
*1Q5GT	.80	12A6	.75	1B24	15.00	864	.75
1R4	.75	12C8	1.05	1N21 XL	.90	869B	29.50
*1T4	.85	12F5GT	.65	1N22 XL	1.60	872A	3.50
3D6	.60	12H6	.75	2C26A	.25	954	.37
*5Z4	1.00	*12K8GT	1.00	2C34	.50	1616	1.95
6AB7	1.10	12J5GT	.65	2C44	1.00	1619	.85
6AK5	1.75	12SH7	.90	2X2/879	.60	1625	.47
6B8	.95	12SJ7	.85	3C24	2.50	1626	.40
*6B8G	.85	12SR7	.88	3E29	14.00	1629	.65
*6C5	.75	14X7	1.15	6C21	25.00	1630	.90
6H6	.75	25D7	1.00	23D4	.60	1631	1.27
*6J8G	1.05	36	.65	211	.80	1632	.75
*6K7	.80	38	.65	215A	.17	*1641	1.50
6K7GT	.70	39/44	.65	307A	4.95	1642	.65
*6L7G	.72	*50	1.00	371B	.75	2051	1.50
6N7	1.00	*57	.65	393A	9.10	*5670	5.90
6R7G	.71	75	.65	471A	2.75	*5814	4.55
6S7G	.75	*77	.65	532A	2.75	7193	.25
6SH7	.75	*85	.75	705A	1.25	8012	1.50
6SH7GT	.80	*117Z6GT	.90	715B	15.00	8020	2.25
6SN7GT	1.05	1005	.45	717A	1.25	9001	1.75
6SN7GTA	1.20	4A21	.75	724B	6.50	9002	1.50
6U7G	.65	615	.15	801	.75	9003	1.80
*7A6	.75	MX408U	.75	805	6.95	9006	.30
7C4	.77	10Y	.55	807	1.75		
7E5 (1201)	.85	VT52	.50	813	8.50		

MANY OTHER JAN TYPES AVAILABLE

Items marked * do not have name of standard manufacturer on tube. They are FIRST QUALITY (not seconds) and meet full specifications with our 100% guarantee. Samples to quantity users.

ALL LISTINGS ARE QUALITY GUARANTEED. INQUIRIES REGARDING THESE AND OTHER REQUIREMENTS GIVEN PROMPT ATTENTION. USUAL DISCOUNTS TO MANUFACTURERS AND JOBBERS.

PARTS

TRANSFORMERS

PLATE TRANSFORMER, 5000 volt AC, center tapped, 350 MA. Primary 115 volt, 60 cycle. Unmounted and not potted, overall dimension 6½ inches x 6 inches x 7 inches, weight 37 lbs. ..... New. $25.00

PULSE TRANSFORMER

68G828-G1 ..... New. $5.50

SWITCHES

ROTATING SWITCH, Ceramic Construction, 3 Pole, Double Throw, Shaft beyond bushing, ½ inch New. $1.00

CORDS

CD-133, Rubber Covered PL-55 Plug with 18 Inch Rubber Cord ..... New. $ .50

CD-652 ..... New. $25.00

TELEPHONE, BA-WP, Similar to WE 55B, 8 foot, Red ..... New. $1.10

TELEPHONE, Patch, WE D171060, 8 foot, Green New. $1.10

PLUGS

TELEPHONE PLUG, Equivalent to PL-55, with Screw Terminals Inserted, Samples furnished to quantity users.... New. $.30

BUTTERFLY CONDENSER

SPECIFIED RANGE, 74-320 MC, NEW, EXCELLENT CONDITION..... $12.50

All items subject to prior sale. Shipments BEST WAY C.O.D. if desired. Rated accounts net ROG.

T. R. LOWENTHAL CO.

ELECTRONIC COMPONENTS

Technical Radio Since 1919

1205 WEST SHERWIN AVENUE, CHICAGO 26, ILLINOIS
PHONE: ROGERS PARK 4-0784

American & Canadian enquiries to our Agents:

POLAS MERCANTILE

115 Broadway

New York, 6

Telephone: Rector 2-8595

ALL OTHER ENQUIRIES TO LONDON

HALTRON

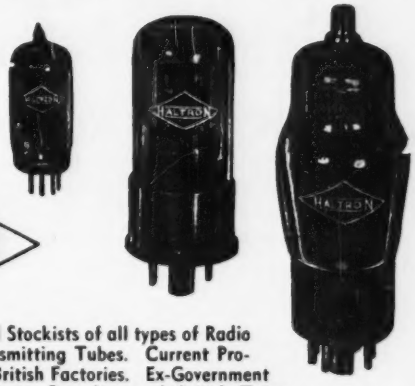

Leading Exporters and Stockists of all types of Radio Receiving and Transmitting Tubes. Current Production of main British Factories. Ex-Government Surplus, American, Canadian and British Tubes in Original Brands. Suppliers to Foreign Governments, Airlines, etc.

HALL ELECTRIC LTD

89, CHARLOTTE ST., LONDON, W.1. Phones: MUSEUM 9681 (5 lines) Cables: HALLECTRIC, LONDON

SURPLUS EQUIPMENT

POWER RHEOSTATS

Standard Brands: 5 Ohms; 100 Watt; 4.48 amps 100 Ohms; 100 Watt; 1.0 amp.

Boxed, Brand New with Knob $2.50 each—or—$25.00 per Doz.

PIONEER AUTOSYNS

AY-1.....26 Volt—400 Cycle.....**$4.95**
AY-5.....26 Volt—400 Cycle.....**$5.95**
AY27D.....**$25.50**
AY6—26 Volt—400 cyc.....**$4.95 ea.**
AY30D—26 Volt—400 cyc.....**$25.00 ea.**

MICROPOSITIONER

Barber Colman AYLZ 2133-1 Polarized D.C. Relay: Double Coil Differential sensitive; Alnico P.M. Polarized field. 24 V contacts; .5 amps; 28 V. Used for remote positioning, synchronizing, control, etc. **$12.50 ea.**

PIONEER GYRO FLUX GATE AMPLIFIER

Type 12076-1-A, complete with tubes **$27.50 ea.**

PIONEER TORQUE UNIT AMPLIFIER

Type 12077-1-A. A single tube amplifier designed for autosyn take off signal. Contains magnetic amplifier assembly. With tube.....**$24.50 ea.**

SERVO MOTOR 10047-2-A: 2 Phase; 400 Cycle; with 40-1 Reduction Gear $10.00 ea.

400 CYCLE MOTORS

AIRESEARCH: 115V; 400 CPS; Single phase; 6500 RPM; 1.4 amp; Torque 4.6 in. oz.; HP .03.....**$10.00 ea.**

EASTERN AIR DEVICES TYPE JM6B: 200 VAC; 1 amp; 3 phase; 400 cycles; 6000 RPM.....**$12.50 ea.**

INVERTERS

PE 218 LELAND ELECTRIC
Output: 115 VAC; Single Phase; PF 90; 380/800 cycle; 1500 VA. **INPUT:** 25-28 VDC; 92 amps; 8000 RPM; Exc. Volts 27.5 **BRAND NEW**.....**$39.95 ea.**

12116-2-A PIONEER
Output: 115 VAC; 400 cyc.; single phase; 45 amp. **Input:** 24 VDC; 5 amp.....**$90.00 ea.**

10563 LELAND ELECTRIC
Output: 115 VAC; 400 cycle; 3-Phase; 115 VA; 75 PF. **Input:** 28.5 VDC; 12 amp.....**$80.00 ea.**

16486 LELAND ELECTRIC
Output: 115 VAC; 400 Cycle; 3-phase; 175 VA; 80 PF. **Input:** 27.5 DC; 12.5 amp; Cont. duty.....**$90.00 ea.**

SYNCHROS

1F Special Repeater (115V-400 Cycle) **$15.00 ea.**

2J1F3 Generator (115V-400 cyc).**$7.50 ea.**

5CT Control Transformer: 90-50 Volt; 60 Cyc.....**$50.00 ea.**

5F Motor (115/90 volt—60 cyc.).**$60.00 ea.**

5G Generator (115/90 volt—60 cyc.) **$50.00 ea.**

5SDG Differential Generator (90/90 volts —400 cyc.).....**$30.00 ea.**

5DG Differential Generator 90/90 volts, 60 cycle.....**$50.00 ea.**

METERS

AC Volt, Westinghouse, Type NA-35—3-inch round. F.S.-10 MA.....**$6.95 ea.**

FREQUENCY, 57-63 cycles per second, 125 volts, mfg. Aero, mod. 7007. 3-inch round **$8.95 ea.**

KILOVOLTS, 0-4, mfg. Dejur; 3-inch round; mod. 310, less resistor.....**$3.95 ea.**

PLEASE ENCLOSE FULL AMOUNT WITH ORDER — **EQUIPMENT FULLY GUARANTEED**

ALL PRICES F.O.B. PASADENA UNLESS OTHERWISE SPECIFIED

C and H Sales Company
BOX 356-E EAST PASADENA STATION • PASADENA 8, CALIFORNIA

---

18 BRAND NEW SPECIALS ! ! !

ELAPSED TIME METERS

General Electric. Sym. M305. Indicates 1-99,999 hours. 115 VAC. 60 cycles. 3" round bakelite case. Square, flush face. New.....**$11.95**

DC SERVO MOTORS

White Rogers Electric Co. 6905 Series. 24 VDC. Torque 150 in. lbs. Reversible. Control box on top has limit switches, relays, and selenium rectifiers (to block AC out of motor). 5x5x4". Can be supplied in either 2½, 3, or 5 RPM models. New.....**$11.50**

INDUCTION VOLTAGE REGULATOR

General Electric. Spec. ±3263300. Sym. VR-107. Type AIRS. Single phase, 60 cycle, 460 VAC primary. Output can be varied 78.6% above and below this value at 1.4 load amperes over entire range. Remote-control, motor operated. 8½x11x22". Wt. 122 lbs. Many applications including instrument and relay calibration, dielectric and vacuum tube testing, and illumination control. New.....**$74.50**

NOISE FILTER

Mallory #NF3-0 Modified. 35 volts DC. 200 amperes. New.....**$2.50**

KLIXON CIRCUIT BREAKERS

Made by Spencer Thermostat Co. Save up to 75% on these new, precision Bkrs.

Amp	Model	Price	Amp	Model	Price
5	C-6363	$0.85	30	PM	$1.15
15	PSM	.95	60	PLM	1.25
20	C-6363	1.00	60	PDLM	1.35
25	PM	1.05	111	PDLMS	1.50

Many other models and ratings available.

HEAVY DUTY TRANSFORMER

#0574. Input 110/220 V. Output 18 V at 100 amps. Primary leads 26" long. Secondary leads 18" long. 7⅝x5x6". Wt. 40 lbs. Mounting Brackets. New.....**$16.95**

AMPLIDYNE MOTOR GENERATOR

Emerson Electric Co. Model 5AM31NJ18A. Input 27 VDC-44A. Output 60 VDC at 8, 8A. 530 watts. 8300 RPM. New.....**$18.50**

VOLTAGE REGULATOR

Leland Electric Co. TYPE B. Carbon pile type. Regulated output 13.0 volts. New.....**$3.45**

BAKELITE TERMINAL BOARD

8 terminals. 5x1⅛x11/16". New.....**$.50**

PROMPT DELIVERY ON ALL ORDERS—ALL MERCHANDISE FULLY GUARANTEED
Terms: Prices FOB St. Louis. Cash or 25% with all orders. Balance COD. Rated Concerns (D&B) balance 10 days cash. Prices subject to change without notice.

McNEAL ELECTRIC & EQUIPMENT CO.
4736 OLIVE STREET — **ST. LOUIS 8, MO.**

Genuine TELECHRON Motors

2 RPM $2.90
3 RPM 3.90
3.6 RPM 3.15
1 RPM 3.95
60 RPM 4.30
One of Each $15.00

ZENITH 1951 TV Remote Control Motor Units

Reversing switch on end of 17 foot cable. Powerful 4 RPM clutch motor.
Will drive anything
Can be used for door opener, window raiser, model RR turntable. Complete with transformer. **$12.90** 6 for $70.00

MARKTIME 5 HOUR SWITCH

A 10 sec. timing device. Pointer moves back to zero after time elapses. Ideal for shutting off radios and TV sets when you go to bed. Limited supply at this special PRICE.... **$4.90**
Also available in 15 min., 30 min., 1 hr. at $5.00

Single Pole 6v. Very Small Relay.....$ .60
Veeder-Root Counter, Rotary.....1.90
Veeder-Root Counter, Ratchet.....2.25
No. 18 Enameled Copper Wire, 1⅛ lb. coil..2.00
Solenoid, works on 24v. D.C. and 115 v. A.C. 1.50
½ amp. 6 v. Transformer.....1.15
9½ amp. sealed 6 v. Transformer.....2.75
MU and ACRO Switches assorted....4 for 1.00
115 v. A.C. Motor, for fan or experiment....1.50
1800 RPM, 115 v. A.C. Motor.....4.50
Guardian, No. 4, 115 v. A.C. Solenoid.....3.50
Price Bros. No. 1A, 115 v. A.C. Solenoid....1.50

Eby bakelite Binding Posts......12
TELETYPE, 1/40 H.P. 110 v. D.C. Motor..3.50
W-L, 100 watt fixed, 1000 ohm Resistor.....60
Arrow-H & H, DPDT Toggle Switch.....65
C/H Off center, SPDT Toggle Switch.....35
Antenna Rotator or Door Opener.
Powerful Geared, 24 v. D.C. or A.C. Motor, with Transformer.....7.50
3 Wire Rubber Cable for Above.....03½
GE Argon Glow Lamps.....4 for 1.00
100 for $20.00

ELAPSED TIME METERS
$15.50

GONIOMETERS
Micro Switch
Solenoids
Relays
Electric Counters

EST. 1923 **BLAN** EST. 1923
64 Dey St., New York 7, N. Y.

D.C. MICROAMMETERS

O-200 Ua 3" sq. G.E. DO-50.....$ 9.00
O-50 Ua 3" sq. G.E. DO-50.....13.00

PORTABLE INSTRUMENTS

Molded Bakelite Case 7"x4½"x3"

D.C. MICROAMMETERS

5...10...50...microamperes

THERMOCOUPLE MILLIAMMETERS

1.5...5...10...milliamperes
Available in multiple range combinations

PRECISION ELECTRICAL INSTRUMENT CO.
146 Grand Street — New York 13, N. Y.

REAL VALUES!

SCR 625 FAMOUS ARMY MINE-DETECTOR

for prospectors—miners—oil companies—plumbers—etc.,—etc.,—etc.

This unit is being offered now at a considerable reduction in price. Recently advertised at $79.50 it is now available in the same brand new wrappings in suitcase style carrying case (less batteries) at

$59.50

WHILE THEY LAST!

CABINET CH-118

Olive drab in color, this cabinet has a full length interlock access door in the rear. The front takes the standard 19" panels with 69 inches of height and 20 inches deep. It is shock mounted on a heavy steel platform and has a two-inch protrusion fully covering one side to accommodate wave trap and wiring. Louvered vents allow air circulation top and bottom. Each F.O.B. Chicago **$34.50**

A few on hand, needs paint jobs, or small repair—as is ..... only $19.95

RA 52—RECTIFIER

A transtat controlled rectifier to produce high voltage DC from 110 VAC 60 cycle source. Up to 11,500 volts DC at 50 watts. Metered high voltage (0-15KV) and current (0-20 MA). New **$74.50**

Some available with small repair or minor part replacement. less tube..... only $49.50

PE 206 INVERTER

24 VDC to 80 VAC at 800 cps 500 VA..Used $3.95

PE 218 INVERTER

24 VDC input, output 115 VAC, 400 cps at 13 amps. (1.5 KVA) ..... New $15.00
Like New $12.50

TS-10

Sound Powered Phones. Brand new....each $9.95
Used $5.95

BC-780 Transmitter P/O BC-100, less tubes..$6.95
BC-779 Keyer P/O BC-100, less tubes..... $4.95

MISCELLANEOUS SPECIALS!

	New
RA 10 DA Receiver.....Used $17.50	$24.95
BC 347 Interphone Amplifier.....	2.95
BC 442 Less Condenser.....Used $1.49	1.95
APS 13 UHF Antenna, Pair.....	.98
1-97 Bias Meter.....Used $3.95....	4.95
RL 42 Antenna Gearbox Motor and Reel.....Used $4.95	7.50
40 Amps. Circuit Breaker.....	.59
1 82 F Five Inch 360 degrees compass indicator and Selsyn receiver.....	4.95
A-81-2 Transmitters Selsyn for 1 82 indicator	2.45
(Both 1 82 & Trans. Selsyn for $7.00)	
PE-101 Dynamotor	2.75
Thermal converter Weston Type D, model 507, range .12 amp.....	.69
BC-1023, Marker Beacon Receiver, complete with tubes, shock mount and instruction manual	9.95
BC-923 27-38 MC-FM Receiver, complete with tubes—Used	24.50
BC-924 27-38 MC, FM Transmitter, complete with tubes.....Used $19.95	
BC-684 27-38 MC, FM Transmitter, less dynamotor .....Used $19.95	
10 meter modification kit for BC-610.....	3.95
SCR-183 complete 12 volt set with all coils, tubes, dynamotor and control units.....	49.50
ARB Control Box.....	1.95
ARB2 Control Box	.89

CATHODE RAY TUBES

3FP7	$1.95	5FP7	$1.95
4AP10	$ .95	5GP1	$3.95
5BP4	$3.95	16DP4	$19.95
5CP1	$4.95	16JP4	$19.95

PRICES UPON REQUEST

T 85/APTS Transmitter
R 132/TPS10 Receiver
TS 36/AP Test Set
TS 10/APN Test Set
TS 16/APN Test Set
TS 27/TSM-1 Test Set
TS 251 Test Set

Shipments FOB warehouse. 20% Deposit on orders. Minimum order $5.00 Illinois residents, add regular sales tax to remittance. Prices subject to change without notice.

ARROW SALES, Inc.
Dept 18
1712-14 S. Michigan Ave., Chicago 16, Ill.
PHONE HArrison 7-9374

PULSE TRANSFORMERS

Tube base plug in type

Here are precision made, high quality compact pulse transformers wound on hypersil cores. They are built in metal bakelite tube bases and can be adapted to many uses. Kindly distribute this data to key personnel in your Electrical Engineering Department, to your Technical Library, to your Electronic Equipment Buyers and to any person who should have knowledge of this item.



TYPE UX 7350
EACH COIL - 50-T #36E
MAX. DC RES. OHMS
1 & 9 = 4.02Ω
2 & 7 = 4.542Ω
3 & 4 = 2.357Ω
5 & 6 = 2.185Ω



OTHER DATA

★—Completely impregnated and sealed.
★—Physically small, measuring only 1.377" dia. x 1.087" high.
★—Convenient to use—merely plug into an octal socket—simplifies production.
★—Schematic of winding sequence and connection pressed into disc covering top of tube base. Schematic designates socket connections.
★—The coils are wound on high-grade tested hypersil cores.
★—Used in some of the Navy's modern and highly accurate Radar and Direction Finding Equipment
★—Standard types—Manufactured by Raytheon Manufacturing Company.
★—Quantities available—Immediate delivery.

SUGGESTED USES

★—Blocking Oscillator, Multivibrator and Scope Circuits.
★—Wherever Accurate Timing and Triggering are necessary.
★—Unexcelled in circuit applications for generating low power and low voltage pulses.
★—Can be used in circuits utilizing repetition rates from 0 to well over 1 MC and pulse widths ranging from .05 Microsecond up.

PRICE $4.50 EACH—Immediate Delivery

HATRY and YOUNG
THE Elect IN ELECTRONICS
42-44 Cornhill, Boston 10, Mass.
Lafayette 3-2546

TUBES Price - Slashed! Receiving & Transmitting

RMA Guaranteed—Standard Brands

OA2	$1.59	OZ4	$.59	7C4/ 1903A	$.89
OB2	.89	IR5	.89	12AT7	1.19
OC3/ VR105	1.29	5U4	.79	12AU7	1.19
OD3/ VR150	1.19	5V4	1.39	12BH7	1.19
2E25A/ HY65	4.89	5Y3	.49	12SA7	.79
3EP1	5.19	6AC7	1.99	12SK7	.79
3HP7	1.49	6AG5	1.89	12SQ7	.69
5FP14	16.95	6AL5	.79	35A5	.98
7BP7	7.89	6AU6	.79	35L6	.89
7CP1	12.49	6BC5	.89	35W4	.69
384TH	12.49	6BG6	1.89	35Y4	.99
384TL	12.49	6BN6	1.39	35Z5	.59
803	2.49	6BQ6	1.59	50A5	.98
805	2.99	6K7	.59	50B5	.98
885	1.29	6SA7	.69	50L6	.75
905	2.29	6SN7	1.09	807	.89
954	.29	6V6	.89		
1624	1.49				
1629	.35				
7193	.29				
8020	1.25				
9003	1.89				
9006	.29				
GL471A	2.75				
CK1005	.79				

TV PICTURE TUBES
BLACK FACE
Sealed Cartons, Brand New, 1 Yr. Guarantee

10BP4	$22.95
12LP4	22.95
14BP4	22.95
16GP4	29.95
16HP4	31.95
17BP4	24.95
19AP4A	24.95
20CP4	33.95
24AP4	69.95

SPEAKERS *All Alnico V—Priced Extra Low*

4" PM	$1.59	4" x 6" 3,500 ohm	$1.69
5" PM	1.69	8" Auto 4-6 ohm	2.89
4" x 6" PM	1.75	8" PM	3.25
6" PM	1.89	12" PM	6.69
6" 62 ohms with output trans.	2.79		

SPECIAL OFFER!—DEDUCT 5% from the price of any speaker in lots of 10 or more. Can be assorted.

GENUINE MOLDED CONDENSERS
Fresh Stock—All Mineral Oil Filled
185° Centigrade—Meets Jan C91 tests
ALL 600 VOLTS

Cap.	Per 10	Per 100
.001	$.79	$6.90
.002	.79	6.90
.005	.79	6.90
.01	.89	7.90
.02	.89	7.90
.05	1.25	9.90
.1	1.25	11.50

ELECTROLYTIC CONDENSERS
All Guaranteed Fresh Stock.

	Ea.	Lots of 10
20x20—150V.	$.39	$3.70
40x40—150V.	.45	4.30
50x30—150V.	.45	4.30
25—25V.	.19	1.50
25—250V.	.29	2.50
8—450V.	.39	3.60
10—450V.	.39	3.60
16—450V.	.59	5.60

FREE: Write for catalog . . . tubes, parts and accessories for radio and TV! Also special electronic instruments catalog.

Minimum order: $5.00. 25% deposit with order, balance C.O.D. Include postage with order. All merchandise subject to prior sales. F.O.B. New York, N. Y.

The Rose Company
100 Park Place New York 7, N. Y. COrtland 7-6195

BRAND NEW STANDARD BRAND TUBES

OA2	1.55	2V3G	.98	7E5	.79	450TH	39.50	801A	.49	865	1.39
OA3/VR75	1.49	2X2	.59	7E6	.69	450TL	44.50	802 RK25	2.95	866A	1.65
OB2	1.59	3A4	.69	7F7	.95	530	12.50	803	3.95	869B	39.50
OB3/VR90	1.25	3B7 1291	.49	10Y	.75	531	7.50	805	3.95	872A	3.75
OC3/VR105	1.25	3B22 EL1C	2.75	12A6	.79	532	175.00	807	1.69	874	1.49
OD3/VR150	1.05	3B26	3.75	24G	1.95	535	3.95	808	4.95	876	.89
1B22	1.95	3C24	1.95	39/44	.49	700A	24.50	811	12.75	879	1.45
1B26	2.75	3C28	4.95	45 Spec.	.35	701A	4.95	811	2.95	931A	6.95
1B27	19.95	3D6/1299	.49	100TH	8.50	702A	3.49	812	2.95	954	.35
1B29	4.75	3D22	4.95	205B	3.95	703A	6.25	813	9.95	955	.55
1B36	14.95	4A1	1.75	211	.75	704A	1.00	814	3.95	956	.69
1B56	47.50	4-250A	34.50	217C	18.00	705A	2.89	828	11.95	957	.35
1D8GT	.89	4B28/S2894	6.75	250R	18.95	707A	12.95	829	11.95	958A	.49
1L4	.89	4E27/257B	15.95	250TH	19.95	707B	24.50	829B	14.95	959A	.69
1R4/1294	.69	4J22	149.50	250TL	19.95	708A	6.75	836B	3.75	1608	4.95
2C22/7193	.35	4J26	159.75	285A	10.95	710A 8011	.98	832A	12.95	1609	4.95
2C26	.39	4J34	195.00	286A	18.95	712A	1.25	832B	8.95	1613	.99
2C34/RK34	.29	4J35	195.00	304TH	13.95	714AY	5.95	833A	49.50	1616	.95
2C40	4.95	4J42/700A	27.50	304TL	12.95	715A	6.95	836	5.95	1619	.45
2C44	1.49	5D21	24.50	307A	4.95	715B	13.95	837	1.49	1624	1.95
2E22	3.50	6B8	.98	310A	6.95	715C	26.50	838	4.95	1625	.45
2J22	7.95	6C8	.88	316A	1.50	721A	4.95	843	.75	1626	.45
2J26	24.50	6C21	19.95	329A	8.95	722A	2.49	846	49.95	1629	.35
2J36	89.50	6J4	5.95	331A	11.95	723A/B	22.50	851	48.75	1636	3.25
2J61	37.50	7A7	.89	352A	4.95	724B	4.95	860	6.50	1642	.98
2J62	37.50	7C4	.49	371B	.95	725A	12.95	861	24.50	1851	1.75
				388A	1.50	730A	10.95	864	.75	2051	1.09
										VT127	2.50

7193	.35	CATHODE RAY TUBES**	
8011	.98	3CP1/S1	1.95
8012A	2.75	3DP1	4.95
8013A	39.50	3FP7	1.95
8020	3.75	4AP10	4.95
8021	1.49	5AP1	3.49
8025A	.89	5FP7	3.95
9001	1.45	7BP3	18.95
9002	6.95	7BP7	6.95
9003	.35	9LP7	12.95
9004	.55	10BP4	18.95
9005	.69	12LP4	21.50
9006	.35	12LP4A	22.25
C5B	8.95	14BP4	26.50
C4A	6.95	16DP4A	34.00
C4J	5.95	16RP4	37.00
CRP72	1.98	17BP4A	37.00
E1148	.35	19AP4A	42.00
FG81A	5.95	19AP4B	42.00
HY114B	.75	20CP4	49.95
HY615	.25		
RE13	175.00	TUNGAR BULBS	
RK25	2.95	6 AMP	
RK34	.29	#2B9416	**4.75
RK72	.65	Westinghouse Rectigon	
RK73	.65		
VT90	.98		
VT98	175.00		

MARITIME INTERNATIONAL COMPANY

11 State Street, New York 4, N. Y. Cable Address "Foxcroft" Phones: Digby 4-3192–3

RADAR
SCR 545A Search and Track. Complete trailer, power supply and spare parts. Nearly new. Write for description and prices.

PORTABLE PUMP ASSEMBLY
Leland, 110 v. 60 c. 1 ph., 1/3 H.P. motor and D. Roper #2 hydraulic pump. 300 lbs. PSI max., 125 lbs. PSI continuous @ 3.25 gallons per min. $52.00

SEARCH LIGHT
Signaling, 12" Curtis Lighting, Inc. 115 v. a-c or d-c, 1000 watt. Complete w/bulb. Comes w/mounting assembly that gives 360° horizontal rotation and 180° vertical rotation. $27.50

WATER COOLING HEAT EXCHANGER:
10 KW, Westinghouse RU-3-B. Includes radiator, fan, pump, visual & electrical temperature & pressure indicators. 110 v. 60 c. Complete in steel housing 24"x31"x32" $100.00

MOTOR
Bendix 1/15 HP, 115 v. 60 c. 1 ph. 1725 RPM. ..$4.75

GENERATOR
Bendix model NEAB. Output 115 v. a-c 10.4 amps, 800 cy. SP. and 28.5 v. d-c, 60 amps @ 2400 RPM. Self excited, splined drive. New. Orig packing. $27.50

BATTERY CHARGER TRANSFORMER
G. E. Cat. #WS-9931A. Pri. 105-115-125 v. 60 c. Sec. 105-90-75-60-45-30 v. @ 6 amps. each side of center tap. Voltage reduced 10% and 20% thru tapped primary; two x 5v. 18 amp. C.T. (Tungar filaments) and two x 7 v. 10 amp. 7¼" h. x 8-¾" w. x 5¼" d. Wt. 56 lbs. New, orig. packing. G. E. price $53.00. ..... $17.50
2 for $30.00

NEW!
• low prices
• values
• equipment
• components
Note: All merchandise is not designated as new is guaranteed to be in excellent to new condition
EPCO
1527 E. 7th St.
Los Angeles 21, Calif.

POWER SUPPLY KIT
Input: 115 v 60 cyc single phase. Output: 7500 v D.C. @ 1.0 amp, continuous. Kit includes: (1) 10 KVA Amertran Plate Transformer, (4) 5 v, 10 amp Amertran Filament Transformer with integral sockets 25 KVA test, (4) 371 B H.V. Rectifier tubes, (1) 12.5 Henry 1.0 amp. swinging choke 15 KV, (1) 1.25/1.25 mfd. 7500 VDC Pyranol capacitor, (3) 160 M 200 W Bleeder resistors, (4) 1¼D x 5 Standoff insulators w/clips @ binding posts. $275.00

CAPACITORS
9.12. mfd., 1265 v. 60 c. a-c or 4000 v. d-c power factor correction 5.0 KV. A.R. Cat. #2523908 ..... $17.50
.25-.25, 6000 v. d-c or .125 @ 13,000 v. d-c, Fast Cat. #A7548, oil. $3.75
2x.15 mfd., @ 8000 v. or .075 mfd. @ 16,000 v. Vitamin Q. $2.90

RESISTORS
Fixed, w.w. 160,000 ohm, 200 w. ferrule ends $1.00
Fixed, w.w. 5,000 ohm, 200 w. ferrule ends $1.00

METERS
3" Westinghouse & Weston 0-1 ma d-c movement, calibrated 0-4 or 0-20 KV Mod. 301, NX35 ..... 4.95
3" Westinghouse & Weston 0-120 amp. a-c calibration, 3 amp f.s. deflection. Includes doughnut current transformer 40/1 ratio. Mod. NA35 & 476. ..... $8.50

RELAY
Magnetic overload, Allen-Bradley #810, 6.3-18.1 amps. 600 v. max. $7.95

RECTIFIER
Dry Disc, 6.5 v. a-c FWCT 2.2 v. d-c @ 3 amps ..... $ .75 4 for $2.00

POWER SUPPLY COMPONENTS
TRANSFORMERS
Plate, American Transformer Co. Spec. 29108. Pri. 115 v. 60 cy. 10.4 KVA. Sec. 17,600 v., 520 amps., 35 KVA test. $65.00
Plate, American Transformer Co. Spec. 29106. Same as above but center-tapped to handle 1 amp @ 8800 v. $75.00

CONTACTOR
Allen-Bradley & Westinghouse, 115 v. 60 cy. coil, DPST, 15 amps. $4.95

HIGH VOLTAGE RECTIFIER POWER SUPPLY
Variable output 0-15,000 v. d-c @ 500 mils. Input 115 v 60 cy. SP. Army type RA-38. Size 63¼" x 53⅜" x 58⅝" Wt. 2040 lbs. Units are new, complete with spare tubes and remote control. Write for detailed information.



OIL CONDENSERS
2 MFD. 5000 VDC $14.40
6 MFD. 600 VDC CP 70 BIFF 605K with Brackets. $1.69
100 MFD 1500 VDC $27.50
BATHTUB CONDENSORS CP53B1FF504K .5MFD—600V. ..$.50

HAYDON SYNCHRONOUS MOTOR
110 V.A.C.
½ R.P.M.
3.6 Watts
$2.47 each

2.2 watt 1-120 RPM. ..... $1.68 each

WESTON WATTMETER Model 641 0-4 KW 250 V. $23.85

Rheostat Type J 150 Ohm 50 Watt #5381 ..... $2.15 each

RAYTHEON FIL. TRAN. 115 V. 60 cyl. SEC. 6.3V. 5.1 amp. 6.3V. 1.2 amp. ..$3.75

UG Connectors UG 352U	$6.00 each
UG 9/U	.95 each
UG 21B/U	1.25 each
UG 234/U	13.00 each
UG 61A/U	1.80 each
UG 58/U	.70 each
83-1SPN	.45 each

BUS FUSES
INDUSTRIAL-TUBES-RECEIVING

Relays and other *Electronic* material are available. Send us your inquiries.

No Risk to You
All Material Offered Brand New

LEONARD GREENE
381 Tremont St. Boston, Mass.
Phone HAncock 6-4794

SAVE $ $ ON BRAND NEW TUBES

OA2	$1.69	2J62	38.95	6AK5	1.39	28D7	1.29	726A	6.50
OB2	1.59	2K25	33.95	6B8	1.10	32L7GT	.98	726B	29.50
OB3/VR90	1.95	2K28	29.95	6BL7GT	1.20	50	.98	807	1.79
OC3/VR105	1.10	2K29	29.95	6C5	.79	5Y3G	.89	809	2.25
OD3/VR150	1.10	3A4	.69	6F4	4.50	RK72	1.65	813	9.95
1A3	1.10	3A5	1.59	6F7	.89	RK73	1.65	829	8.95
1B3GT	1.15	3AP1	18.95	6J5GT	.59	7E	.69	829B	13.95
1B22	3.25	3B24	4.50	6K6	1.49	7F	.79	832A	9.95
1B24 Westing-house	7.95	3B28	7.50	6L6	2.25	83	1.69	833A	42.50
		3C22	59.50	6L7	1.10	250R	9.95	836	5.50
1B24Sylv.	16.95	3C23	8.50	6SG7	1.19	304TH	12.50	837	1.25
1B27	15.25	3C24 24G	1.75	6SH7GT	.89	304TL	9.95	851	52.50
1B42	17.50	3C33	12.50	6SJ7	.89	307A	5.50	860	3.50
1M23	1.29	3E29	14.50	6SL7GT	.89	350A	6.95	872A	2.75
1R4 1294	1.10	3Q4	.89	6ST7	.89	350B	8.95	873	.98
1T5GT	.98	3S4	.89	6V6GT	.69	388A	1.50	884	1.75
1V	.79	4E27	17.50	7B4	.69	394A	4.50	923	1.65
2C39	23.00	4J22	145.00	7C23	59.50	417A	13.50	927	4.75
2C40	9.50	4J23	145.00	7F7	1.10	WL530	19.95	955	.49
2E30	2.25	4J24	145.00	7V7	1.19	700A/B/D	16.50	958A	.49
2J21A	9.50	4J26	145.00	12A6	.89	706CY	39.50	1616	.95
2J22	9.95	4J31	89.50	12C8	1.09	706GY	39.50	1625	.45
2J31	29.50	4J35	145.00	12H6	.89	707B	14.95	1629	.39
2J32	49.50	4J41	89.50	12K8	.89	715B	12.95	2050	1.75
2J33	39.50	4x150A	42.50	12SH7	.89	717A	1.39	2051	1.50
2J34	39.50	5D21	22.50	12SK7	.69	720BY	95.00	8020	1.25
2J36	99.50	5R4GY	2.25	12SL7GT	.79	723A	7.50	8025	5.95
2J40	39.50	6A3	1.49	12SN7GT	.79	723A/B	14.50	9001	1.50
2J48	24.95	6AB7/1833	1.19	12SQ7GT	.79	724B	2.75	9002	1.25
2J56	179.50	6AJ5	1.89	12SR7	.89	725A	7.50	9004	.65
								9005	1.75

1000's OF OTHER TYPES IN STOCK! WRITE AND TELL US YOUR REQUIREMENTS!

We carry a complete stock of Radio & TV Tubes and Electronic Parts. Send us your requirements.

J. S. H. SALES CO.
Dept. E-5, 7562 Melrose Ave., Los Angeles 46, Calif.

WE PAY HIGHEST PRICES FOR SURPLUS STOCKS OF TUBES AND ELECTRONIC PARTS. Send us your list!

FOR SALE
10,500 Ft. RG-58A/U—new
21,000 Ft. #22-2 Cond. Rubber Covered—new
45,000 Ft. #12-1 Cond. Stranded VC—aircraft type—surplus
Subject prior sale
FS-1850, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

SOUNDTRONICS SPECIALS

STANDARD BRAND RES.
1/3 W TO 2 W ..... Jobbers quantities

CHANNEL TYPE COND.

An #CA 255
Made by leading mfgs. 1 11/16"x 1 9/16"x½" ..... 24¢

RG 10 Keyers complete with tubes $32.50

RG 10 U—52 Ω Armored Coax Cable ..... 12¢ ft.

RG 11 U—Coax Cable 9' long with PL 259 each end ..... 89¢

Type J Ad Pots.
600 Ω ½" Shaft ..... 6500 Ω S.D. Shaft
2000 Ω S.D. Shaft ..... 15 K Ω S.D. Shaft ..... 85¢

TRANSFORMER POWER SUPPLY

115 V, 60 CY., 300 V. @ 55 MA., 6.3 V. @ 2 Amps. Has 5Y3, 2 - 8 MF, Chokes, 2 - 30 MFD Filters, Pilot Term. Strip. Meas. 5"x5"x8". Completely wired $6.85

4 WATT W. W. POTS
5 K., 10 K., 20 K. ..... 40¢ ea.

SL 1 radar complete in good cond. $450.00

SCR 296 radar units and racks 6' high with 5 roller bearing drawers ea. drawer approx. 20" long and 19" wide & capable of supporting 150 lbs. of equipment.

1 & 2% Prec. W. W. Reg. 12k, 17k, 20, 30k, 33k, 40k, 43k, 50k, 100k, 84k, 150k, 200k, 220k, 500k ..... 45¢ ea.

1 Ω Prec. Res. W. E. Type D-167099 ..... 80¢ ea.

F. W. SEL. BRIDGE RECTIFIERS

18 V. IN...14 V OUT		40 V IN...34 OUT	
1.5 Amps.	$ 2.90	6 Amps.	$ 3.30
2.4 Amps.	3.85	1.2 Amps.	4.40
6.6 Amps.	5.45	3.2 Amps.	6.55
13 Amps.	9.80	6.6 Amps.	11.70
17.5 Amps.	12.50	9.0 Amps.	13.75

SPRAGUE NOISE FILTER
7 Amps 120 Vac 400 V.D.C. #TVX5. Has 2 toroid coils wound on polyiron core & filter cond. $1.15

12"x24"x⅛" Hair Felt idea for sound deadening. 12¢ ea.

Muter Ceramic Cond 600 V. 15, 22, 33, 56, 75, 82, 180, & 220 MFD. ..... 5¢ ea.
$4.50 per C

400 CY FIL & PLATE Transformers. Write for list.

Following Equipt Used But in Good Cond.
Dumont Type 185 Electronic Switch. & Sq. Wave Generator $85.00
Instrument Electronics Model 45. Wide Band Voltmeter .0005 to 500 volts 5 cy. to 1600 KC. $115.00
Cinema Eng. Type 1683 Ind & Imp. Bridge $285.00
G. R. Type 583 A Output Power Meter. $95.00
R.C.A. U.H.F. Signal Gen. Similar to Type 710A 470 to 560 MC. $145.00
Weston 663 Type 5 Multitester. $22.50
Weston 772 Analizer $32.50
W.E. Range Calibrators Types, I-108, BC-726-A & 168 ..... $24.00 ea.

SOUNDTRONICS LABS.
632 Arch St., Phila. 6, Pa. MA 7-2775

TUBE SPECIALS

VR-150	.95	3S4	.75
1L4	.65	6C21	37.50
1LH4	.80	6SJ7	.75
1N21B	2.95	6S17GT	.85
1R4	.95	6Y6G	.85
1R5	.95	1619	.25
1S5	.75	1624	1.45

ARCBY ELECTRONICS
103 West Liberty Louisville, Ky.

"TAB" That's a Buy!

866A KIT and XFORMER
2 tubes, 2a.c. xfmr 115v 60cyc Inpt, outpt 2.5vct, 10a $6.98
DIODE PROBE TUBE!
Unexcelled for NO-LOSS UHF T-ving. Uti% Sensitive Sub-Miniature—Envelope App. 1¼x⅝". Element & Probe at Tip. Low Fwr. Rtr. BRAND NEW w/Data. VR92. 25¢; 5 for $1.

RELAYS—FAMOUS MAKE
CLARE Octal 115VAC/DPNC SPNO. ..$3.98
CH BB oper. 7 to 34VDC/200 to 1200 Amps. $2.98
S DIANC 32AXX10 Reseta load 10 mas 115VAC $4.95
ADVANCE 4001BAantenna DPDT&SPNO 15 Amp. Ceramic, HF ins. 750 v 110V ..$2.75.
W.Rect115VAC $3.95
A-B w/coil adj18 1/15.2/12 VDC-3A $3.98
CLARE VAC Nitrogen std SSO10/DPDT 18...240 2 Amp Cln octal base @ $1.49.
w/115VAC rect. $1.98
GE inst V'Rel Calif 70,85,110, 160V for 115VAC $9.95
Ins. 4427928117A2 28V/30A/SPNO Dbl Th $1.98

CIRCUIT BREAKERS

Heinemann Mags Bkrs, Amps: 0.22, 1, 2, 3, 5, 7, 8, 12, 15, 20, 25, 30, 35, 40, 50, 70, 100, 180. Each $1.69
Sq. D & CH Toggle Sw Bkrs, Amps: 5, 10, 15, 20, 25, 30. Each ..... 89¢
Klixon Thermal Push Button Bkrs, Amps: 5 10, 15, 20, 30. Each ..... 69¢

NEW WESTON METERS
Brand New—Weston 301, 3" Sq. Panel Mtg. Immediate Delivery. No Priorities.
DC Micro-ammeter 0-50 ma DC. .. $16.98
DC Millammeter 0-1 ma DC (Reads 5KV $7.50
AC Voltmeter 0-150 VAC Rectifier Type 1000 ohms/volt $8.98
DC Voltmeter 0-800 VDC, 1000 ohms V $12.98
Volume Level Indicator—20..3VU. $16.98

LINE FILTERS

USN .1 TO 1000 MC'S
10Amp/130vacde Csd. $1.29
30Amp/250vacde Csd. $3.98
80Amp/600vdc 250vac. Fltrs both sides of line $9.98
1000Amp inside 110 vacde GE SPECIAL 2 for $1.98

Vacuum Precision HiVolt Resistors
Megohms—.12 .25 .6 .75 .83 .99 1.1 1.5 2 3 3.75 Each: Any 10 $1. 10 @ $7.50

"TAB" Dept. 10E, 6 Church St. Corner Church & Liberty Sts. New York 6, N. Y. WOrth 2-7230
That's A Buy!

Precision Resistors—
Over 2½ Million in Stock

"TAB"—Specialists in Precision Resistors
No Mfrs Choice—We Ship Types in Stock

0.11	675	366.6	733	1896	2635	6840	17500	45000	205000
0.42	80	370	740	1897	2700	6998	17977	47500	210000
0.425	81.4	375	750	1898	2750	7000	18000	48333	215000
0.667	88	380	800	1899	2850	7320	18300	48600	220000
0.7	89.8	399	806	1900	2860	7500	18358	49000	225000
1.03	95	400	850	1901	2870	7700	18500	50000	229000
1.3	100	400	854	1902	2900	7717	18800	51000	270000
1.75	101	410	899	1903	3000	7900	19000	52000	275000
2.5	105	414.3	900	1904	3100	7930	19500	54600	290000
3	105.7	418.8	910	1905	3163	7950	20000	55000	300000
3.83	107	425	917	1906	3259	8000	20441	47500	307500
4	120	426.9	946	1907	3298	8094	20500	58000	311000
4.35	121.2	427	978	1908	3333	8250	21000	60000	316000
5	125	440	1000	1909	3384	8500	21500	72000	316000
5.025	130	450	1030	1910	3500	8700	22000	73500	325000
6.25	135	452	1056	1911	3500	8750	22500	75000	330000
6.5	147.5	460	1059	1912	3700	9000	22970	80000	333500
7	150	470	1067	1913	3730	9100	23000	82000	350000
7.8	160	475	1100	1914	3760	9445	23150	84000	353500
7.9	165	478	1110	1915	4000	9500	23325	84600	357000
8	170	480	1150	1916	4030	9710	23400	85750	380000
10.38	175	487	1155	1917	4200	9800	23500	86000	400000
11.25	179	500	1162	1918	4220	9900	23750	88000	410000
12	182	520	1200	1919	4280	9902	24000	91000	420000
13.52	182.4	525	1225	1922	4300	10000	25000	93300	422000
14.2	200	540	1250	1924	4314	10430	25200	95000	425000
14.28	209.4	550	1260	1926	4500	10500	25461	100000	450000
14.5	216	575	1300	1960	4644	10600	25833	110000	450000
15	220	580	1350	1930	4500	10900	26000	115000	470000
16	220.4	600	1355	2000	4720	10924	26500	117000	500000
17	225	600	1400	2045	4750	11000	26600	120000	520000
19	230	612	1458	2080	4850	11400	27000	130000	521000
19.2	235	625	1495	2095	4885	11500	27500	135000	525000
20	240	633	1500	2141	4900	11800	28000	140000	543000
22	245	640	1510	2142	5000	12000	28430	141000	550000
23	245.4	641	1518	2145	5100	12500	28500	145000	570000
24	250	645	1600	2150	5210	12900	29000	150000	575000
25	260	649	1640	2160	5235	13000	29500	150000	600000
26	271	650	1646	2180	5270	13100	29990	155000	620000
28	275	657	1650	2187	5300	13500	30000	160000	650000
30	290	665	1670	2195	5500	13550	31000	165000	654000
31.5	296	668	1680	2200	5600	13600	31500	166750	660000
37	299	670	1710	2250	5730	14000	32000	167000	670000
48	299	673	1712	2300	5770	14250	32500	170000	700000
49	300	675	1740	2400	5910	14400	35000	175000	750000
50	310	680	1770	2450	6000	14500	37000	180000	761300
51.78	311.5	681	1800	2463	6030	14550	38000	183000	775000
55	320	684	1818	2485	6125	14600	38500	185000	813000
56.7	325	689	1830	2490	6140	15000	39000	186000	850000
60	330	697	1845	2500	6200	16000	39580	190000	900000
63	340	699	1892	2525	6250	16500	40000	196000	930000
68	350	700	1894	2600	6495	16800	42000	200000	950000
74	360	711	1895	2625	6500	17000	43000	201000	.....

Any size Above, Each 33¢; Ten for $3.20

MEGOHMS

1.	1.4	1.9	2.75	3.75	5.5	7.62	10		
1.1	1.5	2	2.8	3.9	6.	7.74	11.55		
1.2	1.57	2.11	2.855	4	6.5	8	12		
1.25	1.579	2.2	3	4.23	6.6	8.92	12.83		
1.3	1.65	2.25	3.3	4.25	6.7	8.5	13		
1.35	1.75	2.5	3.5	4.5	7	9.05	13.85		
1.39	1.8	2.7	3.673	5	7.5	9.5			

Any Size Above, Each 70¢; Ten for $6.40

SAVE 95% SENSATIONAL SURPLUS VALUES!

RECEIVERS
- BC-348-L. New
- BC-348-Q. Used
- 3-6 Meg. Command. $6.95
- 6-9.1 Meg. Command. $8.95
- 190-550 Meg. ARC-5. $18.95
- R-28 ARC-5
- APR-1 & Tuning Units TN-17, TN-18
- BC-342
- BC-312
- MN-26C
- RA-10
- RBA/APN-4. Used. $19.95
- Hammerlund BC-1209, 145 to 300 bands, 300 to 600 Megs. FM or AM. $185.00
- BC-348-J, 27/39 megs. FM. Xtnl cond. $39.00
- Marine Band 1.5 to 3 megs. New, S/A 50
- BC-357 Marker Beacon, 75 MC. Used, with plugs.
- BC1206A, 200 to 400 KC. Operates on 24V. DC. Used, good condition. $4.95
- RBR Pocket Receiver, Xtal controlled, 2-9 megs Liteweight portable. Uses 67½ V. B Battery or 2 flashlight cells. New orig. boxes. $15.00
- BC-470 Direction Finder Receiver. Continuous tuning. 200 KC. 18 megs. Less loop, used. $50.00
- Marker Beacon R.R.N.-8. Used. $15.00
- BC-373 Fairchild Liteweight A.D.F. Receiver, used. 14.95
- VHF BC-639-A R.A.-42, 100-156 megs. 110 V. AC.

TRANSCEIVERS
- SCR-284
- BC-474
- BC-620 & PE-117 (50 sets available)
- ARC-5 VHF (50 sets available)
- ARC-4 VHF
- TCS-5. 1.5 to 12 megs. 4 channel, Xtal controlled (70 sets available)
- TBS 60-80 megs, 50 W, AM, (30 sets available). New

TRANSMITTERS
- T-22/ARC-5, 7-9.1 megs. Like new $14.95
- T-24/ARC-5. New, 5.3-7 megs. $8.95
- T-23/ARC-5, 100-156 megs.
- T-19/ARC-5. 3-4 megs. $19.95

RADAR SETS AND COMPONENTS
- BC-640
- BC-974, 9c, 30 megs FM 12 V. Used.
- APS-4
- APS-15
- ARC-13A
- SCR-717

TEST EQUIPMENT
- TS-3
- TS-10
- TS-12
- TS-13
- TS-16
- TS-16
- TS-23
- TS-19
- TS-56
- TS-51
- TS-67
- TS-127
- TS-203/AP
- TS-143
- TS-238
- RC-252 Loran Trainer
- LS "S"-Band. Sig. Generator
- I-122
- I-222
- BC-376
- BC-949
- BC-221
- TS-102
- BC-906
- I-95
- I-130
- IE-56
- IRF-4/AP
- AN/UPM-1
- APA-6
- APA-11
- APA-23
- IAF
- I 203
- I-128
- 781B

WANTED We Pay TOP $ FOR
- BC-611 Handie Talkies or parts
- BC-788C
- I-177C
- PT-445
- ARC-13
- CU-32
- DY-11,12,17
- PE-94 CM
- BC-348

- **AIRFORCE TEST BENCH** with Cables and adaptors for checking all components of RC-375, BC-191, SCR-183, SCR-193, SCR-274N, SCR-522, BC-347 and BC-212. Can be modified to adapt other sets. Folds into table for convenient portable use. Runs on 12 or 24 V. Complete, used.

AIRBORNE EQUIPMENT

TRANSMITTERS
- ATC
- T-47/Art-13
- T-47A/ART-13

VHF SETS
- ARC-4
- ARC-5

MISCELLANEOUS EQUIPMENT
- APN-1
- SCR-718A
- SCR-718A/AM
- SCR-718C
- MT-283/ART-13
- MT-284/ART-13
- MT-14A/ARN-1
- DY-17/ART-13
- DY-12/ART-13
- DY-11/ART-13
- SCR-269
- AN/APN-9
- AT-4/ARN-1
- RC-103
- AN/ARN-5A
- R-89B/ARN-5
- Arlometer 9104 & 9044 Microphone

EXPORT INQUIRIES INVITED
We carry an unusually large stock of Airline Equipment, Test Equipment, Radar Sets, etc. Write for our low prices and complete information. We furnish immediate answers to all inquiries. Write today!

10,000 BATH TUB CONDENSERS .5 mfd 600 V. Tup terminals. Price on request.

ATTN. AIRLINES AND GOV'T. AGENCIES CONVERSION AND SHOP FACILITIES AVAILABLE
We are equipped to convert and repair all types of electronics equipment. No job too small or too large. All work unconditionally guaranteed. Xtnl. references. Prompt replies to all requests for estimates.

JAMMING EQUIPMENT
- APT-4
- APQ-2
- APT-5
- SCR-586/TI
- T-36
- ART-9
- ART-3 Complete

IMPORTANT!
No Order Less Than $5.00. Send 30% deposit. All merchandise subject to prior sale. Prices subject to change at any time.

All foreign orders add $1 minimum service charge.

V&H RADIO & ELECTRONICS SUPPLY
Dept. E-10, 2033-37 West Venice Blvd., Los Angeles 6, California

THE BEST IN ELECTRONIC SURPLUS

AVAILABLE FROM OUR STOCK FOR IMMEDIATE DELIVERY

TRANSMITTERS

T4/FRC, with Modulator **MD 1/FRC**, and **PP-1/FRC** Power Supply.
RCA-ET 4332 and 4336.
TDE, TBK, 8010, 8019, for Ships **ATD**, for Aircraft.
BC-319, BC-604, BC-684, etc.
RCA-2.5 KW, 2.0 to 20.0 mc, Al.
TSI. 500W. Simultaneous Radio Range and Telephone Transmitter. Frequency 200-400 KC. Mfd. for CAA by Federal Tel. Co.
BC-787, 50 Watt AM Transmitter. Freq. 110 to 130 MC. Xtal Control. Operation—110V. 60 cycles AC. MANY OTHERS!

TRANS-RECEIVERS

SCR-284, SCR-509 & 510, SCR-511, SCR-609 & 610, SCR-522, LINK Model 1498, TCS with 12/2 /230 DC and 110V, AC Power Supplies, SCR-508/528/608/628.

AUDIO SOUND

Beachmaster 250 W.; Western Elec. Model 91AS—500W.; RCA 25W (12V.) Mobile; RCA MI-2817-E Amplifier, 1,000 Watts (2—500 watt Channels); **W.E. Speaker Units** D-173246 (25-30 Watts) and D-173232A (50-60 Watts).

TEST EQPT.

BC-221, TS-174, TS-47/APR, TU-56, TU-57, TS-45, TS-143, I-148, TS-305, T S - 1 4 3/C F M - 1 Synchroscope, Others.

RADAR

SCR-545-A, Complete in Trailer Trucks, with or without 25 KVA Gas-Engine Generator Unit.
SF-1 Ship Radar, Complete, NEW, with many boxes of Spares.
MARK V Training Radar, for schools, training.

RECEIVERS

RBM, RBS, RBO, BC-224, DZ-2 Direction-Finders with Loops, **SCR-206 Direction Finders** with Loops.
SCR-291 Goniometers and Accessories, **R-2/ARR3.** Others.

SPECIAL

Wilcox 36A Rectifier-Power Supply, for 3 KW modulated transmitter.
RADIOSONDE AN/AMQ-1, Meteorological Balloon transmitter with self-contained instruments. Receiving and Recording supplementary eqpt. also available.
"SNOOPERSCOPE" TUBES, British Infra-Red Image Converter Tubes, with matching Bausch & Lomb front-end Lens.
SOUND-POWERED HEAD-CHEST SETS, RCA-2454-B, all New, export-packed.
32V. DC to 110V. AC KATO Converters, NEW, good to 300 watts.
115V. DC to 115V. AC., 60 cycles, Motor-Generators. 500 Watts output; mfd. by Esco, and Holtzer-Cabot.
RC-163 Radio Beacon Eqpt., designed for use with SCR-508/608/528/628/510/610 Transmitter-Receivers. 20 to 40 mc. Complete, export-packed, NEW equipment.
TE-54A & TE-55A Cable Vulcanizing Units.
AT-49/APR-4 Antennas.

TELEMARINE COMMUNICATIONS COMPANY

CABLE ADDRESS: TELEMARINE, N. Y. Phone—LOngacre 4-4490

540 W. 27th St., N. Y. 1, N. Y.

SCARCE BUYS!

RADAR—APS-3 airborne radar complete with spare modulator unit	$495.00
Sig. Gen.—2-125 CPS Dumont 215	95.00
Sig. Gen.—I-138A "S" band	95.00
T-85/APT—5 complete, new	175.00
TEST SET—TS-159/TPX 60 cycles	49.00
PANEL METERS—many types available	
METER—Freq. 350-450 cycles, 90-140V. 1/3 of 1% acc. for aircraft, shop, etc., new	24.00
Xmitter—500 watt phone deluxe ham built rig., complete	195.00
Xmitter—150 watt phone—CW ham built	60.00
TBX—xmitter—Rec. 2-6 mc.	29.00
Xmitter—2 meter Arc. 5 like new	39.00
B.C. 645A—Xmitter—Rec., new	18.00
RECEIVER—Arc. 5 3-6 mc. less dial and drive	4.50
B.C. 375—Xmitter, with tubes, new	24.00
GF/RU coil sets for Rec. and xmitter	.50
B.C. 423—Radio modulator	19.00
TU-5—Tuning unit 1500-3000 KC.	2.50
72 OHM—Twin line, 7/21 wire, 1 KW	.04
95 OHM—2 wire shielded coax	.04
Rack Cabinet—19 lg. 8¾ H. 13 dp. black crackle hinged door on top, new	5.95
TUBING—Red plastic #20 wire, 1500'	4.95
3 MFD—4000 V. oil. cond.	4.95
3000 MFD—50 V. and 4000 MFD—25 V. cond., ea.	2.50
40 MFD—25 V. cond. .15 for	1.00
723 A/B TUBE—Ind. boxed, new	9.95
DECK ENT. INSULATOR 9" Dia. Bowel	2.50
RELAYS—24 V. DC. from equip., clean, D.P.D.T. 10 amp	.25
S.P.S.T. DB 30 amp	.50

TRANSFORMERS

230/460 V. .750 KVA. use as 110/220, new	9.95
24 V. 4 KVA 220/440 V. Pri. 3 ph., new	50.00
8.5 V. 5 KVA 220/440 V. Pri. 3 ph., new	60.00
10 V. 10 KVA 220/440 V. Pri. 3 ph., new	110.00
11-13 V. 1 KVA 110 V. Pri., Good cond.	19.00
Dynamotors—12 V. 680 V. 210 ma., new	14.95
TV Chassis—suitable for color TV receivers, sweep circuits, low voltage supplies, 30 KV supplies, projection optical units; also front ends and FM tuners	

All at lowest clearance prices

Write for our bargain bulletin

FOB Hempstead 25% with COD order

ALGERADIO ELECTRONICS CO.

385 Jackson St. Hempstead, N. Y.

SILVERPLATED REFLECTOR—Overall Dimensions 4⅝", Reflecting Surface 4¼", Depth 1⅜", Individually boxed 25¢ ea. $20.00 per 100.

Eastern Air Device J50 Centrifugal Blower, 115 volt 60 cycles 0.1 amp. 1 PH 10 C.F.M. Continuous duty 1.0 M.F.D. Capacitor start with Capacitor **$10.75**; without Capacitor **$10.25**

Eastern Air Device J50E Dual Centrifugal Blower, 115 volt 60 cycles 0.1 amp. 1 PH 20 C.F.M. Continuous duty 1.0 M.F.D. Capacitor start with Capacitor **$18.75**; without Capacitor **$18.25**

Miniature lamp T1¾, 2 volt .19 amp. Airplane Indicator, Amb. Ctd.
10 for **$1.00**
100 for **$8.50**

VOLTMETER Weston 832 120v. A.C. 400 cycles 2¼ flush bakelite Aircraft mounting black scale Fluorescent numerals removed from new equipment **$8.50**

AMMETER, 150/300 dual range Triplet 341A 2¼" rectangular flush bakelite 5 amp Movement @ $4.95 with external current transformer for 150 amp.
Only $7.50

Square D Circuit Breakers Push Type AN3161-35 35 amp. @ 30 volt D.C.
$1.15 each

Square D Bat Handle Circuit Breaker Type AN3160-10 30 volt @ 10 amp
$1.25 each

SEND FOR FREE BULLETIN

Telephone Digby 9-2188-9

A. Cottone & Company — Electronic, Mechanical & Optical Components

880-890 Canal St., New York 13, N.Y.

ALL PRICES F.O.B. N. Y. CITY

TUBE SPECIALS

STANDARD BRANDS

1B3	$1.35	6AT6	.70	6SU7GTY	2.50
1LN5	.95	6AU6	.79	6V6GT	.89
1N21B	3.50	6B4	1.35	6W4	.85
1N23B	4.00	6BA6	.79	6Y6	1.09
1N34	.60	6BG6G	1.89	12A6	.70
2A3	1.25	6BQ6	1.59	12AT7	1.19
2X2	.65	6C4	.85	12AU7	1.19
5R4GY	2.25	6CD6	2.25	12AX7	.95
5U4	.79	6K6GT	.75	12AY7	4.50
5V4	1.20	6H6M	.85	12J5GT	.65
5Y3GT	.49	6N7M	1.20	12SK7	.79
5Z3	.85	6R6	1.50	12SR7M	.75
6AC7	1.29	6SF5GT	.85	14A7	1.05
6AG5	.90	6SH7M	.95	14B6	1.05
6AG7	1.65	6SC7	1.25	25W4	.90
6AK5	1.20	6SL7GT	1.10	59	1.50
6AL5	.79	6SN7	1.09	89Y	.75
6AB6	.70				

Many more types in stock. Write for quotations.

2C51	$5.95	75TH	6.75	807	1.65
2E25	5.95	T200	16.95	809	2.25
2E30	2.00	211C/VT4C	1.75	829B	13.95
2D21	1.65	3C24/24E	1.50	832A	11.95
2K29	21.95	304TL	12.49	866A	1.30
3B24	5.35	304TH	12.49	CK1005	.79
6J4	6.75	350B	5.50	1603	5.95
T20	2.25	394A	5.50	1620	6.50
TUF20	3.95	446A	1.95	8025	5.75
TZ20	2.25	715B	9.50	9001	1.75
TZ40	3.25	721A	2.45	9002	1.50
455	.35	726A	6.50	9005	1.75
CK70	4.95			3API	12.50
RKR73	1.50			3BP1	6.95

All tubes are subject to prior sale. 20% deposit required balance sent COD plus postage. We buy anything in electronics.

Nat Adelman

168 Washington St. New York 6, N. Y.
CO 7-6091

AT

Big Saving!

FERRULE-TYPE RESISTORS

Immediate delivery from our stock of over 250,000.

•

Wide assortment from 0.2 to 300,000 ohms.

•

ENAMEL—GLASS FIXED—ADJUSTABLE

•

New and in perfect condition.

•

Nearly all made to JAN specification.

UNIVERSAL MARINE & MFG. CORP.

137 Alexander St. Yonkers 2, N. Y.

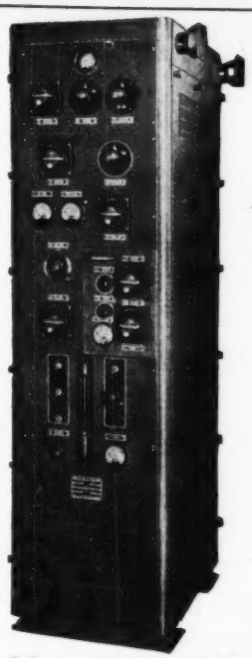

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

R.C.A. COMMUNICATION TRANSMITTER

Model MI-8167, a 350 watt CW and 250 Watt 'phone operating in the frequency range of 2000 to 20,000 kcs., from 220 V. AC 50/60 cycle input. Beautifully constructed and self-contained. Speech amplifier and tubes included. All complete and new, packed for export.

Complete descriptive data on request.

Other choice selected guaranteed transmitters, receivers and combinations for all types of services and wattage.

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

COMMUNICATION DEVICES CO. 2331 TWELFTH AVE N. Y. 27, N. Y.

Cable: COMMUNIDEV Tel: AD-4-6174, 5

TEST EQUIPMENT

TS-3	TS-61	TS-146	BC-1277	W-1158
TS-6	TS-62	TS-153	CLQ-60	
TS-10	TS-74	TS-159	D-150637	TRANS.
TS-14	TS-76	TS-203	I-143	APQ-2
TS-15	TS-91	TS-206	I-196	APT-1-2-5-5A
TS-16	TS-92	TS-218	I-203A	ARQ-8
TS-19	TS-98	TS-226	I-208	ART-2-7
TS-24	TS-100	TS-268	I-212	AXT-2
TS-26	TS-102	APA-11	I-223	TPS-2
TS-27	TS-111	BC-221	LM-8	
TS-33	TS-118	BC-376	LM-15	RECVRS:
TS-35	TS-125	BC-638	LS-1	APM-9
TS-36	TS-126	BC-905	LW	APR-5A
TS-45	TS-127	BC-906	OAP-1	ARN-8
TS-47	TS-131	BC-978	OAV-1	ARQ-8
TS-59		BC-1236		

RECEIVERS CPN-3 RA 10 DB TPS-2 RT-48ATPX-1
COMMUNICATIONS, BEACON, LORAN, IFF AND RADAR
SCR-717B; APS-(2)(3)(4)(15); APQ-13

MAGNETRONS POWER UNITS ANTENNAE INDICATORS
TURBO AMPLIFIERS CONTROL AND JUNCTION BOXES, Etc.

New and Enlarged Space and Facilities

LERU LABORATORIES, INC.

Black Oak Ridge Rd. and Jackson Ave. Wayne, N. J.
R. F. D. #1, Paterson, N. J.
Telephone: Terhune 5-2765 N. Y. C. Telephone: Oregon 5-3525

• **CARTER.** 6 Volt Dynamotors • Compact Brand New • Original Boxed.
6V.D.C. in—400 volts DC out @ 375 MA. $28.00
6 V.D.C. in—590 volts DC out @ 250 MA. $33.00
• **G.R. Model 50-B Variacs**—New in orig. crates, 115 or 230 VAC input; 31 max amps.—factory price $140.00. Your cost only $99.50
• **BC-221-AK-Mod. Freq. Meter**—New; lens case $125.00
• **BC-611—Walkie-Talkies** in excell. operating condition on a matched freq. The set of 2 at $149.50
• **300 ohm Twinlead**—High qual. polystyrene ..... $14.50 per roll of 1,000 feet

The AR-11 is a Complete, Ultra-Compact Radio Station In Portable Leather Case;

35 Watt Transmitter and Superhet Rcvr. Complete with 110 and/or 220 V.A.C. pwr. supply—With all Accessories. New; Export packed (orig. cost $550.00) @ $250.00—Ten Sets in Stock.

SELENIUM RECTIFIERS
Full-Wave Bridge Types

Current (cont.)	18/14 Volts	36/28 Volts	54/42 Volts	110/100 Volts
1	.....	3.75	.....	.....
2	2.40	3.90	7.50	10.50
4	3.85	7.00	9.50	.....
6	5.85	.....	.....	.....
8	5.90	10.50	.....	.....
12	7.75	15.00	.....	.....
24	16.00	29.95	.....	.....

All our Rectifiers are new & Guaranteed one year. Quick service on special Rectifiers to your specs.

QUALITY, TESTED TUBES

New and guaranteed in stock now; many others not listed—complete line of receiving tubes at low prices. Submit your requirements on any types for our quotation.

0A2	$1.49	101-D		954	.27
0B2	1.85	(WE)	1.25	955	.40
1B26	2.50	101-F		956	.37
1B27	15.00	(WE)	1.25	958-A	.62
1L2I (G.E.)	4.00	101-L		1616	.75
1N21	.85	(WE)	1.25	1625	.40
1N23	1.45	211	.85	1626	.40
1L23B	4.00	274-B		1629	.30
1N34	.65	(WE)	3.50	5517	2.95
1N48	.65	275-A		5688-A	5.00
2D21	1.75	(WE)	4.50	5854	4.50
2E24	4.75	310-A		5918	.75
2E26	3.80	(WE)	6.50	6021	6.85
2E30	2.15	311-A		6044	.49
2J32	40.00	(WE)	7.50	6005	1.50
2J61	32.50	313-C		6096	.49
2K25	27.50	(WE)	1.25	100-TH	8.50
2K28	32.00	373-A		304-TH	11.50
2K45	99.50	(WE)	5.00	304-TL	11.50
3AP1	10.75	374-A		450-TH	
3BP1	7.25	(WE)	7.00	(CURR)	37.50
3BP11	10.00	387-A		FG-172	45.00
3DP1-A	5.95	(WE)	2.50	HK-254	7.00
3E29	13.50	802-A		HK-257-B	14.50
4-250-A	27.50	(GE)	1.50	RK-28-A	5.00
4E27	14.50	707-A	7.95	RK-34	.27
5BP1	4.95	715-A	6.95	RK-38	12.50
5D21	19.95	715-C	22.95	RK-47	5.00
5FP7	1.95	729-A	6.95	RK-59	.75
5J1P1	22.50	807	1.65	RK-63	10.95
5LP7	15.75	809	2.35	RKR-72	1.25
5LP11	15.75	812	2.75	RKR-73	1.45
6AJ5	1.50	813	7.85	T-40	3.00
6AK5	1.25	829-B	13.50	VR-105	1.25
6J6	.85	832	5.50	VR-150	.95
10-Y	.45	832-A	9.75	KU-676	25.00
12AT7	.85	837	1.50		
12AY7	3.00	872-A	2.25		
12AX7	.85	892-R	199.50		

Terms: FOB NYC—25% Deposit with order—or send full remittance to save COD charges—Rated Firms (D.&B.) Net 10 days—All merchandise guaranteed.
Phone: KEctor 2-2563
Cable: Barrylect, N. Y.

BARRY ELECTRONICS CORP.
136 Liberty Street New York 6, N. Y.

→ ATTENTION PURCHASING AGENTS · · · CHIEF ENGINEERS ←

DO YOU HAVE OILS, BATHTUBS, CHANNEL CAPACITORS ON YOUR PROCUREMENT PROGRAM? CHECK THIS LISTING FOR GOOD BUYS AND COMPLETE STOCKS. LARGE QUANTITIES ON HAND—OUR PERSONAL AND FRIENDLY SERVICE ALLOWS SAME DAY SHIPMENT ON RECEIPT OF P. O.

CAP→	.01	2X .01	0.2	2X .02	.05	2X .05	3X .05	.1	2X .1	3X .1	.25	2X .25	3X .25	.5	2X .5	3X .5	1.0	2X 1.0	2.0	4.0	5.0
400 V					.50			.50			.60			.65	.80		.75	←CHANNELS			
600 V	.45		.45		.55	.60	.70	.60	.65	.75	.65	.75	.85	.75	.90		.85	←CHANNELS		1.25	
50 V																				.60	
100 V																.30	.35			.65	.70
200 V				.30	.25				.25					.25	.35		.35	.65	.60		
400 V	.25		.25	.35	.25	.35	.40	.25	.30	.35	.30	.35		.30	.45		.40		.85		
600 V	.30	.40	.30	.40	.30	.40	.45	.30	.35	.40	.35	.40		.35	.60	.50	.65	1.65	1.65		
1000 V	.35							.40	.45		.45			.60			.85				
1200 V			.40	.45																	
1500 V				.80				.85	.90												

ALL MATERIAL CLEAN, NEW & GUARANTEED—MFRS.—ALL STANDARD MAKES. SOME JAN. SPECIFY LOCATION & NUMBER OF TERMINALS WHEN ORDERING. MANY SPECIAL VALUES AND TYPES INCLUDING BATHTUB CASED ELECTROLYTICS AVAILABLE, H V TRANSMITTING TYPES

Min. Order $5.00
56 LISPENARD ST. ELECTRONIC SPECIALTY SUPPLY CO. BArclay 7-2684
MATERIAL PROPERLY PKGD **NEW YORK 13, N.Y.**

NEW MERCHANDISE *Prompt Delivery*
COAXIAL RF CONNECTORS *Guaranteed*
MANY OTHER TYPES AVAILABLE

UG-27A/U	$2.80	UG-88/U	$1.25	UG-262/U	$1.40
UG-58A/U	1.40	UG-107B/U	3.50	UG-290/U	1.25
UG-58/U	1.05	UG-260/U	1.35	PL-259A	.75

****SPECIAL** 7000 3D21A type TUBES @**

F M ELECTRONICS CO.
56 Lispenard Street
New York 13, N. Y.
BArclay 7-2685

WE HAVE LARGE QUANTITIES OF RADIO TUBES

TYPE	PRICE	TYPE	PRICE	TYPE	PRICE
OZ4A	$0.70	6BE6	$1.20	6SK7GT	$0.96
1G6GT	0.72	6C4	0.86	6SN7GT	1.20
1LN5	0.80	6C5GT	0.51	6SS7	0.95
1R5	0.90	6C6	0.75	19A6	0.48
1S4	0.86	6D6	0.68	19SH7	0.96
1T4	0.86	6H6	0.94	19SK7	0.98
5U4G	0.80	6J5	0.60	19SQ7GT	0.90
6AB7	0.90	6J5GT	0.51	19SR7	0.90
6AC7	1.20	6K6GT	0.91	35Z4GT	0.85
6AL5	1.00	6K7GT	0.70	35Z5GT	0.75
6AQ5	1.40	6SG7	0.90	50L6GT	0.90
6B8	0.93	6SH7	0.80	42	0.76
6B8G	0.93	6SK7	0.96		

TYPE	PRICE
3E22	$2.50
6C21	30.00
357A	22.50
803	3.00
805	2.90
807	1.75
808	1.70
830B	3.00
9005	1.30

List Price: $13.50

SPECIAL SALE TYPE 805 { **OUR PRICE: $2.90**

This offer subject to change and prior sale.

METROPOLITAN OVERSEAS SUPPLY CORPORATION
MANUFACTURERS AND DISTRIBUTORS OF ELECTRONIC PRODUCTS
1133 BROADWAY, NEW YORK 10, N. Y. CHELSEA 3-1105

PHOTOCON SALES

1062 N. Allen Ave. Pasadena 7, Calif. *SYcamore 4-7156 RYan 1-8271*

WRITE FOR OUR NEW 24 PAGE SURPLUS SALES CATALOG

WE WILL BUY YOUR NEW OR CLEAN USED ELECTRONIC SURPLUS: ARC-1, ARC-3, BC-224, BC-348, BC-312, EC-342, ATC, ART-13, APS-13, BC-221, LM's, TS-12, TS-13, TS-23, TS-34, TS-35, IE-19A, I-222, SCR-522, TS-100, I-100, or any BC, I, IE, TS, APR.

WRITE FOR PRICES
APR4, APR5A, APR7, TS-34, 804CS2, APA-38, BC-348, ART-13, TS-12, ARC-1, APN-9

Weston 769 Electronic Analyzer	LIKE NEW	$200.00
Weston 799 Insulation Tester 0-10,000 meg.	LIKE NEW	60.00
Weston 779 Analyzer	LIKE NEW	100.00
Weston 666 Volt-ohm Milliameter, case, and model 666 socket selector	LIKE NEW	80.00
Bristol Dynamaster Recorder-Controller KRQ1531 for Resistance Thermometers 130-145 ohm	LIKE NEW	350.00
Variac—General Radio Type 50A 0-135V, @ 50 amps	EXCELLENT	95.00
APN-1 Altimeter Indicator 0-1 ma. shunt, 250° dial	NEW	2.95
2" Aircraft Meter 1-0-1 milliameter scale calibrated 50-0-50		1.95
MG075-G-1 Onan Motor Generator Motor 115/230V. 60 cycles 5.3 amps. 26V. D.C. @ 4 amps		100.00
Counting Rate Meter — General Radio 1500A 0-20,000 counts per minute	EXCELLENT	395.00
IE36A Test Sets for SCR-522		35.00
I-139A Test Sets for SCR-522		15.00
TS100/AP Oscilloscopes, EXC		99.50
BC-376H Oscillator	LIKE NEW	35.00

One of the largest and most complete electronic surplus stocks in the country. We have thousands of tubes, capacitors, plugs, accessories, transmitters-receivers, test equipment, etc. Send us your requirements.

TERMS: Prices f.o.b. Pasadena, California. 25% on all C.O.D. orders. Prices subject to change without notice Californias add 3% Sales Tax.

If there is anything you want—

or something you don't want that other readers —or use—advertise it in

SEARCHLIGHT SECTION

CLASSIFIED ADVERTISING DIVISION

CONDENSERS OUR SPECIALTY
OIL FILLED & TRANSMITTING MICA TYPES
All Values and Voltage Ratings
We Invite Your Inquiries
TECHNICAL RADIO PARTS CO.
557 McDonald Ave., Brooklyn 18, N. Y.

CONDENSER SPECIALS

10 mfd.—600 V ..... $ .75
Three term. bot. mntg. channel type. Dims. 3¾"x3½"x2". Two 5 mfd. sections rated 400 V at 72 deg. "C". 1800 V test. Meets commercial specs. for 600 V operation up to 40 degs. "C". Ideal for filter or power factor application where ruggedness and quality are paramount. Carton of 24 weight 42 lbs.
$.65 ea.

16 mfd.—600 V $1.75
Dual 8 mfd oil filled cond. hermetically sealed and packed. Tube type PT-SC-11 measuring 3¾"x2⅜"x2⅝". Stud mntg. centers 2". Plugs into standard four prong socket. *Quantity discount.*

7 mfd.—600 V $1.45
Small, high quality oil cond. by a leading mfg. measuring *only* 2½"x3¾"x1¾" complete with brackets.

6 mfd.—150 V ..... $ .25
Three term. dual 3 mfd. oil cond. complete with brackets, measuring 4¼"x1¾"Wx1".

8 mfd.—1000 V $2.39
Dual 4 mfds. hermetically sealed and packed, measuring 5⅜"x3¾"x2 7/16". Case of 10 $2.10.

8 mfd.—600 V	$1.69
8 mfd.—500 V	1.29
4 mfd.—600 V	1.25
4 mfd.—400 V	.85
2 mfd.—600 V TLAD	.80
1 mfd.—600 V Channel	.65
1 mfd.—500 V Channel G.E	.58
1 mfd.—400 V Channel C-D	.50
.5 mfd.—400 V Channel Arox	.29
.2 mfd.—1000 V ST Bathtub	.19

NEW—BC—906
FREQ. METER—NEW



Range 150-225 MC—Bat. operation with precision velvet vernier dial, tuning charts, 0-500 D.C. microammeter, diode-Triode and plug-in antenna. Contained in black aluminum carrying case 12½ x 8¾x6½.
Price $21.95

Large quantities of bathtub, channel and upright oil conds. from 25 V to 25KV. Trans. & Rcvng. micas. Standard brand pots and 25 Watt rheos. Inquiries solicited.

WANTED

Condensers of all types in any quantity. Also other standard components. Top prices.

Write:—Art Hankins, Owner

MONMOUTH RADIO LABS.
Box 159 Oakhurst, N. J.

FOR SALE

ELECTRICAL STEEL

We can offer about 26,000# of Hi-Grade Strip—.005 x 12⅜" "Hipersil" 3¼% Transformer grade — In Coils weighing about 900# each—Material new and prime but outside wrap weather discolored.

GLOBE TRADING COMPANY
1815 Franklin Detroit 7, Michigan
Phone—WOodward 1-8277

INSULATED TUBING and SLEEVING

Electro has been quite fortunate in being able to purchase a large variety of insulation sleeving of all types. This stock is fresh stock and available for immediate delivery at approximately one half the regular price. Some sizes are limited in quantity therefore we suggest your placing your order at once. All insulation is offered subject to prior sale. Advise us if you wish us to substitute sizes if your size is out of stock.

Size	I.D.	Color	Type	Per 100'	Per M'
	.0156"	Green	Var. Cam.	$1.75	$13.00
	.0156	Black	Extr. Plas.	.75	5.40
20	.034	Black	Var. Cam.	2.75	13.50
20	.034	Yellow	Tri. Sat. Glass	3.75	32.50
20	.034	Brown	Tri. Sat. Glass	3.75	32.50
14	.072	Black	Var. Cam.	2.10	17.50
12	.089	Black	Sat. Glass	1.10	7.00
12	.089	Orange	Extr. Glass	4.75	42.50
12	.089	Orange	Var. Cam.	2.20	18.00
12	.089	Black	Var. Cam.	2.20	18.00
11	.101	Black	Extr. Plas.	1.10	7.00
11	.101	Black	Var. Cam.	2.55	21.50
11	.101	Black	Sat. Glass	5.00	46.00
11	.101	Yellow	Sat. Glass	5.00	46.00
11	.101	Yellow	Dbl. Sat. Glass	7.50	60.00
10	.112	Black	Var. Cam.	2.75	21.50
9	.124	Black	Var. Cam.	3.00	25.00
8	.141	Black	Var. Cam.	3.15	27.50
8	.141	Black	Extr. Plas.	1.40	13.00
8	.141	Clear	Extr. Plas.	1.40	13.00
8	.141	Yellow	Cel. Extr.	3.15	27.50
7	.158	Black	Var. Cam.	3.45	30.50
6	.178	Black	Sat. Glass	6.15	57.50
6	.178	Clear	Extr. Plas.	1.65	12.50
6	.178	Orange	Var. Cam.	3.80	34.50
6	.178	White	Extr. Plas.	1.65	12.50
6	.171	Black	Var. Cam.	3.80	34.50
5	.198	Black	Var. Cam.	4.10	37.00
5	.198	Black	Extr. Plas.	1.85	14.50
5	.198	White	Extr. plas.	1.85	14.50
4	.224	Clear	Extr. Plas.	2.00	16.00
4	.224	Black	Sat. Glass	7.00	64.00

Size	I.D.	Color	Type	Per 100'	Per M'
3	.249	Black	Extr. Plas.	$2.25	$18.50
3	.249	Black	Tri. Sat. V. C.	5.25	48.50
3	.249	White	Extr. Plas.	2.25	18.50
3	.249	Black	Sat. Glass	6.55	61.50
2	.278	Clear	Extr. Plas.	2.65	22.50
2	.278	Black	Var. Cam.	5.15	47.50
1	.299	Clear	Extr. Plas.	3.00	26.00
5/16"	.3125	Clear	Extr. Plas.	3.10	27.00
5/16"	.3125	Black	Neo. Hose	18.00	
0	.347	Yellow	Var. Cam.	6.60	62.00
0	.347	Black	Var. Cam.	6.60	62.00
3/8"	.375	Black	Dbl. Sat. V. C.	8.50	81.00
3/8"	.375	Black	Extr. Plas.	3.60	32.00
3/8"	.375	Yellow	Var. Cam.	8.00	76.00
3/8"	.375	Black	Sat. Glass	8.90	85.00
3/8"	.375	Black	Var. Cam.	3.60	32.00
7/16"	.438	Black	Extr. Plas.	4.00	36.00
7/16"	.438	White	Extr. Plas.	4.00	36.00
15/32"	.469	Clear	Extr. Plas.	4.50	43.00
1/2"	.500	Black	Extr. Plas.	5.00	46.00
5/8"	.625	Clear	Extr. Plas.	6.85	64.00
11/16"	.688	Black	Extr. Plas.	8.75	
3/4"	.750	Clear	Extr. Plas.	9.50	
13/16"	.813	Clear	Extr. Plas.	10.00	
7/8"	.875	Black	Extr. Plas.	12.50	
7/8"	.875	Clear	Extr. Plas.	12.50	
1"	1.000	Clear	Extr. Plas.	15.00	
1"	1.000	Black	Extr. Plas.	15.00	
1-1/8"	1.125	Black	Extr. Plas.	17.50	
1-1/8"	1.125	Clear	Extr. Plas.	17.50	
1-1/4"	1.250	Black	Extr. Plas.	20.00	

Quot. on req.

MINE DETECTOR SCR 625

Detects metallic objects (ferrous or non-ferrous) to a depth of approx. 6 ft. Find outboard motors on the bottom of lakes, locate underground piping, treasure, metallic fragments in lumber, etc. New, complete with inst. book. $65.00. Used but like new..... $45.00

MOTORS AND GENERATORS

Elec. Spec. Type JAI, 24VDC, ¼HP 3800RPM.. $14.95
EMC, SPN44461, 24VDC, 100HP, 21RPM..... 14.95
Emerson Type D26BT, 24VDC, 24A 100RPM 160 oz./in torque 12.95
A.C. Gilbert, trim tab motor, 24VDC..... 2.95
Diehl, C78889, 115VAC 60cy, 3ph, 1/40HP, 3450RPM (used) 3.95
G.E. Selsyn 2J1G1, 57.5/57.5V 400cy..... 9.95
G.E. Selsyn 2J1F1, 115/57.5V 400cy..... 12.95
G.E. Selsyn 2J1H1, 115/57.5V 400cy..... 12.95
Pioneer Bendix Autosyn AY-20..... 14.95
Pioneer Bendix Autosyn AY-59D1..... 12.95
Pioneer Bendix Magnesyn CL-6..... 9.95
Oster, D-4-2, 24VDC, 1/60HP, 1800RPM..... 9.95
Oster, VRS-1B, 6VDC, 1.8A, 5000RPM..... 8.95
Elecr. MLZ310-52, 24VDC, 0.32A, 1800RPM .. 4.95
G.E. PM Generator, Model 5BY09F8, 140VDC, .025A 1800RPM 8.95
Oster, E24-2-1, Motor for 7G Selsyn..... 7.95
Ohio Elec. CP35220, 115VAC, 1ph, 60cy, 1/40HP, 3400RPM 12.95
Alliance, 451-1182, 27.5VDC 1/90HP, 7500RPM 6.95
Delco, A7135, 27VDC, 2.4A, 1/30HP 3600 RPM 9.95
Gillette, Elec razor motor 115VAC 60cy 1.95
White Rogers, 6805X, 24VDC, .65A, 50 oz/in torque 12.95
Oster, C-2P-1L, Blower, 28VDC, 1/100HP, 7000 RPM 12.95
Oster, C-2BP-1A, 27.5VDC, 1/100HP, 7000RPM 8.95
Westinghouse, 1171391, 27VDC, ⅛HP, 5800RPM 9.95
Elec Ind, Type 203, 115VAC, 1ph 60cy, 1.75HP 1800 RPM 11.95
Eastern Air Devices, 431, 115VAC, 400cy, 1/50 HP 9.95
G.E. Model 5BA10AJ40, 24VDC, 140RPM, 0.55A, 10 oz/in torque 12.95
Gen'l Ind, 23026, 115VAC, 60cy, 1ph 80RPM.. 3.95
Univ Elec, Model 523, 115VDC, 1.2A, 5000RPM 5.95
Delco, A7501B, 27.5VDC, ¼HP, 11A, 6000RPM 17.95
Pump Eng, 1454-ME, 24VDC, 95A, 2.2HP, 4000 RPM 27.50
Pioneer Autosyn, PR-51503-1-2320-1A..... 9.95
Fasco Blowers, 115VAC, 60cy 50 CFM 9.95
W.E. KS5603, 24-28VDC, 1/100HP, 0.6A, 5000 RPM 3.95

RELAYS

G.E. #CR2791-B100J4, 3PDT, 6VDC, 15A Contacts $1.25
Allied 1D0D28, 3PDT 6VDC 15A contacts..... $1.35
Leach Type 1054ARV, 3PST on make, SPST on break, 20-32 VDC, 15A contacts..... $1.25
G.E. #CR2791-B100F3, DPDT 24 VDC 5A contacts 75c
Price #311, DPDT, 28VDC, 10 Amp cont. 1900 ohm coil 95c
G-M #13020, DPST on make, 3PST on break, 24VDC, 15A contacts $1.25
Allen Bradley X89309, SPST double make, 24VDC, 200A $2.50
A-B Bulletin X36545, type B6B, SPST Double Make, 24 VDC, 200 Amp..... $2.50
Dunco Thermal Time Delay 115 VAC 60 Cy. SPST, 1 min delay..... $1.95

WESTINGHOUSE HQS PHASE SELECTOR RELAYS, for selective Pole Carrier Relaying, 3 unit per set $95.00

Pioneer Gen-E-Motor Dynamotor #882869. Input 18V; Output 450V @ 150MA..... $3.95

CONVERTERS PU-16/AP, input 28VDC; output 115 VAC 400 cy. 6.5A..... $59.50

INVERTERS PU-7/AP, input 28VDC; output 115 VAC 400 cy. 6.5A..... $59.50

INVERTERS PE-218, input 28VDC; output 115VAC, 400 cy. at 1.5 KVA..... $29.95

WIRE WOUND RHEOSTATS
Standard Brands

#241D, 250/250 ohms 50W w/⅛" shaft..... 85c
#241D, 300/300 ohms 50W w/⅛" shaft..... 95c
#241D, 400/400 ohms 50W w/⅛" shaft..... 95c
#50D, 30/30 ohms 50W w/⅛" shaft..... 95c
Model J, 10/16 Ohms 50W w/⅛" shaft..... $1.25
Model J, 0.5 ohms 50W..... 95c
Model J, 5 Ohms 50W..... 95c
Model J, 75 ohms 50W..... 95c
Model J, 150 ohms 50W..... 95c
Model J, 800 ohms 50W..... $1.25
Model J, 1000 ohms 50W..... $1.25
Model J, 5000 ohms 50W..... $1.45
Model H, 60 Ohms 25W..... 75c
60 Ohms 25W..... 85c
Model H, 100 Ohms 25W..... 75c
Model H, 175 Ohms 25W..... 75c
Type PH, 15 Ohms 25W..... 75c
All size potentiometers and rheostats in stock. Write us your requirements on all carbon or wirewound.

BC-375E Transmitter complete w/tuning units. Brand New $50.00

HEAVY DUTY
COPPER OXIDE RECTIFIERS
HAMMETT ELECTRIC RECTIFIERS MODEL SR76-100B. Input: 220 volts 60 cy 3 ph 15A. Output: 15 volts at 130 Amperes, 30 volts at 65 amperes, cont. duty. Complete w/volt and ammeters. Like new. Special..... $195.00

All prices F.O.B. Boston. Orders accepted from rated concerns on open accounts net 30 days

Electro Sales Company

110 PEARL ST. *Liberty 2-7890* BOSTON 10, MASS.

DEPENDABILITY IN ELECTRONICS

WE ARE NATIONAL DISTRIBUTORS OF PARTS, TUBES AND EQUIPMENT. WE SOLICIT INQUIRIES FROM ORGANIZATIONS WHO APPRECIATE INTELLIGENT SERVICE AND HONEST PRICES, PARTICULARLY AT THESE CRITICAL TIMES.

NORMAN RADIO DISTRIBUTORS INC.
94-29 MERRICK BOULEVARD JAMAICA, N.Y. - REpublic 9-4651

FOR SALE

Beryllium Copper Strip
.0062 (+ — .0005) x 5" x 60"
No. 1 — B & S Hard
700# Available
GLOBE TRADING COMPANY
1815 Franklin Street Detroit 7, Michigan

SURPLUS COMPONENTS FOR SALE

Bathtubs, oils, micas, xformers, chokes, relays, trimmers, sockets, odd items, etc.
Surplus lots purchased.
EMPIRE ELECTRONICS
Box 41, Midwood Stat., Brooklyn 30, N. Y.
Phone BRyant 9-1220

WANTED

(Additional Wanted Ads on Page 337)

WANTED

Tubes. Test equipment. Condensers, & general inventories. Highest prices paid.
W-9948, Electronics
230 W. 42nd St., New York 18, N. Y.

WANTED

YOUR SPARE SURPLUS EQUIPMENT
DYNAMOTORS • SELSYNS • AUTOSYNS • INVERTERS • TRANSMITTERS
RECEIVERS • TEST EQUIPMENT
Please send list stating condition and lowest price.
No Quantity Too Small or Too Large!
C. & H SALES COMPANY
BOX 366-SE EAST PASADENA STATION • PASADENA 8, CALIFORNIA

CRITICALLY NEEDED

We are in dire need of:

TS-125's	TS-34's
TS-155's	TS-117's
TS-13's	TS-268's

If you have any of these pieces, write, wire or telephone collect. (Wellesley 5-0933)
OVERBROOK CO., Overbrook 81, Massachusetts

COLUMBIA ELECTRONICS LTD.

EQUIPMENT WANTED!

We want to buy all types of surplus electronic equipment. We are one of the largest buyers in U. S. We buy more because we give every seller top prices and a fair deal. TELL US WHAT YOU HAVE. USE COUPON BELOW—AND MAIL TODAY!

Use following numbers to indicate conditions: N-1, brand new; N-2, used, like new; N-3, used.

ITEM	CONDITION	PRICE WANTED

To: COLUMBIA ELECTRONICS LTD., 524 S. San Pedro St., Los Angeles 13, Calif.

Name .....

Address .....

SEE COLUMBIA ELECTRONICS AD ON PAGE 367

PANEL METERS

large stock guaranteed accuracy

Legend: G.E.—General Electric, W.—Weston, W.H.—Westinghouse, W.E.—Western Electric, G.R.—Gruen, W.L.—Western Limited, H—Hoyt, S—Simpson, T—Triplet.

D. C. MICROAMPS

150 T 2" Rd.	$6.95	150 S 3" sq.-Rd.	$9.95
200 T 2" Rd.	6.95	200 S 3" sq.-Rd.	9.95
200 W 2" Rd.	9.95	200 W 3" Rd.	12.95
500 W 2" Rd.	8.95	500 W 3" Rd.	11.95
100 W 3" Rd.	16.95	500 WH-GE 3"	9.95

R. F. AMMETERS

500 Mils. WL 2" sq.	$4.45
2 Amps. S 2" sq.	4.95
3 Amps. S 2" sq.	4.95
4 Amps. GE 2" Rd.	4.95
*5 Amps. W 3" Rd.	14.95
*30 Amps. W 3" Rd.	18.95

*With external thermocouple.

A. C. VOLTMETERS

10V W 3" Rd.	$8.95	300V W 3" Rd.	$12.95
10V WH 3" Rd.	8.45	300V WH 3" Rd.	10.95
150V W 2" Rd.	7.95	300V GE 3" sq.	10.95
150V W 3" Rd.	10.95	150V W 3" Rd Rect. type 1000/ohm V.	14.95
150V T 2" Rd.	7.95		15.95
150V WH 3" Rd.	8.95		

A. C. AMMETERS

5 A W 3" Rd.	$8.95
5 A W 4" Rd 1%	12.95
250 A W 4" Rd. 1% with ext. curr. exform.	17.95

D. C. MILLIAMMETERS

1 Mil W 741 4" Sq.	$14.95
1 Mil W 301 3" Rd.	9.95
Weston 301 3" Rd. 10-50-100-200-300-400-500 each	9.95
W'house NX-35 3" Rd. 15-25-50-100-150-200-300-500-750 ea.	5.95
Simpson 2" Rd.-Sq. 1 Mil, 100-200-300-500 ea.	5.95
Hoyt 2" Rd. 0-1 Mil.	4.95
Hoyt 3" Rd. 0-1 Mil.	5.95
Gruen 2" Rd. 0-1 Mil.	4.95
Triplet 2" Rd. 100-200-300-500 Mil ea.	3.95

D. C. AMMETERS

W'house NX-35 3" Rd. 1A-2A-5A ea.	$8.95
*W'house 10A-30-50A ea.	6.95
W'house NX-35 3" Rd. 100A-200A-300A	12.95
*With ext. shunt.	
GE 2" Rd. 30 amps.	4.95

D. C. VOLTMETERS

*W 741 4" Sq. 2KV-4KV 1%	$19.95
W 3" Rd. 1000 ohm/V 50-100-150-200 ea.	10.95
*With w/ext. mult.	
W 500—1KV ea.	12.95
Wh. 3" Rd. 10-25-50-80 ea.	6.95
WH 3" Rd. 150-200-300 ea.	7.95
W 2" Rd. 25-50-100-150 ea.	7.95
W 2" Rd. 200-300-500 ea.	8.95

New York Tel. DI 9-3813

Some types limited quantity. All meters subject to prior sale.
Other types available to meet unusual requirements. Let us quote by return mail.

TERMS: 25% with order balance C.O.D. Charges. F.O.B. L. I.

AMERICAN ELECTRONICS
29 South Park Ave.
Rockville Centre, L. I., N. Y.
Tel. Rockville Centre 6-0207

WHOLESALE ONLY

ELECTRONIC COMPONENTS
AIRCRAFT EQUIPMENT
HYDRAULICS
RADIO & ELECTRONIC SURPLUS
13933-9 Brush St. Detroit 3, Mich.
Phone Townsend 9-3403

TUBE REBUILDING

Large Transmitting and Power types
Economical • Guaranteed
FREELAND PRODUCTS CO.
700 BRYADES ST., N. O., LA.

New Bathtub Condensers	Original Pack
2x.1—600v—4 top term.	.29¢
2x.01—600v—4 side term.	.29¢
.1—600v—2 top term.	.27¢
2x.5—400v—3 top term.	.25¢
2x.25—400v—3 side term.	.25¢

DRILLICK Electronic Sales Co.
5281 W. Pico Blvd. Los Angeles 19, Calif.

ELECTRO—THE BEST FOR ELECTRONIC SURPLUS

Amertran "TRANSTATS" Voltage Regulator

11.5 KVA 50/60 cy. Commutator range 0-115 V. Max. Amps. 100. Reconnection diagram available for 230 V. 50 A operation. BRAND NEW Factory Cases $225.00

SUPERIOR POWERSTAT

Type 1136-3Y. Pri.: 230V, 3 ph, 60 cy. Output: 0-270 Volts 7 KVA. May be separated and used as three 0-115V, 1 ph, 60 cy, 2.0 KVA units. Brand New $100.00

Transstat .25 KVA. Fixed winding 115/1/60. Commutator range 103-126 V. Max AMPS. 2.17 ..... $9.45
.5 KVA Fixed Winding 115/1/400 Commutator range 92-115 V Max Amps. 5.5 ..... $4.50

TRANSFORMERS
All have 115V 400 cy Primary

Raytheon UX8547. Sec: 1000V @ 2.5 Ma; Sec 2: 6.15 V @ 700 Ma. $3.95
Federal RA6404-I. Sec #1 550/0/165/550 @ 200 MA; Sec #2 & 3: 5 V @ 3A; Sec #4: 6.3 V @ 2A; Sec #5: 25 V @ 2.2A. 4.00
W. E. #KS-8998. Sec #1: 990 VCT @ 420 MA; Sec #2: 875 VCT @ 420 MA; Sec #3: 780 VCT @ 420 MA. 7.95
RCA 901695-501. Sec #1: 790 V @ 400 MA; Sec #2: 5.1a V @ 6 A; Sec #3: 5.1a V @ 2 A. 4.00
Sperry 702523. Sec #1: 740 V @ 12 MA; Sec #2: 2.5 V @ 3A; Sec #3: 2.5 V @ 3A; Sec #4 & 5: 6.3 V @ 2.25 A. 3.25
Sperry 702719. Sec #1: 700 VCT @ 315 MA; Sec #2: 200 VCT @ 100 MA; Sec #3: 6.3 V @ 15 A; Sec #4: 18 V @ 600 MA; Sec #5: 5 V @ 6 A. 7.95
Thordarson. 2 Volts at 5 Amperes 2.95
Raytheon UX8302C. Sec #1: 6.3 V @ 4.7 A; Sec #2: 5 V @ 3 A; Sec #4: 6.3 V @ 600 MA. 3.50
W. E. #D-11646. Sec #1: 5 V @ 2 A; Sec #2: 2.5 V @ 5 A. 3.50

TRANSFORMERS
All have 115V 60 cy Primary

W. E. #KS-8608. Sec #1: 708 VCT @ 177 MA; Sec #2: 5 V @ 4 A; Sec #3: 6.3 V @ 1 A; Sec #4: 2.5 V @ 7.5 A. $3.95
Inst. #1100-856600. Sec #1: 11 V @ 2.5 A. 2.25
Sub Sig U-7420. Sec #1: 225 V @ .18 A; Sec #2: 6.3 V @ 2.5 A. 3.25
Bendix 630178. Sec 1: 1.5 Volts @ 0.005 A. 1.25
Amertran 7180. Sec #1: 2.5 VCT @ 10 A. 2.95

THE FOLLOWING ARE AUDIO TRANSFORMERS

Amertran 3871. Pri: 20000/10000/5000/4000 ohms; Sec: 500/15/7.5/5/3.65/1.2Ω ohms $4.65
Amertran 23882. Pri: 4000/1000 Ohms; Sec: 4000 ohms; DB Level plus or minus 2S 1.35
Federal RA-6403-I. Pri: 8500 ohms @ 9 MA; Sec: 600 ohms 1.35
Federal RA-6408-I. Pri: 2500/2000 ohms; Sec: 600 ohms 1.35
Zenith 95G39. Pri: 2000 ohms 40 H; Sec: 60 ohms Ratio: 8.3 to 1 ..... 1.35
Hammond 12238. Pri: 3000 Ohms; Sec: 12000 ohms CT Ratio: 1 to 2 ..... 1.65
N. Y. T. C. 5804. Pri: 2300 ohms CT; Sec: 2000/1800/1500/1300 250 MA 2.25
Pacent 27A. Single Plate to Single Grid. 3 to 1 ratio 1.85
CTC #5643-34. Pri: 3500 ohms; Sec: 7 ohms 1.00
Hammond #2940. Pri: 3000 ohms; Sec: 12000 ohms CT Ratio: 1 to 2 ..... 1.65
MWC #12-182-I. Pri: 1500 ohms 50 H. Output to Voice Coil. 1.4/0.7/0.3/0.1V 1.00
Federal W15-40. Pri: 300 ohms; Sec: 250,000/680,000 ohms; Ratio 1 to 47.3 ..... 1.00
Federal RA6407-I. Pri: Tapped unbalance, 15000 ohms @ 0.006 ADC; Sec: 1770 ohms CT. Response 200 to 5000 cy. 1.5 DB level, 55 W 1.25

THE FOLLOWING ARE MISC. TYPES

Raytheon Interstage UX-8442. Pri: Minus 40 volts; Sec: Plus 40 volts 1250 V test $1.00
W. E. Oscilloscope #ES677584-1. SC#4G1670A/T5 ..... .95
Bendix Overload Dwg. #CAL-2030-1 ..... 1.65
W. E. Network Assembly D-139589 ..... 1.00
W. W. Network Assembly D-43867 ..... 4.95
Stancor Modulation A-3871. Pri: 4500 ohms; Sec: 8500 ohms. Class A 1.35
Raytheon Pulse WX5137. Pri: 4 KV 1 MU; Sec: 16 KV 16 A 8.25
G. E. #6G6457. Pri: 1/1.5/3.6/8/10 Volts; Sec: 50-50 Volts 100 W 1.65

GC-9 XMITTER. With spare parts kit. Frequency range 3-18 MC and 200-600 KC. Band switching 100 w output. Brand new in original mfg. crates. Comes with tubes and spare parts kit. Comes in three units: high and low frequency xmitter and rectifier. Dimensions: 14" deep x 27" long x 29¼" high. Netwt. 137 lbs. Shpg. wt. approx. 250 lbs. Finished in black crackle shock mounted. Has 7 meters for indicating plate and grid current, also antenna current. Operates 110V 800 cycles. Single phase and 24V DC. Contains 2—803 tubes, 1—807, 1—801, 2—837, 1—523, 2—1616. Comes with maintenance manual and test data $99.50

PLUG IN COILS FOR GF XMTRS.

2000-2500 KC $1.00
2500-3300 KC 1.00
3000-3675 KC 1.00
3675-4525 KC 1.00
4000-4900 KC 1.00
4900-6000 KC 1.00
6000-7350 KC 1.00
7350-9050 KC 1.00

PLUG IN COILS FOR RU RCVRS. SINGLE FREQUENCY

400- 600 KC $1.00
850-1330 KC 1.00
1330-2040 KC 1.00
2040-3000 KC 1.00
3000-4325 KC 1.00
4000-6000 KC 1.00
9050-12,575 KC 1.00

DUAL FREQUENCY

195- 290 KC & 290 435 KC $1.65
200- 380 KC & 2000-3700 KC 1.65
530-1000 KC & 2000-3700 KC 1.65
540- 830 KC & 2040-3000 KC 1.65
540- 830 KC & 3000-4325 KC 1.65
400- 600 KC & 6000-9050 KC 1.65
540- 830 KC & 5200-7700 KC 1.65

OHMITE R.F. CHOKE, Z-0, 2 Millihenries, 1000 MA ..... 66¢
HAMMARLUND R. F. CHOKE, RFC-250, 250 millihenries ..... 95¢
TANK COIL, miniature, slug tuned 4397 .5 KC ..... 95¢
HAMMARLUND COIL & PADDER ASS'Y, f/Super Pro 100, 200-400 KC. $1.35

REACTORS AND CHOKES

Raytheon #U11010. Rated 10H @ 1.2 A DC $49.95
G.E. Cat. #7479974. Rated 2.5H @ 2.3 A DC $37.50
G.E. Cat. #7479964. Rated 50H @ .025 A DC $27.50
Ind #CK3016. Rated @ 20H @ 60 MA DC $2.95
Thordarson #T48853. Rated 6H @ 80 MA DC $1.50
Raytheon #U-7423. Rated 1.2-1.6H @ 0.0 MA DC $2.25
Raytheon #UX8887D. Rated 30H @ .03 A DC $5.25
G.E. Cat. #7472403. Rated 5H @ .035 A DC 4 KV Test $2.35
Thordarson #T45921. Rated 7H @ 0.9 A DC 10 KV Test $19.50
Raytheon UX9114A. Rated 0.160H @ 1.4 A DC. $3.00
Zenith 95G40. Rated 150H @ 1.0 MA DC $2.25
Raytheon UX9116. Rated 0.30H @ 2.0 A DC $3.00
Raytheon WX-5148. Dual. Rated 1.75/1.75 @ 0.25/0.25 A DC $3.50

HEAVY DUTY TRANSFORMERS

G.E. Cat. #7479965. Pri: 230V 60 cy Sec: 16.4/8.2 VCT 11/5.5V @ 60A, 8¼H 9½L 6¾W $25.00
G.E. Cat. #7963585. Pri: 203.5V 60 cy Sec: 6.3V @ 250 Amperes $39.50
G.E. Cat. #7479971. Pri: 230/208V 50/60 cy; Sec: 1365/1300/1235VCT 725VA. 7½ x 5¾ x 8½ $29.50
G.E. Cat. #7479972. Pri: 230/208V 50/60 cy; Sec: 2450/2350/2210VMS. 2.85 KVA $49.50
G.E. Cat. #7475695. Pri: 115V 60 cy. Sec: 3530/3720/3910 V. M.S. 1.3U KVA $47.50
Maloney Elec. RKL10383. Pri: 115/230V 50/60 cy. Sec: 0/21000 Volts @ 100 MA DC, Half Wave. 0.1 Filled. 16"D 16"W excl. of lbs. $125.00

CONTROL BOXES

BC-450A, Radio Control Box $4.95
BC-602A, Radio Control Box 1.25
BC-606C, Interphone control box ..... 95¢
BC-451A, Radio Control Box 2.95
CW-23012, Remote tuning control for RU RCVRS. 1.25
RL-9, Interphone Control Box 1.25
RM-52, Remote Control Unit 2.95
C2P-23330, Pilot's Control Units 2.95
C2/ARR2 Radio Control Box 1.25
CBY-62017, Junction Box f/RU Rcvrs. 1.25
MI-22A, Station Control Box 1.25
CW-23087, Receiver Switch Box f/RU 1.25
CW-23097, Xmtr Control Box f/GF Equip. 1.25
CW-23098, Exr. Control Box f/GF Equip 1.25
J23/ARC4, Junction Box for ARC4 Equip. 1.75
C26/ARC5, Remote Dial Assy f/ARC5 ..... 1.45
C51/ARC4, Channel Sel. Sw. f/ARC4 ..... 1.75
C38/ARC5, Rcvrs Control Box f/ARC5 ..... 1.75
C30/ARC5, Channel Control f/ARC5 ..... 1.75
C48/ARC5, Switch Box f/ARC5 ..... 1.75

FUSES AND FUSEHOLDERS

4 Amp 250V 3AG Fuses $1.50/c
5 Amp 250V Midget Fuse 2.00/c
6 Amp 250V Midget Fuse 2.00/c
10 Amp 5000V Indicating 40.00/c
15 Amp 250V 3AG Fuses 2.00/c
15 Amp 125V Midget Fuse 2.00/c
30 Amp 250V 4AG Fuses 1.50/c
30 Amp 250V 3AG Fuses 2.00/c
30 Amp 250V Plug Fuse 4.50/c
Buss Type HKP Fuseholder 15.00/c
Buss Type HCM Fuseholder 15.00/c
G.E. EL-1 60A Fuseholder ..... 1.35 ea

RECTIFIERS

IT&T Selenium, WE. KS8920, 20 plates 1" dia. Input 18VAC Output 18VDC @ .25A $2.75
IT&T Selenium, Half Wave, #FE4, 4 plates 1⅛" dia. Input 18VAC Output 7.5VDC @ .45A $1.00
Westinghouse #163B Copper Oxide, Half Wave, 4 plates 1⅝" D. Input 4VAC Output 3VDC @ .25A. $1.75
G.E. Model GR85F16, Selenium, Full Wave, 24 plates 1" D. Input 54VAC Output 26VDC @ .2A $3.95
R-L #RL20281, Selenium, Full Wave, 24 plates 1" D. 230VAC Output 180VDC @ .0075A. $3.95
Westinghouse #8540Y2A. Copper Oxide 13 plates 1⅝" D. Bridge, Input 65VAC Output 45VDC @ .32A. $9.95

HIGH VOLTAGE CAPACITORS

Cat. #28F628 rated 0.1 Mu-F @ 12KV DC ..... $ 9.95
#7520 rated 2 x .1 Muf @ 7500 VDC 17.50
Cat. #14F64 rated 0.25 Mu-F @ 20KV DC 17.50
Cat. #14F71 rated 0.25 Mu-F @ 32.5KV DC. 35.00
Cat. #A7548 rated 2x.25 Mu-F @ 6000 VDC 12.50
CD Paper rated 0.5 Muf @ 25KV DC. 45.00
#RC-2151 rated 2x.5 Muf @ 9000 VDC. 25.00
Cat. #1120063 rated 0.65 Mu-F @ 12.5KV DC .. 15.00
Type FP rated 1.0 Mu-F @ 10KV DC 32.50
Cat. #14F63 rated 1.0 Mu-F @ 15KV DC. 37.50
Cat. #AE6734 rated 1.0 Mu-F @ 25KV DC. 75.00
#TK60020 rated 2.0 Muf @ 6000 V DC 22.50
Cat. #14F538 rated 4.5 Muf @ 7500 V DC. 35.00
Cat. #14F13 rated 5.0 Muf @ 10KV DC. 45.00

ELAPSED TIME METERS

Mfd. by R. W. Cramer Co. Type RT-2H. 0-10,000 hours by tenths. 115 Volts 60 cy. $9.75
Mfd. by G.E. Model 8KT8Y63. 0-10,000 hrs. by tenths. 115 V., 60 cy. 3" sq. $14.95
Mfd. by G.E. Model 8KT8Y60. 0-10,000 hrs. by tenths. 115 V., 60 cy. $14.50

SPECIAL BUYS OF THE MONTH METERS

0-3 VDC, Simpson Model 25 ..... $3.95
0-5 VDC, Readrite "S" $1.75
0-16 VDC, Stewart Warner $1.35
0-30 VDC, G.E. Type AW-41 ..... $4.95
0-30 VDC, Weston Model 301 ..... $8.95
16-32 VDC, Stewart Warner $1.35
0-100 VDC, Simpson Model 25 ..... $4.95
0-100 VDC, Westinghouse RX33 ..... $5.95
0-150 VDC, Hoyt Model 17L $4.95
0-1 MADC, G.E. Model DO-40 ..... $7.95
0-1 MADC, Simpson Model 126 ..... $7.95
0-1 MADC, Rolfer Smith TP $8.95
0-1 MADC, G.E. Type DW-53 ..... $6.95
0-10 MADC, G.E. Type DO-40 ..... $7.95
0-10 MADC, Weston Model 267 ..... $14.50
0-10 MADC, Westinghouse QX37 ..... $14.50
0-10 MADC, DeJur-Amsco #310 ..... $5.95
0-15 MADC, W. E. #CW22132 ..... $7.95
0-20-200 MADC, Westinghouse QX37 (dual movement) $16.50
0-80 MADC, W.E. #D-170198 ..... $7.95
0-100 MADC, Weston Model 267 ..... $14.50
100-0-100 MADC, Weston 301 ..... $8.95
100-0-100 MADC, Beede 381A (used) $2.50
0-200 MADC, G.E. Type DO-41 ..... $7.95
0-200 MADC, G.M. Laf Sw. #TF-31C $7.50
0-1000 MADC, DeJur-Amsco #310 ..... $6.35
0-1000 MADC, Beede 3"Rd $5.95
0-1 ADC, Westinghouse DA-37 ..... $16.50
0-2 ADC, Westinghouse NX35 ..... $7.95
0-10 ADC, Westinghouse DA-37 ..... $16.50
0-15 ADC, Hoyt Portable @515 ..... $9.95
20-0-20 ADC, Jewell #86 (used) $3.50
0-15 VAC, G.E. Type AO-22 ..... $7.95
0-150 VAC, Hickok Type 57M $8.25
0-150 VAC, Westinghouse NA35 ..... $8.95
0-150 VAC, Weston Model 476 ..... $10.50
0-250 VAC, Westinghouse QA-37 ..... $16.95
0-10 MADC, G.E. Type AW-42 ..... $7.50
0-500 MADC, Burlington #22C $7.75
0-500 MADC, G.E. Type AO-22 ..... $8.95
0-3 AAC, Burlington #22C $5.75
0-5 AAC, Weston Model 476 ..... $10.50
0-75 AAC, Triplet Model 331 ..... $7.95
0-2 ARF, Simpson Model 136 ..... $6.25
0-2.5 ARF, Burlington #33C $6.25
0-2.5 ARF, Simpson Model 128 ..... $7.95
0-3 ARF, G.E. Type DO-44 ..... $7.95
0-4 ARF, G.E. Type DW-52 ..... $7.25
0-5 ARF, Weston Model 425 ..... $10.50
0-10 ARF, Westinghouse NP-35 ..... $8.95
0-20 ARF, G.E. Type DO-44 ..... $8.95
0-3000 RPM, Stewart Warner 63800 ..... $12.50
48-52 & 58-62 Freq. Meter HFP Model 30F $12.95
50-70 Cycles Frequency Meter Weston Model 814. $17.50
57-63 Cycles, Freq. Meter, Frahm Type MF7 ..... $14.95

Westinghouse Watthour Meters

Type CS, 240V/60cy/1ph 15 Amp., 3 Wire, new..$12.50
Type CS, 120V/60cy/1ph 15 Amp., 2 Wire, new..$8.50
Type CA, 120/60cy/1ph 15 Amp., 2 Wire, new..$6.50
W.E. Test Set 1-115 ..... $9.50

W.E. Sine Wave Generator KS5913L02 16V 2 Ph. 1725 RPM, driven by W.E. motor KS5913L01. 115V 60 cy. 1 Ph. 1/50 HP 1725 RPM. $17.95

G.E. VOLTAGE REGULATOR MODEL 3GVD11B6. for use w/115V 60 cy supply, 23-35KV complete w/10 Tubes $49.95

ALL MERCHANDISE BRAND NEW UNLESS OTHERWISE NOTATED

ALL PRICES F.O.B. BOSTON. ORDERS ACCEPTED FROM RATED CONCERNS ON OPEN ACCOUNTS NET 30 DAYS. MINIMUM ORDER $3.00

ESCO ELECTRO Sales Co.

Dept. E10 110 PEARL STREET BOSTON 10, MASS. Liberty 2-7890

6-VOLT INPUT CARTER GENEMOTORS

Brand New
Each $29.95
Way Below List Price!

Output	Model
400V/375Ma Int	4037A
590V/150Ma Int	5919A

Each $29.95

590V/250Ma Int	5925A

Each $34.95

All CARTER GENEMOTORS supplied with General-Electric Input Filter FREE!

T A B
THAT'S A BUY

Infrared Snooperscope

Image-Converter Tube HIsensitivity simplified design 2" dia. Willemite screen—Resolution up to 350 lines/in. Complete data & tube Core, Oil impreg. 2500V for CRT. 6.3V/.6A, 2.5V/1.75A Ctd Kenyon 1400vet/90ma, 6.3v/4a, 5v/3a, H'sld $8.98

TRANSFORMERS

115 V 60 Cyc Input

TV & CR over Xfmr for 7" to 20" Tubes. Hi VOLTS to 20KV (w/quadrupler ckt). ALL Tubes, PL & FIL wndgs divrug. 300 VDC/275Ma Full - Wave, 6.4V/10.5A, 5.4V/8A, 2.5V/3A Hypersil $8.98 PL259 /S31SPM $8.98 M359 /83-1AP UG22/U

Full-Wave Selenium Bridge Rectifiers

Amps	18/14	36/28
1.3	1.98	2.78
2	2.40	3.78
4	3.85	7.00
8	5.90	9.98
12	7.50	14.00
24	14.00	27.00

Other Types—Write for List

COAXIAL CONNECTORS

Receptacle	.55
Plug	.55
Angle Plug Adpt.	.30
Panel Jack	.$1.49

Write for Connector Listing

TUBES "TAB" TESTED & GUARANTEED

Prices Subject to Change

OA2	1.58	2J33	39.39	6B5	1.19	6Y6G	.89	14E7	1.09	56	.85
OA3/VR75	1.47	2J34	38.50	6B6G	.89	6Y7G	1.09	57	.79	76	.79
OA4G	1.33	2J36	128.00	6B7	1.19	6Z7G	1.29	58	.79	77	.79
OB2	1.56	2J37	12.70	6B8	1.49	7A5	1.49	75	.79	78	.79
OB3/VR90	1.23	2J38	17.25	6BA6	.79	7A4 XXL	1.49	1A7	1.19	59	1.78
OC3/VR105	.$2.50	2J39	48.50	6BA7	1.19	7A5	1.49	1N7	1.49	T60	10.49
	1.43	2J42	250.00	6BD6	.89	7AD7	1.49	14W7	1.09	71A	.79
OD3/VR150	.98	2J48	28.50	6BE6	.79	7AF7	.99	14X7	1.23	72	.95
OE3	2.53	2J49	39.45	6BF6	1.49	7AG7	1.99	15E	1.47	CRP72	1.37
OZ4	.79	2J50	27.50	6BH6G	1.99	7AY5G	.89	14H7	.99	RK59	1.45
VS-1	12.49	2J52	249.50	6BA6	.79	7A4 XXL	.89	14J7	1.19	59	1.78
C1A	4.75	2J56	199.50	6BA7	1.19	7A5	.99	14N7	1.49	T60	10.49
O1A	.69	2J61	49.45	6BC5	.99	7A6	.79	14Q7	1.09	HY69	6.98
1A3	1.10	2K25	31.95	6BC7	1.23	7A7	.99	14R7	1.19	70A7	1.59
1A4P	.79	2K25		6BD5GT	1.65	7A8	.89	14S7	1.09	70L7GT	1.59
1A5GT	.79	72AB	29.45	6BD6	.89	7AD7	1.49	14W7	1.09	71A	.79
1A6	1.49	2K28 mtd	34.95	6BE6	.79	7AF7	.99	14X7	1.23	72	.95
1A7GT	.89	2K29	23.95	6BF6	1.49	7AG7	1.99	15E	1.47	CRP72	1.37
1AE4	1.00	2V3G	1.29	6BG6G	1.19	7AH7	1.19	15R	.89	CRP73	1.49
1B3/8016	.89	2V3GT	.98	6BH6	.79	7B4	.79	FG17	3.98	73	1.67
1B4P	.89	2X2	.69	6BJ6	.99	7B5	.79	18	.98	NR74	.29
1B5 .25S	.99	2X2A	1.89	6BL7GT	2.75	7B6	.79	19	.69	HY75	4.59
1B7GT	.99	3A4	.99	6BN6	1.49	7B7	.89	19BG6G	.79	75	.79
1B21 471A	2.85	3A5	1.69	6BN7		7B8	.89	19T8	1.09	75TL	6.89
1B22	3.23	3A8GT	1.59	6BQ6GT	1.19	7C4 1203A	.89	19V8	1.62	76	.79
1B23	9.90	3B4	2.69	6C4	.69	7C5	.79	T20 1623	3.79	77	.69
1B24Watng	8.75	3B5	.99	6C5GT	.79	7C6	.79	TUP20	5.19	78	1.05
1B24 Sylv.	17.49	3B7 1291	.69	6C6	.79	7C7	1.49	TZ20	3.79	79	.89
1B26	2.65	3B23 RK22	4.95	6C7	1.26	7C23	72.00	20	1.17	80	.69
1B27	24.00	3B24	5.49	6C8G	.89	7C29	69.95	RK20A	8.95	81	1.69
1B32/532A	3.98	3B25	4.50	6C21	29.45	7E5.1201	1.29	RX21	3.75	FG81A	3.98
1B35	11.98	3B26	3.70	6CB6	.89	7E6	.89	22	.98	82	1.19
1B37	18.00	3B28	8.80	6CD6G	2.49	7E7	.99	24	.85	82V	1.49
1B38	32.25	3C6 XXB	1.49	6D4	2.65	7F7	1.09	24A	1.49	83	1.19
1B40	4.95	3C22	64.25	6D6	.89	7F8	2.19	24G 3C24	1.98	83V	1.89
1B41	49.95	3C23	12.98	6D7G	.89	7G7 1232	1.29	25A6	1.09	84/6Z4	.99
1B42	18.00	3C31 C1B	1.98	6D8G	.89	7H7	.89	25A7	1.19	85	.79
1B46	1.98	3C34 HK24	5.49	6E5	.89	7J7	1.09	25AC5GT	1.59	87	
1B53	49.95	3C45	19.85								
1B56	47.00	3D6 1299	.69								
1B60	69.75	3D21A	1.95								
1C1G	2.70	3D23	4.98								
1C5GT	.89	3E29	14.95	6E6	1.39	7K7	1.29	25AV5GT	.79	89	.75
1C6	.79	3LF4	1.29	6E7	1.39	7L7	1.19	25B06GT	1.19	VR92	.25
1C7G	.89	3Q4	.79	6E8	4.00	7N7	1.19	25C6	1.18	FG90	19.95
1D5GP	.99	3Q5GT	1.29	6F5	.79	7Q7	.79	25L6GT	.69	100TH	8.89
1D7G	.89	3S4	.79	6F6	.99	7R7	.99	25W4GT	.89	102D	2.98
1D8GT	.89	3V4	.79	6F6GT	.79	7S7	1.09	25Y5	.79	FG104	32.98
1E5	.99	4-125A	29.95	6F7	1.39	7T7	1.03	25Z5	.79	FG105	18.98
1E7G	.99	4-250A	49.95	6F8G	1.29	7V7	1.39	25Z6GT	.99	FG105	18.98
1F4	.69	4-1000A	132.00	6G6G	1.29	7W7	1.19	26	.79	VU111	1.45
1F5G	.79	4B27	4.98	6H4GT	.98	7X7	.27			HY114B	.75
1F6	.89	4C25 HK54	5.95	6H6	.89	XXFM	1.19	FG27A	8.70	HY115	.75
1F7G	.89	4C33	59.00	C4J	6.95	7Y4	.69	RK28A	4.89	HY115	145
1G4GT	.89	4C36	15.98	6J4	6.98	7Z4	.69	28D7	1.39	117L7	.79
1G5G	.89	4E27	287.14.98	6J5GT	.59	8DC-15	4.98	30	.79	M7GT	1.59
1G6GT	.79	4J27	148.50	6J6	1.29	10Y	.49	31	.59	117N7GT	1.79
1H4G	.89	4J31	95.00	6J7	1.09	12A	.89	HY31Z	2.75	117P7GT	1.39
1H5GT	.89	4J34	194.00	6J8G	1.19	12A5	1.39	32	.89	117Z3	1.59
1H6GT	.79	4J47	700 .27.00	6K4	3.39	12A6	.89	FG32	7.90	117Z4GT	1.39
1J5G	1.20	4J47	200.00	6K5GT	1.09	12A7	1.29	32L7GT	1.19	117Z6GT	1.19
1J6GT	.79	4J47CY	198.00	6K6GT	.79	12AH7	.79	33	.59	117Z7GT	1.49
1L4	.69	4J52	350.00	6K7	.85	12AC7	1.45	34	.69	F123A	8.49
1L6	.89	4T4.2	.98	6K8	.99	12AH7GT	1.99	35 .51	.89	T125	12.49
1LA4	1.19	4X-500F	85.00	6L5G	.79	12AK5	1.98	35A5	1.98	T126	19.98
1LA6	.99	5AX4GT	.54	6L6G	2.43	12AK5W	2.98	35B5	.79	VT127A	3.90
1LB4	1.29	5AZ4	.79	6L6GA	1.69	12AL5	1.11	35C5	.69	CV148	4.98
1LC5	.79	5C30/C5B	3.95	6L6GB	1.69	12AT6	.59	35L6GT	.79	150T	14.50
1LC6	.89	5D21	24.30	6L6GC	1.69	12AT7	1.09	35T	4.99	VT158	14.49
1LD5	.99	5D23		6L7	1.19	12AU6	.89	35TG	3.45	FG166	49.00
1LE3	.99	RK65	24.95	6N4	2.39	12AU7	.79	35W4	.49	FG172	42.50
1LE6		5J29	12.48	6N6G	1.69	12AV6	.69	35Y4	.69	193A	1.29
1LH4	.89	5R4G Spec	1.49	6N7GT	1.29	12AW6	1.79	35Z3	.79	FG190	12.80
1LN5	.79	5R4WGY	1.39	6P5GT	.89	12AX7	.89	35Z4GT	.69	T200	22.98
1N5GT	.99	5T4	1.99	6Q7	.89	12AY7	8.98	35Z5GT	.59	201A	.815
1P5GT	.79	5U4G	.59	6R7	.99	12BA6	.79	REL36	4.74	CX301A	.98
1P42	4.32	5V4G	.59								
1Q5GT	.89	5W4	.89								
1Q26	69.00	5X4G	.79								
1R4/1294	1.29	5Y3GT	.49								
1S4	.79	5Y4G	.49								
1S4	1.19	5Z3	.99								
1S5	.79	5Z4	1.25								
1S21	6.98	C5A	6.75								
1T4	.79	6A4	1.59								
1T5GT	.99	6A4	1.89								
1U4 5910	.69	6A5G	2.39								
1U5	.79	6A6	.89								
1V	.79	6A7	1.39								
1V2	.79	6A8GT	1.09								
1X2	.89	6A8	.79								
1Z2	3.98	6AB5 6N5	1.33								
2A3	1.19	6AB7 1853	1.39								
2A4G	1.19	6AC5GT	1.39								
2A5	.89	6AC6G	1.49								
2A6	.69	6AC7	.99								
2A7	.69	6AD6G	.99								
2AC-15	4.98	6AD7GT	1.49								
2AS-15	4.98	6AE5	.89								
2B7	.89	6AF6G	1.33								
2B22	3.98	6AG5	.89								
2C22 1642	.67	6AG7	1.49								
2C22 7193	.33	6AH5G	1.49								
2C26	.19	6AH6	1.99								
2C26A	.47	6AJ5	1.39								
2C34 RK34	.69	6AK5	1.39								
2C39	33.98	6AK5W	2.98								
2C40	9.98	6AK6	1.49								
2C40 JAN	19.90	6AL5	1.69								
2C43	26.75	6AL7GT	1.29								
2C43 464A	9.49	6AN5	5.98								
2C45	1.20	6AQ5	.99								
2C51	6.95	6AQ6	.99								
2C52	5.98	6AQ7GT	1.19								
2D21	1.49	6AR5	.79								
2E5	1.19	6AR6	2.98								
2E22	1.25	6AS5	.79								
2E24	8.85	6AS6	2.79								
2E25 HY65	5.15	6AS7G	4.98								
2E30	2.19	6AT6	.59								
2J21	10.69	6AU5GT	1.49								
2J21A	9.25	6AV5GT	1.29								
2J22	7.90	6AV6	.59								
2J31	29.75	6AW6	1.89								
2J31A	79.95	6AX5GT	.79								
2J32	59.95	6B4G	1.39								

393A	8.90	956	.39	CK1028	9.98	Mazda Pilots					
394A	4.90	957	.34	CK1089	4.69	49, box 10	.60				
FP400	15.98	958A	.67	CK1090	4.69	55, box 10	.50				
X400	14.98	991	.39	5638	4.79	64, Each	.07				
417A	8.95	FM1000	1.85	CK5672		Sa T4.3W	.18				
GL434A	14.98	CK1005	.85	CK5678	2.98	100W 20V	.25				
GL502A	1.79	1613 6F6X	.98	CK5678		291, Box 10	.36				
GL530	22.00	1619	.98	CK5678	3.49	CK5678					
GL532	3.89	1622	.69	CK5697	5.98	311/28V	.15				
GL538	3.89	1622	2.69	CK5702	5.98	313/28V	.15				
GL574	1.98	1624	5.00	CK5704	5.79	323/3V	.29				
GL591	1.98	1625	.42	3BP1							
GL591A	1.98	1626	.42	3BP1A	14.98	Sylvania					
GL591B	1.98	1629	.35	3CP1	2.20	Neon Bulbs					
GL601B	.19	1630	.97	3DP1	4.85	NE16 .99¢	.40				
GL616	37.00	1632	.77	3EP1	5.85	NE20	.10				
GL617	18.00	1633	.73	3FP1	5.85	NE21	.45				
GL670A	11.98	1634	.77	3FP7A	4.98	NE51	.55				
701A	5.89	1635	1.49	3FP7A	14.98	NE45 2W	.27				
702A	3.29	1636	1.49	3HP1	4.98	NE51 NE20	.10				
703A	5.98	1635	.95	3HP7	3.85						
703A	5.98	200T	149.50	3HP14	14.98	Bull's Eye Lite					
704A	.98	2050	.42	3JP1	12.50	Dialco Type					
705A 8021	2.75	2051	1.19	4AP10	19.95	Chromed Less					
707A	10.49	R4340	36.00	5AP1	4.69	Bulb .59: 2/ .98					
707B	17.49	5516	7.75	5AP1	3.65						
710A 8011	1.95	5608A	3.35	5BP1A	14.98	TelSlideLamps					
713A	1.00	5651	3.30	5BP4	4.75	6/12/24/48/55V					
				5CP1	4.89	Each .18					
				5EP1	2.95						
				5FP14	18.98	Xtal Diodes					
				5HP1	9.75	Many Late					
				5HP4	9.75	Dates—Latest					
				5JP2	24.40	JAN Specs					
				5LP1	29.95						
				5MP1	9.75						
				5NP1	5.85	1N21	.89				
				7BP1	4.95	1N21A	1.65				
				7BP7	6.75	1N21B	3.98				
				7JP4	18.30	1N21C	26.70				
				9GP7	14.89	1N22	1.25				
				9LP7	10.95	1N23	1.49				
				10BP4	18.29	1N23A	2.98				
				10DP7A	24.50	1N23B	6.98				
				12DP7	16.89	1N25	7.45				
				12DP7A	49.50	1N26	6.45				
				12GP7	16.89	1N27	1.65				
				12HP7	16.89	1N29	3.50				
				12JP4	27.00	1N32	18.00				
				12JP7	47.00	1N34	.69				
				12LP4	21.25	1N34A	.89				
				16KP4	47.29	1N35	1.95				
				16LP4A	36.98	1N38	1.62				
				16MP4A	43.98	1N39	5.65				
				16RP4	36.49	1N40	4.98				
				16TP4	39.98	1N45	1.39				
				17AP4	43.98	1N46	.89				
				17BP4	43.45	1N48	.70				
				17BP4A	36.49	1N51	.52				
				19DP4A	26.95	1N52	.95				
				20CP4	68.25	1N54	.89				
				902	10.65	1N55	2.99				
				905	3.49	1N56	.89				
				912	89.98	1N57	.89				
				913	11.98	1N58	1.19				
				914A	45.00	1N60	.60				
						1N61	1.98				
				Vacuum Capacitors			**Write**				
				Mmf-kv	**Ea.**	1N63	3.89				
				25-7.5	3.49	1N64	.75				
				50-7.5	3.98	1N67	2.95				
				50-15	7.98	1N69	1.98				
				12-20	9.98	K34	1.39				
				50-20	9.98	CK705	.77				
				75-20	12.98	CK706	.54				
				12-32	12.98	CK707	1.80				
				1.39	Tungar Bulbs		Thermistors				
				1.26	16X897	3.49	WEco 10A	.90			
				1.26	16X898	3.49	WEco 12A	1.10			
				1.79	195526	2.49	D167019 Vol				
				1.79	217283	6.75	Limiter 2.95				
				1.79	289881	2.50	D168391 Ther-				
				1.79	859483	2.95	mal Comp 2.95				
				1.26	PM3	.98	D170396 HF				
				1.79	PM4	.98	Pwr Meas .90				
				1.79	PM5	1.29	IC Bulb Time				
				1.79	PM6	.98	Delay .90				
				1.79	PM7	.98	Varistors				
				1.96	PM8	.98	CW20259 USN				
				1.29	9-3	.49	38C 2.95				
				1.49	10-T1	.49	WEco 40A .90				
				1.39	10-T2	.49	WEco 41A 1.50				
				1.49	13-4	.49	Xtal Freq Stds				
				1.89	20-4	.49	1000Kc 3.49				
				1.49	23D4	.49	4706Kc .98				
				1.95	L42B	.36	5000Kc 3.98				
				1.88	K49A	.36	Htr Oven Xtals				
				1.98	K4S	.40	5010 5025/5055				
			250.00	.95	CK543DX	.98	Kc. Ea. 14.98				
				.98	M55B	.36	Tubes Gtd Exc				
				1.98	L62A	.49	Open Fil &				
				1.33	CK547DX	.36	B'kage Via				
				1.98	WL121A	2.61	R'Exp. Only.				
				1.98	100-77	.49	We ship G, GT				
				.98	CK5784	3.98	or M				
				.98	CK5714AX	.29	no choice.				
				.29	SD828						
				40	SD969						

Sell Your **SURPLUS TUBES & EQUIPMENT** – Send List & Prices

Use Your Priority for **SPEEDY DELIVERY** Extend Your DO and Contract Number

6R8	1.39	12BA7	.79	36	.65	203A	5.98	826	.95	**Sub-Miniatures**	
6S4	.98	12BD6	1.75	37	.69	205B/VT2	1.69	828	11.29		
6S7G	.89	12BE6	.89	38	.59	CE266	3.15	829	11.49	1AD4	2.95
6S8GT	.89	12BF6	.85	RK39	2.98	211/VT4C	2.98	829B	14.49	2E31	1.49
6SA7GT	.89	12BH7	1.29	39 44	.59	CE215	8.98	830B	3.49	2E36	2.49
6SB7Y	1.19	12C8	1.39	CRC40	.59	RX215	9.95	832	5.65	2E43	1.39
6SC7	1.39	12F5GT	.79	T40	4.29	WE215A	.18	832A	9.75	CX501X	1.26
6SD7GT	.89	12H6	.89	TZ40	3.98	217C	8.75	833A	48.90	CK501AX	1.26
6SF5	.89	12J5GT	.69	40	1.09	227A	4.98	834	5.95	CK502AX	1.79
6SF7	.89	12J7GT	.99	HY40Z	3.75	231	1.20	836	4.75	CK503AX	1.79
6SG7	1.19	12K7GT	.89	41	.79	242C	4.49	837	1.55	CK505AX	1.79
6SH7	.99	12K8	.99	42	.69	244A	4.15	838	3.98	CK506AX	1.79
6SJ7	.89	12Q7GT	.79	43	.85	247A	9.95	843	.39	CK509AX	1.26
6SK7GT	.89	12SK7GT	.98	45	.69	250R	9.98	845	4.98	CK512AX	1.79
6SL7GT	.89	12SA7GT	.89	45S VT52	1.19	250TH	22.25	849	29.45	CK522AX	1.79
6SN7GT	.79	12SC7	1.39	45Z3	.69	250TL	19.90	852	19.98	CK525AX	1.79
6SN7WGT	2.25	12SF5GT	.79	45Z5GT	.89	HK254	15.49	860	4.90	CK526AX	1.79
6SQ7GT	.79	12SF7GT	.59	46	.89	260TH	23.98	861	23.98	CK528AX	1.79
6SR7	.69	12SG7	.89	47	.99	274B 5R4	2.59	864	.39	CK529AX	1.96
6SS7	1.09	12SH7	1.19	48	2.39	276A	9.89	865	1.29	CK531DX	.98
6ST7	1.19	12SJ7GT	.79	RK48A	14.85	T300	26.98	866A	1.49	CK532DX	.98
6SU7GTY	3.37	12SK7	.89	RK49	7.50	304TH	13.75	869	36.95	CK533AX	1.39
6SZ7	1.05	12SL7GT	.79	49	.83	304TL	12.25	872A	2.35	CK534AX	.89
6T7G	.89	12SN7GT	.89	50	1.19	307A RK75	4.85	GE872A	4.98	CK536AX	.89
6T8	1.19	12SQ7GT	.79	TF50	.98	311A	6.75	874	4.98	CK537AX	4.98
6U4GT	.89	12SR7	.98	50A5	1.19	311A	7.98	878	1.95	CK538DX	.89
6U5 6G5	.99	12X3	.90	50H5	.79	313C	2.98	884 6Q5G	1.88	CK539DX	.98
6U6GT	1.09	12Z3	1.49	50L6GT	.89	314A	1.49	885	1.49	CK541DX	1.98
6U7G	.69	14A4	1.09	50C6	1.49	323A	24.25	893A	250.00	CK542DX	1.98
6V6	2.25	14A7 12B7	.99	50L6GT	.69	327A	4.95	922	.95	CK543DX	.98
6V6GT	.69	14AF7	.50	X6	.89	350B	5.98	923	1.00	CK544DX	.98
6W4GT	1.99	XXD	1.19	50Y6GT	.79	353A	6.75	927 CE25	1.98	CK546DX	.98
6W4GT	.69	14B6	.99	50Z7G	.98	HK354	24.98	929	1.33	CK547DX	1.98
6W6GT	.89	14B8	.89	52	.99	355A	14.15	930	.98	CK5784	4.98
6X4	1.39	14C5	1.09	53	.79	371B	.98	931A	6.98	CK5714AX	.29
6X4	.49	14C7	1.09	T55	8.79	388A	.79	954	.29	SD828	.98
6X5GT	.49	14E6	.99	55	1.06	388A	1.49	955	40	SD969	.98

THAT'S A BUY **T A B** THAT'S A BUY

DEPT. 10E SIX CHURCH ST. NEW YORK 6, N.Y., U.S.A. – CORNER CHURCH & LIBERTY STS. ROOM 200

Money Back Guarantee (Cost of Mdse Only) $5 Min. Order FOB NYC. Add Shpg. Charges & 25% Dep. Tubes Gtd via R-Exp. only. Prices Subject to Change Without Notice. Phone: WOrth 2-7230.

INDEX TO ADVERTISERS

Ace Engineering & Machine Co., Inc.... 320
Acheson Colloids Corp.... 52
Acme Electronics, Inc.... 326
Adams & Westlake Company, The.... 229
Aeronautical Communications Equipment, Inc.... 235
Aerovox Corp.... 34
Aircraft-Marine Products, Inc.... 163
Aircraft Radio Corporation.... 152
Airdesign, Inc.... 202
Airpax Products Company.... 296
Alden Products Co.... 62,
Allegheny Ludlum Steel Corp.... 67
Allen Co., Inc., L. B.... 336
Allen Manufacturing Company.... 152
Allied Control Company, Inc.... 174
Allied Radio Corp.... 280
Altec Lansing Corporation.... 264
American Gas Accumulator Company.... 242
American Lava Corp.... 189
American Phenolic Corporation.... 158
American Smelting & Refining Co.
Federated Metals Division.... 233
American Television & Radio Co.... 305
American Time Products, Inc.... 161
Amperex Electronic Corp.... Third Cover
Amperite Company, Inc.... 222
Ampex Electric Corporation.... 308
Amplifier Corporation of America.... 323
Andrew Corporation.... 302
Antara Products Division of General Dyestuff Corp.... 32A, 32B
Antenna Research Laboratory Inc.... 330
Anti-Corrosive Metal Products Co., Inc.... 268
Arkwright Finishing Company.... 188
Arnold Engineering Company.... 241
Art Wire & Stamping Co.... 317
Astron Corporation.... 307
Atlantic India Rubber Works, Inc.... 210
Auburn Button Works, Inc.... 287
Audio Engineering Society.... 323
Automatic Electric Sales Corporation.... 225

Ballantine Laboratories, Inc.... 184
Barker & Williamson, Inc.... 226
Barry Corporation.... 76
Bead Chain Manufacturing Co.... 289
Bell Telephone Laboratories.... 243
Bendix Aviation Corporation Eclipse-Pioneer Division.... 206
Bentley, Harris Mfg. Co.... 169
Berkeley Scientific Corporation.... 216
Beta Electric Corporation.... 315
Bird Electronic Corp.... 324
Birmingham Sound Reproducers, Ltd.... 146
Birnbach Radio Co., Inc.... 329
Birtcher Corporation.... 214
Bishop Manufacturing Corporation.... 230
Bliley Electric Company.... 154
Boeing Airplane Company.... 279
Bogue Electric Mfg. Co.... 207
Boonton Radio Corporation.... 141
Borg Corp., George W.... 330, 331
Bowser, Inc.... 311
Brand & Co., Inc., William.... 160
Bridgeport Brass Co.... 233
Brown Electro-Measurement Corp.... 329
Browning Laboratories, Inc.... 298
Brush Development Company.... 48, 214
Burnell and Company.... 27
Burstein-Applebee Co.... 331
Bussmann Mfg. Co.... 221

Cambridge Thermionic Corp.... 18
Cannon Electric Co.... 272
Centralab, Div. Globe-Union, Inc.... 9, 10, 11
Chase Brass & Copper Sub. of Kennecott Copper Corp.... 263
Chicago Condenser Corp.... 210
Chicago Telephone Supply Corporation.... 56, 57
Chicago Transformer Div. of Essex Wire Corp.... 274
Clinch Manufacturing Corp.... 133
Clare and Co., C. P.... 30, 31
Cleveland Container Company.... 165
Clippard Instrument Laboratory, Inc.... 258
Cohn Corporation, Sigmund.... 242
Collins Radio Company.... 23
Condenser Products Company.... 7
Consolidated Engineering Corp.... 262
Continental-Diamond Fibre Company.... 183
Cornell-Dubilier Electric Corp.... 60
Corning Glass Works.... 32
Cornish Wire Co., Inc.... 192
Corry-Jamestown Mfg. Corp.... 254
Coto-Coil Co., Inc.... 178
Craft Manufacturing Co.... 194
Cramer Co., Inc., R. W.... 212
Cross Co., H.... 336
Crowley & Co., Inc., Henry L.... 171
Curtis Development & Mfg. Co.... 208

Dalis, Inc., H. L.... 322
Dano Electric Company.... 311
Daven Co., The.... 173
Dedur Amsco Corporation.... 312
Delco Radio Div., General Motors Corp.... 211
Dial Light Company of America.... 292
Distillation Products Industries.... 162
Doelcam Corp.... 240
Dow Corning Corporation.... 44
Driver-Harris Company.... 6
Dumont Electric Corp.... 282
DuMont Laboratories, Inc., Allen B. 59, 185, 261
du Pont de Nemours and Co., (Inc.) E. I. Electrochemicals Dept.... 297
Durant Manufacturing Co.... 234
DX Radio Products Co.... 246

Eastern Air Devices, Inc.... 321
Eastman Kodak Company Industrial Photographic Div.... 157
Edin Company, Inc.... 299
Elcor, Inc.... 38
Elsier Engineering Company, Inc.... 331, 336
Eitel-McCullough, Inc.... 46
Electra Mfg. Co.... 294
Electran Mfg. Co.... 296
Electric Indicator Co.... 287
Electrical Industries, Inc.... 226
Electrical Reactance Corp.... 42
El-Tronics, Inc.... 333, 336
Electromagnetics Research Corp.... 292
Electro Products Laboratories.... 295
Electro Tec Corporation.... 307
Electro-Voice, Inc.... 178
Electronic Associates, Inc.... 208
Electronic Tube Corp.... 250
Electrons, Inc.... 270
Emeloid Co., Inc.... 334
Erie Resistor Corp.... 65

Fairchild Camera & Instrument Corp.... 16
Federal Telephone & Radio Corporation.... 170
Ferroxcube Corp. of America.... 16B
Five Star Co.... 336
Freed Transformer Co., Inc.... 215
Furst Electronics.... 246
Fusite Corporation.... 72

Gair Company, Inc., Robert.... 210
Gamewell Company.... 294
General Control Co.... 324
General Electric Company Apparatus Dept.... 247, 285 Chemical Dept.... 195 Electronics Dept.... 39 Telechron Dept.... 281
General Industries Co.... 33
General Radio Company.... 24, 25
Gilfillan Brothers.... 265
Gramer Transformer Corporation.... 187
Graphite Metallizing Corp.... 234
Gray Research & Development Co., Inc.... 54
Grayhill.... 307
Green Instrument Co.... 206
Gries Reproducer Corp.... 323
Guardian Electric Mfg. Co.... 179
Guthman Co., Inc., E. I.... 227

Hardwick, Hindle, Inc.... 201
Hathaway Instrument Co.... 332
Haydon Company, A. W.... 218

SECON development and production METALLURGISTS

BASE, RARE AND PRECIOUS METALS AND ALLOYS

SMALL UNITS

SMALL SIZES

CLOSE TOLERANCES

Nickel alloy, filament wire and ribbon: flat, grooved, crowned.

Grid wire electroplated.

Alloys for special requirements, bare or enamelled.

•

Further details upon request.

SECON METALS CORPORATION
228 East 45th Street, New York 17, N. Y.
MUrray Hill 7-1594

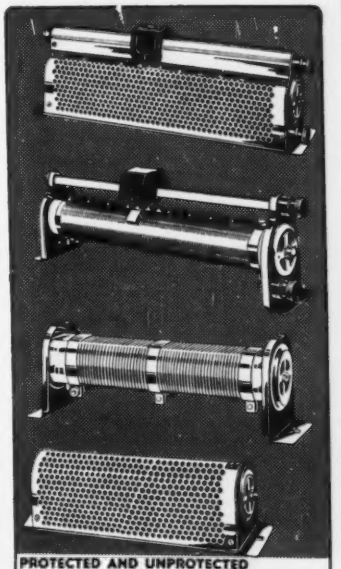

PROTECTED AND UNPROTECTED
SLIDE-CONTACT RHEOSTATS AND RESISTORS 220 TO 1000 WATT
REX RHEOSTAT CO.
BALDWIN, L. I., N.Y.

FOR PRODUCT INFORMATION
Refer to the 1951-52 Issue of
ELECTRONICS BUYERS' GUIDE

Haydon Manufacturing Co., Inc. 28, 29
Heath Company 166
Heiland Research Corporation 325
Heil-Coil Corp. 200
Helipot Corporation 203
Hermetic Seal Products Company 41
Hewlett-Packard Company 19, 35
Hexacon Electric Company 326
Hickok Electrical Instrument Co. 194
Houghton Laboratories, Inc. 238

Illinois Condenser Co. 290
Improved Seamless Wire Company, The. 214
Indiana Steel Products Company 26
Industrial Condenser Corp. 325
Industrial Timer Corporation 22
Instrument Resistors Company 309
International Resistance Co. 4, 5
Irvington Varnish & Insulator Co. ..21, 200

JFD Manufacturing Co., Inc. 327
Jelliff Manufacturing Corporation, C. O.. 226
Jensen Manufacturing Co. 73
Johnson Co., E. F. 256
Jones Div., Howard B. Cinch Mfg. Corp.. 331

Kahle Engineering Co. 311
Karp Metal Products Co., Inc. 47
Kartron 336
Keller Corporation 327
Kenyon Transformer Company, Inc. 190
Kester Solder Company 137
Kinney Manufacturing Company 45
Kollsman Instrument Corp. 245
Knights Company, James 266

Lambda Electronics Corp. 298
Lampkin Laboratories, Inc. 336
Lapp Insulator Co., Inc. 49
Leach Relay Company 196
Leeds & Northrup Co. 50
Leland Inc., G. H. 246
Lenkurt Electric Co. 254
Lenz Electric Manufacturing Co. 251
Linde Air Products Co., A. Division of Union Carbide & Carbon Corp. ... 306
Link Aviation, Inc. 318

Machlett Laboratories, Inc. 205
Mack Molding Company, Inc. 224
Magnecord, Inc. 252, 291
Mallory and Company, Inc., P. R. ...80, 135
Manning, Maxwell & Moore, Inc. 197
Manson Laboratories 327
Marconi Instruments, Ltd. 296
Marion Electrical Instrument Co. 2
Markem Machine Company 240
McGraw-Hill Book Co., Inc. 313, 336
McIntosh Engineering Laboratories, Inc. 206
Measurements Corporation 309
Metal Textile Corporation 298
Metals & Control Corp., General Plate Division 273
Mica Condensers Corp. 336
Mica Insulator Company 167
Micro Instrument Co. 321
Millen Mfg. Co., Inc., James 320
Milo Radio & Electronics Corp. 172
Minneapolis-Honeywell Regulator Co., Industrial Div. 219, 326
Minnesota Mining & Mfg. Co. 58, 283
Mitchell-Rand Insulation Co., Inc. 237
Moslnee Paper Mills Company 276
Muirhead & Co., Ltd. 5
Mycalex Corp. of America 74

National Company, Inc. 242
National Moldite Co. 186
Neo-Sil Corp. 61
New Hampshire Ball Bearings, Inc. 315
New Hermes, Inc. 320
New York Transformer Co., Inc. 304
North American Aviation, Inc. 198, 288
North Electric Mfg. Co. 260
Northern Radio Co., Inc. 305
Nothelfer Winding Laboratories 332
Numberall Stamp & Tool Co. 290

Olympic Metals Products Co., Inc. 310
Onan & Sons, Inc., D. W. 300
O'Neill-Irwin Mfg. Co. 300

FOR Improved PERFORMANCE Specify



DUMONT NOISE SUPPRESSORS
FOR RADIO AND TV INTERFERENCE

Here in America space, time and sound bow to man-made magic of Electric Power and Electric devices which are providing entertainment along with human convenience and comfort. Across the broad scene of American Industry the high fidelity performance of such devices is realized by continually improved controls developing higher standards and economies. Manufacturers and their products both benefit when they thus bring increased enjoyment and listening pleasure into the home.

Dumont engineering skill has fashioned such a device in a standard noise suppressor for minimizing radio and television noise interference introduced via power supply circuits emanating from commonly used fluorescent lights, oil burners, sewing machines, adding machines, electric drills, shaving units, motors, etc.

This proven device is being given wider publicity in the interest of benefiting public user and product manufacturer. It has come to be relied upon as an invaluable aid by application engineers everywhere.

REFRIGERATOR

MOTOR

OIL BURNER

UL APPROVED



FLUORESCENT LAMP

To get the best in your products write DUMONT into your specifications.

DUMONT
ELECTRIC CORP

308 DYCKMAN ST. NEW YORK 34, N. Y.

Oregon Electronics Mfg. Co. 202
Oster Manufacturing Co., John 181
Owens-Corning Fiberglas Corp. 223

Panoramic Radio Products, Inc. 321
Paramount Paper Tube Corp. 303
Patton-MacGuyer Co. 303
Peerless Electrical Products, Div. of Altec Lansing Corp. 300
Permoflux Corporation 246
Phalo Plastics Corporation 284
Pix Manufacturing Co., Inc. 325
Pliaskon Division, Libbey-Owens-Ford Glass Co. 55
Polarad Electronics Corporation 36
Polytechnic Research & Development Co., Inc. 70, 71
Potter & Brumfield 8
Potter Instrument Co., Inc. 14
Precision Apparatus Co., Inc. 304
Precision Metal Products Co. of Malden 294
Precision Paper Tube Co. 317
Presto Recording Corporation 75
Progressive Manufacturing Company 278
Pyramid Electric Co. 76, 147

Quaker City Gear Works 317

Radio Corp. of America ..... 12, 13, 231, 257 Back Cover
Radio Materials Corporation 217
Radio Receptor Company, Inc. 20
Radio Wire Television, Inc. 305
Rahm Instruments, Inc. 222
Railway Express Agency, Air Express Division 267
Rawson Electrical Instrument Co. 319
Raytheon Manufacturing Co. 145, 306
R-B-M Division, Essex Wire Corp. 143
Reeves-Hoffman Corporation 220
Religious Generations Foundation, The 329
Remler Company, Ltd. 328
Republic Foil & Metal Mills, Inc. 37
Resistance Products Co. 288
Rex Corporation 292
Rex Rheostat Co. 881
Richardson Company 158, 159
Robinson Aviation Inc. 168
Runzel Cord & Wire Co. 300

Samco Products Company 149
Sangamo Electric Company 277
Sarkes Tarzian, Inc. 244
Scientific Electric Div. of "S" Corrugated Quenched Gap Co. 226
Scientific Electronic Laboratories, Inc. 311
Secon Metals Corporation 381
Servo Corporation of America 238
Sessions Clock Company, Timer Div. 232
Set Screw & Mfg. Co. 230
Shallcross Manufacturing Co. 53
Sigma Instruments, Inc. 79
Signal Engineering & Mfg. Co. 317
Simpson Electric Company 255
Smuckler & Co., Inc., A. F. 316
Sola Electric Company 139
Sorensen and Company, Inc. 193
Southwestern Industrial Electronics Co. 319
Specialty Battery Company 333
Speer Resister Corp. 269
Sperry Gyroscope Co. 191
Spincraft, Inc. 218
Sponge Rubber Products Company 275
Sprague Electric Company 16A
Stackpole Carbon Co. 160
Stahl, Inc., Michael 323
Standard Electric Time Co. 319
Standard Piezo Company 328
Standard Pressed Steel Co. 216
Standard Transformer Corp. 282
Statham Laboratories 331
Staver Company, Incorporated 321
Stevens Arnold, Inc. 154
Stevens Mfg. Co., Inc., Geo. 190
Steward Manufacturing Co., D. M. 249
Stoddart Aircraft Radio Co. 314
Stokes Machine Co., F. J. 199
Struthers-Dunn, Inc. 243
Stupakoff Ceramic & Mfg. Company 153
Superior Electric Co. 40
Superior Tube Company 43
Sylvania Electric Products, Inc. 77, 151, 238

Taylor Fibre Co. 155
Taylor Tubes, Inc. 164
Tektronix, Inc. 236
Tel-Instrument Co., Inc. 292
Telechronics Laboratory, Inc. 236
Telex, Electro-Acoustic Division 222
Transicoil Corporation 301
Transradio, Ltd. 230

First with TEFLON
7 AND 9 PIN MINIATURES

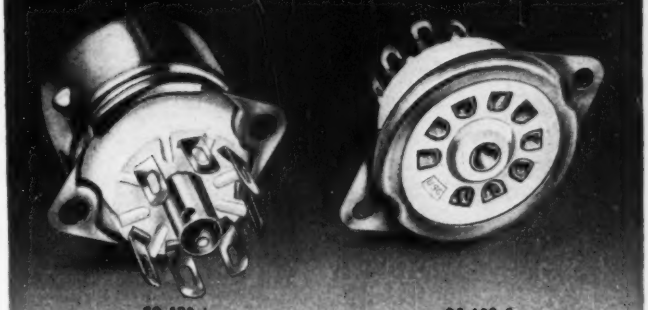

CHEMELEC

High Performance
TUBE SOCKETS

Ideal wherever high or low ambient temperatures or frequency stability are problems.

- Surface resistivity 3.5 x 10^{13} ohms.
- Loss factor less than 0.0005.
- Dielectric constant 2.0 (60 cycles to 30,000 megacycles).
- Serviceable at −150°F to +575°F with negligible change in critical electrical characteristics.
- Won't carbonize under arcing.
- 0.0% water absorption (ASTM Test).
- Unaffected by extreme humidity, corrosive atmosphere or fungus. Non-flammable.
- Chemically inert—unaffected by oils, organic or inorganic acid, alkali or solvent.
- Allocation limits supply to projects with National Production Authority sanction.
- Write for catalog No. SO-428-9.

UNITED STATES GASKET COMPANY
TEFLON PRODUCTS DIVISION
600 N. 10TH STREET, CAMDEN, N.J.

APPLICATION ENGINEERED "PRECISION" Circuit Tester

20,000 Ohms per Volt

THE SERIES "85"

Compact, laboratory style, **high sensitivity test set.** "Application Engineered" for production, test, laboratory, school and service-maintenance phases of modern **radio-electronics-communications.**

20,000 Ohms per Volt D.C.
1000 Ohms per Volt A.C.

VOLTAGE RANGES:	0-3-12-60-300-1200-6000 A.C. & D.C.
CURRENT RANGES:	0-120 microamps 0-1.2-12-120-1200 MA.- 0-12 Amps D.C.
RESISTANCE RANGES:	0-6000-600K Ohms 0-6-60 Megohms.
DECIBEL RANGES:	From—26 to +70 DB.

Complete with batteries and test leads **$39.95**

PLUS superior physical features:

- 4½" wide angle meter
- Heavy duty molded bakelite instrument case, size 5½ x 7⅛ x 3"
- Heavy gauge, anodized aluminum panel
- Rotary Range and Function Selection
- Recessed 6000 volt safety jacks
- Only two pin jacks for all standard ranges

LC-1 Leather Carrying Case

Custom designed top-grain cowhide case with tool and test lead compartment. **$9.50**

See this and other "Precision" Application Engineered instruments on display at leading radio parts distributors. Write for latest catalog.

Precision Apparatus Co., Inc.
92-27 HORACE HARDING BLVD.
ELMHURST 10, N. Y.

*Reg. U.S. Patent Office
Export: 458 B'way, N.Y.C., U.S.A. Cables: MORHANEX
In Canada: Atlas Radio Corp. Ltd., Toronto, Ontario

Triplett Electrical Instrument Co..... 177
Tung-Sol Electric Inc..... 175
Turner Company..... 17

Ucinite Co..... 259
Ulanet Company, George..... 186
Union Carbide & Carbon Corp., Linde Air Products Div..... 300
Union Electric Products Co..... 210
United States Gasket Company..... 383
United Transformer Co.....Second Cover
Universal Winding Company..... 64

Veeder-Root, Inc..... 213
Victoreen Instrument Company..... 313
Vitro Corp. of America..... 327
Vulcan Electric Company..... 298

Waldes Kohinoor, Inc..... 51
Ward Leonard Electric Company..... 204
Ward Products Corp..... 280
Warren Wire Company..... 319
Waterman Products Co., Inc..... 303
Weller Electric Corp..... 325
Western Gold & Platinum Works..... 315
Westinghouse Electric Corp. 68, 69, 182, 239
Weston Electrical Instrument Corp.... 60
Wheeler Insulated Wire Co., Inc..... 176
White Dental Mfg. Company, S. S. 182, 327
Whitehead Stamping Company..... 327
Wilcox Electric Company..... 15
Williams & Co., C. K..... 190
Wilton Tool Mfg. Co..... 334
Winchester Electronics Incorporated.. 313
Workshop Associates, Inc..... 271

Zophar Mills, Inc..... 288

■

PROFESSIONAL SERVICES..... 335

■

SEARCHLIGHT SECTION
(Classified Advertising)

EMPLOYMENT
Positions Vacant.....337-344
Civil Service..... 337
Selling Opportuunities Offered..... 342
Positions Wanted..... 337
Selling Opportunities Wanted..... 337

EQUIPMENT
(Used or Surplus New)
For Sale.....345-380

WANTED
Equipment 337, 378

ADVERTISERS INDEX

Adelman, Nat..... 374
Admiral Corporation..... 340
Airborne Instruments Laboratory, Inc..... 340
Aircraft Armaments Inc..... 341
Algeradio Electronics Co..... 374
Amber Co. 337
American Electrical Sales Co..... 378
Ames & Day Inc..... 337
Applied Science Corp. of Princeton..... 344
Archy Electronics..... 373
Arma Corporation..... 337
Arrow Sales, Inc..... 371
Barry Electronics Corp..... 375
Bell Aircraft Corp..... 343
Bendix Aviation Corp..... 338
Blan 370
Boonton Radio Corp..... 337
C & H Sales Co.....370, 378
California Institute of Technology..... 342
Capehart-Farnsworth Corp..... 339
Chase Electronics Supply Co..... 368
Columbia Electronics, Ltd.....367, 378
Communications Devices Co..... 375
Communications Equipment Co...357, 358, 359
Compass Communications Co..... 366
Convair 339
Cornell Aeronautical Laboratory, Inc..... 344
Cottone & Co., A..... 374
Davies Laboratories, Inc., The..... 338
Drillick Electronic Sales Co..... 378
Electro Impulse Laboratory..... 367
Electro Sales Co., Inc.....377, 379
Electronic Engineering Co., of Calif..... 338
Electronicraft, Inc..... 354
Emerson Electric Mfg. Co..... 343
Emmons Radio Supply Co..... 368
Empire Electronics Co..... 378
E P C O..... 372
F. M. Electronics Co..... 376
Forest Sales Co..... 376
Freeland Products Co..... 378
French-Van Breems Inc..... 366
General Electric Co..... 341
General Motors Corp., AC Spark Plug Div. 340
General Precision Laboratory, Inc..... 342
Globe Trading Co.....377, 378
Goodyear Aircraft Corp..... 338
Greenberg, David..... 363
Greene, Leonard..... 372
Hall Electric, Ltd..... 369
Harmar Co., The..... 360
Hatry & Young..... 371
Horlick Co., William I..... 356
Hughes Research & Development Laboratories 342
Instrument Associates..... 349
J. S. H. Sales Co..... 372
Lectronic Research Laboratories..... 355
Legri S. Company, Inc..... 362
Leru Laboratories Inc..... 375
Liberty Electronics, Inc..... 350
Lowenthal Co., T. R..... 369
Marino Radio Co..... 345
Maritime International Co..... 372
Maritime Switchboard..... 364
Maxson Corp., The W. L..... 340
McNeal Electric & Equipment Co..... 370
Metropolitan Overseas Supply Corp..... 376
Mogull Co., Inc., Alexander..... 348
Monmouth Radio Laboratories..... 377
Norman Radio Distributors, Inc..... 378
Northrop Aircraft, Inc..... 342
Overbrook Company..... 378
Phillips Petroleum Co..... 342
Photocon Sales..... 376
Powell, Harold H..... 364
Precision Electrical Instrument Co..... 370
Radio Development & Sales Co..... 368
Radio & Electronic Surplus..... 378
Radio Ham Shack, Inc.....346, 347
Radio Surplus Corp..... 365
Reliance Merchandizing Co..... 352
Rose Co., The..... 371
Sandia Corp. 341
Servo-Tek Products Co., Inc..... 351
Soundtronics Labs..... 373
Stevens Aircraft Corp..... 366
TAB 373, 380
Tallen Co., Inc..... 337
Technical Radio Parts Co..... 376
Telemarine Communications Co..... 374
Universal General Corp..... 361
Universal Marine & Mfg. Corp..... 374
University of Chicago..... 344
University of Minnesota..... 344
V & H Radio & Electronic Supply Co..... 373
Vitro Corp., of America, The..... 343
Wells Sales, Inc..... 353
Westinghouse Electric Corp..... 343
Weston Laboratories.....368, 378
West Region Electronics..... 337
Workshop Assoc..... 344

This index is published as a convenience to the readers. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

NEW AMPEREX tubes

Specifically designed for grid-control operation at peak anode voltages as high as *27,000 v.* for heavy duty INDUSTRIAL uses and high power TRANSMITTERS with outputs to *150 KW.* (3 phase full wave)

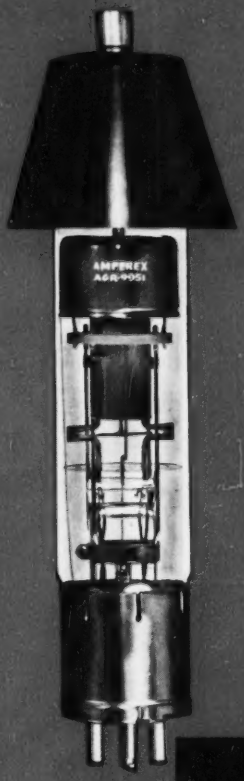

PROVEN LIFE

AGR-9951/5870
$110.00



Re-tube with AMPEREX

	AGR-9951/5870	AGR-9950/5869
CATHODE Directly Heated, Oxide Coated		
MAXIMUM PEAK ANODE VOLTAGE Inverse	27,000 10,000	13,000 10,000
Forward	27,000 10,000	13,000 10,000
CONDENSED MERCURY TEMPERATURE LIMITS (centigrade)	+30° to +40° +25° to +60°	+25° to +55° +25° to +60°
MAXIMUM PLATE CURRENT (Amperes) Peak	10	4
Average	2.5	1
FREQUENCY RANGE (cps)	25 to 150	25 to 150
FILAMENT VOLTAGE	5.0	5.0
FILAMENT CURRENT (amperes)	15	6.5
TUBE VOLTAGE DROP (volts, approx.)	14 (1b = 10 amperes)	15 (1b = 4 amperes)

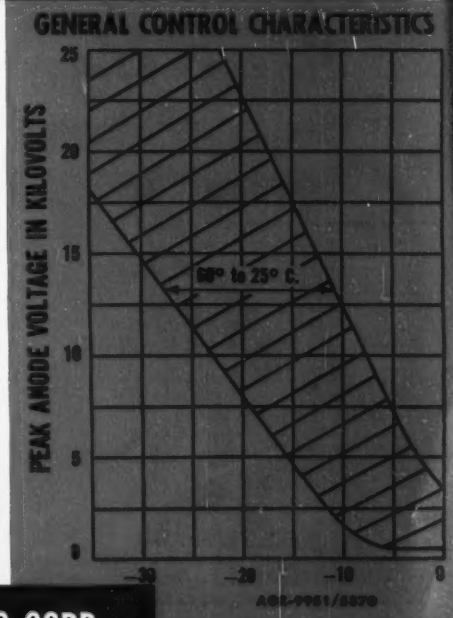

THREE-ELECTRODE, MERCURY VAPOR

RECTIFYING TUBES

with NEGATIVE CONTROL characteristics

AMPEREX ELECTRONIC CORP.
25 WASHINGTON STREET, BROOKLYN 1, N. Y.
In Canada and Newfoundland: Rogers Majestic Limited
11-19 Brentcliffe Road, Leaside, Toronto, Ontario, Canada

Three RCA "Pencil" Triodes

The Fountainhead of Modern Tube Development is *RCA*

. . . for UHF services up to 3000 Mc

THE THREE "PENCIL" TRIODES illustrated are significant examples of RCA's pioneering leadership in the development of special tube types for specialized applications. These triodes feature a double-ended coaxial-electrode structure in which plate and cathode cylinders extend outward from each side of the central grid flange. This unusual construction results in minimum transit time, low lead inductance, and low interelectrode capacitances. One type employs cylindrical resonators which are integral with the tube.

RCA-5794 is a fixed-tuned oscillator triode especially designed for radiosonde applications. It has two resonators, one of which is attached between grid and cathode and the other between grid and plate. The latter is tuned to 1680 Mc by means of an adjustment screw. The useful power output is approximately 500 milliwatts.

RCA-5675 is a medium-mu triode for use in grounded-grid circuits up to 3000 Mc. As a local oscillator, it is capable of delivering a power output of 475 milliwatts at 1700 Mc, and about 50 milliwatts at 3000 Mc. The tube is less than 2¼" long with a diameter, except for the grid flange, of only ¼ inch.

RCA-5876 is a general-purpose, high-mu triode intended particularly for use in grounded-grid service as an rf amplifier, if amplifier, or mixer tube in receivers operating at frequencies up to about 1000 Mc; as a frequency multiplier up to 1500 Mc; and as an oscillator up to 1700 Mc. It may also be used as a low power rf amplifier in mobile transmitters, and in class C service will deliver a useful power output of 5 watts up to 500 Mc.

For complete technical data on any of these RCA "pencil" triodes, write RCA, Commercial Engineering, Section 42JR, Harrison, New Jersey, or your *nearest* RCA field office.

FIELD OFFICES: (EAST) Humboldt 5-3900, 415 S. 5th St., Harrison, N. J. (MIDWEST) Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill. (WEST) Madison 9-3671, 420 S. San Pedro St., Los Angeles, Calif.

RADIO CORPORATION of AMERICA

ELECTRON TUBES — **HARRISON, N. J.**